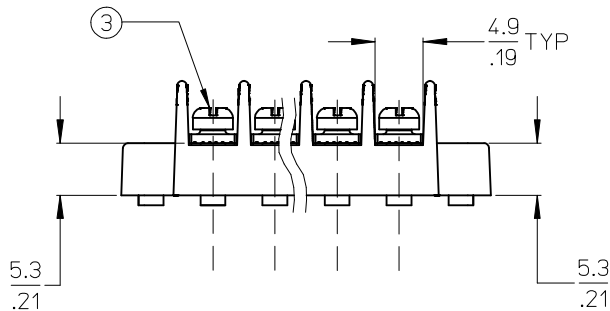

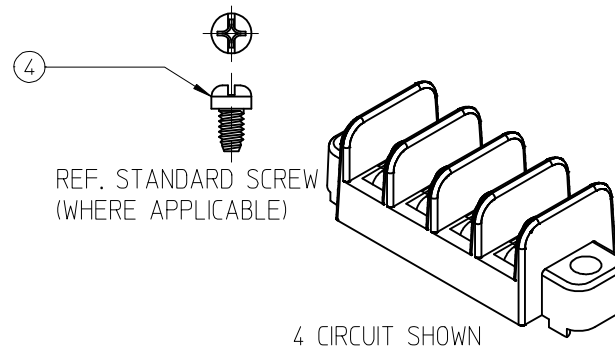
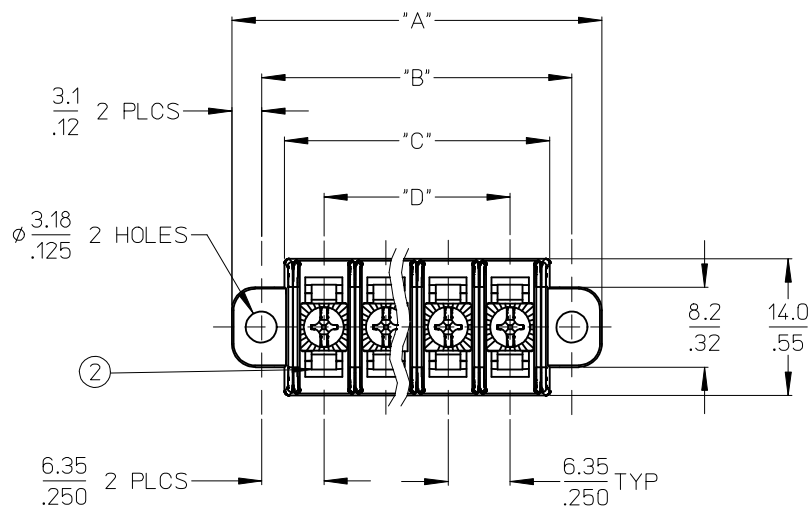


NOTES:

1. MATERIAL: SEE TABLE.
2. FINISHES: SEE TABLE.
3. PRODUCT SPECIFICATION: NOT REQUIRED.
4. DIMS ARE SHOWN IN MM/INCH.
5. "XX" REFERS TO THE QTY. OF CIRCUITS.
6. ROHS COMPLIANT.

4	XX	SCREW #3-48, PHIL-SLOT (STD.)	BRASS	NICKEL
3	XX	SCREW #3-48, SQ. W., PHIL-SLOT, (-50 OPT.)	STEEL	ZINC/CLEAR CHROMATE
2	XX	TERMINAL .CB, STYLE 1	BRASS	TIN PLATE
1	1	BARRIER TERMINAL STRIP SR	THERMOPLASTIC	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

TYPE ERROR ON SHEET 2
EC NO: WNA2010-0204
DRAWN: JENCINAS 2009/09/25
CHKD: CYORK 2009/09/25
APPR: JMACNEIL 2009/09/28

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES	± --- ± ---
3 PLACES	± --- ± .005
2 PLACES	± 0.13 ± .01
1 PLACE	± 0.3 ± ---
ANGULAR ± 2 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
JENCINAS	2007/12/06
CHECKED BY	DATE
CYORK	2007/12/06
APPROVED BY	DATE
JMACNEIL	2007/12/06
MATERIAL NO.	
SEE SHEET 2	

SCALE 2:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
TITLE 6.35/.250 SR BTS CB, NO PC TERMINALS WITH MOUNTING ENDS		
 MOLEX INCORPORATED		
DOCUMENT NO. SD-38610-005		SHEET NO. 1 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

10 9 8 7 6 5 4 3 2 38610

QTY CKTS	DIM "A"		DIM "B"		DIM "C"		DIM "D"		MATERIAL #	MATERIAL #	MATERIAL #
	MM	INCH	MM	INCH	MM	INCH	MM	INCH	STD OPTION	-50 OPTION	BARRIER
2	25.2	0.99	19.20	0.750	14.5	0.57	6.35	0.250	386100402	386101602	386183102
3	31.6	1.24	25.55	1.000	20.8	0.82	12.70	0.500	386100403	386101603	386183103
4	37.9	1.49	31.90	1.250	27.2	1.07	19.05	0.750	386100404	386101604	386183104
5	44.3	1.74	38.25	1.500	33.5	1.32	25.40	1.000	386100405	386101605	386183105
6	50.6	1.99	44.60	1.750	39.9	1.57	31.75	1.250	386100406	386101606	386183106
7	57.0	2.24	50.95	2.000	46.2	1.82	38.10	1.500	386100407	386101607	386183107
8	63.3	2.49	57.30	2.250	52.6	2.07	44.45	1.750	386100408	386101608	386183108
9	69.7	2.74	63.65	2.500	58.9	2.32	50.80	2.000	386100409	386101609	386183109
10	76.0	2.99	70.00	2.750	65.3	2.57	57.15	2.250	386100410	386101610	386183110
11	82.4	3.24	76.35	3.000	71.6	2.82	63.50	2.500	386100411	386101611	386183111
12	88.7	3.49	82.70	3.250	78.0	3.07	69.85	2.750	386100412	386101612	386183112
13	95.1	3.74	89.05	3.500	84.3	3.32	76.20	3.000	386100413	386101613	386183113
14	101.4	3.99	95.40	3.750	90.7	3.57	82.55	3.250	386100414	386101614	386183114
15	107.8	4.24	101.75	4.000	97.0	3.82	88.90	3.500	386100415	386101615	386183115
16	114.1	4.49	108.10	4.250	103.4	4.07	95.25	3.750	386100416	386101616	386183116
17	120.5	4.74	114.45	4.500	109.7	4.32	101.60	4.000	386100417	386101617	386183117
18	126.8	4.99	120.80	4.750	116.1	4.57	107.95	4.250	386100418	386101618	386183118
19	133.2	5.24	127.15	5.000	122.4	4.82	114.30	4.500	386100419	386101619	386183119
20	139.5	5.49	133.50	5.250	128.8	5.07	120.65	4.750	386100420	386101620	386183120
21	145.9	5.74	139.85	5.500	135.1	5.32	127.00	5.000	386100421	386101621	386183121
22	152.2	5.99	146.20	5.750	141.5	5.57	133.35	5.250	386100422	386101622	386183122
23	158.6	6.24	152.55	6.000	147.8	5.82	139.70	5.500	386100423	386101623	386183123
24	164.9	6.49	158.90	6.250	154.2	6.07	146.05	5.750	386100424	386101624	386183124
25	171.3	6.74	165.25	6.500	160.5	6.32	152.40	6.000	386100425	386101625	386183125
26	177.6	6.99	171.60	6.750	166.9	6.57	158.75	6.250	386100426	386101626	386183126
27	184.0	7.24	177.95	7.000	173.2	6.82	165.10	6.500	386100427	386101627	386183127
28	190.3	7.49	184.30	7.250	179.6	7.07	171.45	6.750	386100428	386101628	386183128
29	196.7	7.74	190.65	7.500	185.9	7.32	177.80	7.000	386100429	386101629	386183129
30	203.0	7.99	197.00	7.750	192.3	7.57	184.15	7.250	386100430	386101630	386183130
31	209.4	8.24	203.35	8.000	198.6	7.82	190.50	7.500	386100431	386101631	386183131
32	215.7	8.49	209.70	8.250	205.0	8.07	196.85	7.750	386100432	386101632	386183132

Ⓟ

TYPED ERROR ON TABLE EC NO: WNA2010-0204 DRAWN: JENCINAS 2009/09/25 CHKD: CYORK 2009/09/25 APPR: JMACNEIL 2009/09/28	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 2:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		4 PLACES	± ---	± ---	DRAWN BY JENCINAS	DATE 2007/12/06	TITLE 6.35/.250 SR BTS CB, NO PC TERMINALS WITH MOUNTING ENDS MOLEX INCORPORATED	
		3 PLACES	± ---	± .005	CHECKED BY CYORK	DATE 2007/12/06		
		2 PLACES	± 0.13	± .01	APPROVED BY JMACNEIL	DATE 2007/12/06		
		1 PLACE	± 0.3	± ---	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-38610-005		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

9 8 7 6 5 4 3 2 1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.