




20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1





CARRIER VIEW




SELECT GOLD LOCATION




WINDING DETAIL A

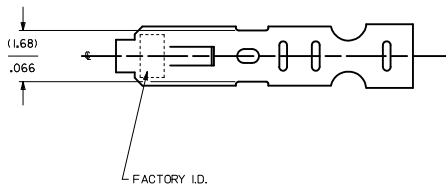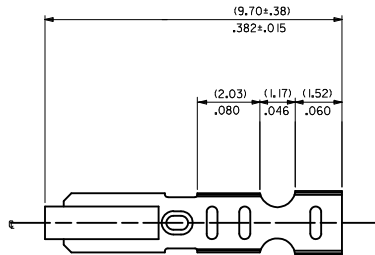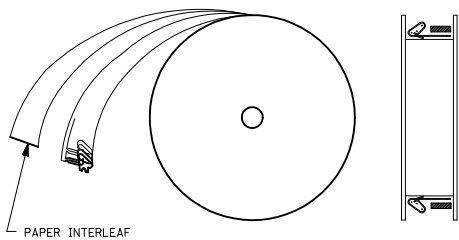

- NOTES:
1. MATERIAL:
(0.20)/.008 THICK PHOS BRONZE
 2. FINISH:
222 - OVERALL MATTE TIN: (0.00254)/.000100 MIN. TIN OVER
(0.00127)/.000050 MIN NICKEL
P909 - OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.
231 - SELECT GOLD: (0.00127)/.000050 MIN.
SELECT MATTE TIN: (0.00254)/.000100 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
550 - SELECT GOLD: (0.00038)/.000015 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.
555- SELECT GOLD (0.00038)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030
558 - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
561- SELECT GOLD (0.00076)/.000030 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050
 3. PRODUCT SPEC: PS-10-07
 4. PACKAGING SPECIFICATION: LOOSE TERMINALS: PER PK-2759-001
CHAIN FORM TERMINALS: NONE
 5. CRIMP IS FOR 22-30 GA WIRE WITH (157)/.062 DIA INSULATION MAX.
 6. INSERTION FORCE OF TERMINAL INTO (2.54)/.100 CENTERLINE CONNECTOR IS 2.5 LBS. MAX
 7. TERMINAL RETENTION IN HOUSING IS 26.7N / 6LBS MIN. WHEN PULLED AT THE RATE OF
(25.4MM)/ 1 INCH PER MINUTE.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES
WITHIN HALF THE TOTAL TOLERANCE.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002



SECTION A-A
BACKGROUND OMITTED



SECTION B-B
BACKGROUND OMITTED

6459-(***)*
FORM
L=LOOSE
A=CHAIN PER DETAIL A
PLATING
SEE NOTE 2

REMOVED 208 PLT EC NO: UCP2012-2810 DRAWN: JAGUILAR CHKD: MATT KIPPER APPR: FSMITH	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		 THIRD ANGLE PROJECTION
				MM/IN				INCH		
				DRAWN BY		DATE		TITLE		
		4 PLACES ± ---		SAMIEC		01/21/92		KK (2.54)/.100 CRIMP		
		3 PLACES ± ---		CHECKED BY		DATE		TERMINAL, 22-30 GA WIRE		
		2 PLACES ± 0.13 ± 0.10		PA TEL		01/21/92		SAME AS 2759 EXCEPT MAIL		
		1 PLACE ± 0.25 ± 0.25		APPROVED BY		DATE				
		ANGULAR ± 1/2°		FSMITH		2012/03/20		MOLEX MOLEX INCORPORATED		
				MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
				SEE CHART		SD-6459		1 OF 2		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1															
M	6459-(***)*																					M													
	PART NO.			ENG. NO.																															
L		08-52-0101				6459-(P909)																		L											
		08-52-0123				6459-(P909)L																													
K		08-65-0801				6459-(561)																		K											
						6459-(561)L																													
J		08-52-0118				6459-(222)																		J											
						6459-(222)L																													
I		08-65-0811				6459-(558)																		I											
		08-65-0812				6459-(558)L																													
		08-65-0815				6459-(555)																													
H		08-65-0816				6459-(555)L																		H											
		08-65-0813				6459-(550)																													
		08-65-0814				6459-(550)L																													
G		08-65-0817				6459-(231)																		G											
		08-65-0818				6459-(231)L																													
F																								F											
E																								E											
D																								D											
C																					C														
B																					B														
A																					A														
REMOVE 6459-(208) EC NO: UCP2012-2810 DRWN: JAGUILAR 2012/02/27 CHKD: MATT KIPPER 2012/02/27 APPR: FSMITH 2012/03/20 REV QUALITY SYMBOLS ▽=0 ▽=0 ▽=0 GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><td></td><td>mm</td><td>INCH</td></tr><tr><td>4 PLACES</td><td>±.---</td><td>±.---</td></tr><tr><td>3 PLACES</td><td>±.---</td><td>±.005</td></tr><tr><td>2 PLACES</td><td>±0.13</td><td>±.010</td></tr><tr><td>1 PLACE</td><td>±0.25</td><td>±.---</td></tr></table> ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS SIZE D DIMENSION STYLE MM/IN SCALE 1:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION DRAWN BY DATE CHECKED BY DATE APPROVED BY DATE TITLE KK (2.54)/.100 CRIMP TERMINAL, 22-30 GA WIRE SAME AS 2759 EXCEPT MATL MATERIAL NO. DOCUMENT NO. SHEET NO. SEE CHART SD-6459 2 OF 2 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																						mm	INCH	4 PLACES	±.---	±.---	3 PLACES	±.---	±.005	2 PLACES	±0.13	±.010	1 PLACE	±0.25	±.---
	mm	INCH																																	
4 PLACES	±.---	±.---																																	
3 PLACES	±.---	±.005																																	
2 PLACES	±0.13	±.010																																	
1 PLACE	±0.25	±.---																																	
	1b_frame_D_P_AM_T Rev. F 2009/06/17	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1															

REMOVE 6459-2810 EC NO: UCP2012-2810 DRWN:JAGUILAR CHKD:MATT KIPPER APP:FSMITH 2012/02/27 2012/02/27 2012/03/20	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><th></th><th>mm</th><th>INCH</th></tr><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± .005</td></tr><tr><td>2 PLACES</td><td>± 0.13</td><td>± .010</td></tr><tr><td>1 PLACE</td><td>± 0.25</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ±1/2°</td></tr></table> DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± .005	2 PLACES	± 0.13	± .010	1 PLACE	± 0.25	± ---	ANGULAR ±1/2°			DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				mm	INCH																				
			4 PLACES	± ---	± ---																				
			3 PLACES	± ---	± .005																				
			2 PLACES	± 0.13	± .010																				
			1 PLACE	± 0.25	± ---																				
			ANGULAR ±1/2°																						
			DRAWN BY SAMIEC		DATE 01/21/92	TITLE KK (2.54)/.100 CRIMP TERMINAL, 22-30 GA WIRE SAME AS 2759 EXCEPT MATL																			
			CHECKED BY PATEL		DATE 01/21/92																				
			APPROVED BY FSMITH		DATE 2012/03/20	 MOLEX INCORPORATED																			
MATERIAL NO. SEE CHART		DOCUMENT NO. SD-6459	SHEET NO. 2 OF 2																						
SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																							

SIZE D

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.