



# Quad SPST CMOS Analog Switches

## General Description

The DG202/DG212 are normally open, quad single-pole single-throw (SPST) analog switches. These CMOS switches can be continuously operated with power supplies ranging from  $\pm 4.5\text{V}$  to  $\pm 18\text{V}$ . Maxim guarantees that these switches will not latch up if the power supplies are disconnected with input signals still connected.


The DG202/DG212 are similar to the DG201/DG211 except for inverted control inputs. All devices have guaranteed break-before-make switching, as well as essentially constant on-resistance over the analog signal range. All switches conduct current in either direction and add no offset to the output signal.

Compared to the original manufacturer's products, Maxim's DG202/DG212 consume very little power, making them better suited for portable applications. Maxim has also eliminated the need for the third logic power supply ( $V_L$ ) that is required for the operation of the original manufacturer's DG212 without sacrificing compatibility.

## Applications

Analog Multiplexers  
Programmable Gain Amplifiers  
Communications Systems  
Sample/Holds  
Automatic Test Equipment  
PBX, PABX

## Typical Operating Circuit

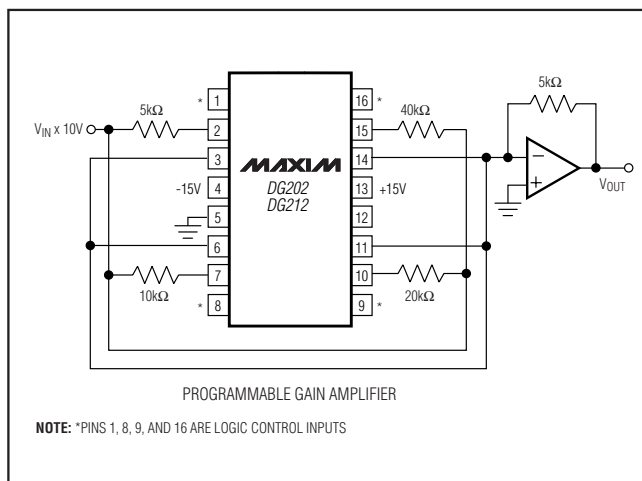


## Features

- ◆ Guaranteed  $\pm 4.5\text{V}$  to  $\pm 18\text{V}$  Operation
- ◆ No  $V_L$  Supply Required
- ◆ Nonlatching with Supplies Turned Off and Input Signals Present
- ◆ CMOS and TTL Logic Compatible
- ◆ Monolithic, Low-Power CMOS Design

## Ordering Information

| PART      | TEMP RANGE                                  | PIN-PACKAGE        |
|-----------|---------------------------------------------|--------------------|
| DG202CUE  | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | 16 TSSOP           |
| DG202CSE  | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | 16 SO              |
| DG202CJ   | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | 16 Plastic DIP     |
| DG202C/D  | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | Dice               |
| DG202AEGE | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 QFN (5mm x 5mm) |
| DG202AEUE | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 TSSOP           |
| DG202ADY  | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 SO              |
| DG202ADJ  | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 Plastic DIP     |
| DG202AK   | $-55^\circ\text{C}$ to $+125^\circ\text{C}$ | 16 CERDIP          |
| DG212CUE  | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | 16 TSSOP           |
| DG212CSE  | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | 16 SO              |
| DG212CJ   | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | 16 Plastic DIP     |
| DG212C/D  | $0^\circ\text{C}$ to $+70^\circ\text{C}$    | Dice               |
| DG212EGE  | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 QFN (5mm x 5mm) |
| DG212EUE  | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 TSSOP           |
| DG212DY   | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 SO              |
| DG212DJ   | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 Plastic DIP     |
| DG212ETE  | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  | 16 Thin QFN        |

## Pin Configurations

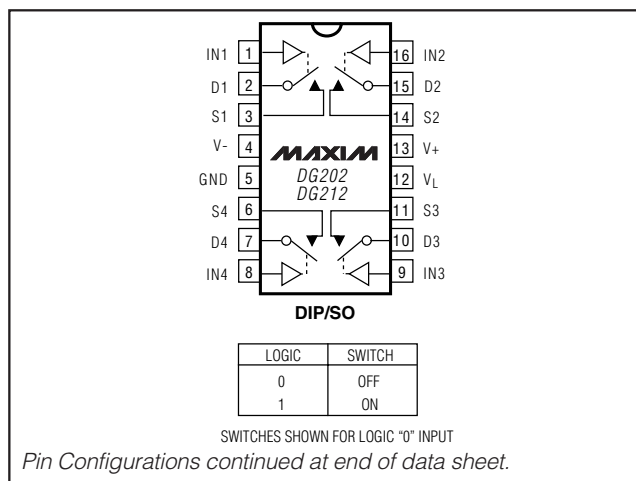

# Quad SPST CMOS Analog Switches

## ABSOLUTE MAXIMUM RATINGS (DG212)

|                                                                 |                                 |
|-----------------------------------------------------------------|---------------------------------|
| V <sub>+</sub> to V <sub>-</sub> .....                          | 44V                             |
| V <sub>IN</sub> to Ground.....                                  | V <sub>-</sub> , V <sub>+</sub> |
| V <sub>L</sub> to Ground.....                                   | -0.3V, 25V                      |
| V <sub>S</sub> or V <sub>D</sub> to V <sub>+</sub> .....        | 0, -40V                         |
| V <sub>S</sub> or V <sub>D</sub> to V <sub>-</sub> .....        | 0, 40V                          |
| V <sub>+</sub> to Ground.....                                   | 25V                             |
| V <sub>-</sub> to Ground.....                                   | -25V                            |
| Current, Any Terminal Except S or D.....                        | 30mA                            |
| Continuous Current, S or D.....                                 | 20mA                            |
| Peak Current, S or D<br>(pulsed at 1ms 10% duty cycle max)..... | 70mA                            |
| Storage Temperature Range.....                                  | -65°C to +125°C                 |

### Operating Temperature Range

|                |                |
|----------------|----------------|
| DG212C .....   | 0°C to +70°C   |
| DG212D/E ..... | -40°C to +85°C |

### Power Dissipation (T<sub>A</sub> = +70°C) (Note 1)

|                                                               |        |
|---------------------------------------------------------------|--------|
| 16-Pin Plastic Dip (derate 10.5mW/°C above +70°C) ..          | 842mW  |
| 16-Pin Narrow SO (derate 8.7mW/°C above +70°C) .....          | 696mW  |
| 16-Pin TSSOP (derate 9.4mW/°C above +70°C) .....              | 755mW  |
| 16-Pin QFN (5mm x 5mm)<br>(derate 19.2mW/°C above +70°C)..... | 1538mW |
| 16-Pin Thin QFN<br>(derate 14.7mW/°C above +70°C).....        | 1177mW |

**Note 1:** Device mounted with all leads soldered to PC board.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS (DG212)

(V<sub>+</sub> = +15V, V<sub>-</sub> = -15V, GND = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (For more information on TYP values see Note 2.)

| PARAMETER                             | SYMBOL                  | CONDITIONS                                                                                              |                                                                                            | MIN  | TYP          | MAX          | UNITS |
|---------------------------------------|-------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------|--------------|--------------|-------|
| SWITCH                                |                         |                                                                                                         |                                                                                            |      |              |              |       |
| Analog Signal Range                   | V <sub>ANALOG</sub>     |                                                                                                         |                                                                                            | -15  |              | +15          | V     |
| Drain-Source ON-Resistance            | R <sub>DS (ON)</sub>    | V <sub>D</sub> = ±10V, V <sub>IN</sub> = 2.4V, I <sub>S</sub> = 1mA                                     |                                                                                            |      | 115          | 175          | Ω     |
| Source OFF-Leakage Current            | I <sub>S (OFF)</sub>    | V <sub>IN</sub> = 0.8V                                                                                  | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V<br>V <sub>S</sub> = -14V, V <sub>D</sub> = 14V |      | 0.01<br>-5.0 | 5.0<br>-0.02 | nA    |
| Drain OFF-Leakage Current             | I <sub>D (OFF)</sub>    | V <sub>IN</sub> = 0.8V                                                                                  | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V<br>V <sub>S</sub> = -14V, V <sub>D</sub> = 14V |      | 0.01<br>-5.0 | 5.0<br>-0.02 |       |
| Drain ON-Leakage Current<br>(Note 3)  | I <sub>D (ON)</sub>     | V <sub>S</sub> = V <sub>D</sub> = 14V, V <sub>IN</sub> = 2.4V                                           |                                                                                            |      | 0.1          | 5.0          |       |
|                                       |                         | V <sub>S</sub> = V <sub>D</sub> = -14V, V <sub>IN</sub> = 2.4V                                          |                                                                                            |      | -5.0         | -0.15        |       |
| INPUT                                 |                         |                                                                                                         |                                                                                            |      |              |              |       |
| Input Current with Input Voltage High | I <sub>INH</sub>        | V <sub>IN</sub> = 2.4V                                                                                  |                                                                                            | -1.0 | -0.0004      |              | μA    |
|                                       |                         | V <sub>IN</sub> = 15V                                                                                   |                                                                                            |      | 0.003        | 1.0          |       |
| Input Current with Input Voltage Low  | I <sub>INL</sub>        | V <sub>IN</sub> = 0                                                                                     |                                                                                            | -1.0 | -0.0004      |              |       |
| DYNAMIC                               |                         |                                                                                                         |                                                                                            |      |              |              |       |
| Turn-ON Time                          | t <sub>ON</sub>         | See Switching Time Test Circuit<br>V <sub>S</sub> = 2V, R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 35pF     |                                                                                            |      | 460          | 1000         | ns    |
| Turn-OFF Time                         | t <sub>OFF1</sub>       |                                                                                                         |                                                                                            |      | 360          | 500          |       |
|                                       | t <sub>OFF2</sub>       |                                                                                                         |                                                                                            |      | 450          |              |       |
| Source OFF-Capacitance                | C <sub>S (OFF)</sub>    | V <sub>S</sub> = 0, V <sub>IN</sub> = 0, f = 1MHz                                                       |                                                                                            |      | 5            |              | pF    |
| Drain OFF-Capacitance                 | C <sub>D (OFF)</sub>    | V <sub>D</sub> = 0, V <sub>IN</sub> = 0, f = 1MHz                                                       |                                                                                            |      | 5            |              |       |
| Channel ON-Capacitance                | C <sub>D + S (ON)</sub> | V <sub>D</sub> = V <sub>S</sub> = 0, V <sub>IN</sub> = 5V, f = 1MHz                                     |                                                                                            |      | 16           |              |       |
| OFF-Isolation (Note 4)                | OIRR                    | V <sub>IN</sub> = 0, R <sub>L</sub> = 1kΩ, C <sub>L</sub> = 15pF,<br>V <sub>S</sub> = 1VRMS, f = 100kHz |                                                                                            |      | 70           |              | dB    |
| Crosstalk<br>(Channel to Channel)     | CCRR                    |                                                                                                         |                                                                                            |      | 90           |              |       |

# Quad SPST CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS (DG212) (continued)

(V+ = +15V, V- = -15V, GND = 0, TA = +25°C, unless otherwise noted.) (For more information on TYP values see Note 2.)

| PARAMETER                                   | SYMBOL | CONDITIONS             | MIN  | TYP  | MAX   | UNITS |
|---------------------------------------------|--------|------------------------|------|------|-------|-------|
| <b>SUPPLY</b>                               |        |                        |      |      |       |       |
| Positive Supply Current                     | I+     | VIN = 0 and 2.4V (all) |      | 0.02 | 0.4   | mA    |
| Negative Supply Current                     | I-     |                        |      | 0.01 | 0.4   |       |
| Logic Supply Current                        | IL     |                        |      | 0    | 0     |       |
| Power-Supply Range for Continuous Operation | VOP    |                        | ±4.5 |      | ±18.0 | V     |

**Note 2:** Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

**Note 3:** ID(ON) is leakage from driver into "ON" switch.

**Note 4:** OFF-Isolation = 20 log VS/VD, VS = input to OFF switch, VD = output.

## ABSOLUTE MAXIMUM RATINGS (DG202)

Voltages Reference to V-

|                                                                 |                                                     |
|-----------------------------------------------------------------|-----------------------------------------------------|
| V+.....                                                         | 44V                                                 |
| GND.....                                                        | 25V                                                 |
| Digital Inputs (Note 1), VS, VD.....                            | -2V to (V+ + 2V)<br>or 20mA, whichever occurs first |
| Current, Any Terminal Except S or D.....                        | 30mA                                                |
| Continuous Current, S or D.....                                 | 20mA                                                |
| Peak Current, S or D<br>(pulsed at 1ms 10% duty cycle max)..... | 70mA                                                |

Operating Temperature Range

|                                                       |                 |
|-------------------------------------------------------|-----------------|
| DG202C.....                                           | 0°C to +70°C    |
| DG202D/E.....                                         | -40°C to +85°C  |
| DG202A.....                                           | -55°C to +125°C |
| Storage Temperature Range.....                        | -65°C to +150°C |
| Power Dissipation (Note 2)                            |                 |
| 16-Pin Plastic Dip (derate 10.5mW/°C above +70°C) ... | 842mW           |
| 16-Pin SO (derate 8.7mW/°C above +70°C) .....         | 696mW           |
| 16-Pin TSSOP (derate 9.4mW/°C above +70°C) .....      | 755mW           |
| 16-Pin QFN (5 × 5)                                    |                 |
| (derate 19.2mW/°C above +70°C).....                   | 1538mW          |
| 16-Pin Cerdip (derate 10.0mW/°C above +70°C).....     | 800mW           |

**Note 1:** Signals on S-, D-, or IN- exceeding V+ or V- on Maxim's DG202 will be clamped by internal diodes, and are also internally current limited to 25mA.

**Note 2:** Device mounted with all leads soldered to PC board.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS (DG202)

(V+ = +15V, V- = -15V, GND = 0, TA = +25°C, unless otherwise noted.) (For more information on TYP values see Note 3.)

| PARAMETER                         | SYMBOL               | CONDITIONS                                                          |                                             | DG202A |       |     | DG202C, D, E |       |     | UNITS |
|-----------------------------------|----------------------|---------------------------------------------------------------------|---------------------------------------------|--------|-------|-----|--------------|-------|-----|-------|
|                                   |                      |                                                                     |                                             | MIN    | TYP   | MAX | MIN          | TYP   | MAX |       |
| SWITCH                            |                      |                                                                     |                                             |        |       |     |              |       |     |       |
| Analog Signal Range               | V <sub>ANALOG</sub>  |                                                                     |                                             | -15    |       | 15  | -15          |       | 15  | V     |
| Drain-Source ON Resistance        | R <sub>DS (ON)</sub> | V <sub>D</sub> = ±10V, V <sub>IN</sub> = 2.4V, I <sub>S</sub> = 1mA |                                             |        | 115   | 175 |              | 115   | 200 | Ω     |
| Source OFF-Leakage Current        | I <sub>S (OFF)</sub> | V <sub>IN</sub> = 0.8V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V |        | 0.01  | 1.0 |              | 0.01  | 5.0 | nA    |
|                                   |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -1.0   | -0.02 |     | -1.0         | -0.02 |     |       |
| Drain OFF-Leakage Current         | I <sub>D (OFF)</sub> | V <sub>IN</sub> = 0.8V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V |        | 0.01  | 1.0 |              | 0.01  | 5.0 |       |
|                                   |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -1.0   | -0.02 |     | -1.0         | -0.02 |     |       |
| Drain ON-Leakage Current (Note 4) | I <sub>D (ON)</sub>  | V <sub>IN</sub> = 2.4V                                              | V <sub>S</sub> = -14V                       |        | 0.1   | 1.0 |              | 0.1   | 1.0 |       |
|                                   |                      |                                                                     | V <sub>S</sub> = 14V                        | -1.0   |       |     | -5.0         |       |     |       |

# Quad SPST CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS (DG202) (continued)

(V+ = +15V, V- = -15V, GND = 0, T<sub>A</sub> = +25°C, unless otherwise noted.) (For more information on TYP values see Note 3.)

| PARAMETER                                   | SYMBOL                                    | CONDITIONS                                                          | DG202A     |         |       | DG202C, D, E |         |       | UNITS |   |
|---------------------------------------------|-------------------------------------------|---------------------------------------------------------------------|------------|---------|-------|--------------|---------|-------|-------|---|
|                                             |                                           |                                                                     | MIN        | TYP     | MAX   | MIN          | TYP     | MAX   |       |   |
| INPUT                                       |                                           |                                                                     |            |         |       |              |         |       |       |   |
| Input Current with Input Voltage High       | I <sub>INH</sub>                          | V <sub>IN</sub> = 2.4V                                              | -1.0       | -0.0004 |       | -1.0         | -0.0004 |       | μA    |   |
|                                             |                                           | V <sub>IN</sub> = 15V                                               |            | 0.003   | 1.0   |              | 0.003   | 1.0   |       |   |
| Input Current with Input Voltage Low        | I <sub>INL</sub>                          | V <sub>IN</sub> = 0                                                 | -1.0       | -0.0004 |       | -1.0         | -0.0004 |       |       |   |
| DYNAMIC                                     |                                           |                                                                     |            |         |       |              |         |       |       |   |
| Turn-ON Time                                | t <sub>ON</sub>                           | See Figure 1 Switching Time Test Circuit                            |            | 480     | 600   |              | 480     | 600   | ns    |   |
| Turn-OFF Time                               | t <sub>OFF1</sub>                         |                                                                     |            | 370     | 450   |              | 370     | 450   |       |   |
| Charge Injection                            | Q                                         | C <sub>L</sub> = 1000pF, V <sub>GEN</sub> = 0, R <sub>GEN</sub> = 0 |            | 20      |       |              | 20      |       | pC    |   |
| Source OFF-Capacitance                      | C <sub>S (OFF)</sub>                      | V <sub>S</sub> = 0,                                                 | f = 140kHz | 5       |       |              | 5       |       | pF    |   |
| Drain OFF-Capacitance                       | C <sub>D (OFF)</sub>                      | V <sub>IN</sub> = 0                                                 |            | 5       |       |              | 5       |       |       |   |
| Channel ON-Capacitance                      | C <sub>D (ON)</sub> + C <sub>S (ON)</sub> | V <sub>D</sub> = V <sub>S</sub> = 0, V <sub>IN</sub> = 5V           |            | 16      |       |              | 16      |       |       |   |
| OFF-Isolation                               |                                           | V <sub>IN</sub> = 0, Z <sub>L</sub> = 75Ω                           |            | 70      |       |              | 70      |       | dB    |   |
| Crosstalk (Channel to Channel)              |                                           | V <sub>S</sub> = 2.0V, f = 100kHz                                   |            | 90      |       |              | 90      |       |       |   |
| SUPPLY                                      |                                           |                                                                     |            |         |       |              |         |       |       |   |
| Positive Supply Current                     | I+                                        | All channels ON or OFF                                              |            | 0.02    | 0.1   |              | 0.02    | 0.1   | mA    |   |
| Negative Supply Current                     | I-                                        | All channels ON or OFF                                              |            | -0.1    | -0.01 |              | -0.1    | -0.01 |       |   |
| Power-Supply Range for Continuous Operation | V <sub>OP</sub>                           |                                                                     |            | ±4.5    |       | ±18          | ±4.5    |       | ±18.0 | V |

**Note 3:** Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.

**Note 4:** I<sub>D (ON)</sub> is leakage from driver into "ON" switch.

# Quad SPST CMOS Analog Switches

## ELECTRICAL CHARACTERISTICS (DG202)

(V+ = +15V, V- = -15V, GND = 0, T<sub>A</sub> = full operating temperature range, unless otherwise noted.) (For more information on TYP values see Note 3.)

| PARAMETER                             | SYMBOL               | CONDITIONS                                                          |                                             | DG202A |     |     | DG202C, D, E |     |     | UNITS |
|---------------------------------------|----------------------|---------------------------------------------------------------------|---------------------------------------------|--------|-----|-----|--------------|-----|-----|-------|
|                                       |                      |                                                                     |                                             | MIN    | TYP | MAX | MIN          | TYP | MAX |       |
| SWITCH                                |                      |                                                                     |                                             |        |     |     |              |     |     |       |
| Analog Signal Range                   | V <sub>ANALOG</sub>  |                                                                     |                                             | -15    |     | +15 | -15          |     | +15 | V     |
| Drain-Source ON Resistance (Note 5)   | R <sub>DS (ON)</sub> | V <sub>D</sub> = ±10V, V <sub>IN</sub> = 2.4V, I <sub>S</sub> = 1mA |                                             | 250    |     |     | 250          |     |     | Ω     |
| Source OFF-Leakage Current            | I <sub>S (OFF)</sub> | V <sub>IN</sub> = 0.8V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V | 100    |     |     | 100          |     |     | nA    |
|                                       |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -100   |     |     | -100         |     |     |       |
| Drain OFF-Leakage Current             | I <sub>D (OFF)</sub> | V <sub>IN</sub> = 0.8V                                              | V <sub>S</sub> = 14V, V <sub>D</sub> = -14V | 100    |     |     | 100          |     |     |       |
|                                       |                      |                                                                     | V <sub>S</sub> = -14V, V <sub>D</sub> = 14V | -100   |     |     | -100         |     |     |       |
| Drain ON-Leakage Current (Note 6)     | I <sub>D (ON)</sub>  | V <sub>IN</sub> = 2.4V                                              | V <sub>S</sub> = -14V                       | 200    |     |     | 200          |     |     |       |
|                                       |                      |                                                                     | V <sub>D</sub> = 14V                        | -200   |     |     | -200         |     |     |       |
| INPUT                                 |                      |                                                                     |                                             |        |     |     |              |     |     |       |
| Input Current with Input Voltage High | I <sub>INH</sub>     | V <sub>IN</sub> = 2.4V                                              |                                             | -1.0   |     |     | -1.0         |     |     | μA    |
|                                       |                      | V <sub>IN</sub> = 15V                                               |                                             | 1.0    |     |     | 1.0          |     |     |       |
| Input Current with Input Voltage Low  | I <sub>INL</sub>     | V <sub>IN</sub> = 0                                                 |                                             | -1.0   |     |     | -1.0         |     |     |       |

**Note 5:** Electrical characteristics, such as On-Resistance, will change when power supplies other than ±15V, are used.

**Note 6:** I<sub>D (ON)</sub> is leakage from driver into "ON" switch.

## Pin Description

| PIN          |              | NAME    | FUNCTION                                                        |
|--------------|--------------|---------|-----------------------------------------------------------------|
| DIP/SO/TSSOP | QFN/TQFN     |         |                                                                 |
| 1, 16, 9, 8  | 15, 14, 7, 6 | IN1–IN4 | Input                                                           |
| 2, 15, 10, 7 | 16, 13, 8, 5 | D1–D4   | Analog Switch Drain Terminal                                    |
| 3, 14, 11, 6 | 1, 12, 9, 4  | S1–S4   | Analog Switch Source Terminal                                   |
| 4            | 2            | V-      | Negative-Supply Voltage Input                                   |
| 5            | 3            | GND     | Ground                                                          |
| 12           | 10           | N.C.    | No Connection                                                   |
| 13           | 11           | V+      | Positive-Supply Voltage Input—Connected to Substrate            |
| —            | EP           | EP      | Exposed Pad. Connect exposed pad to V+ or leave EP unconnected. |


## Switching Time Test Circuit

Switch output waveform shown for V<sub>S</sub> = constant with logic input waveform as shown. Note that V<sub>S</sub> may be +ve or -ve as per switching times test circuit. V<sub>O</sub> is the steady state output with switch on. Feedthrough via gate capacitance may result in spikes at leading and trailing edge of output waveform.

## Protecting Against Fault Conditions

Fault conditions occur when power supplies are turned off when input signals are still present, or when over-voltages occur at the inputs during normal operation. In either case, source-to-body diodes can be forward biased and conduct current from the signal source. If

# Quad SPST CMOS Analog Switches

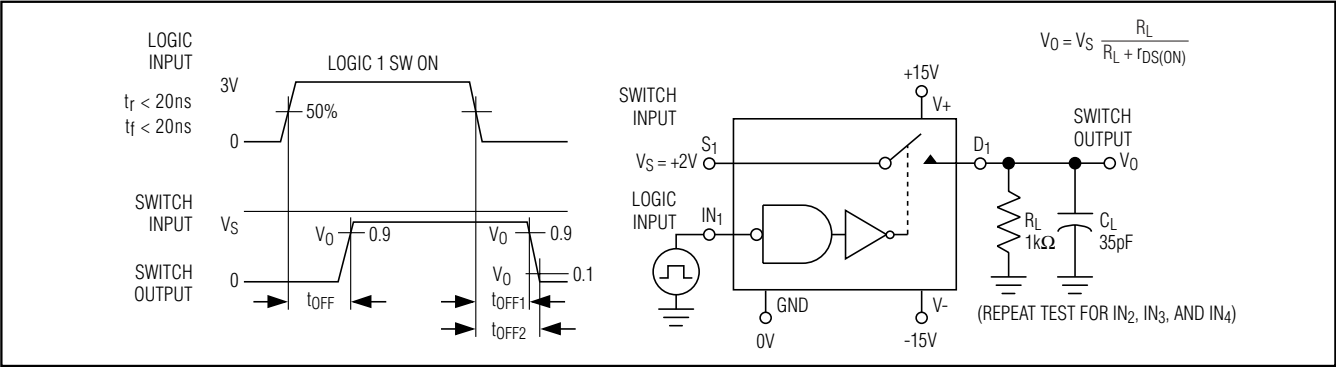


## Typical RDS(ON) vs. Power Supplies for Maxim's DG202, and DG212

| POWER SUPPLIES | RDS(ON) AT ANALOG SIGNAL LEVEL |      |      |      |      |      |
|----------------|--------------------------------|------|------|------|------|------|
|                | -5V                            | +5V  | -10V | +10V | -15V | +15V |
| ±5V            | 350Ω                           | 380Ω | —    | —    | —    | —    |
| ±10V           | —                              | —    | 165Ω | 250Ω | —    | —    |
| ±15V           | —                              | —    | 125Ω | 160Ω | 135Ω | 155Ω |

this current is required to be kept to low (μA) levels then the addition of external protection diodes is recommended.

To provide protection for overvoltages up to 20V above the supplies, a 1N4001 or 1N914 type diode should be placed in series with the positive and negative supplies as shown in Figure 2. The addition of these diodes will reduce the analog signal range to 1V below the positive supply and 1V above the negative supply.

## Pin Configurations (continued)

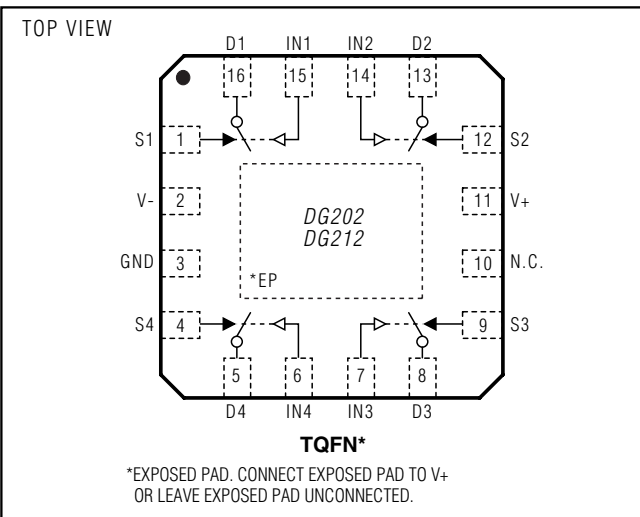




# Quad SPST CMOS Analog Switches

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

DG202/DG212

SOICN EPSS



| DIM | INCHES    |       | MILLIMETERS |      |
|-----|-----------|-------|-------------|------|
|     | MIN       | MAX   | MIN         | MAX  |
| A   | 0.053     | 0.069 | 1.35        | 1.75 |
| A1  | 0.004     | 0.010 | 0.10        | 0.25 |
| B   | 0.014     | 0.019 | 0.35        | 0.49 |
| C   | 0.007     | 0.010 | 0.19        | 0.25 |
| e   | 0.050 BSC |       | 1.27 BSC    |      |
| E   | 0.150     | 0.157 | 3.80        | 4.00 |
| H   | 0.228     | 0.244 | 5.80        | 6.20 |
| L   | 0.016     | 0.050 | 0.40        | 1.27 |

### VARIATIONS:

| DIM | INCHES |       | MILLIMETERS |       | N  | MS012 |
|-----|--------|-------|-------------|-------|----|-------|
|     | MIN    | MAX   | MIN         | MAX   |    |       |
| D   | 0.189  | 0.197 | 4.80        | 5.00  | 8  | AA    |
| D   | 0.337  | 0.344 | 8.55        | 8.75  | 14 | AB    |
| D   | 0.386  | 0.394 | 9.80        | 10.00 | 16 | AC    |

### NOTES:


1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED 0.15mm (.006").
3. LEADS TO BE COPLANAR WITHIN 0.10mm (.004").
4. CONTROLLING DIMENSION: MILLIMETERS.
5. MEETS JEDEC MS012.
6. N = NUMBER OF PINS.

|                                                                                                                      |                                 |                                                                                       |     |
|----------------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------------------------------------------------------------|-----|
|  <b>DALLAS</b><br>SEMICONDUCTOR |                                 |  |     |
| PROPRIETARY INFORMATION                                                                                              |                                 |                                                                                       |     |
| TITLE:<br>PACKAGE OUTLINE, .150" SOIC                                                                                |                                 |                                                                                       |     |
| APPROVAL                                                                                                             | DOCUMENT CONTROL NO.<br>21-0041 | REV.<br>B                                                                             | 1/1 |

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

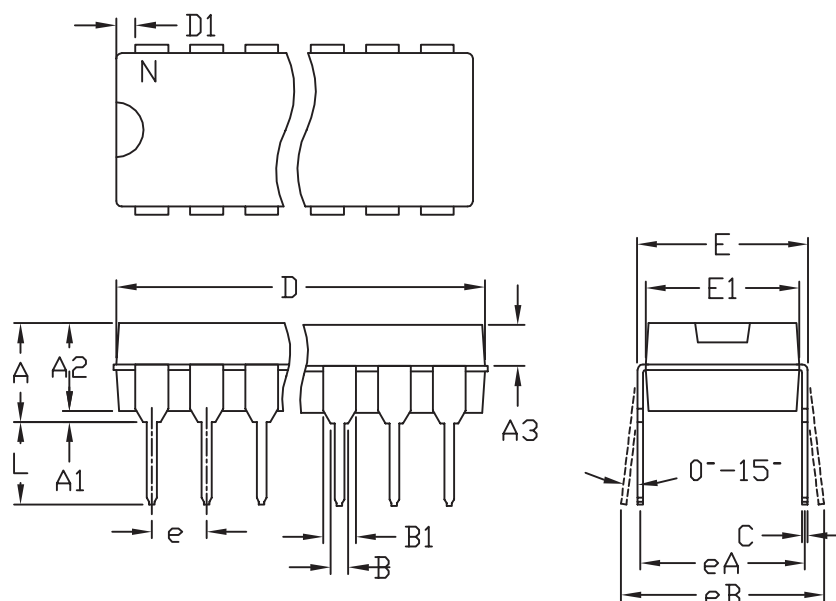

PDIP/EP

|    | INCHES |       | MILLIMETERS |       |
|----|--------|-------|-------------|-------|
|    | MIN    | MAX   | MIN         | MAX   |
| A  | ---    | 0.180 | ---         | 4.572 |
| A1 | 0.015  | ---   | 0.38        | ---   |
| A2 | 0.125  | 0.175 | 3.18        | 4.45  |
| A3 | 0.055  | 0.080 | 1.40        | 2.03  |
| B  | 0.015  | 0.022 | 0.381       | 0.56  |
| B1 | 0.045  | 0.065 | 1.14        | 1.65  |
| C  | 0.008  | 0.014 | 0.2         | 0.355 |
| D1 | 0.005  | 0.080 | 0.13        | 2.03  |
| E  | 0.300  | 0.325 | 7.62        | 8.26  |
| E1 | 0.240  | 0.310 | 6.10        | 7.87  |
| e  | 0.100  | BSC.  | 2.54        | BSC.  |
| eA | 0.300  | BSC.  | 7.62        | BSC.  |
| eB | 0.400  | BSC.  | 10.16       | BSC.  |
| L  | 0.115  | 0.150 | 2.921       | 3.81  |

|   | INCHES |       | MILLIMETERS |       |    |       |
|---|--------|-------|-------------|-------|----|-------|
|   | MIN    | MAX   | MIN         | MAX   | N  | MS001 |
| D | 0.348  | 0.390 | 8.84        | 9.91  | 8  | AB    |
| D | 0.735  | 0.765 | 18.67       | 19.43 | 14 | AC    |
| D | 0.745  | 0.765 | 18.92       | 19.43 | 16 | AA    |
| D | 0.885  | 0.915 | 22.48       | 23.24 | 18 | AD    |
| D | 1.015  | 1.045 | 25.78       | 26.54 | 20 | AE    |
| D | 1.14   | 1.265 | 28.96       | 32.13 | 24 | AF    |
| D | 1.360  | 1.380 | 34.54       | 35.05 | 28 | *5    |

### NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. CONTROLLING DIMENSION: MILLIMETER
4. MEETS JEDEC MS001-XX AS SHOWN IN ABOVE TABLE
5. SIMILAR TO JEDEC MO-058AB
6. N = NUMBER OF PINS



PACKAGE FAMILY OUTLINE: PDIP .300"

1/1

21-0043 D


DOCUMENT CONTROL NUMBER REV

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)


DG202/DG212

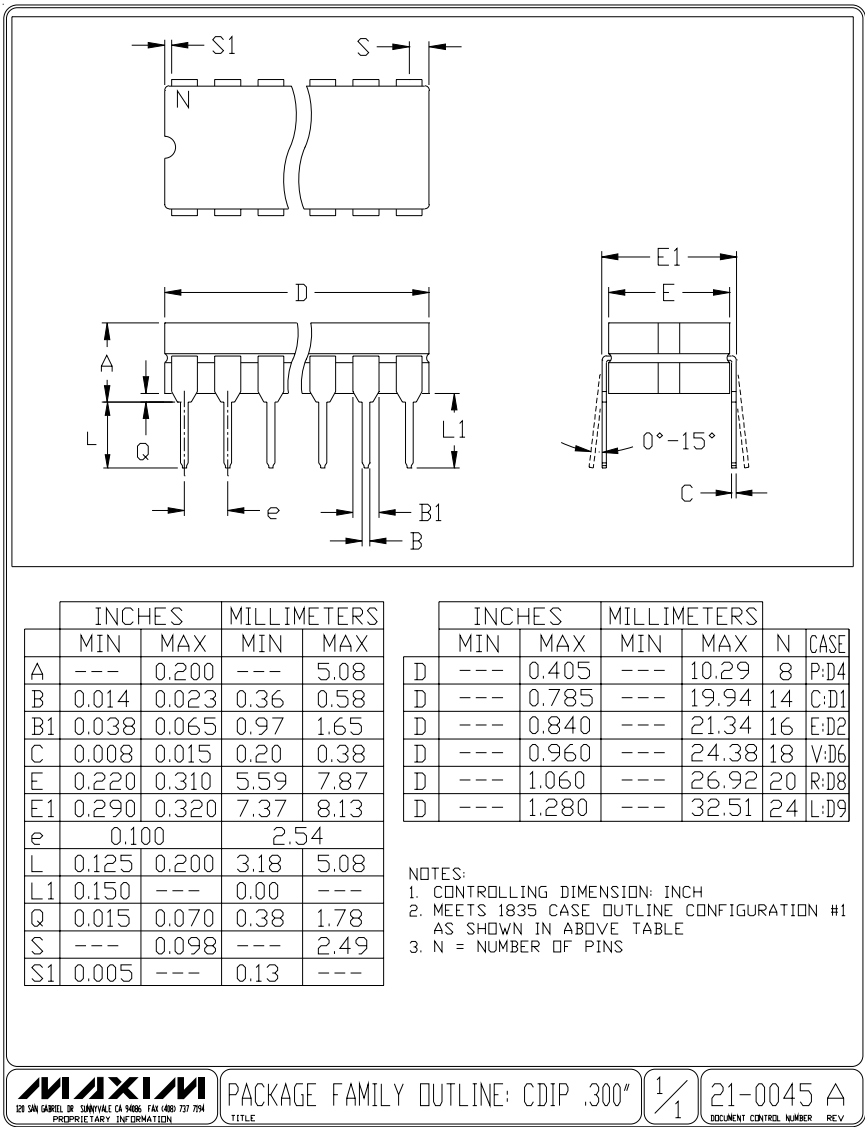

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

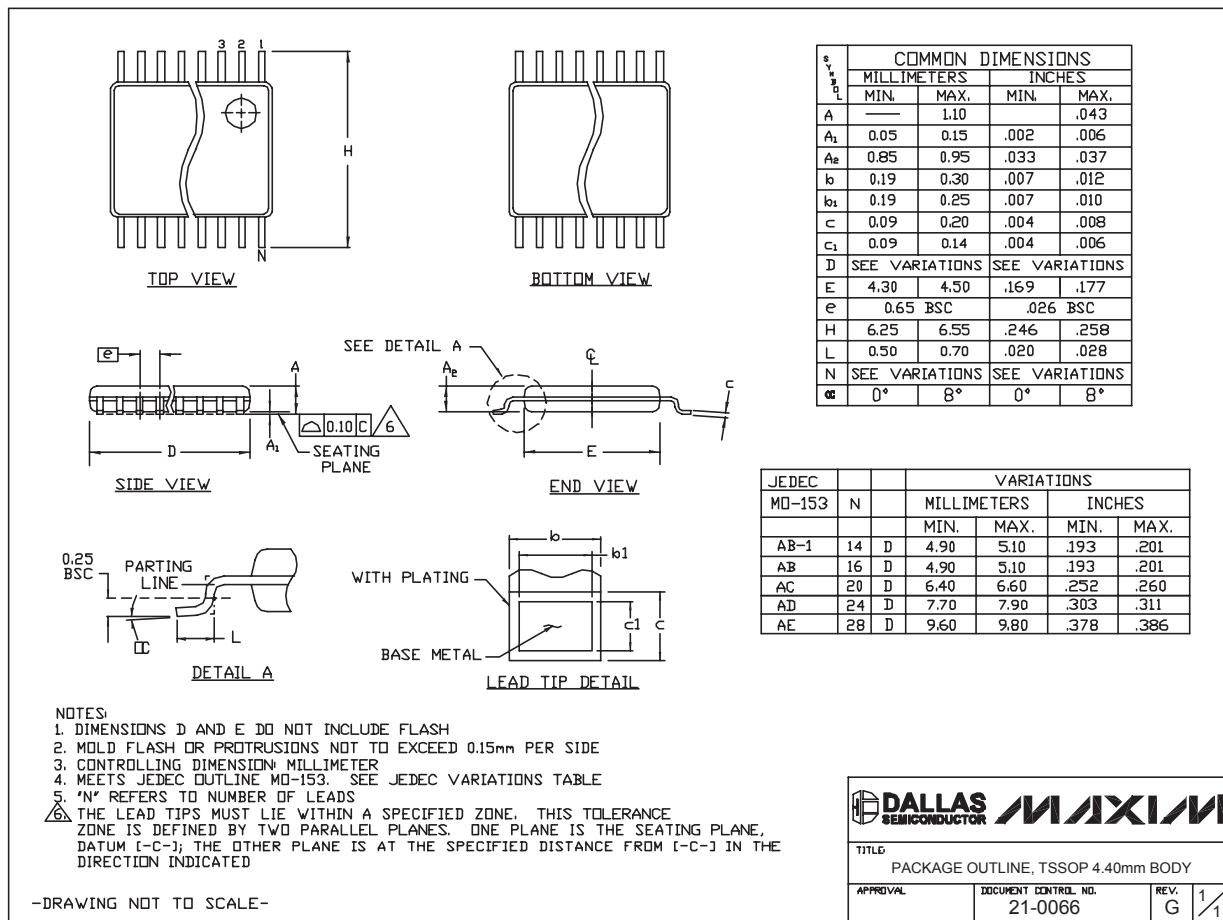


TSSOP4, 40mm, EPS

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

DG202/DG212

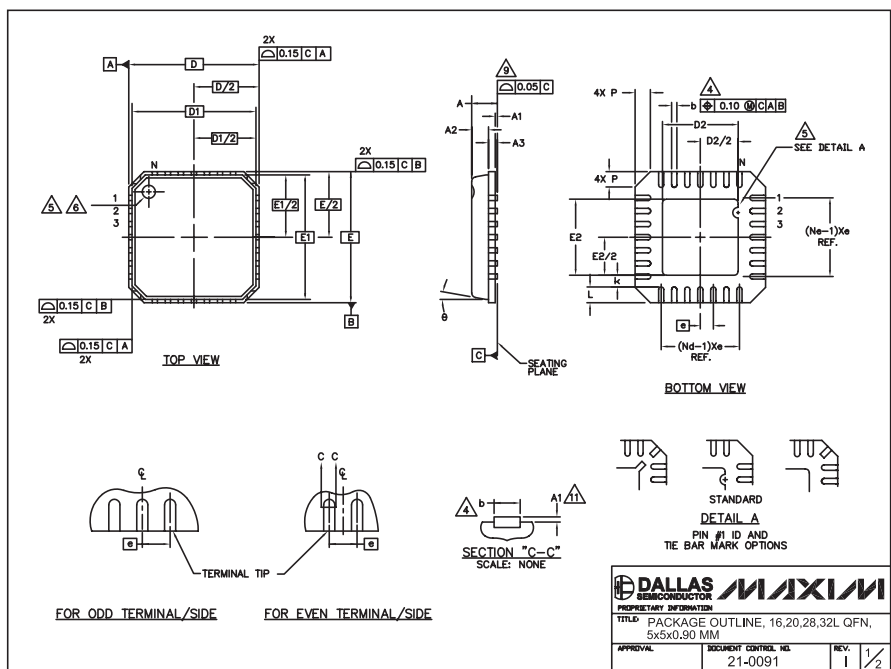

| COMMON DIMENSIONS |          |      |      |          |      |      |          |      |      |          |      |      |
|-------------------|----------|------|------|----------|------|------|----------|------|------|----------|------|------|
| PKG               | 16L 5x5  |      |      | 20L 5x5  |      |      | 28L 5x5  |      |      | 32L 5x5  |      |      |
| SYMBOL            | MIN.     | NOM. | MAX. | MIN.     | NOM. | MAX. | MIN.     | NOM. | MAX. | MIN.     | NOM. | MAX. |
| A                 | 0.80     | 0.90 | 1.00 | 0.80     | 0.90 | 1.00 | 0.80     | 0.90 | 1.00 | 0.80     | 0.90 | 1.00 |
| A1                | 0.00     | 0.01 | 0.05 | 0.00     | 0.01 | 0.05 | 0.00     | 0.01 | 0.05 | 0.00     | 0.01 | 0.05 |
| A2                | 0.00     | 0.65 | 1.00 | 0.00     | 0.65 | 1.00 | 0.00     | 0.65 | 1.00 | 0.00     | 0.65 | 1.00 |
| A3                | 0.20 REF |      |      | 0.20 REF |      |      | 0.20 REF |      |      | 0.20 REF |      |      |
| b                 | 0.28     | 0.33 | 0.40 | 0.23     | 0.28 | 0.35 | 0.18     | 0.23 | 0.30 | 0.18     | 0.23 | 0.30 |
| D                 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 |
| D1                | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      |
| E                 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 | 4.90     | 5.00 | 5.10 |
| E1                | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      | 4.75 BSC |      |      |
| e                 | 0.80 BSC |      |      | 0.65 BSC |      |      | 0.50 BSC |      |      | 0.50 BSC |      |      |
| k                 | 0.25     | —    | —    | 0.25     | —    | —    | 0.25     | —    | —    | 0.25     | —    | —    |
| L                 | 0.35     | 0.55 | 0.75 | 0.35     | 0.55 | 0.75 | 0.35     | 0.55 | 0.75 | 0.30     | 0.40 | 0.50 |
| N                 | 16       |      |      | 20       |      |      | 28       |      |      | 32       |      |      |
| ND                | 4        |      |      | 5        |      |      | 7        |      |      | 8        |      |      |
| NE                | 4        |      |      | 5        |      |      | 7        |      |      | 8        |      |      |
| P                 | 0.00     | 0.42 | 0.60 | 0.00     | 0.42 | 0.60 | 0.00     | 0.42 | 0.60 | 0.00     | 0.42 | 0.60 |
| θ                 | 0°       | 12°  | 0°   | 12°      | 0°   | 12°  | 0°       | 12°  | 0°   | 12°      | 0°   | 12°  |

| EXPOSED PAD VARIATIONS |      |      |      |      |      |      |
|------------------------|------|------|------|------|------|------|
| PKG CODES              | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| G1655-3                | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G2055-1                | 2.55 | 2.70 | 2.85 | 2.55 | 2.70 | 2.85 |
| G2055-2                | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G2855-1                | 2.55 | 2.70 | 2.85 | 2.55 | 2.70 | 2.85 |
| G2855-2                | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |
| G3255-1                | 2.95 | 3.10 | 3.25 | 2.95 | 3.10 | 3.25 |

**NOTES:**

- DIE THICKNESS ALLOWABLE IS 0.305mm MAXIMUM (.012 INCHES MAXIMUM)
- DIMENSIONING & TOLERANCES CONFORM TO ASME Y14.5M - 1994.
- N IS THE NUMBER OF TERMINALS.
- ND IS THE NUMBER OF TERMINALS IN X-DIRECTION & Ne IS THE NUMBER OF TERMINALS IN Y-DIRECTION.
- DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.20 AND 0.25mm FROM TERMINAL TIP.
- THE PIN #1 IDENTIFIER MUST BE EXISTED ON THE TOP SURFACE OF THE PACKAGE BY USING INDENTATION MARK OR INK/LASER MARKED. DETAILS OF PIN #1 IDENTIFIER IS OPTIONAL, BUT MUST BE LOCATED WITHIN ZONE INDICATED.
- EXACT SHAPE AND SIZE OF THIS FEATURE IS OPTIONAL.
- ALL DIMENSIONS ARE IN MILLIMETERS.
- PACKAGE WARPAGE MAX 0.05mm.
- APPLIED FOR EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDED PART OF EXPOSED PAD FROM MEASURING.
- MEETS JEDEC MO220; EXCEPT DIMENSION "b".
- APPLIED FOR EXPOSED PAD AND TERMINALS. EXCLUDE EMBEDDING PART OF EXPOSED PAD FROM MEASURING.
- THIS PACKAGE OUTLINE APPLIES TO ANVIL SINGULATION (STEPPED SIDES).

**DALLAS MAXIM SEMICONDUCTOR**

**PROPRIETARY INFORMATION**


**TITLE:** PACKAGE OUTLINE, 16,20,28,32L QFN, 5x5x0.90 MM

**APPROVAL**      **DOCUMENT CONTROL NO.** 21-0091      **REV.** I 2/2

# Quad SPST CMOS Analog Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

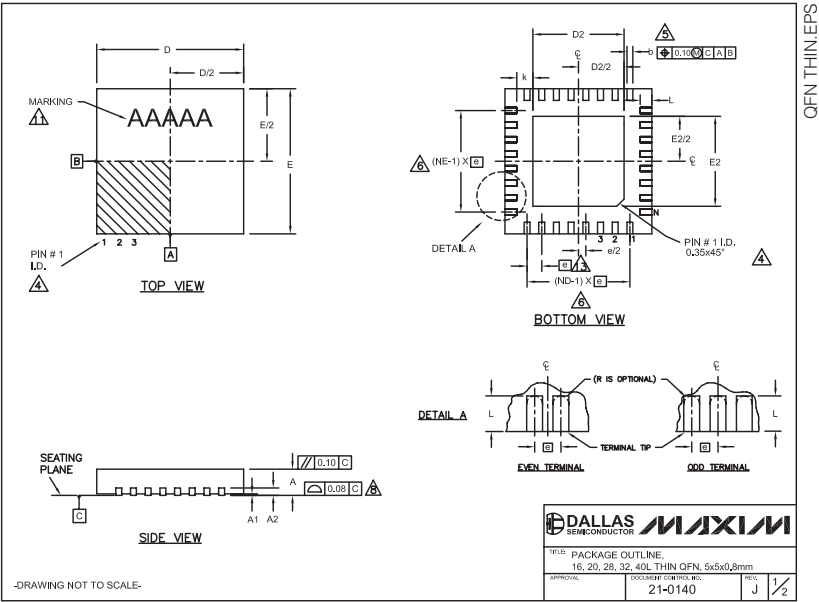

| COMMON DIMENSIONS |           |      |      |           |      |      |           |      |      |           |      |      |
|-------------------|-----------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|
| PKG.              | 16L 5x5   |      |      | 20L 5x5   |      |      | 28L 5x5   |      |      | 32L 5x5   |      |      |
| SYMBOL            | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. |
| A                 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 |
| A1                | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 |
| A2                | 0.20 REF. |      |      | 0.20 REF. |      |      | 0.20 REF. |      |      | 0.20 REF. |      |      |
| b                 | 0.25      | 0.30 | 0.35 | 0.25      | 0.30 | 0.35 | 0.20      | 0.25 | 0.30 | 0.20      | 0.25 | 0.30 |
| D                 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 |
| E                 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 | 4.90      | 5.00 | 5.10 |
| e                 | 0.80 BSC. |      |      | 0.85 BSC. |      |      | 0.90 BSC. |      |      | 0.90 BSC. |      |      |
| k                 | 0.25      | -    | -    | 0.25      | -    | -    | 0.25      | -    | -    | 0.25      | -    | -    |
| L                 | 0.30      | 0.40 | 0.50 | 0.45      | 0.55 | 0.65 | 0.30      | 0.40 | 0.50 | 0.30      | 0.40 | 0.50 |
| N                 | 16        |      |      | 20        |      |      | 28        |      |      | 32        |      |      |
| ND                | 4         |      |      | 5         |      |      | 7         |      |      | 8         |      |      |
| NE                | 4         |      |      | 5         |      |      | 7         |      |      | 8         |      |      |
| JEDEC             | WHHB      |      |      | WHHC      |      |      | WHHD-1    |      |      | WHHD-2    |      |      |

| EXPOSED PAD VARIATIONS |      |      |      |      |      |      |      |      |      |      |      |      |
|------------------------|------|------|------|------|------|------|------|------|------|------|------|------|
| PKG. CODES             | D2   |      |      | E2   |      |      |      |      |      |      |      |      |
| SYMBOL                 | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| T1655-2                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T1655-3                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T1655N-1               | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T2055-3                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T2055-4                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T2055-5                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |      |      |      |      |      |      |
| T2855-3                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |      |      |      |      |      |      |
| T2855-4                | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 |      |      |      |      |      |      |
| T2855-5                | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 |      |      |      |      |      |      |
| T2855-6                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |      |      |      |      |      |      |
| T2855-7                | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 |      |      |      |      |      |      |
| T2855-8                | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |      |      |      |      |      |      |
| T2855N-1               | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |      |      |      |      |      |      |
| T3255-3                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T3255-4                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T3255-5                | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T3255N-1               | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |      |      |      |      |      |      |
| T4055-1                | 3.40 | 3.50 | 3.60 | 3.40 | 3.50 | 3.60 |      |      |      |      |      |      |
| T4055-2                | 3.40 | 3.50 | 3.60 | 3.40 | 3.50 | 3.60 |      |      |      |      |      |      |

NOTES:

1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JEDEC 95-1 SPR-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
5. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
6. ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
7. DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
8. COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
9. DRAWING CONFORMS TO JEDEC MO220, EXCEPT EXPOSED PAD DIMENSION FOR T2855-3 AND T2855-6.
10. WARPAGE SHALL NOT EXCEED 0.10 mm.
11. MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
12. NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
13. LEAD CENTERLINES TO BE AT TRUE POSITION AS DEFINED BY BASIC DIMENSION "w", ±0.05.

-DRAWING NOT TO SCALE-

## Revision History

Pages changed at Rev3: 1-6, 11

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

© 2006 Maxim Integrated Products MAXIM is a registered trademark of Maxim Integrated Products, Inc.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.