nichicon

UZT

4.5mmL Chip Type, Wide Temperature Range

For SMD | Smaller | Anti-Solvent Feature

- Chip type with 4.5mm height, operating over wide temperature range of −40 to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

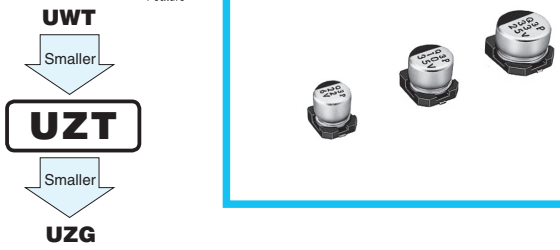

■Specifications

Item	Performance Characteristics
Category Temperature Range	−40 to +105°C
Rated Voltage Range	6.3 to 50V
Rated Capacitance Range	1 to 100μF
Capacitance Tolerance	±20% at 120Hz, 20°C
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (μA) , whichever is greater.
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C Rated voltage (V): 6.3 / 10 / 16 / 25 / 35 / 50 tan δ (MAX.): 0.38 / 0.32 / 0.20 / 0.16 / 0.14 / 0.14
Stability at Low Temperature	Measurement frequency : 120Hz Rated voltage (V): 6.3 / 10 / 16 / 25 / 35 / 50 Impedance ratio ZT / Z20 (MAX.) Z−25°C / Z+20°C: 6 / 5 / 3 / 3 / 3 / 3 Z−40°C / Z+20°C: 10 / 10 / 6 / 6 / 4 / 4
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 105°C. Capacitance change: Within ±25% of the initial capacitance value (16V or less) / Within ±20% of the initial capacitance value (25V or more) tan δ: 300% or less than initial specified value Leakage current: Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C. Capacitance change: Within ±10% of the initial capacitance value tan δ: Less than or equal to the initial specified value Leakage current: Less than or equal to the initial specified value
Marking	Black print on the case top.

■Chip Type

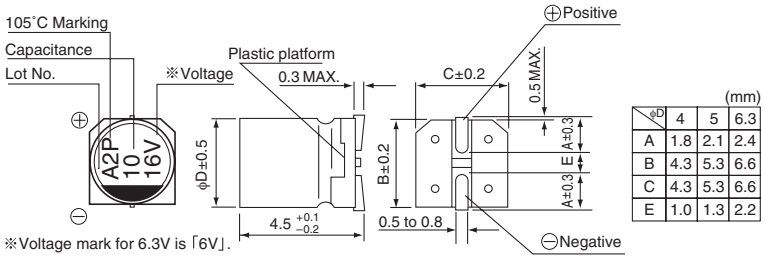

(mm)

φD	4	5	6.3
A	1.8	2.1	2.4
B	4.3	5.3	6.6
C	4.3	5.3	6.6
E	1.0	1.3	2.2

Type numbering system (Example : 16V 10μF)

1	2	3	4	5	6	7	8	9	10	11	12	13	14
U	Z	T	1	C	1	0	0	M	C	L	1	G	B

- 14: Taping code
- 12 13: Configuration
- 9: Capacitance tolerance (±20%)
- 6 7 8: Rated capacitance (10μF)
- 4 5: Rated voltage (16V)
- 3: Series name
- 1 2: Type

■Dimensions

Cap. (μF) \ V / Code	6.3 / 0J		10 / 1A		16 / 1C		25 / 1E		35 / 1V		50 / 1H	
1	010										4	5.4
2.2	2R2										4	9.6
3.3	3R3										4	12
4.7	4R7						4	11	4	13	5	16
10	100				4	16	5	20	5	22	6.3	26
22	220	4	19	5	24	5	26	6.3	33	6.3	36		
33	330	5	26	5	30	6.3	35	6.3	42				
47	470	5	32	6.3	40	6.3	44						
100	101	6.3	52									Case size φD (mm)	Rated ripple

Rated ripple current (mArms) at 105°C 120Hz

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UUX(p.170), UUJ(p.176) series if high C/V products are reqired.
- Please refer to page 3 for the minimum order quantity.

● Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.