




## SERIES: VOF-10 | DESCRIPTION: AC-DC POWER SUPPLY

### FEATURES


- up to 10 W continuous power
- compact size
- universal input (85~264 Vac / 120~375 Vdc)
- single output from 3.3~48 Vdc
- no minimum load required
- 3000 Vac isolation
- over current, over voltage, and short circuit protections
- UL/cUL and TUV 60950-1 safety approvals
- no load power consumption < 0.5 W
- efficiency up to 78%

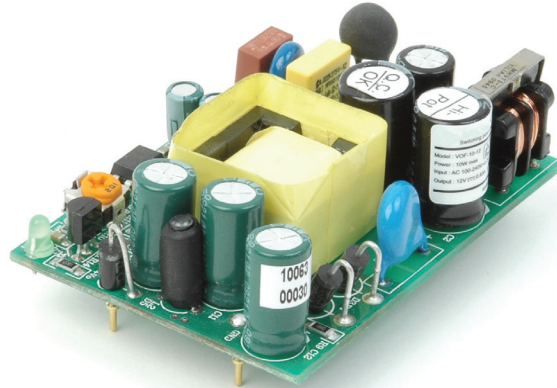

| MODEL      | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple <sup>1</sup><br>and noise<br>max<br>(mVp-p) | efficiency<br>typ<br>(%) |
|------------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|--------------------------|
| VOF-10-3.3 | 3.3                        | 2.4                             | 8                             | 100                                                | 70                       |
| VOF-10-5   | 5                          | 2.0                             | 10                            | 100                                                | 75                       |
| VOF-10-9*  | 9                          | 1.11                            | 10                            | 120                                                | 75                       |
| VOF-10-12  | 12                         | 0.83                            | 10                            | 120                                                | 75                       |
| VOF-10-15  | 15                         | 0.67                            | 10                            | 150                                                | 75                       |
| VOF-10-24  | 24                         | 0.42                            | 10                            | 240                                                | 78                       |
| VOF-10-48* | 48                         | 0.21                            | 10                            | 480                                                | 78                       |

Notes: 1. Ripple & noise are measured at 20 MHz BW with 47  $\mu$ F ceramic and 100 nF electrolytic capacitors on the output  
 \*. Discontinued.

### PART NUMBER KEY

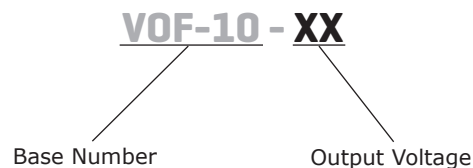

## INPUT

| parameter      | conditions/description                                           | min       | typ | max        | units      |
|----------------|------------------------------------------------------------------|-----------|-----|------------|------------|
| voltage        |                                                                  | 85<br>120 |     | 264<br>375 | Vac<br>Vdc |
| frequency      |                                                                  | 47        |     | 63         | Hz         |
| input current  |                                                                  |           |     | 0.6        | A          |
| inrush current | 110 Vac, full load, cold start<br>220 Vac, full load, cold start |           |     | 15<br>30   | A<br>A     |
| input fuse     | built-in, non-user serviceable                                   |           |     |            |            |

## OUTPUT

| parameter                 | conditions/description            | min | typ          | max        | units  |
|---------------------------|-----------------------------------|-----|--------------|------------|--------|
| line regulation           | 3.3 Vdc model<br>all other models |     | ±0.6<br>±0.5 |            | %<br>% |
| load regulation           | 3.3 Vdc model<br>all other models |     | ±1.2<br>±1   |            | %<br>% |
| temperature coefficient   |                                   |     | ±0.05        |            | %/°C   |
| hold-up time              | at 115 Vac, full load             |     | 16           |            | ms     |
| adjustability             | adjustable with built-in trim pot |     | ±5           |            | %      |
| switching frequency       |                                   |     | 100          |            | kHz    |
| no load power consumption | 48 Vdc model<br>all other models  |     |              | 0.7<br>0.5 | W<br>W |

## PROTECTIONS

| parameter                | conditions/description                                    | min | typ | max | units |
|--------------------------|-----------------------------------------------------------|-----|-----|-----|-------|
| over voltage protection  | clamped by TVS                                            |     |     |     |       |
| over current protection  | automatically recovers                                    |     | 105 |     | %     |
| short circuit protection | protected, long term short circuit may reduce reliability |     |     |     |       |

## SAFETY & COMPLIANCE

| parameter            | conditions/description                | min     | typ   | max  | units |
|----------------------|---------------------------------------|---------|-------|------|-------|
| isolation voltage    | input to output at 10 mA for 1 minute |         | 3,000 |      | Vac   |
| isolation resistance | input to output at 500 Vdc at 25°C    | 50      |       |      | MΩ    |
| safety approvals     | TUV EN 60950, UL/cUL 60950-1          |         |       |      |       |
| EMI/EMC              | FCC class B, EN 55022 class B, CE     |         |       |      |       |
| leakage current      |                                       |         |       | 0.25 | mA    |
| RoHS                 | 2011/65/EU                            |         |       |      |       |
| MTBF                 | according to MIL-HDBK-217F            | 250,000 |       |      | hours |


## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | 0   |     | 60  | °C    |
| storage temperature   |                        | -20 |     | 85  | °C    |
| operating humidity    | non-condensing         | 20  |     | 90  | %     |
| storage humidity      | non-condensing         | 20  |     | 90  | %     |


## MECHANICAL

| parameter      | conditions/description                         | min | typ | max | units |
|----------------|------------------------------------------------|-----|-----|-----|-------|
| dimensions     | 65 x 45 x 18.5 (2.56 x 1.77 x 0.73 inches)     |     |     |     | mm    |
| cooling method | free air convection (see derating curve below) |     |     |     |       |

## DERATING CURVES

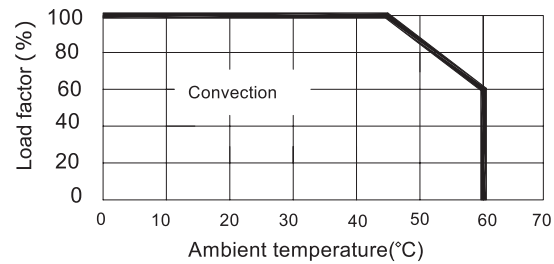

## MOUNTING METHOD



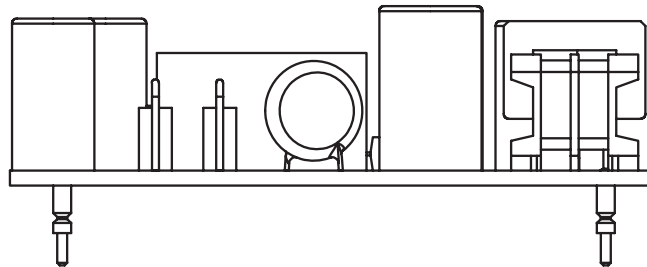


### Horizontal

(performance evaluations conducted under this mounting method)

## MECHANICAL DRAWING

units: mm [inches]  
tolerance:  $\pm 0.3$  [ $\pm 0.01$ ]  
unless otherwise noted

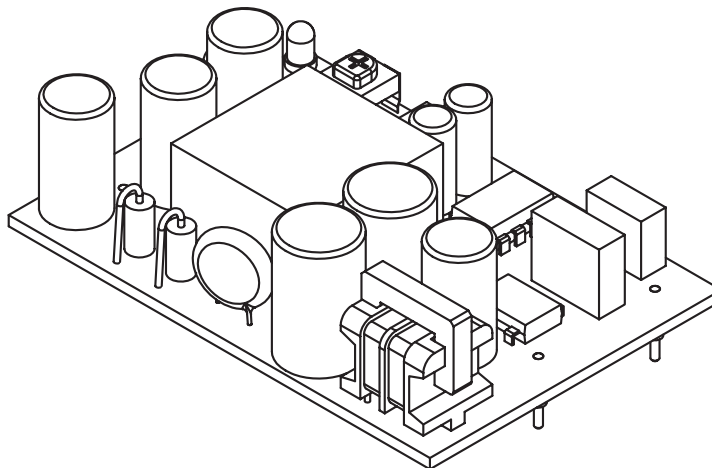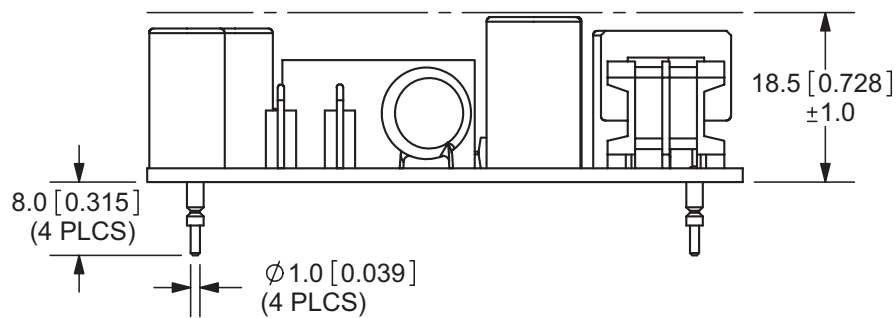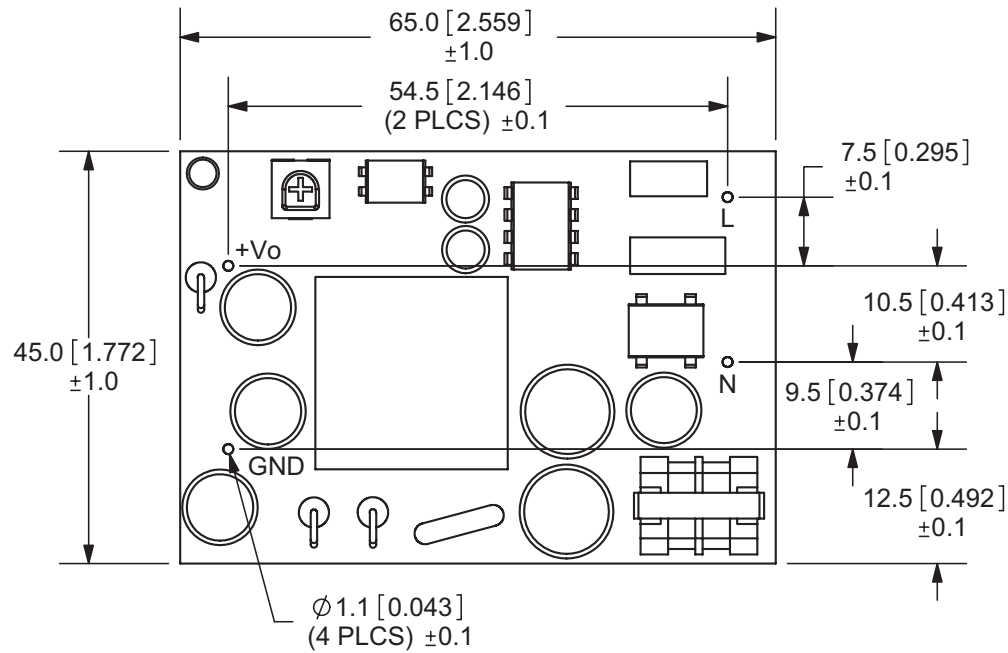

## REVISION HISTORY

| rev. | description                    | date       |
|------|--------------------------------|------------|
| 1.0  | initial release                | 03/18/2010 |
| 1.01 | new template applied           | 05/13/2011 |
| 1.02 | added MTBF data                | 09/20/2011 |
| 1.03 | V-Infinity branding removed    | 08/21/2012 |
| 1.04 | discontinued 9 & 48 Vdc models | 12/29/2015 |

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC®**

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.