


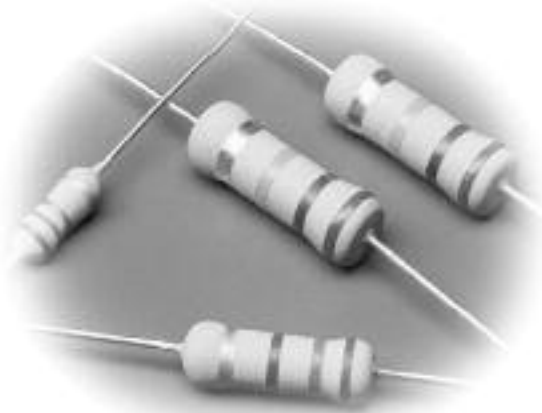


### features


- PCF series: Coated with UL94V0 flameproof material
- Suitable for automatic machine insertion
- Able to replace carbon composition resistors in most applications
- Marking: HFC size: Reddish brown body color with alpha-numeric marking, PCF size: Light green body color with color-coded bands
- Products with lead-free terminations meet EU RoHS requirements
- Higher reliability against disconnection compared to wirewound resistors and film resistors
- AEC-Q200 Qualified: HPC only

### dimensions and construction

#### HPC

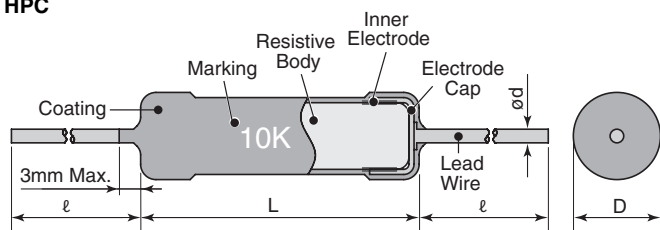

#### PCF

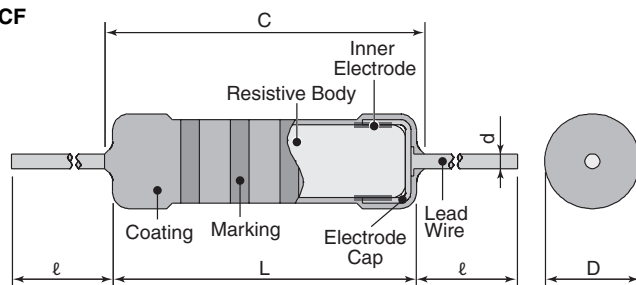

| Type   | Dimensions inches (mm)   |                |                        |               |                         |
|--------|--------------------------|----------------|------------------------|---------------|-------------------------|
|        | L                        | C (max.)       | D                      | d (nom.)      | I                       |
| HPC1/2 | .433±.039<br>(11.0±2.0)  | —              | .138±.039<br>(3.5±1.0) | .031<br>(0.8) | 1.50±.118<br>(38.0±3.0) |
| HPC1   | 0.630±.039<br>(16.0±2.0) | —              | .177±.039<br>(4.5±1.0) |               |                         |
| HPC2   | .827±.039<br>(21.0±2.0)  | —              | .197±.039<br>(5.0±1.0) |               |                         |
| HPC3   | 1.02±.039<br>(26.0±2.0)  | —              | .236±.039<br>(6.0±1.0) |               |                         |
| HPC4   | 1.50±.039<br>(38.0±2.0)  | —              | .276±.039<br>(7.0±1.0) | .039<br>(1.0) | 1.18±.118<br>(30.0±3.0) |
| HPC5   | 1.73±.039<br>(44.0±2.0)  | —              | .295±.039<br>(7.5±1.0) |               |                         |
| PCF1/2 | .354±.039<br>(9.0±1.0)   | .437<br>(11.1) | .138±.02<br>(3.5±0.5)  | .028<br>(0.7) |                         |
| PCF1   | 0.65±.039<br>(16.5±1.0)  | .748<br>(19.0) | .217±.039<br>(5.5±1.0) | .031<br>(0.8) |                         |
| PCF2   | .748±.039<br>(19.0±1.0)  | .886<br>(22.5) | .276±.039<br>(7.0±1.0) |               |                         |

### ordering information

| Part # | PCF        | 1/2                                                    | C                    | T631                | R                  | 102                                                                          | K                  |
|--------|------------|--------------------------------------------------------|----------------------|---------------------|--------------------|------------------------------------------------------------------------------|--------------------|
| Type   | HPC<br>PCF | Power Rating                                           | Termination Material | Taping              | Packaging          | Nominal Resistance                                                           | Tolerance          |
|        |            | 1/2: 0.5W<br>1: 1W<br>2: 2W<br>3: 3W<br>4: 4W<br>5: 5W | C: SnCu              | 1/2: T52<br>1: T631 | A: Ammo<br>R: Reel | 2 significant figures + 1 multiplier<br>3 significant figures + 1 multiplier | K: ±10%<br>M: ±20% |

For further information on packaging, please refer to Appendix C.

### applications and ratings


| Part Designation | Power Rating @ 70°C | Minimum Dielectric Withstanding Voltage | Resistance Range E-12 (±10%) E-6 (±20%)       | Resistance Tolerance | T.C.R. (ppm/°C)                       | Absolute Maximum Working Voltage | Absolute Maximum Overload Voltage | Absolute Maximum Pulse Voltage* | Operating Temperature Range |
|------------------|---------------------|-----------------------------------------|-----------------------------------------------|----------------------|---------------------------------------|----------------------------------|-----------------------------------|---------------------------------|-----------------------------|
| HPC1/2           | 0.5W                | —                                       | 10Ω - 390KΩ (+10%)<br><br>3.3Ω - 330KΩ (+20%) | K: ±10%<br>M: ±20%   | -900±300: R<100Ω<br>-1200±300: R≥100Ω | 200V                             | 400V                              | 8kV                             | -40°C to +200°C             |
| HPC1             | 1.0W                | —                                       |                                               |                      |                                       | 300V                             | 600V                              | 15kV                            |                             |
| HPC2             | 2.0W                | —                                       |                                               |                      |                                       | 400V                             | 800V                              | 25kV                            |                             |
| HPC3             | 3.0W                | —                                       |                                               |                      |                                       | 450V                             | 900V                              | 25kV                            |                             |
| HPC4             | 4.0W                | —                                       |                                               |                      |                                       | 500V                             | 1000V                             | 25kV                            |                             |
| HPC5             | 5.0W                | —                                       |                                               |                      |                                       | 550V                             | 1100V                             | 25kV                            |                             |
| PCF1/2           | 0.5W                | 500V                                    | 4.7Ω - 100KΩ                                  |                      | -900±300: R<100Ω<br>-1300+300: R≥100Ω | 200V                             | 400V                              | 10kV                            |                             |
| PCF1             | 1.0W                |                                         | 3.3Ω - 390KΩ                                  |                      |                                       | 300V                             | 600V                              | 14kV                            |                             |
| PCF2             | 2.0W                |                                         |                                               |                      |                                       | 400V                             | 800V                              | 20kV                            |                             |

\* Resistance to pulse: change shall be ±5% of the pre-test values. 1 sec. ON, 1 second OFF, 10,000 cycles. The voltage is applied with maximum pulse voltage.

### environmental applications


#### Derating Curve

##### PCF

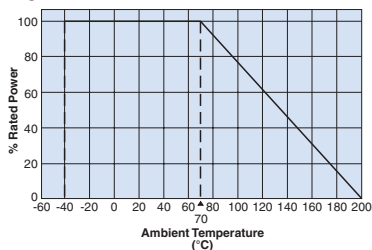


For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

##### HPC

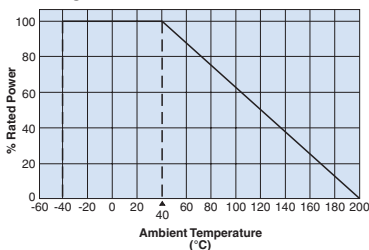

For resistors operated at an ambient temperature of 40°C or above, a power rating shall be derated in accordance with the above derating curve.

### Performance Characteristics

| Parameter                                            | Requirement $\Delta R \pm(\% + 0.05\Omega)$                                                                                                                      |         | Test Method                                                                                                                                                                                                                                                        |                                             |      |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|------|
|                                                      | Limit                                                                                                                                                            | Typical |                                                                                                                                                                                                                                                                    |                                             |      |
| Resistance                                           | Within regulated to tolerance                                                                                                                                    | —       | Resistance<br>3.3 $\Omega$ ~8.2 $\Omega$<br>10 $\Omega$ ~82 $\Omega$<br>100 $\Omega$ ~390k $\Omega$                                                                                                                                                                | Measurement voltage<br>0.3V<br>1.0V<br>3.0V | 25°C |
| T.C.R                                                | HPC: -900±300x10 <sup>-6</sup> /K:<br>R<100 $\Omega$<br>-1200±300x10 <sup>-6</sup> /K:R≥100 $\Omega$<br>PCF: -900±300:R<100 $\Omega$<br>-1300±300:R>100 $\Omega$ | —       | HPC: +25°C/-40°C and +25°C/+125°C<br>PCF: +25°C/-40°C, +25°C/+75°C and +25°C/+125°C                                                                                                                                                                                |                                             |      |
| Voltage Coefficient<br>(Apply for over 1k $\Omega$ ) | 0~0.2%/V (HPC1/2, PCF)<br>0~0.1%/V (HPC1)<br>0~0.05%/V (HPC2,3,4,5)                                                                                              | —       | Rated voltage and rated voltage x 10%                                                                                                                                                                                                                              |                                             |      |
| Overload                                             | 2%                                                                                                                                                               | 0.4%    | Rated voltage x 2.5 or maximum overload voltage for 5s, whichever less                                                                                                                                                                                             |                                             |      |
| Resistance to pulse                                  | 5%                                                                                                                                                               | —       | <div>The resistor mounted to the test circuit as below.<br/>1 sec. ON and 1 sec. OFF. 10,000 cycles.<br/>The voltage is applied with maximum pulse voltage.</div> <div></div> |                                             |      |
| Resistance to soldering heat                         | 2%                                                                                                                                                               | 0.8%    | 350°C±10°C, 3.5s±0.5s                                                                                                                                                                                                                                              |                                             |      |
| Rapid change of temperature                          | 2%                                                                                                                                                               | 0.4%    | -40°C(30min.)/+85°C(30min.), 5 cycles                                                                                                                                                                                                                              |                                             |      |
| Moisture resistance                                  | 5%                                                                                                                                                               | 0.6%    | 40°C±2°C, 90%~95%RH, 1000h, 1.5h ON/0, 5h OFF cycles                                                                                                                                                                                                               |                                             |      |
| Load life                                            | 5%                                                                                                                                                               | 0.4%    | HPC: 40°C±2°C, 1000h, 1.5h ON/0, 5h OFF cycles<br>PCF: 70°C±3°C, 1000h, 1.5h ON/0, 5h OFF cycles                                                                                                                                                                   |                                             |      |
| Resistance to Solvent                                | No abnormality in appearance. Marking shall be easily legible.                                                                                                   | —       | Dipping in IPA or Xylene for 3 minutes and leaving for 10 minutes after removing drops, then brushing 10 times.                                                                                                                                                    |                                             |      |

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/05/13



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.