


FAST AND COMPACT

conga-TC87

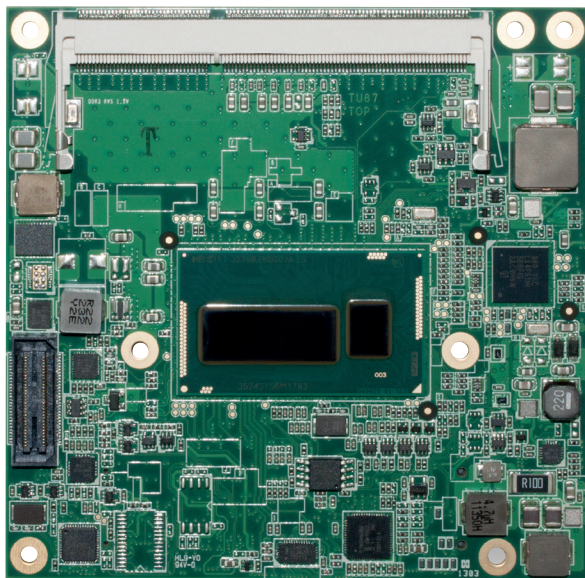


- 4th Gen. Intel® Core™ i7 dual core processor
- 3x DisplayPort 1.2, up to 4k resolution
- Intel® AVX 2.0 Vector extension for improved floating point computing
- COM Express Compact Type 6 module

COM  **Express®**

| | | | | | |
|---------------------------------|--|---------------------|---------------------|-----------|---|
| Formfactor | COM Express® Compact, (95 x 95 mm), Type 6 Connector Layout | | | | |
| CPU | Intel® Core™ i7-4650U | 1.7 GHz Dual Core | Turbo Boost 3.3 GHz | cache 4MB | 15W TDP configurable to 11.5W, AES-NI, AVX2, AMT 9.5, TXT |
| | Intel® Core™ i5-4300U | 1.9 GHz Dual Core | Turbo Boost 2.9 GHz | cache 3MB | 15W TDP configurable to 11.5W, AES-NI, AVX2, AMT 9.5, TXT |
| | Intel® Core™ i3-4010U | 1.7 GHz Single Core | | cache 3MB | 15W TDP AES-NI, AVX2 |
| | Intel® Celeron® 2980U | 1.6 GHz Single Core | | cache 3MB | 15W TDP |
| | Intel® Turbo Boost Technology, Intel® Hyper-Threading Technology (Intel® HT Technology), Intel® Advanced Vector Extensions 2.0 (Intel® AVX2), Intel® Advanced Encryption Standard New Instructions (Intel® AES-NI), Integrated dual channel memory controller, up to 25.6 GByte/sec. memory bandwidth, Integrated Intel® HD Graphics 5000 series with dynamic frequency up to xxGHz, Intel® Clear Video HD Technology Intel® Virtualization Technology (Intel® VT), Intel® Trusted Execution Technology (Intel® TXT), Intel® Streaming SIMD Extensions 4.2 (Intel® SSE4.2), PCLMULQDQ Instruction, Intel® Secure Key, Intel® Transactional Synchronization Extensions (Intel® TSX) | | | | |
| DRAM | 2 Sockets, SO-DIMM DDR3L@1.35V up to 1600MT/s and 16GByte | | | | |
| Chipset | Integrated mobile Intel® 8 Series Chipset: Intel® QM87 / HM86 @ planned Celeron variants | | | | |
| Ethernet | Intel® I218-LM GbE LAN Controller with AMT 9.5 support | | | | |
| I/O Interfaces | 4x PCI Express™ GEN. 2.0 lanes, 4x Serial ATA® RAID 0/1/5/10 support, 2x ExpressCard®, 2x USB 3.0 (XHCI), 8x USB 2.0 (EHCI), LPC bus, I ² C bus (fast mode, 400 kHz, multi-master) | | | | |
| Sound | Digital High Definition Audio Interface with support for multiple audio codecs | | | | |
| Graphics | Next Generation Intel® HD Graphics with OpenCL 1.2, OpenGL 4.0 and DirectX11.1 support; up to three independent displays: HDMI 1.4, DVI, DisplayPort 1.2; High performance hardware MPEG-2 decoding, WMV9 (VC-1) and H.264 (AVC) support Blu-ray support @ 40 MBit/s | | | | |
| LVDS (eDP optional) | Dual channel LVDS transmitter, Supports flat panels 2x24 Bit interface, VESA mappings, resolutions up to 1920x1200, Automatic Panel Detection via EDID/EPI | | | | |
| Digital Display Interface (DDI) | 2x TMDS (HDMI) / DisplayPort 1.2a with daisy chaining, resolutions up to 4k | | | | |
| congatec Board Controller | Multi Stage Watchdog, non-volatile User Data Storage, Manufacturing and Board Information, Board Statistics, BIOS Setup Data Backup, I ² C bus (fast mode, 400 kHz, multi-master), Power Loss Control | | | | |
| Embedded BIOS Features | AMI Aptio® UEFI 2.x firmware, 8 MByte serial SPI firmware flash | | | | |
| Security | The conga-TC87 can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels. | | | | |
| Power Management | ACPI 4.0 with battery support | | | | |
| Operating Systems | Microsoft® Windows 8, Microsoft® Windows 7, Linux, Microsoft® Windows embedded Standard | | | | |
| Power Consumption | Typ. application: tbd., see User's Guide for full details, CMOS Battery Backup Ultra low standby power, support for CPU power states up to C10 | | | | |
| Temperature | Operating: 0 .. +60°C Storage: -20 .. +80°C | | | | |
| Humidity | Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond. | | | | |
| Size | 95 x 95 mm (3.74" x 3.74") | | | | |

conga-TC87 | Block diagram

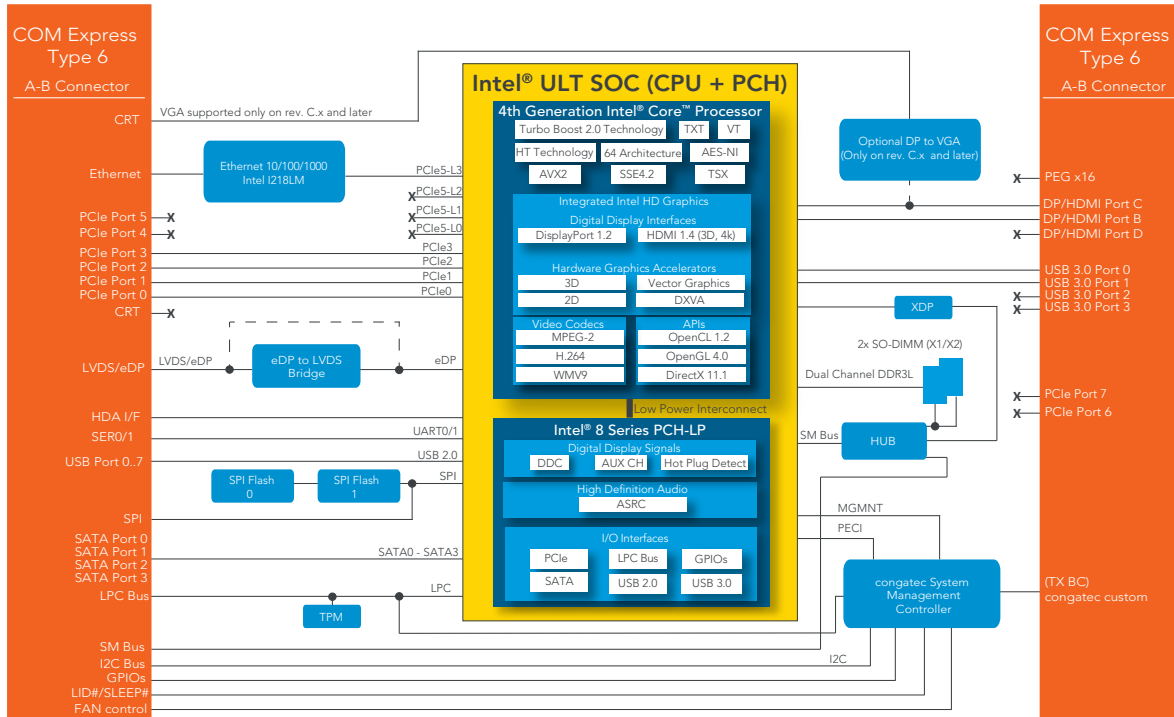

conga-TC87 | Order Information

| Article | PN | Description |
|-------------------------|--------|---|
| conga-TC87/i7-4650U | 046901 | COM Express Type 6 Compact module with Intel® Core™ i7-4650U dual core processor with 1.7GHz, 4MB L2 cache and 1600MT/s dual channel DDR3L memory interface. |
| conga-TC87/i5-4300U | 046902 | COM Express Type 6 Compact module with Intel® Core™ i5-4300U dual core processor with 1.9GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface. |
| conga-TC87/i3-4010U | 046903 | COM Express Type 6 Compact module with Intel® Core™ i3-4010U dual core processor with 1.7GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface. |
| conga-TC87/2980U | 046904 | COM Express Type 6 Compact module with Intel® Celeron® Processor 2980U dual core processor with 1.6GHz, 2MB L2 cache and 1600MT/s dual channel DDR3L memory interface. |
| conga-TC87/i5-4300U VGA | 046906 | COM Express Type 6 Compact module with Intel® Core™ i5-4300U dual core processor with 1.9GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface. Features legacy VGA display interface. |
| conga-TC87/i3-4010U VGA | 046907 | COM Express Type 6 Compact module with Intel® Core™ i3-4010U dual core processor with 1.7GHz, 3MB L2 cache and 1600MT/s dual channel DDR3L memory interface. Features legacy VGA display interface. |
| conga-TC87/2980U VGA | 046908 | COM Express Type 6 Compact module with Intel® Celeron® Processor 2980U dual core processor with 1.6GHz, 2MB L2 cache and 1600MT/s dual channel DDR3L memory interface. Features legacy VGA display interface. |
| TC87/HSP-B | 046953 | Standard heatspreader for COM Express module conga-TC87. All standoffs are with 2.7mm bore hole. |
| TC87/HSP-T | 046954 | Standard heatspreader for COM Express module conga-TC87. All standoffs are M 2.5 threaded. |
| TC87/CSP-B | 046951 | Standard passive cooling solution for COM Express module conga-TC87. All standoffs are with 2.7mm bore hole. |
| TC87/CSP-T | 046952 | Standard passive cooling solution for COM Express module conga-TC87. All standoffs are M 2.5 threaded |
| DDR3L-SODIMM-1600 (2GB) | 068755 | DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 2GB RAM |
| DDR3L-SODIMM-1600 (4GB) | 068756 | DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 4GB RAM |
| DDR3L-SODIMM-1600 (8GB) | 068757 | DDR3L SODIMM memory module with 1600 MT/s (PC3L-12800S) and 8GB RAM |

| Accessories | | |
|------------------------------------|--------|---|
| conga-TEVAL | 065800 | Evaluation carrier board for Type 6 COM-Express-modules |
| conga-LDVI/EPI | 011115 | LVDS to DVI converter board for digital flat panels with onboard EEPROM |
| COM-Express-carrier-board-Socket-5 | 400007 | Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces |
| COM-Express-carrier-board-Socket-8 | 400004 | Connector for COM-Express carrier boards, height 8mm, packing unit 4 pieces |

© 2015 congatec AG. All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Rev. December 1, 2015 KS



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.