

## Silicon Carbide Power Schottky Diode



$V_{RRM}$	=	650 V
$I_F (T_C = 25^\circ\text{C})$	=	2.5 A
$I_F (T_C \leq 150^\circ\text{C})$	=	1 A
$Q_C$	=	7 nC

### Features

- Industry's leading low leakage currents
- 175 °C maximum operating temperature
- Temperature independent switching behavior
- Superior surge current capability
- Positive temperature coefficient of  $V_F$
- Extremely fast switching speeds
- Superior figure of merit  $Q_C/I_F$

### Package

- RoHS Compliant



**DO – 214AA**

### Advantages

- Low standby power losses
- Improved circuit efficiency (Lower overall cost)
- Low switching losses
- Ease of paralleling devices without thermal runaway
- Smaller heat sink requirements
- Low reverse recovery current
- Low device capacitance
- Low reverse leakage current at operating temperature

### Applications

- Power Factor Correction (PFC)
- Switched-Mode Power Supply (SMPS)
- Solar Inverters
- Wind Turbine Inverters
- Motor Drives
- Induction Heating
- Uninterruptible Power Supply (UPS)
- High Voltage Multipliers

### Maximum Ratings at $T_j = 175^\circ\text{C}$ , unless otherwise specified


Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Repetitive peak reverse voltage	$V_{RRM}$			650		V
Continuous forward current	$I_F$	$T_C = 25^\circ\text{C}$		2.5		A
Continuous forward current	$I_F$	$T_C \leq 150^\circ\text{C}$		1		A
RMS forward current	$I_{F(RMS)}$	$T_C \leq 150^\circ\text{C}$		2		A
Surge non-repetitive forward current, Half Sine Wave	$I_{F,SM}$	$T_C = 25^\circ\text{C}, t_p = 10\text{ ms}$		10		A
Non-repetitive peak forward current	$I_{F,max}$	$T_C = 25^\circ\text{C}, t_p = 10\ \mu\text{s}$		65		A
$I^2t$ value	$\int i^2 dt$	$T_C = 25^\circ\text{C}, t_p = 10\text{ ms}$		0.5		A <sup>2</sup> S
Power dissipation	$P_{tot}$	$T_C = 25^\circ\text{C}$		64		W
Operating and storage temperature	$T_j, T_{stg}$			-55 to 175		°C

### Electrical Characteristics at $T_j = 175^\circ\text{C}$ , unless otherwise specified


Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	
Diode forward voltage	$V_F$	$I_F = 1\text{ A}, T_j = 25^\circ\text{C}$		1.5	2.0	V
		$I_F = 1\text{ A}, T_j = 175^\circ\text{C}$		2.3	3.0	
Reverse current	$I_R$	$V_R = 650\text{ V}, T_j = 25^\circ\text{C}$		1	10	$\mu\text{A}$
		$V_R = 650\text{ V}, T_j = 175^\circ\text{C}$		5	50	
Total capacitive charge	$Q_C$	$I_F \leq I_{F,MAX}$ $dI_F/dt = 200\text{ A}/\mu\text{s}$ $T_j = 175^\circ\text{C}$		7		nC
Switching time	$t_s$	$V_R = 400\text{ V}$ $V_R = 400\text{ V}$		< 20		ns
Total capacitance	C	$V_R = 1\text{ V}, f = 1\text{ MHz}, T_j = 25^\circ\text{C}$		76		pF
		$V_R = 400\text{ V}, f = 1\text{ MHz}, T_j = 25^\circ\text{C}$		12		

### Thermal Characteristics


Thermal resistance, junction - case	$R_{thJC}$	3.55	°C/W
-------------------------------------	------------	------	------

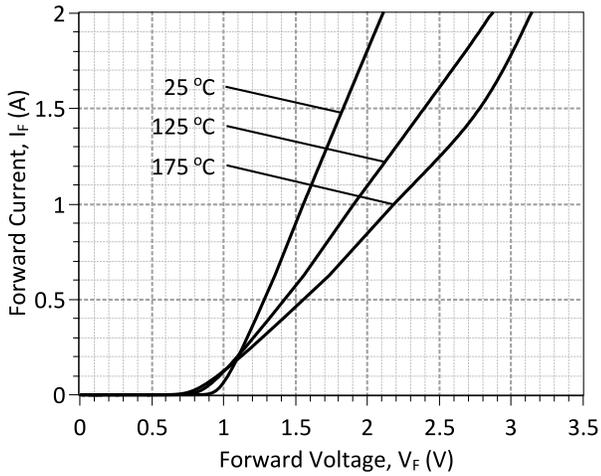


**Figure 1: Typical Forward Characteristics**

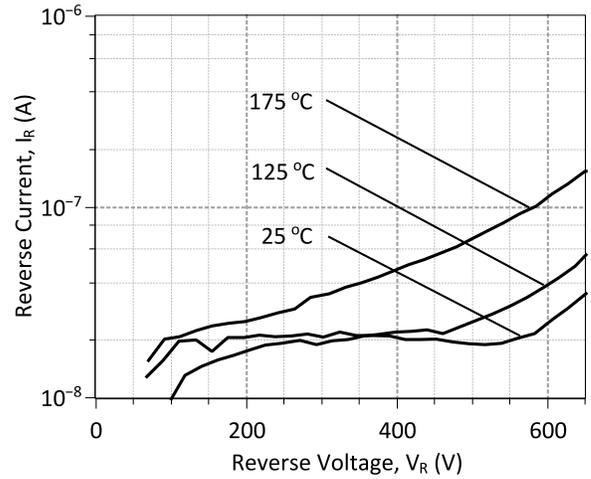


**Figure 2: Typical Reverse Characteristics**

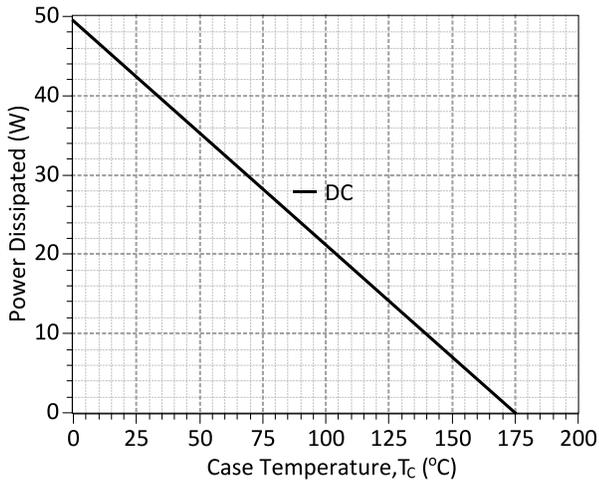


**Figure 3: Power Derating Curve**

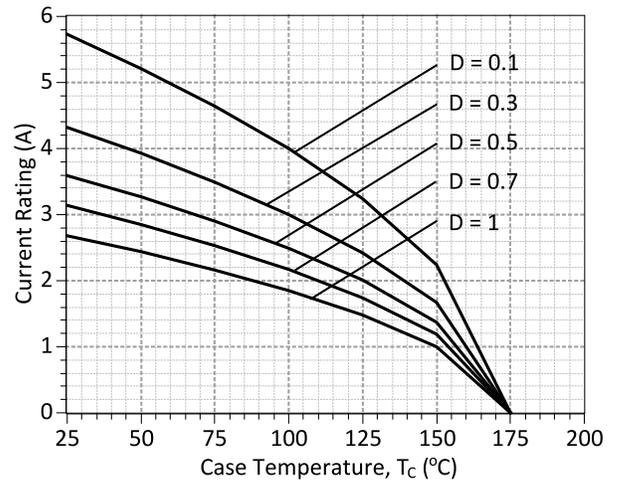


**Figure 4: Current Derating Curves ( $D = t_P/T$ ,  $t_P = 400 \mu s$ )  
(Considering worst case  $Z_{th}$  conditions)**

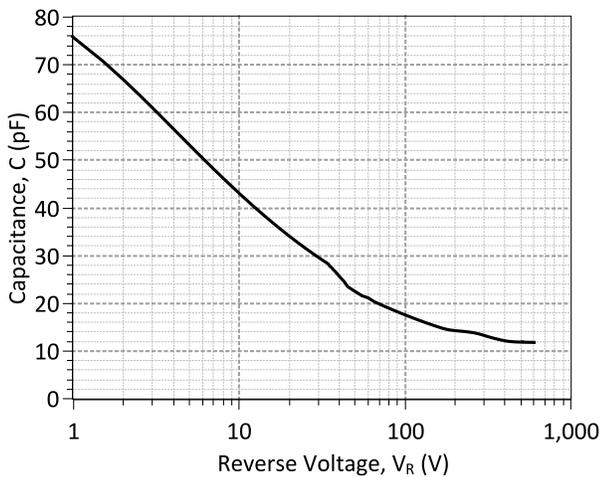


**Figure 5: Typical Junction Capacitance vs Reverse Voltage Characteristics**

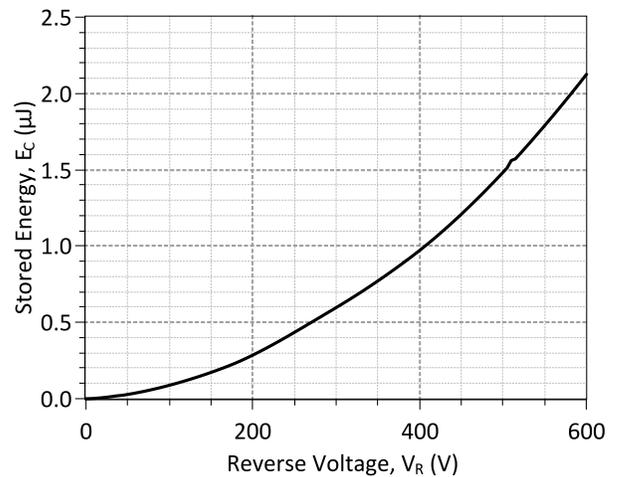

**Figure 6: Typical Capacitive Energy vs Reverse Voltage Characteristics**

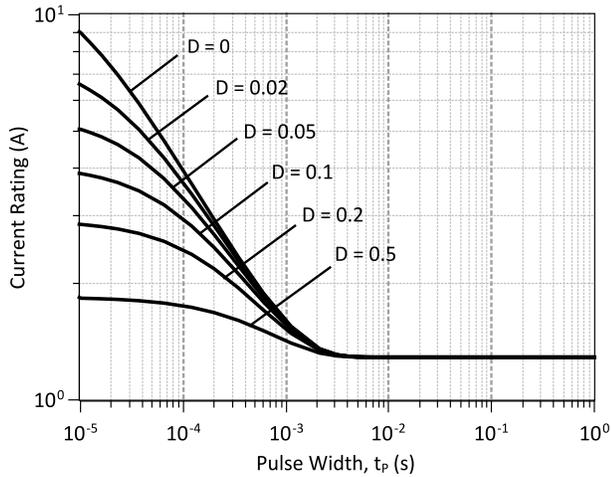

**Figure 7: Current vs Pulse Duration Curves at  $T_C = 160\text{ }^\circ\text{C}$**

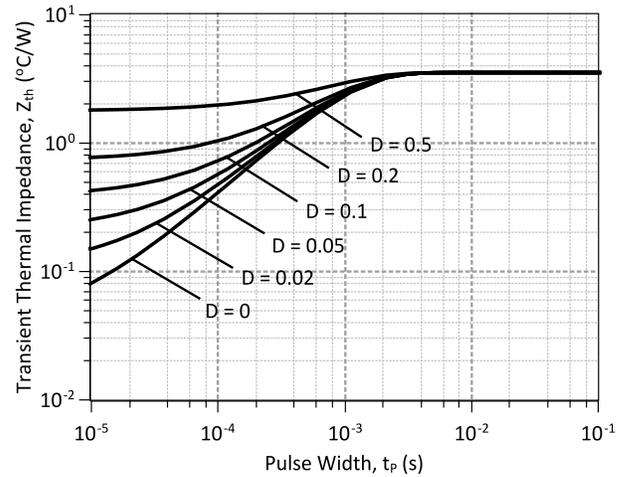


**Figure 8: Transient Thermal Impedance**

**Package Dimensions:**

**DO-214AA**

**PACKAGE OUTLINE**

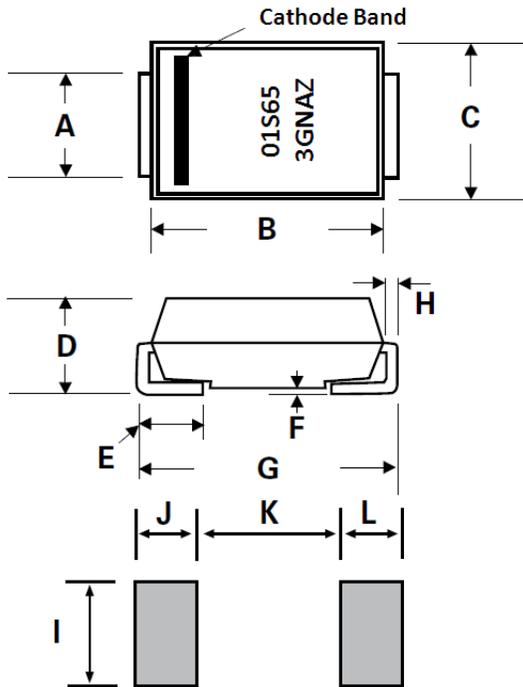

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.077	0.086	1.950	2.200
B	0.160	0.180	4.060	4.570
C	0.130	0.155	3.300	3.940
D	0.084	0.096	2.130	2.440
E	0.030	0.060	0.760	1.520
F	-	0.008	-	0.203
G	0.205	0.220	5.210	5.590
H	0.006	0.012	0.152	0.305
I	0.089	-	2.260	-
J	0.085	-	2.160	-
K	-	0.107	-	2.740
L	0.085	-	2.160	-

**NOTE**

1. CONTROLLED DIMENSION IS INCH. DIMENSION IN BRACKET IS MILLIMETER.
2. DIMENSIONS DO NOT INCLUDE END FLASH, MOLD FLASH, MATERIAL PROTRUSIONS

**Revision History**

Date	Revision	Comments	Supersedes
2014/08/26	1	Updated Electrical Characteristics	
2013/09/09	0	Initial release	

Published by

GeneSiC Semiconductor, Inc.  
43670 Trade Center Place Suite 155  
Dulles, VA 20166

GeneSiC Semiconductor, Inc. reserves right to make changes to the product specifications and data in this document without notice.

GeneSiC disclaims all and any warranty and liability arising out of use or application of any product. No license, express or implied to any intellectual property rights is granted by this document.

Unless otherwise expressly indicated, GeneSiC products are not designed, tested or authorized for use in life-saving, medical, aircraft navigation, communication, air traffic control and weapons systems, nor in applications where their failure may result in death, personal injury and/or property damage.

## SPICE Model Parameters

This is a secure document. Please copy this code from the SPICE model PDF file on our website ([http://www.genesicsemi.com/images/products\\_sic/rectifiers/GB01SLT06-214\\_SPICE.pdf](http://www.genesicsemi.com/images/products_sic/rectifiers/GB01SLT06-214_SPICE.pdf)) into LTSPICE (version 4) software for simulation of the GB01SLT06-214.

```
*      MODEL OF GeneSiC Semiconductor Inc.
*
*      $Revision:   1.0           $
*      $Date:      09-SEP-2013   $
*
*      GeneSiC Semiconductor Inc.
*      43670 Trade Center Place Ste. 155
*      Dulles, VA 20166
*
*      COPYRIGHT (C) 2013 GeneSiC Semiconductor Inc.
*      ALL RIGHTS RESERVED
*
*      These models are provided "AS IS, WHERE IS, AND WITH NO WARRANTY
*      OF ANY KIND EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED
*      TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A
*      PARTICULAR PURPOSE."
*      Models accurate up to 2 times rated drain current.
*
*      Start of GB01SLT06-214 SPICE Model
*
.SUBCKT GB01SLT06 ANODE KATHODE
D1 ANODE KATHODE GB01SLT06_25C; Call the Schottky Diode Model
D2 ANODE KATHODE GB01SLT06_PIN; Call the PiN Diode Model
.MODEL GB01SLT06_25C D
+ IS      3.57E-18      RS      0.49751
+ TRS1    0.0057       TRS2    2.40E-05
+ N       1            IKF     322
+ EG      1.2          XTI     3
+ CJO     9.12E-11     VJ     0.371817384
+ M       1.527759838 FC      0.5
+ TT      1.00E-10     BV     650
+ IBV     1.00E-03     VPK    650
+ IAVE    1            TYPE    SiC_Schottky
+ MFG     GeneSiC_Semiconductor
.MODEL GB01SLT06_PIN D
+ IS      5.73E-11     RS      0.72994
+ N       5            IKF     800
+ EG      3.23         XTI     -14
+ FC      0.5          TT      0
+ BV     650           IBV     1.00E-03
+ VPK    650           IAVE    1
+ TYPE    SiC_PiN
.ENDS
*
*      End of GB01SLT06-214 SPICE Model
```



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.