

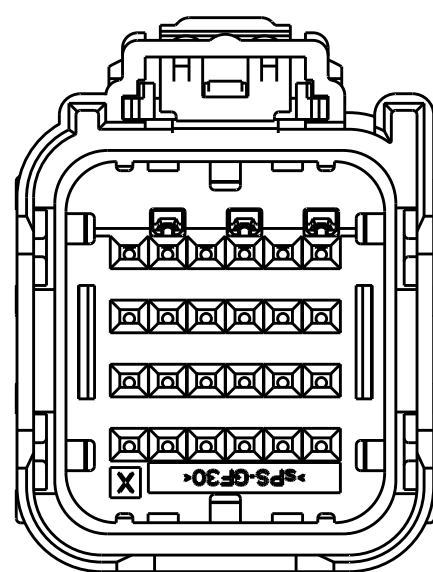
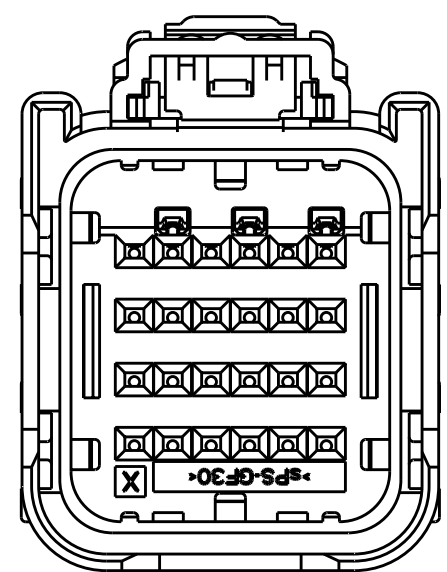




OPTION "B"

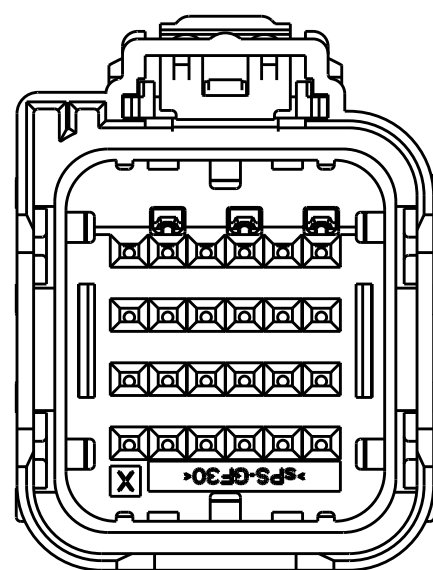


OPTION "D"

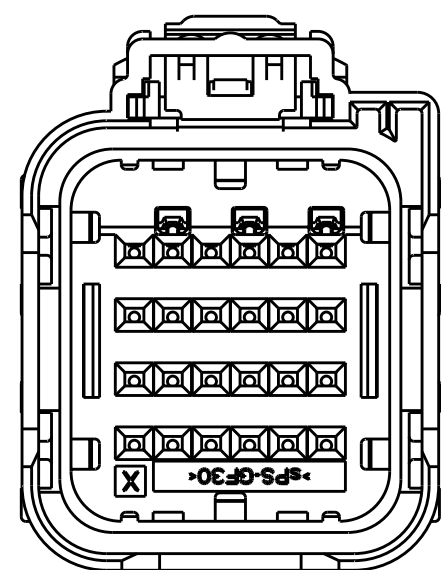


OPTION "F"

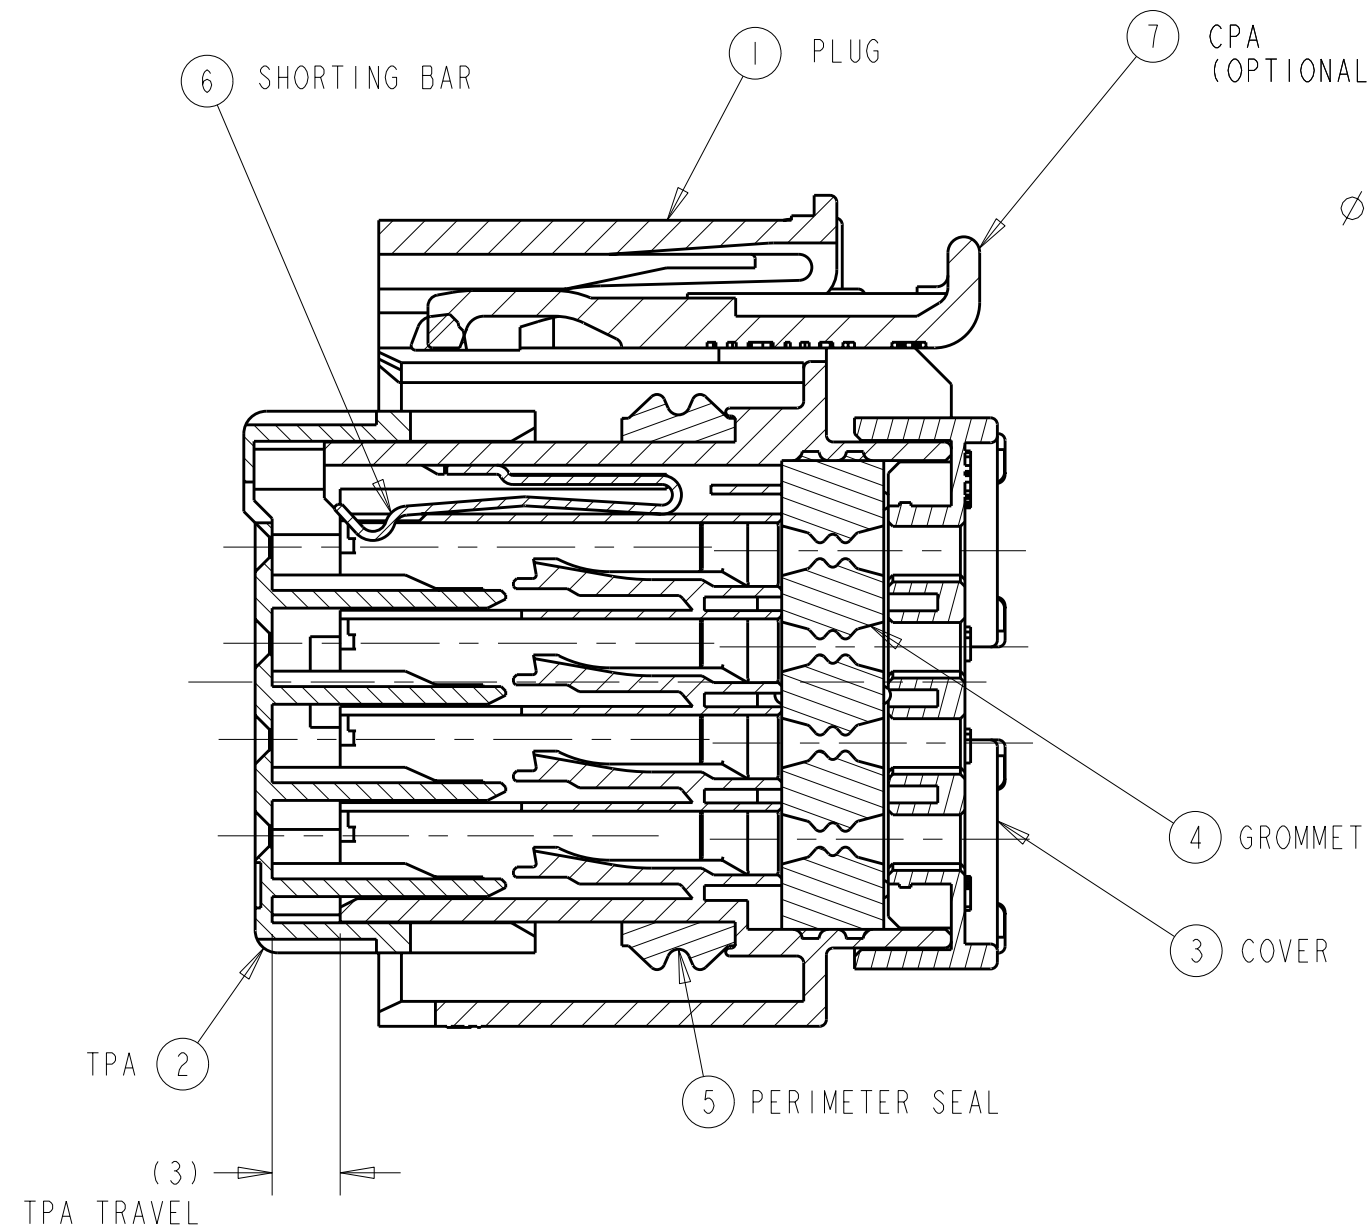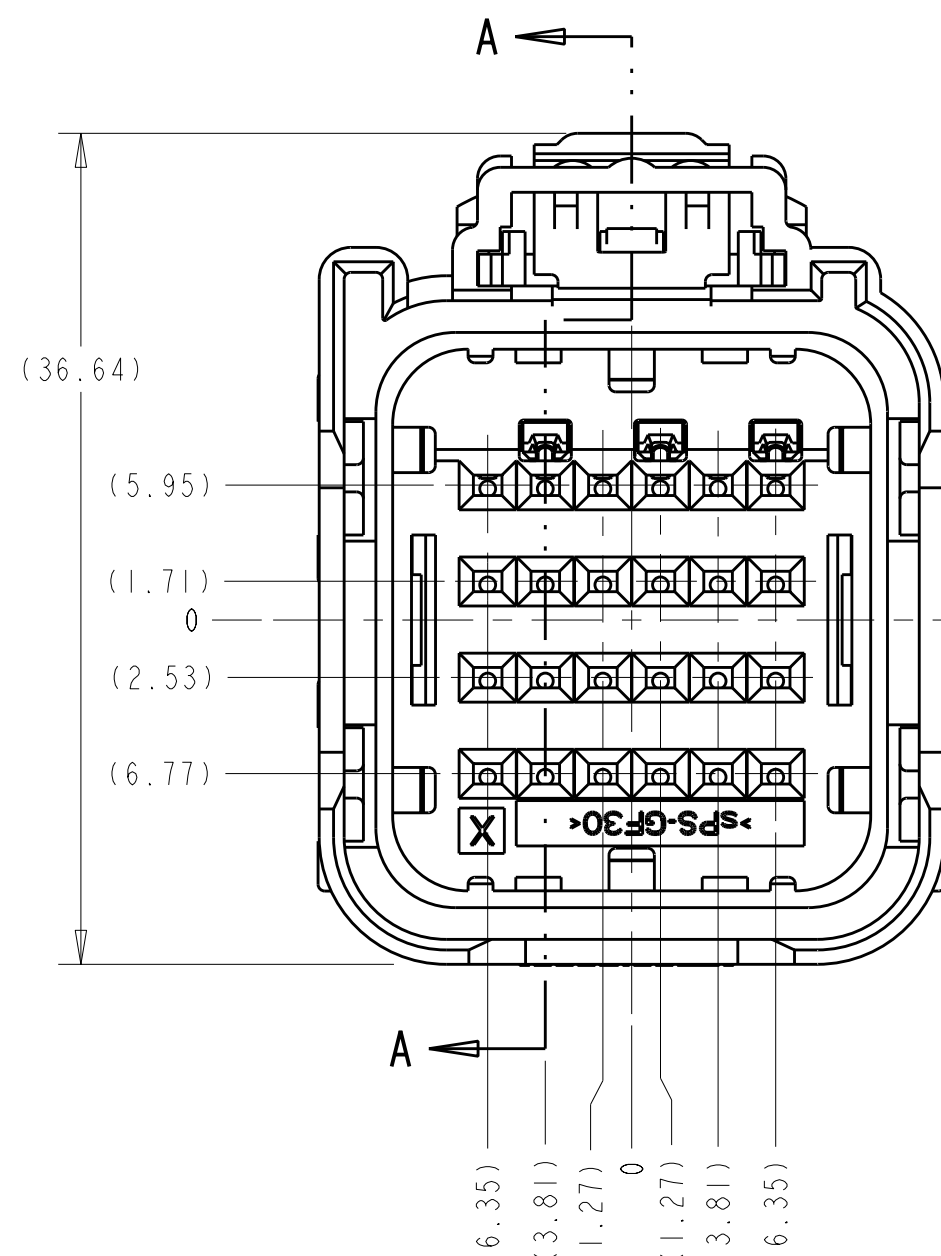

SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

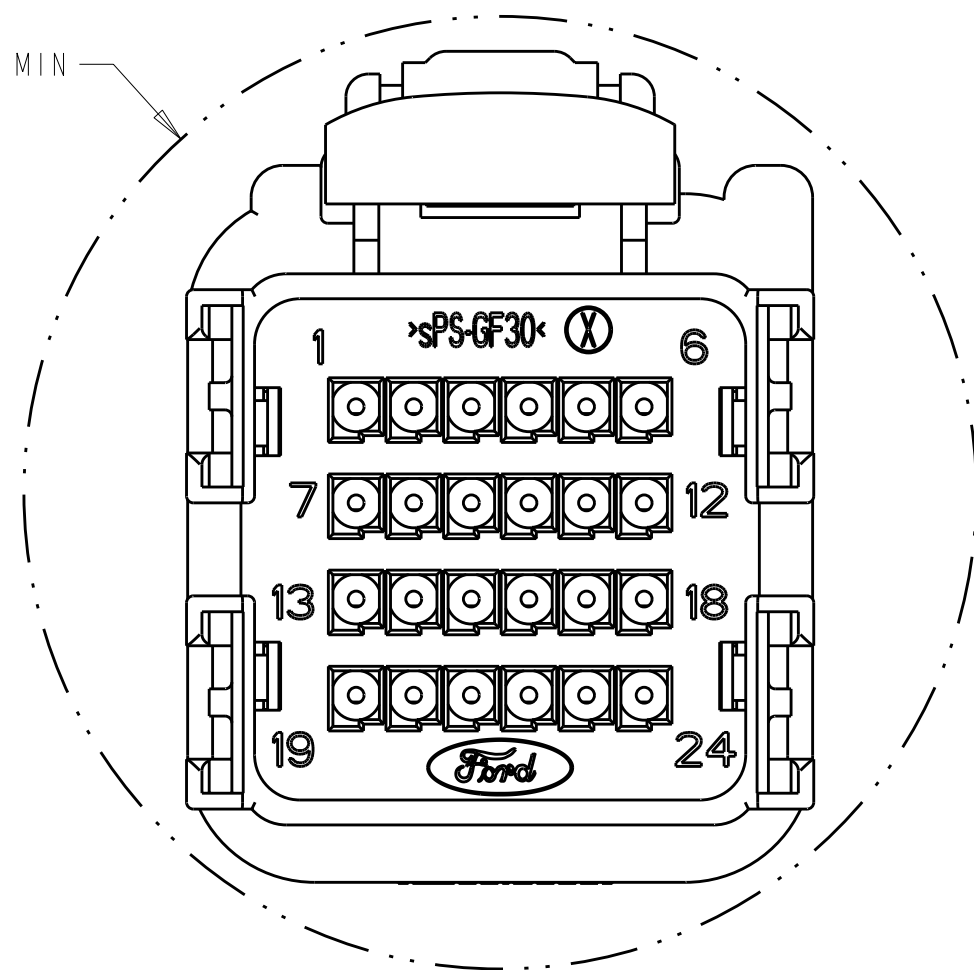


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

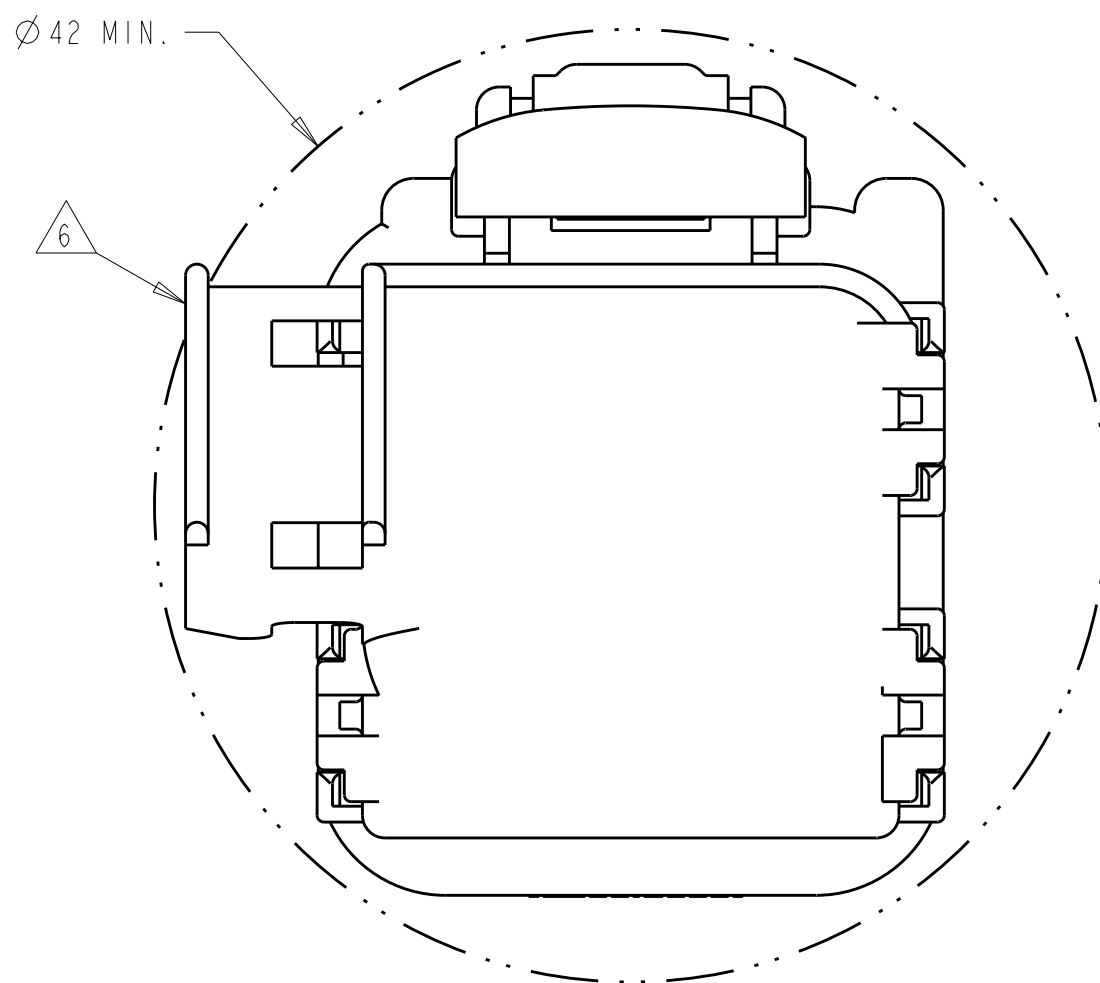

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm2)
3. TPA IS SHIPPED IN IT'S PRE-LOADED POSITION. ALL ASSEMBLIES ARE TO BE TRAY PACKAGED.
4. CUSTOMER PART NUMBER AND TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR, A = ASSEMBLY PROCESS USED) ARE PRINTED IN THIS LOCATION.
5. PART ASSEMBLY WEIGHT WITHOUT TERMINALS AND WITH STANDARD PIN-OUT CONFIGURATION IS 14.39 GRAMS.
6. OPTIONAL WIRESHIELD P/N 7-1419157-8 (SOLD SEPARATELY). PLEASE CONTACT YOUR TYCO ELECTRONICS SALES REPRESENTATIVE FOR AVAILABILITY AND PRICING.

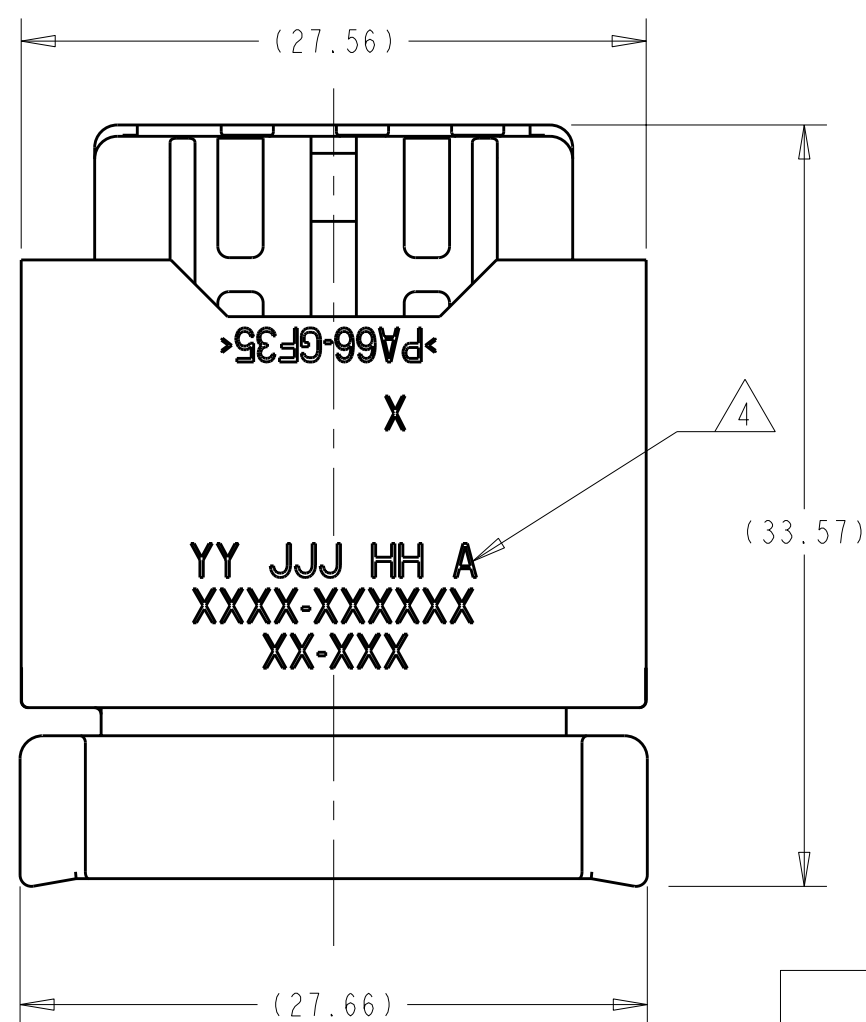


ASSEMBLY
PART NUMBERS


[illegible]

KEYING OPTION "A" SHOWN

	CPA	PBT-GF15	RED
	SHORTING BAR	S.S.	SEE COMPONENT DRAWING
	PERIMETER SEAL	SILICONE	GREEN
	GROMMET	SILICONE	BROWN
	COVER	PA66 35% GF	BLACK
3	TPA WITH SHORTING BAR POSITIONS CONFIGURATION	sPS 30% GF	NATURAL
3	PLUG WITH KEYING OPTION "F" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 30% GF	BLACK
3	PLUG WITH KEYING OPTION "E" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "C" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "A" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "D" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "C" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	NATURAL
3	PLUG WITH KEYING OPTION "B" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "A" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	GRAY
1	DESCRIPTION	MATERIAL	FINISH/COLOR

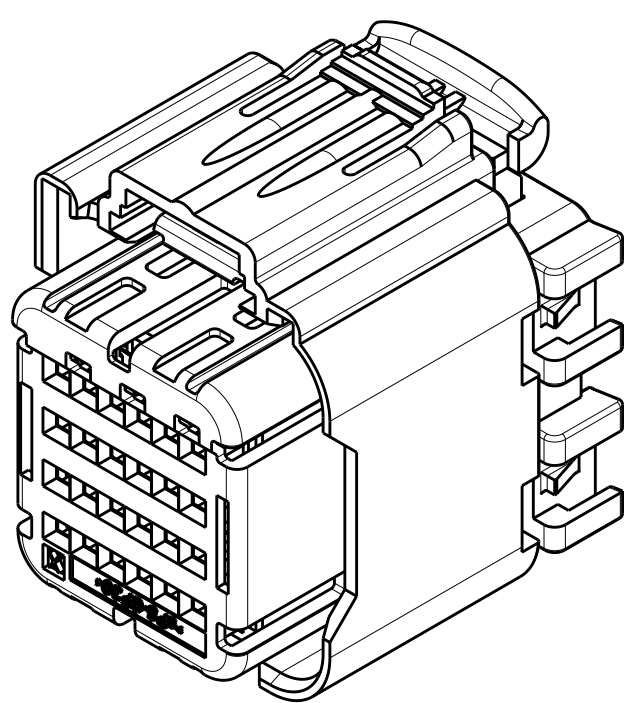

SCALE 2:1

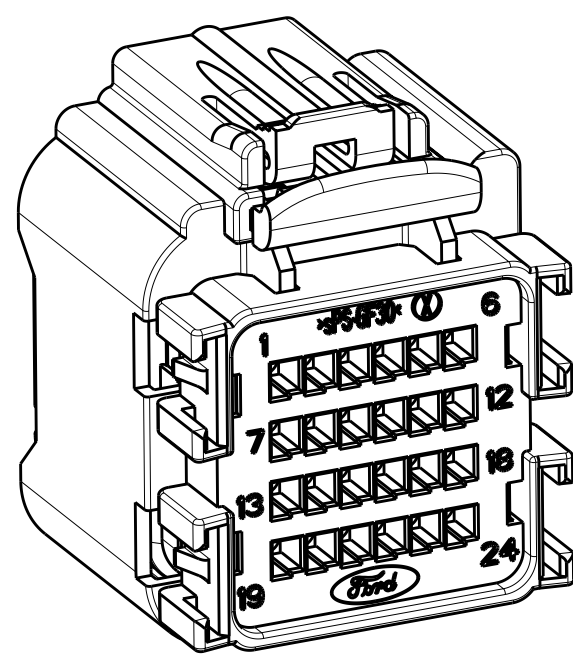

SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24JUL2007 E. VESTAL CNG 24JUL2007 W. WELLINSKY RWD 24JUL2007		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.3 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±°		NAME 24 WAY ARM PLUG ASSEMBLY WITH SELECT LOAD SHORTING BARS CUSTOMER SPEC.	
		PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A1 00779 C=1924674	
MATERIAL SEE CHART ABOVE		FINISH WEIGHT SEE NOTE 5		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 5 REV S	

LOC	DIST	REVISIONS					
FX	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PIN-OUT CHART																																
		1 / 2																									N	2098376-1	KEY "F"			
		1 / 2																									N	1924686-1	KEY "E"			
		1 / 2																									N	1924685-1	KEY "D"			
		1 / 2																									N	1924684-1	KEY "C"			
		1 / 2																									N	1924683-1	KEY "B"			
		1 / 2																									N	1924682-1	KEY "A"			
5 / 6	3 / 4	1 / 2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	CPA	ASSEMBLY PART NUMBER	PLUG KEYING OPTION			
SHORTING BAR POSITION			TERMINAL HOLE POSITION																													
CAVITIES W/ A NUMERIC SYMBOL INDICATE SHORTING BAR LOADED			CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS																													
BLANK CAVITIES INDICATE NO SHORTING BAR LOADED			BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS																													

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

9 PLC ±.3
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±.
4 PLC ±.
ANGLES ±°
FINISH -

MATERIAL

SEE CHART ABOVE

DWN R. VESTAL 24JUL2007
CHK W. WELLINSKY 24JUL2007
APVD W. WELLINSKY 24JUL2007

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

NAME

24 WAY ARM PLUG ASSEMBLY
WITH SELECT LOAD SHORTING BARS
CUSTOMER SPEC.

SIZE A1

CAGE CODE 00779

DRAWING NO C=1924674

RESTRICTED TO

-

TE Connectivity

SCALE 3:1

SHEET 5

OF 5

REV S



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.