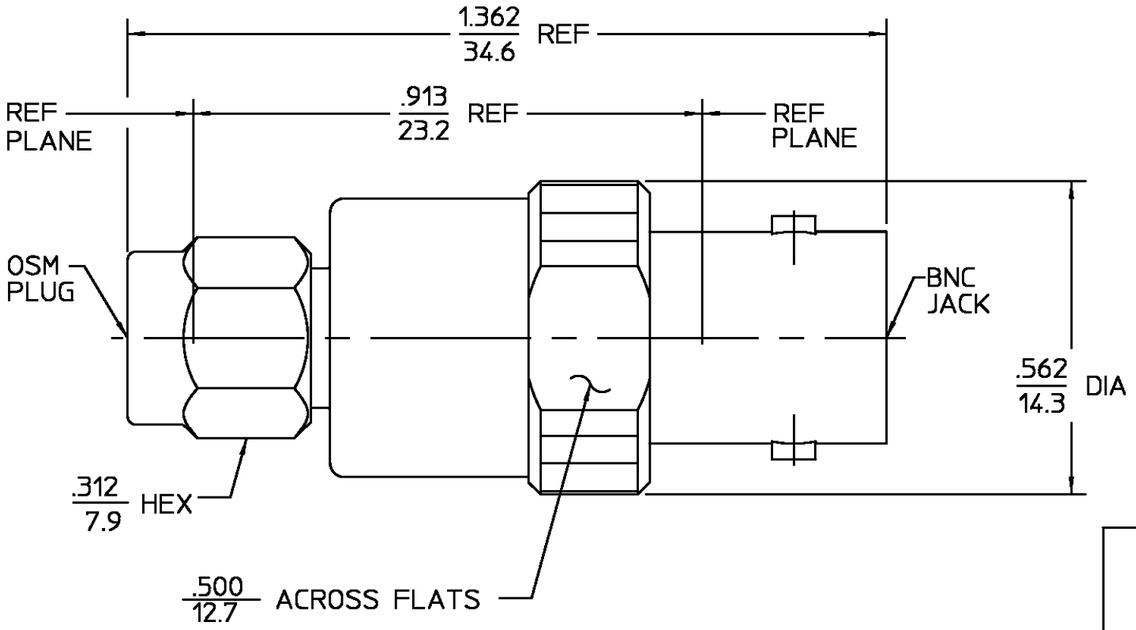

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01_2	REVISED	08/04/94	

ELECTRICAL	
Nominal Impedance (Ohms)	50
Frequency Range (GHz)	DC to 4
Volt Rating (VRMS MAX)	
@ Sea Level	335
VSWR	1.30 Max at 0.5 to 4.0 GHz
Insertion Loss (dB MAX)	$0.2\sqrt{f(GHz)}$
RF Leakage (dB MIN)	-55, 2 to 3 GHz
Corona, 70,000 Ft (VRMS MIN)	250
Dielectric Withstanding Voltage	
(VRMS MIN) @ Sea Level	1500
Contact Resistance (Milliohms MAX)	
Center Contact	4.1
Outer Contact	2.2
RF High Potential @ Sea Level	
(VRMS MIN @ 5 MHz)	670
I.R.(Megohms MIN)	5000

MECHANICAL		
Interface Dimensions		
BNC	MIL-STD-348A Fig. 301.2	
OSM	MIL-STD-348A Fig. 310.1	
Recommended Mating Torque		
	4-6 In-Lbs	
Mating Characteristics:	BNC	OSM
Insertion (Lbs Max)	2.0	N/A
Withdrawal (Oz Min)	2.0	N/A
Force to Engage/Disengage		
Longitudinal		
Force (Lb Max)	3.0	N/A
Torque (In-Lb Max)	2.5	2.0
Contact Retention		
Axial (Lbs Min)	6.0	
Radial (In-Oz)	N/A	
Weight (Grams)	TBD	

ENVIRONMENTAL
Temperature Rating -65°C to +125°C
Vibration MIL-STD-202, Method 204, Condition D
Shock MIL-STD-202, Method 213, Condition I
Thermal Shock MIL-STD-202, Method 107, Condition C,
Moisture Resistance MIL-STD-202, Method 106
Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray

COMPONENT	MATERIAL	FINISH
HOUSING (OSB)	BRASS PER ASTM-B-16 HALF HARD	NICKEL PLATE PER QQ-N-290
HOUSING (OSM) COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCE ON
FRAC. ± 1/64 DEC. ±.005 ANGLES ± 1°

DRAWN BY DRW DATE 6/6/67
CHECKED BY KWW 6-9-77
APP'D BY RMF 6/9/77

AMP

AMP Incorporated
140 Fourth Avenue
Waltham, MA 02451-7599

These drawings and specifications are the property of M/A-COM Interconnect Division and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

USE ASS'Y PROCEDURE

NO. A.P. N/A

TITLE BNC JACK TO OSM PLUG ADAPTER

SIZE	CODE IDENT NO.		REV
B	26805	3282-2241-00	01_2

SCALE 4:1 SHEET 1 OF 1

CUSTOMER DRAWING

AMP PART # 1058083-1
SHEET 1 OF 1 REV A

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.