

## TW8811C

TFT Flat Panel Controller with Built-in 3D Video Decoder, Triple ADCs and PIP Support

FN7760  
Rev.0.00  
December 06, 2010

TW8811 is a high performance integrated LCD display processor designed for in-car display applications including navigation systems, in dash DVD players, rear-seat/

head-mount displays, and automotive TVs. The chip uses a single 27Mhz crystal, comes in a 208-pin LQFP package and is qualified for automotive applications including -40°C to +85°C temperatures and 1,000 hours of reliability testing.

TW8811 requires an external 64mbit SDRAM to support PIP and other advanced functions.

Inputs include composite video, s-video, YPbPr, analog RGB, 24-bit digital RGB and 8/16/24 bit YCbCr. For composite video streams, a high quality 3D comb filter for NTSC and PAL with concurrent 3D noise reduction is integrated to reduce artifacts typically found in analog video signals.

In addition to a 3D comb filter, a number of proprietary image processing algorithms are implemented in TW8811 to improve picture quality including a built in 2D-deinterlacing engine with low angle compensation, black/white stretch and color enhancement. TW8811 has a sophisticated PIP function that includes Picture in Picture (PIP) with variable sub-window size, picture over picture (POP), and multiple PIP.

The TW8811 on-screen display can select 256 colors from 24-bit colors (16.7 million colors) and is a graphic style OSD with a variety of functions including blinking, transparency, blending, and multi-window support. The TW8811 also supports external 18-bit OSDs with external alpha blending control.

## Applications

- Navigation system
- In dash DVD
- Rear-seat/head-mount display
- Automotive TV

## Features

### Analog Video Decoder


- NTSC (M, 4.34) and PAL (B, D, G, H, I, M, N, N, combination), PAL (60), SECAM with automatic format detection
- Three 10-bit ADCs and analog clamping circuit
- Fully programmable static gain or automatic gain control for the Y or CVBS channel
- Programmable white peak control for the Y or CVBS channel
- Software selectable analog inputs allows any of the following combinations:
  - Up to 4 composite video
  - Up to 2 S-Video
  - Up to 1 YPbPr
- High quality motion adaptive 3D comb filter for both NTSC and PAL with concurrent 3D noise reduction
- PAL delay line for color phase error correction

### Analog RGB Inputs

- Triple 80 MHz 9-bit ADCs with clamping and programmable gain amplifier
- Up to three independent RGB / YPbPr channels with corresponding SOG
- Built-in line locked PLL with sync separator
- Allows high resolution components inputs like DTV 480p, 720p, 1080i

### 24-bit Digital RGB and 8/16/24-bit YCbCr Inputs

- Allows connection with alternative Video and PC Graphics inputs
- Supports both 656 and 601 video formats
- Allows connection to HDMI

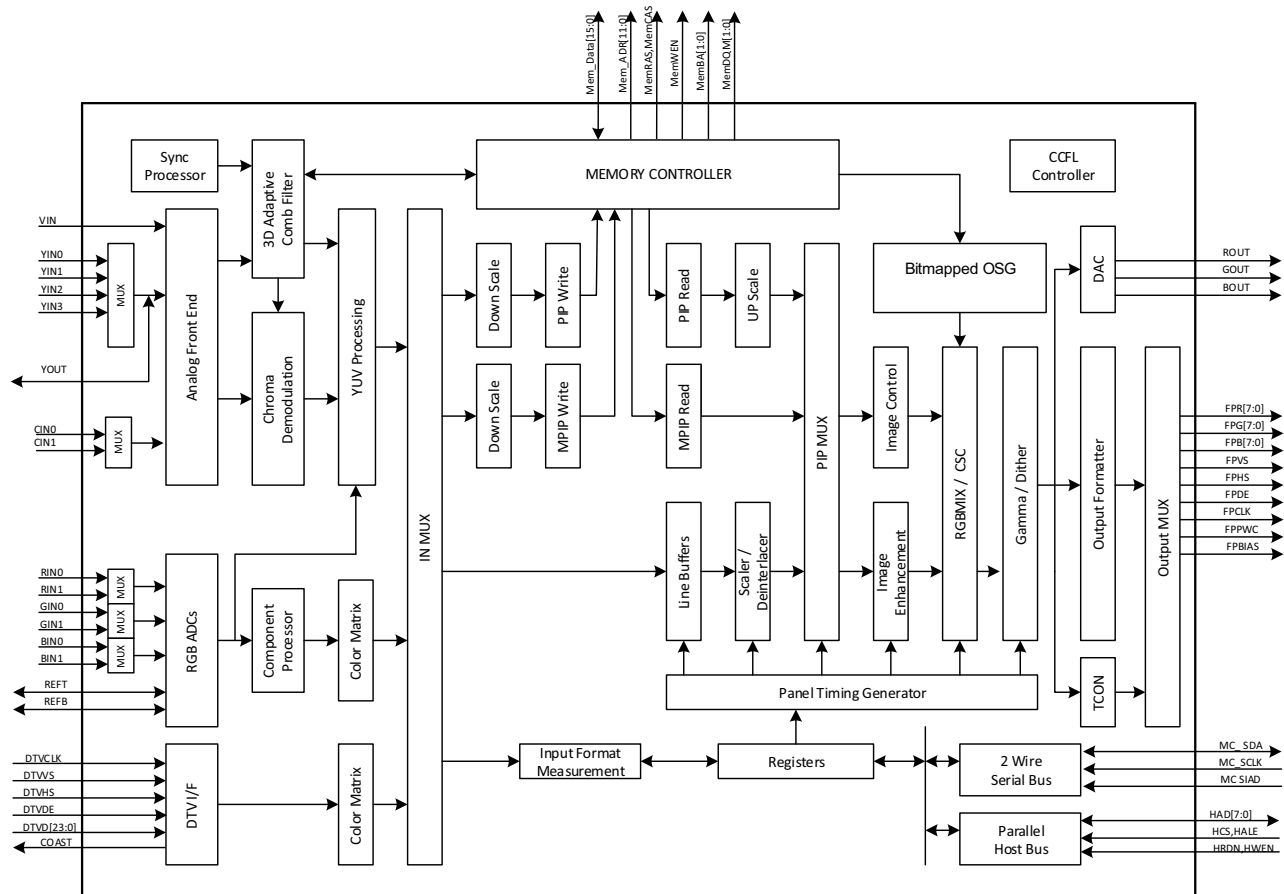

**FIGURE 1. TW8811 FLAT PANEL TV/MONITOR CONTROLLER FUNCTIONAL BLOCK DIAGRAM**

© Copyright Intersil Americas LLC 2010. All Rights Reserved.

All trademarks and registered trademarks are the property of their respective owners.

For additional products, see [www.intersil.com/en/products.html](http://www.intersil.com/en/products.html)

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at [www.intersil.com/en/support/qualandreliability.html](http://www.intersil.com/en/support/qualandreliability.html)

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.