






PRODUCT NUMBER	PLATING PERFORMANCE LEVEL	APPLICATION	SHROUD FOR REAR PLUG UP APPLICATIONS
63743-1YYY	TELCORDIA CO	STANDARD	84818-102
63743-1YYYYLF		LEAD FREE	84818-102LF
63743-5YYY	TELCORDIA UE	STANDARD	84818-502
63743-5YYYYLF		LEAD FREE	84818-502LF
63743-9YYY	TELCORDIA CO	STANDARD	84818-102
63743-9YYYYLF		LEAD FREE	84818-102LF



DETAIL A
SCALE 4:1
SEE NOTE 18

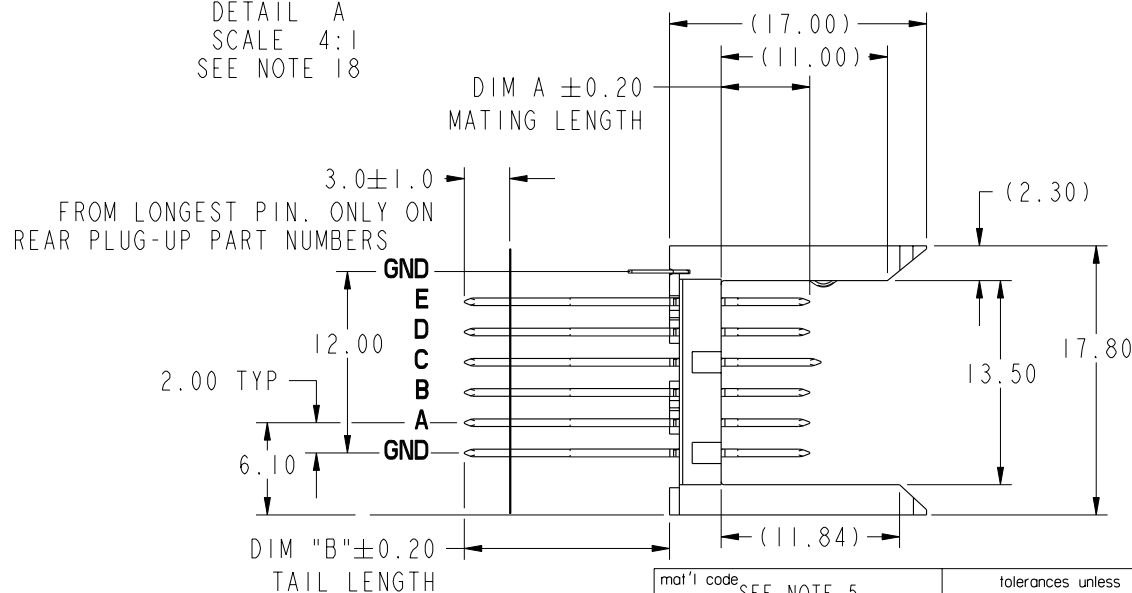

SEE DETAIL A

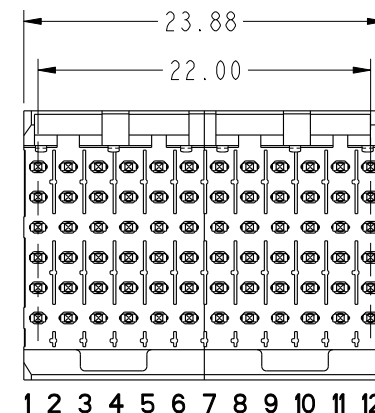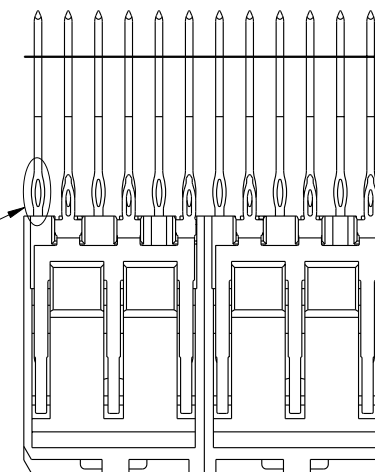

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		 www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3		projection 	COPY		title	
P	V06-0498	DCH	2006-06-05		0.XX ±0.13			VERTICAL SIGNAL HDR 5 ROW			
R	V06-0779	DAI	2006-08-11		.XXX ±.051			P.F. 60 POS. SELECT LOAD STD			
S	V07-0182	DCH	2007-04-20	angles	0° ±2°			product family		METRAL 1000	code
T	V07-0733	HTB	2008-01-02	dr	K. BELL	2000-03-15		scale	size	dwg no	213
U	V08-0049	LP	2008-2-4	enrg	M. HAHN	2000-03-15					
-	-	-	-	chr	M. HAHN	2000-03-15	1 of 6				
N	V05-0533	TAB	2005-06-01	appd	M. HAHN	2000-03-15		1:1	A	63743	
sheet index	revision sheet	U	U	U	U	U	U				
		1	2	3	4	5	6				

Pro/E

3

cage code 22526

4



PDM: Rev:U

STATUS: Released

Printed: May 13, 2011




PRODUCT NUMBER
 SEE SHEET 1

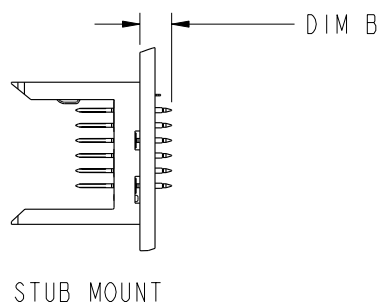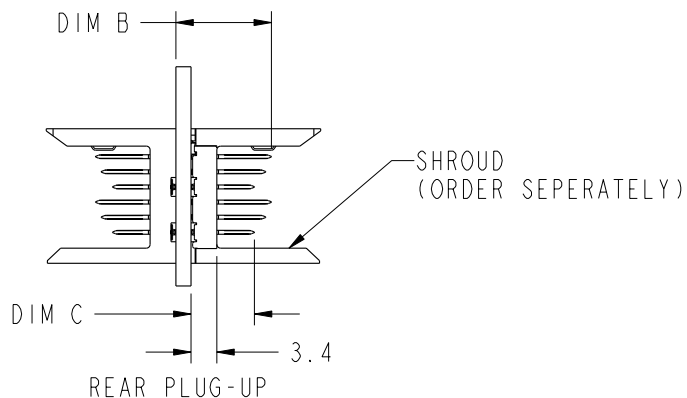

PRESS-FIT HOLES	OPTION 1	OPTION 2
HOLE DIAMETER AFTER PLATING	0.65-0.77	0.65-0.80
DRILLED HOLE	0.78-0.83	0.81-0.86 (0.85 DRILL)
COPPER PLATING	0.025-0.050	0.025 MIN
SnPb PLATING	0.005-0.015	0.005-0.015

SEE PRINT 58351 FOR
 ADDITIONAL PCB INFO.

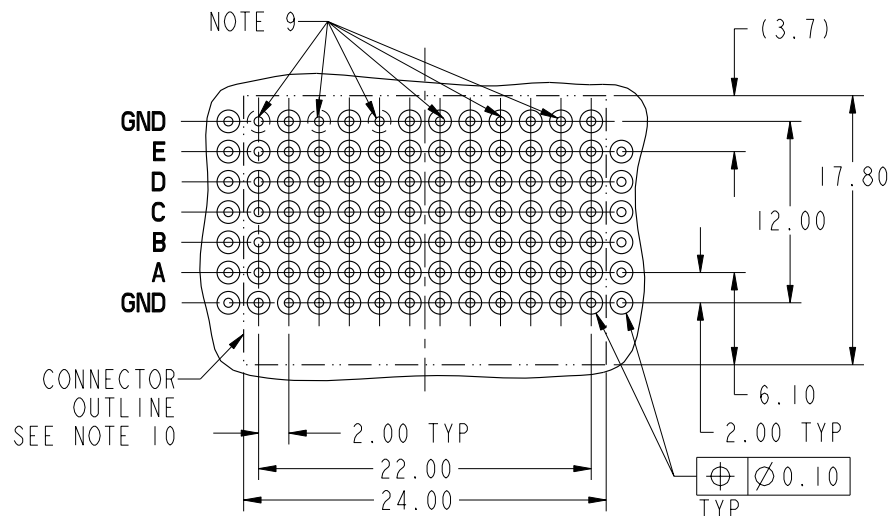

RECOMMENDED PCB HOLE PATTERN
 (COMPONENT SIDE)

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com			
ltr	ecr no.	dr	date	linear	0.X ± 0.3	projection	COPY	title VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.			
U					0.XX ± 0.13						
					.XXX ± .051						
				angles	0° ± 2°	MM 1:1	scale	product family METRAL 1000 code size dwg no 63743 sheet 2			
				dr	K. BELL 2000-03-15						
				enrg	M. HAHN 2000-03-15						
				chr	M. HAHN 2000-03-15						
				appd	M. HAHN 2000-03-15						
sheet index	revision sheet							cage code 22526			

Pro/E

3

cage code 22526

4

PDM: Rev:U

STATUS: Released Printed: May 13, 2011



PIN CODE NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW
01*	5.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
22		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
30		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
05		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
35		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
48		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
40		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
65		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
09		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
02*	5.75	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
44		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
31		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
06		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
36		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
49		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
25		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
66		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
10		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
03*	6.50	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
45		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
32		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
07		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
37		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
50		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
41		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
24		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
11		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP

** THE GREATEST RANGE OCCURS
WHEN THE B DIMENSION OF PIN
'GND' IS ONE SIZE SHORTER
THEN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3	projection	COPY	title	VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.
U					0.XX ±0.13				
					.XXX ±.051				
				angles	0° ±2°		MM	product family	METRAL 1000
				dr	K. BELL 2000-03-15				
				engr	M. HAHN 2000-03-15				
					chr	M. HAHN 2000-03-15	scale	size	dwg no
					appd	M. HAHN 2000-03-15			
sheet index	revision sheet							A	63743
									code 213 sheet 3



PIN CODE NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW
04*	7.25	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
46		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
33		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
08		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
38		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
51		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
42		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
67		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
12		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
19*	8.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
47		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
34		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
20		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
39		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
52		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
43		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
68		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
21		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP

** THE GREATEST RANGE OCCURS
WHEN THE B DIMENSION OF PIN
'GND' IS ONE SIZE SHORTER
THEN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3	projection	COPY	title	VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.
U					0.XX ±0.13				
					.XXX ±.051				
				angles	0° ±2°		MM	product family	METRAL 1000
				dr	K. BELL 2000-03-15				
				enrg	M. HAHN 2000-03-15				
				chr	M. HAHN 2000-03-15	scale	1:1	size	dwg no
				appd	M. HAHN 2000-03-15				
sheet	revision								
index	sheet								

cage code 22526

Pro/E

3

4

PDM: Rev:U

STATUS: Released

Printed: May 13, 2011



SELECT LOAD PATTERNS												
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X001 FOR LEAD FREE SEE NOTE 16	E	02	02	02	02	02	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02
	C	04	04	04	04	04	04	04	04	04	04	04
	B	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X002 FOR LEAD FREE SEE NOTE 16	E	01	01	01	01	01	01	01	01	01	01	01
	D	01	01	01	01	01	01	01	01	01	01	01
	C	03	03	03	03	03	03	03	03	03	03	03
	B	01	01	01	01	01	01	01	01	01	01	01
	A	01	01	01	01	01	01	01	01	01	01	01
	GND	01	01	01	01	01	01	01	01	01	01	01
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X003 *RPU FOR LEAD FREE SEE NOTE 16	E	18	18	18	18	18	18	18	18	18	18	18
	D	18	18	18	18	18	18	18	18	18	18	18
	C	50	50	50	50	50	50	50	50	50	50	50
	B	48	48	48	48	48	48	48	48	48	48	48
	A	48	48	48	48	48	48	48	48	48	48	48
	GND	48	48	48	48	48	48	48	48	48	48	48
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X004 FOR LEAD FREE SEE NOTE 16	E	19	02	02	02	02	02	02	02	02	02	02
	D	19	02	02	02	02	02	02	02	02	02	02
	C	19	02	02	02	02	02	02	02	02	02	02
	B	19	02	02	02	02	02	02	02	02	02	02
	A	19	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X005 FOR LEAD FREE SEE NOTE 16	E	01	01	01	01	01	01	01	01	01	01	01
	D	01	01	01	01	01	01	01	01	01	01	01
	C	01	01	01	01	01	01	01	01	01	01	01
	B	01	01	01	01	01	01	01	01	01	01	01
	A	01	01	03	01	01	03	01	01	03	01	03
	GND	01	01	01	01	01	01	01	01	01	01	01

*REAR PLUG-UP PART NUMBER

METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X006 FOR LEAD FREE SEE NOTE 16	E	01	01	01	01	01	01	01	01	01	01	01
	D	02	01	01	01	01	01	02	01	01	01	01
	C	02	01	01	01	01	01	02	01	01	01	01
	B	03	03	03	03	03	03	03	03	03	03	03
	A	01	01	01	01	01	01	01	01	01	01	01
	GND	01	01	01	01	01	01	01	01	01	01	01
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X007 FOR LEAD FREE SEE NOTE 16	E	02	02	02	02	01	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02
	B	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X008 FOR LEAD FREE SEE NOTE 16	E	02	02	02	02	01	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02
	B	02	02	02	02	03	02	02	02	02	03	02
	A	02	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X009 *RPU FOR LEAD FREE SEE NOTE 16	E	06	05	06	05	06	05	06	05	06	05	06
	D	06	06	06	06	06	05	06	05	05	05	05
	C	06	05	05	05	05	06	05	05	05	05	05
	B	06	05	05	05	05	06	05	05	05	05	05
	A	06	05	05	05	05	06	05	05	05	05	05
	GND	31	31	31	31	31	31	31	31	31	31	31
METRAL P/N	ROW	CONTACT CODE										
		1	2	3	4	5	6	7	8	9	10	11
63743-X010 FOR LEAD FREE SEE NOTE 16	E	55	55	02	02	02	02	55	55	55	55	55
	D	55	55	02	02	02	02	55	55	55	55	55
	C	55	55	02	02	02	02	55	55	55	55	55
	B	55	55	02	02	02	02	55	55	55	55	55
	A	55	55	02	02	02	02	55	55	55	55	55
	GND	55	55	02	02	02	02	55	55	55	55	55

PCB THICKNESS
RANGE FOR REAR
PLUG UP
APPLICATIONS:
3.25 - 4.99 FOR
METRAL 1000
RECEPTACLE
APPLICATIONS AND 3.30 - 4.95
FOR METRAL
4000 APPLICATIONS

NOT A STANDARD METRAL 1000
OR METRAL 4000 APPLICATION

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER	
ltr	ecr no.	dr	date	linear	0.X ±0.3	projection	COPY
U					0.XX ±0.13		
				angles	.XXX ±.051	MM	title VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.
					0° ±2°		
				dr	K. BELL 2000-03-15	scale 1:1	product family METRAL 1000 size A
				enrg	M. HAHN 2000-03-15		
				chr	M. HAHN 2000-03-15		
				appd	M. HAHN 2000-03-15		
sheet index	revision sheet						code 213 sheet 5

PRODUCT NUMBER

SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.

2. SEE FCI PUBLICATION 950511-028 FOR "ELECTRICAL PERFORMANCE DATA FOR DIFFERENTIAL APPLICATIONS."

3. SEE FCI PUBLICATION 950511-029 FOR "ELECTRICAL PERFORMANCE DATA FOR SINGLE-ENDED APPLICATION."

4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994

5. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
PIN MATERIAL: PHOSPHOR BRONZE
GROUND SPRING MATERIAL: PHOSPHOR BRONZE

6. PLATING INFORMATION: PLATING IN CONTACT AREAS MEET PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1.
PLATING ON "LF" TAILS IS Sn ONLY, ALL OTHERS ARE SnPb.

7. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.

FOR MATING WITH METRAL 1000 RECEPTACLES

DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS A-E

DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND NEXT TO ROW A

DIM C : 5.00mm MIN, 8.00mm MAX FOR ROWS A-E

DIM C : 4.60mm MIN, 6.30mm MAX FOR ROW GND NEXT TO ROW A

FOR MATING WITH METRAL 4000 RECEPTACLES

DIM A : 5.00mm MIN, 6.50mm MAX FOR ROWS A, B, D & E

DIM A : 5.00mm MIN, 8.00mm MAX FOR ROW C

DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND NEXT TO ROW A

DIM C : 5.00mm MIN, 7.00mm MAX FOR ROWS A, B, D & E

DIM C : 5.00mm MIN, 8.00mm MAX FOR ROW C

DIM C : 4.60mm MIN, 6.30mm MAX FOR ROW GND NEXT TO ROW A

8. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 2.9mm SINCE THE COMPLIANT SECTIONS OF THE GROUND SPRING OF THE HEADER DIRECTLY OPPOSE THE GROUND SPRING OF THE SHROUD.

THE MIN PCB THICKNESS FOR FRONT PLUG-UP ONLY APPLICATIONS IS 1.6mm.

9. THESE HOLES ARE NEEDED FOR REAR PLUG-UP DESIGNS USING A SHROUD AND MAY BE OMITTED FOR FRONT PLUG-UP ONLY DESIGNS.

10. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.

11. CURRENT RATING: 1 AMP PER PIN

12. TEMPERATURE RANGE: -55°C TO +105°C

13. P/N 63743-XYYYLF

LEAD FREE (OPTIONAL)
SELECT LOAD PATTERN
PLATING CODE

14. A PLATING HAS Au FLASH IN PRESS-FIT AREA (LEAD FREE).

15. THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

16. FOR LEAD FREE PART NUMBERS, ADD AN "LF" SUFFIX.
EXAMPLE: 63743-X01LF

17. EQUIVALENT PRECIOUS METAL PLATINGS MAY BE SUBSTITUTED.

18. PIN TYPE IS AT THE MANUFACTURERS OPTION AND CAN BE EITHER BABY-H OR EYE OF THE NEEDLE STYLE

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com		
lfr	ecr no.	dr	date	linear	0.X ±0.3	COPY		projection	title VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.	
U					0.XX ±0.13					
					.XXX ±.051					
				angles	0° ±2°					
				dr	K. BELL	2000-03-15	MM ←→	scale 1:1	product family METRAL 1000	code 213
				enrg	M. HAHN	2000-03-15				
				chr	M. HAHN	2000-03-15				
				appd	M. HAHN	2000-03-15				
sheet index	revision sheet								size A	dwg no 63743
										sheet 6

This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.