






PRODUCT NUMBER	PLATING PERFORMANCE LEVEL	APPLICATION	SHROUD FOR REAR PLUG UP APPLICATIONS
63743-1YYY	TELCORDIA CO	STANDARD	84818-102
63743-1YYYYLF		LEAD FREE	84818-102LF
63743-5YYY	TELCORDIA UE	STANDARD	84818-502
63743-5YYYYLF		LEAD FREE	84818-502LF
63743-9YYY	TELCORDIA CO	STANDARD	84818-102
63743-9YYYYLF		LEAD FREE	84818-102LF



DETAIL A
SCALE 4:1
SEE NOTE 18

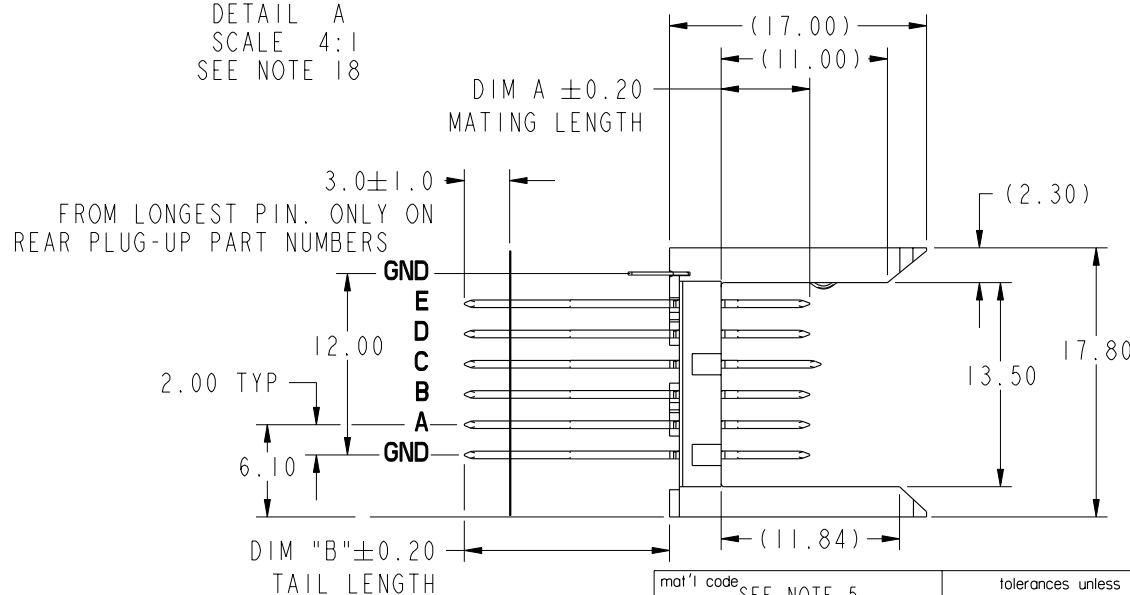

SEE DETAIL A

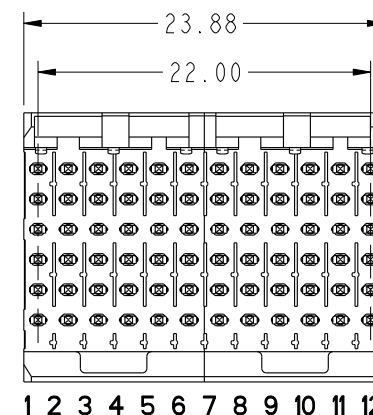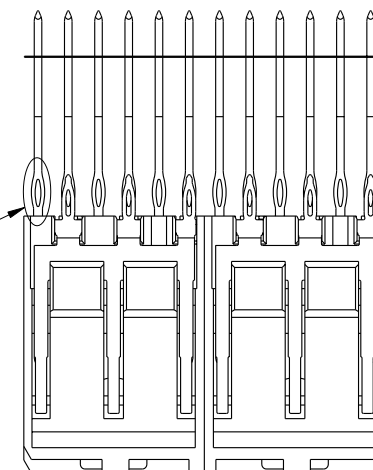

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		FCI	
ltr	ecn no.	dr	date	linear	0.X ±0.3	COPY		projection		www.fciconnect.com	
P	V06-0498	DCH	2006-06-05		0.XX ±0.13					title	
R	V06-0779	DAI	2006-08-11		.XXX ±.051					VERTICAL SIGNAL HDR 5 ROW	
S	V07-0182	DCH	2007-04-20	angles	0° ±2°					P.F. 60 POS. SELECT LOAD STD.	
T	V07-0733	HTB	2008-01-02	dr	K. BELL 2000-03-15	MM				product family METRAL 1000	
U	V08-0049	LP	2008-2-4	enrg	M. HAHN 2000-03-15	scale				code	
-	-	-	-	chr	M. HAHN 2000-03-15	1:1				size	
N	V05-0533	TAB	2005-06-01	appd	M. HAHN 2000-03-15					dwg no	
sheet index		revision sheet		U	U	U	U	U	U	A	
				1	2	3	4	5	6	63743	
										sheet 1 of 6	
										cage code 22526	

Pro/E

3

cage code 22526

4



PDM: Rev:U

STATUS: Released

Printed: May 13, 2011




PRODUCT NUMBER
 SEE SHEET 1

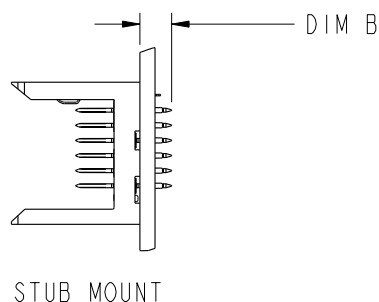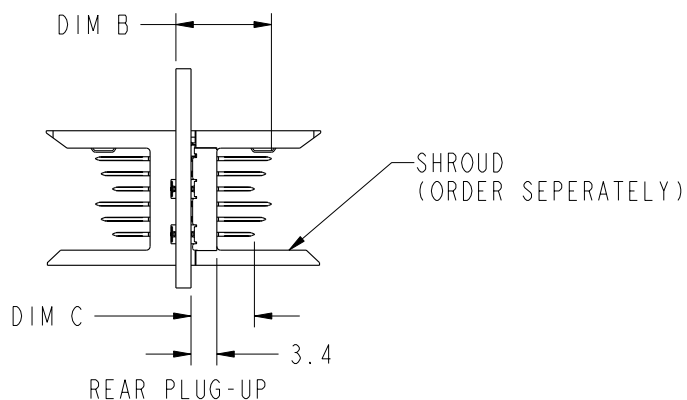

PRESS-FIT HOLES	OPTION 1	OPTION 2
HOLE DIAMETER AFTER PLATING	0.65-0.77	0.65-0.80
DRILLED HOLE	0.78-0.83	0.81-0.86 (0.85 DRILL)
COPPER PLATING	0.025-0.050	0.025 MIN
SnPb PLATING	0.005-0.015	0.005-0.015

SEE PRINT 58351 FOR
 ADDITIONAL PCB INFO.

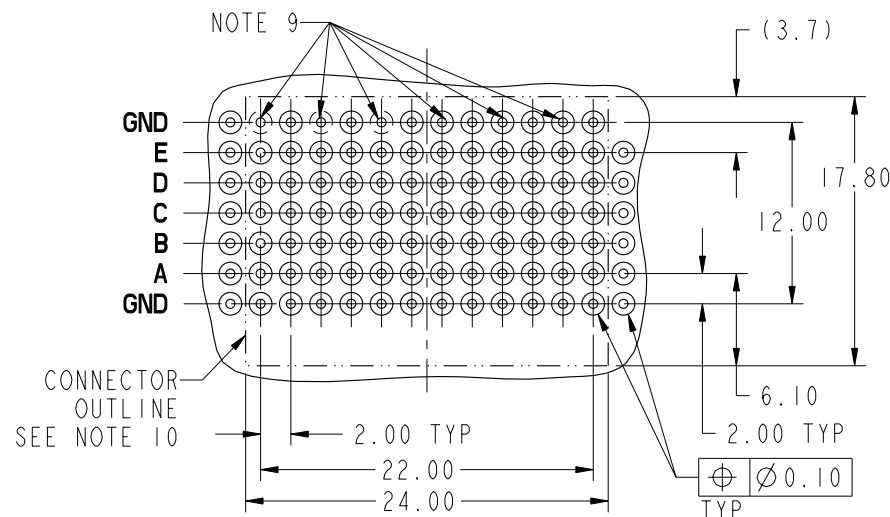

RECOMMENDED PCB HOLE PATTERN
 (COMPONENT SIDE)

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com			
ltr	ecr no.	dr	date	linear	0.X ±0.3	projection	COPY	title VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.			
U					0.XX ±0.13						
					.XXX ±.051						
				angles	0° ±2°	MM 1:1	scale	product family		METRAL 1000	code
				dr	K. BELL 2000-03-15			size	dwg no	A	213
				enrg	M. HAHN 2000-03-15						
				chr	M. HAHN 2000-03-15						
				appd	M. HAHN 2000-03-15						
sheet index	revision sheet										sheet 2
								cage code		22526	4

Pro/E

3

cage code
 22526

4

PDM: Rev:U

STATUS: Released Printed: May 13, 2011



PIN CODE NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW
01*	5.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
22		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
30		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
05		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
35		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
48		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
40		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
65		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
09		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
02*	5.75	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
44		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
31		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
06		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
36		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
49		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
25		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
66		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
10		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
03*	6.50	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
45		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
32		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
07		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
37		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
50		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
41		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
24		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
11		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP

** THE GREATEST RANGE OCCURS
WHEN THE B DIMENSION OF PIN
'GND' IS ONE SIZE SHORTER
THEN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCi www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3		projection	COPY	
U					0.XX ±0.13			title	
					.XXX ±.051			VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.	
				angles	0° ±2°		 MM 1:1	product family METRAL 1000	
				dr	K. BELL	2000-03-15		code	
				enrg	M. HAHN	2000-03-15		213	
				chr	M. HAHN	2000-03-15	size	dwg no	sheet
				appd	M. HAHN	2000-03-15			
sheet index		revision sheet							



PIN CODE NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW
04*	7.25	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
46		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
33		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
08		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
38		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
51		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
42		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
67		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
12		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
19*	8.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
47		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
34		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
20		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
39		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
52		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
43		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
68		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
21		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP

** THE GREATEST RANGE OCCURS
WHEN THE B DIMENSION OF PIN
'GND' IS ONE SIZE SHORTER
THEN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		www.fciconnect.com				
ltr	ecr no.	dr	date	linear	0.X ±0.3	projection		title VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.				
U					0.XX ±0.13							
					.XXX ±.051							
				angles	0° ±2°	 MM scale 1:1		product family	METRAL 1000	code	213	
			dr	K. BELL	2000-03-15			size	dwg no	63743	sheet	4
			enrg	M. HAHN	2000-03-15			A				
			chr	M. HAHN	2000-03-15							
			appd	M. HAHN	2000-03-15							
sheet	revision											
index	sheet											



SELECT LOAD PATTERNS												
METRAL P/N	ROW	CONTACT CODE										
63743-X001 FOR LEAD FREE SEE NOTE 16	E	02	02	02	02	02	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02
	C	04	04	04	04	04	04	04	04	04	04	04
	B	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
63743-X002 FOR LEAD FREE SEE NOTE 16	E	01	01	01	01	01	01	01	01	01	01	01
	D	01	01	01	01	01	01	01	01	01	01	01
	C	03	03	03	03	03	03	03	03	03	03	03
	B	01	01	01	01	01	01	01	01	01	01	01
	A	01	01	01	01	01	01	01	01	01	01	01
	GND	01	01	01	01	01	01	01	01	01	01	01
METRAL P/N	ROW	CONTACT CODE										
63743-X003 *RPU FOR LEAD FREE SEE NOTE 16	E	18	18	18	18	18	18	18	18	18	18	18
	D	18	18	18	18	18	18	18	18	18	18	18
	C	50	50	50	50	50	50	50	50	50	50	50
	B	48	48	48	48	48	48	48	48	48	48	48
	A	48	48	48	48	48	48	48	48	48	48	48
	GND	48	48	48	48	48	48	48	48	48	48	48
METRAL P/N	ROW	CONTACT CODE										
63743-X004 FOR LEAD FREE SEE NOTE 16	E	19	02	02	02	02	02	02	02	02	02	02
	D	19	02	02	02	02	02	02	02	02	02	02
	C	19	02	02	02	02	02	02	02	02	02	02
	B	19	02	02	02	02	02	02	02	02	02	02
	A	19	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
63743-X005 FOR LEAD FREE SEE NOTE 16	E	01	01	01	01	01	01	01	01	01	01	01
	D	01	01	01	01	01	01	01	01	01	01	01
	C	01	01	01	01	01	01	01	01	01	01	01
	B	01	01	01	01	01	01	01	01	01	01	01
	A	01	01	03	01	01	03	01	01	03	01	03
	GND	01	01	01	01	01	01	01	01	01	01	01



*REAR PLUG-UP PART NUMBER

METRAL P/N	ROW	CONTACT CODE										
63743-X006 FOR LEAD FREE SEE NOTE 16	E	01	01	01	01	01	01	01	01	01	01	01
	D	02	01	01	01	01	01	02	01	01	01	01
	C	02	01	01	01	01	01	02	01	01	01	01
	B	03	03	03	03	03	03	03	03	03	03	03
	A	01	01	01	01	01	01	01	01	01	01	01
	GND	01	01	01	01	01	01	01	01	01	01	01
METRAL P/N	ROW	CONTACT CODE										
63743-X007 FOR LEAD FREE SEE NOTE 16	E	02	02	02	02	01	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02
	B	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
63743-X008 FOR LEAD FREE SEE NOTE 16	E	02	02	02	02	01	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02
	B	02	02	02	02	03	02	02	02	02	03	02
	A	02	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02
METRAL P/N	ROW	CONTACT CODE										
63743-X009 *RPU FOR LEAD FREE SEE NOTE 16	E	06	05	06	05	06	05	06	05	06	05	06
	D	06	06	06	06	06	05	06	05	05	05	05
	C	06	05	05	05	05	06	05	05	05	05	05
	B	06	05	05	05	05	06	05	05	05	05	05
	A	06	05	05	05	05	06	05	05	05	05	05
	GND	31	31	31	31	31	31	31	31	31	31	31
METRAL P/N	ROW	CONTACT CODE										
63743-X010 FOR LEAD FREE SEE NOTE 16	E	55	55	02	02	02	02	55	55	55	55	55
	D	55	55	02	02	02	02	55	55	55	55	55
	C	55	55	02	02	02	02	55	55	55	55	55
	B	55	55	02	02	02	02	55	55	55	55	55
	A	55	55	02	02	02	02	55	55	55	55	55
	GND	55	55	02	02	02	02	55	55	55	55	55

METRAL P/N	ROW	CONTACT CODE										
63743-X011 FOR LEAD FREE SEE NOTE 16	E	55	55	55	55	55	55	55	55	55	55	55
	D	55	55	55	55	55	55	55	55	55	55	55
	C	55	55	55	55	55	55	55	55	55	55	55
	B	55	55	55	55	55	55	55	55	55	55	55
	A	55	55	55	55	55	55	55	55	55	55	55
	GND	55	55	55	55	55	55	55	55	55	55	55
METRAL P/N	ROW	CONTACT CODE										
63743-X012 FOR LEAD FREE SEE NOTE 16	E	02	02	02	02	02	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02
	B	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02
	GND	-	02	02	02	02	-	-	02	02	02	-

PCB THICKNESS
RANGE FOR REAR
PLUG UP
APPLICATIONS:
3.25 - 4.99 FOR
METRAL 1000
RECEPTACLE
APPLICATIONS AND 3.30 - 4.95
FOR METRAL
4000 APPLICATIONS

NOT A STANDARD METRAL 1000
OR METRAL 4000 APPLICATION

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		 www.fciconnect.com				
ltr	ecn no.	dr	date	linear	0. X ±0.3		projection 	COPY	title VERTICAL SIGNAL HDR 5 ROW P.F. 60 POS. SELECT LOAD STD.					
U					0. XX ±0.13									
					.XXX ±.051									
				angles	0° ±2°		 MM	scale 1:1	product family		METRAL 1000		code	
				dr	K. BELL	2000-03-15			size		dwg no		213	
				enrg	M. HAHN	2000-03-15							sheet	
				chr	M. HAHN	2000-03-15							5	
				appd	M. HAHN	2000-03-15								
sheet index		revision sheet												

SFF SHEET 1

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.

3. SEE FCI PUBLICATION 950511-029 FOR "ELECTRICAL PERFORMANCE DATA FOR SINGLE-ENDED APPLICATION."

4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994

5. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED,
FLAME RETARDANT PER UL 94-V0.
PIN MATERIAL: PHOSPHOR BRONZE
GROUND SPRING MATERIAL: PHOSPHOR BRONZE

6. PLATING INFORMATION: PLATING IN CONTACT AREAS MEET PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1. PLATING ON "LF" TAILS IS Sn ONLY. ALL OTHERS ARE SnPb.

7. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.

FOR MATING WITH METRAL 1000 RECEPTACLES

DIM A : 5.00mm MIN. 8.00mm MAX FOR ROWS A-E

DIM A : 5.00mm MIN. 5.75mm MAX FOR ROW GND NEXT TO ROW A

DIM C : 5.00mm MIN. 8.00mm MAX FOR ROWS A-E

DIM C : 4.60mm MIN. 6.30mm MAX FOR ROW GND NEXT TO ROW A

FOR MATING WITH METRAL 4000 RECEPTACLES

DIM A : 5.00mm MIN. 6.50mm MAX FOR ROWS A, B, D & E

DIM A : 5.00mm MIN. 8.00mm MAX FOR ROW C

DIM A : 5.00mm MIN. 5.75mm MAX FOR ROW GND NEXT TO ROW A

DIM C : 5.00mm MIN. 7.00mm MAX FOR ROWS A, B, D & E

DIM C : 5.00mm MIN, 8.00mm MAX FOR ROW C

DIM C : 4.60mm MIN., 6.30mm MAX FOR ROW GND NEXT TO ROW A

8. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 2.9mm SINCE THE COMPLIANT SECTIONS OF THE GROUND SPRING OF THE HEADER DIRECTLY OPPOSE THE GROUND SPRING OF THE SHROUD.

THE MIN PCB THICKNESS FOR FRONT
PLUG-UP ONLY APPLICATIONS IS 1.6mm.

9. THESE HOLES ARE NEEDED FOR REAR PLUG-UP DESIGNS USING A SHROUD AND MAY BE OMITTED FOR FRONT PLUG-UP ONLY DESIGNS.
10. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.

11. CURRENT RATING: 1 AMP PER PIN

12. TEMPERATURE RANGE: -55°C TO +105°C

13. P/N 63743-XYYYLF

LEAD FREE (OPTIONAL)
SELECT LOAD PATTERN
PLATING CODE

14. A PLATING HAS Au FLASH IN PRESS-FIT AREA (LEAD FREE).
15. THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

16. FOR LEAD FREE PART NUMBERS, ADD AN "LF" SUFFIX.
EXAMPLE: 63743-X01LF
17. EQUIVALENT PRECIOUS METAL PLATINGS MAY BE SUBSTITUTED.
18. PIN TYPE IS AT THE MANUFACTURERS OPTION AND CAN
BE EITHER BABY-H OR EYE OF THE NEEDLE STYLE

[illegible]

Pro/E

3

cage code	22526
-----------	-------

 Δ



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.