


## High Efficiency LED in Ø 5 mm Tinted Diffused Package



19224

### DESCRIPTION

The TLH.640. series was developed for standard applications like general indicating and lighting purposes.

It is housed in a 5 mm tinted diffused plastic package. The wide viewing angle of these devices provides a high on-off contrast.

Several selection types with different luminous intensities are offered. All LEDs are categorized in luminous intensity groups. The green and yellow LEDs are categorized additionally in wavelength groups.

That allows users to assemble LEDs with uniform appearance.

### FEATURES

- Choice of three bright colors
- Standard T-1 $\frac{3}{4}$  package
- Small mechanical tolerances
- Suitable for DC and high peak current
- Wide viewing angle
- Luminous intensity categorized
- Yellow and green color categorized
- TLH.640. without stand-offs
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC


**RoHS**  
COMPLIANT

### APPLICATIONS

- Status lights
- Off/on indicator
- Background illumination
- Readout lights
- Maintenance lights
- Legend light

### PRODUCT GROUP AND PACKAGE DATA

- Product group: LED
- Package: 5 mm
- Product series: standard
- Angle of half intensity:  $\pm 30^\circ$

| PARTS TABLE    |                               |              |
|----------------|-------------------------------|--------------|
| PART           | COLOR, LUMINOUS INTENSITY     | TECHNOLOGY   |
| TLHR6400       | Red, $I_V = 10$ mcd (typ.)    | GaAsP on GaP |
| TLHR6400-CS12Z | Red, $I_V = 10$ mcd (typ.)    | GaAsP on GaP |
| TLHR6401       | Red, $I_V = 12$ mcd (typ.)    | GaAsP on GaP |
| TLHR6405       | Red, $I_V = 14$ mcd (typ.)    | GaAsP on GaP |
| TLHR6405-ASZ   | Red, $I_V = 14$ mcd (typ.)    | GaAsP on GaP |
| TLHR6405-BT12Z | Red, $I_V = 14$ mcd (typ.)    | GaAsP on GaP |
| TLHY6400       | Yellow, $I_V = 10$ mcd (typ.) | GaAsP on GaP |
| TLHY6400-CS12Z | Yellow, $I_V = 10$ mcd (typ.) | GaAsP on GaP |
| TLHY6400-MS12Z | Yellow, $I_V = 10$ mcd (typ.) | GaAsP on GaP |
| TLHY6401       | Yellow, $I_V = 12$ mcd (typ.) | GaAsP on GaP |
| TLHY6405       | Yellow, $I_V = 14$ mcd (typ.) | GaAsP on GaP |
| TLHY6405-ASZ   | Yellow, $I_V = 14$ mcd (typ.) | GaAsP on GaP |
| TLHY6405-BTZ   | Yellow, $I_V = 14$ mcd (typ.) | GaAsP on GaP |
| TLHG6400       | Green, $I_V = 10$ mcd (typ.)  | GaP on GaP   |
| TLHG6400-AS12Z | Green, $I_V = 10$ mcd (typ.)  | GaP on GaP   |
| TLHG6400-CS12Z | Green, $I_V = 10$ mcd (typ.)  | GaP on GaP   |
| TLHG6401       | Green, $I_V = 12$ mcd (typ.)  | GaP on GaP   |

| PARTS TABLE    |                              |            |
|----------------|------------------------------|------------|
| PART           | COLOR, LUMINOUS INTENSITY    | TECHNOLOGY |
| TLHG6401-AS12Z | Green, $I_V = 12$ mcd (typ.) | GaP on GaP |
| TLHG6405       | Green, $I_V > 15$ mcd (typ.) | GaP on GaP |
| TLHG6405-ASZ   | Green, $I_V > 15$ mcd (typ.) | GaP on GaP |
| TLHG6405-BTZ   | Green, $I_V > 15$ mcd (typ.) | GaP on GaP |

| ABSOLUTE MAXIMUM RATINGS <sup>1)</sup> TLHR640. , TLHY640. , TLHG640. |                              |            |               |      |
|---|------------------------------|------------|---------------|------|
| PARAMETER   | TEST CONDITION               | SYMBOL     | VALUE         | UNIT |
| Reverse voltage   |                              | $V_R$      | 6             | V    |
| DC Forward current  | $T_{amb} \leq 65$ °C         | $I_F$      | 30            | mA   |
| Surge forward current   | $t_p \leq 10$ $\mu$ s        | $I_{FSM}$  | 1             | A    |
| Power dissipation   | $T_{amb} \leq 65$ °C         | $P_V$      | 100           | mW   |
| Junction temperature  |                              | $T_j$      | 100           | °C   |
| Operating temperature range   |                              | $T_{amb}$  | - 20 to + 100 | °C   |
| Storage temperature range   |                              | $T_{stg}$  | - 55 to + 100 | °C   |
| Soldering temperature   | $t \leq 5$ s, 2 mm from body | $T_{sd}$   | 260           | °C   |
| Thermal resistance junction/ambient                                   |                              | $R_{thJA}$ | 350           | K/W  |

Note:

<sup>1)</sup>  $T_{amb} = 25$  °C, unless otherwise specified

| OPTICAL AND ELECTRICAL CHARACTERISTICS <sup>1)</sup> TLHR640., RED |                         |          |             |      |          |      |      |
|--|-------------------------|----------|-------------|------|----------|------|------|
| PARAMETER  | TEST CONDITION          | PART     | SYMBOL      | MIN. | TYP.     | MAX. | UNIT |
| Luminous intensity <sup>2)</sup>                                   | $I_F = 10$ mA           | TLHR6400 | $I_V$       | 1.6  | 10       |      | mcd  |
|  |                         | TLHR6401 | $I_V$       | 4    | 12       |      | mcd  |
|  |                         | TLHR6405 | $I_V$       | 6.3  | 14       |      | mcd  |
| Dominant wavelength  | $I_F = 10$ mA           |          | $\lambda_d$ | 612  |          | 625  | nm   |
| Peak wavelength  | $I_F = 10$ mA           |          | $\lambda_p$ |      | 635      |      | nm   |
| Angle of half intensity  | $I_F = 10$ mA           |          | $\varphi$   |      | $\pm 30$ |      | deg  |
| Forward voltage  | $I_F = 20$ mA           |          | $V_F$       |      | 2        | 3    | V    |
| Reverse voltage  | $I_R = 10$ $\mu$ A      |          | $V_R$       | 6    | 15       |      | V    |
| Junction capacitance   | $V_R = 0$ , $f = 1$ MHz |          | $C_j$       |      | 50       |      | pF   |

Note:

<sup>1)</sup>  $T_{amb} = 25$  °C, unless otherwise specified

<sup>2)</sup> In one packing unit  $I_{Vmin.}/I_{Vmax.} \leq 0.5$

| OPTICAL AND ELECTRICAL CHARACTERISTICS <sup>1)</sup> TLHY640., YELLOW |                         |          |             |      |          |      |      |
|---|-------------------------|----------|-------------|------|----------|------|------|
| PARAMETER   | TEST CONDITION          | PART     | SYMBOL      | MIN. | TYP.     | MAX. | UNIT |
| Luminous intensity <sup>2)</sup>                                      | $I_F = 10$ mA           | TLHY6400 | $I_V$       | 1.6  | 10       |      | mcd  |
|   |                         | TLHY6401 | $I_V$       | 4    | 12       |      | mcd  |
|   |                         | TLHY6405 | $I_V$       | 6.3  | 14       |      | mcd  |
| Dominant wavelength   | $I_F = 10$ mA           |          | $\lambda_d$ | 581  |          | 594  | nm   |
| Peak wavelength   | $I_F = 10$ mA           |          | $\lambda_p$ |      | 585      |      | nm   |
| Angle of half intensity   | $I_F = 10$ mA           |          | $\varphi$   |      | $\pm 30$ |      | deg  |
| Forward voltage   | $I_F = 20$ mA           |          | $V_F$       |      | 2.4      | 3    | V    |
| Reverse voltage   | $I_R = 10$ $\mu$ A      |          | $V_R$       | 6    | 15       |      | V    |
| Junction capacitance  | $V_R = 0$ , $f = 1$ MHz |          | $C_j$       |      | 50       |      | pF   |

Note:

<sup>1)</sup>  $T_{amb} = 25$  °C, unless otherwise specified

<sup>2)</sup> In one packing unit  $I_{Vmin.}/I_{Vmax.} \leq 0.5$

| OPTICAL AND ELECTRICAL CHARACTERISTICS <sup>1)</sup> TLHG640., GREEN |                              |          |             |      |          |      |      |
|--|------------------------------|----------|-------------|------|----------|------|------|
| PARAMETER  | TEST CONDITION               | PART     | SYMBOL      | MIN. | TYP.     | MAX. | UNIT |
| Luminous intensity <sup>2)</sup>                                     | $I_F = 10 \text{ mA}$        | TLHG6400 | $I_V$       | 1.6  | 10       |      | mcd  |
|  |                              | TLHG6401 | $I_V$       | 4    | 12       |      | mcd  |
|  |                              | TLHG6405 | $I_V$       | 6.3  | 15       |      | mcd  |
| Dominant wavelength  | $I_F = 10 \text{ mA}$        |          | $\lambda_d$ | 562  |          | 575  | nm   |
| Peak wavelength  | $I_F = 10 \text{ mA}$        |          | $\lambda_p$ |      | 565      |      | nm   |
| Angle of half intensity  | $I_F = 10 \text{ mA}$        |          | $\phi$      |      | $\pm 30$ |      | deg  |
| Forward voltage  | $I_F = 20 \text{ mA}$        |          | $V_F$       |      | 2.4      | 3    | V    |
| Reverse voltage  | $I_R = 10 \mu\text{A}$       |          | $V_R$       | 6    | 15       |      | V    |
| Junction capacitance   | $V_R = 0, f = 1 \text{ MHz}$ |          | $C_j$       |      | 50       |      | pF   |

Note:

<sup>1)</sup>  $T_{amb} = 25 \text{ }^\circ\text{C}$ , unless otherwise specified

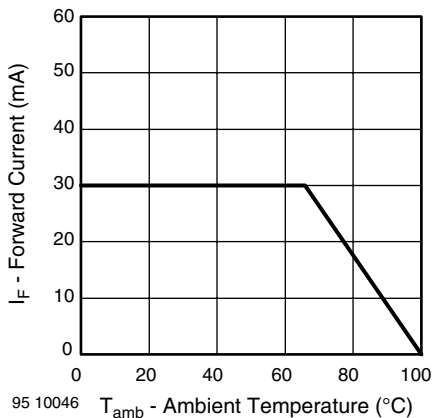
<sup>2)</sup> In one packing unit  $I_{Vmin.}/I_{Vmax.} \leq 0.5$ 
**TYPICAL CHARACTERISTICS**
 $T_{amb} = 25 \text{ }^\circ\text{C}$ , unless otherwise specified


Figure 1. Forward Current vs. Ambient Temperature

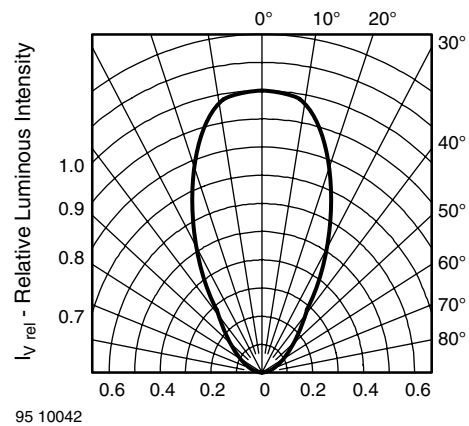


Figure 3. Rel. Luminous Intensity vs. Angular Displacement

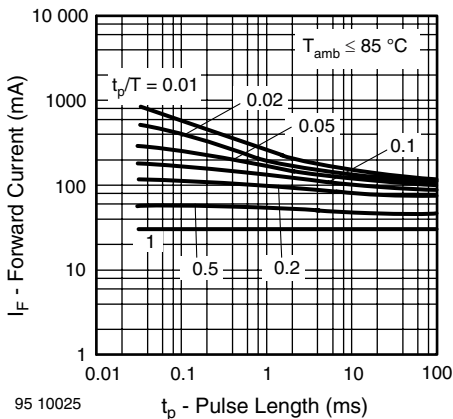


Figure 2. Forward Current vs. Pulse Length

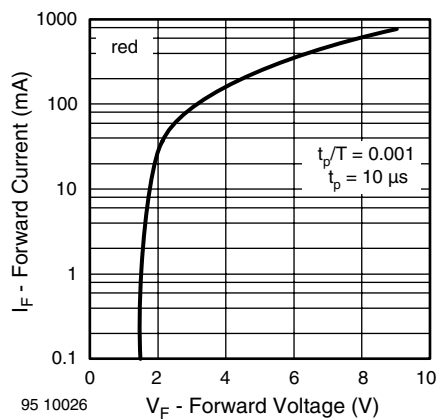


Figure 4. Forward Current vs. Forward Voltage

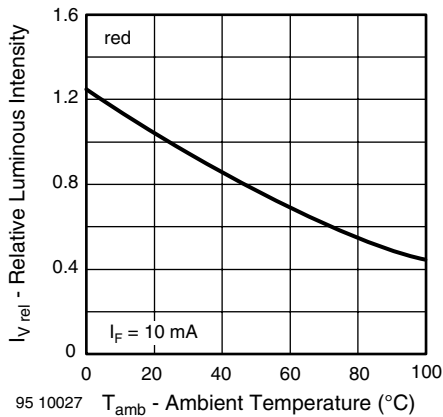


Figure 5. Rel. Luminous Intensity vs. Ambient Temperature

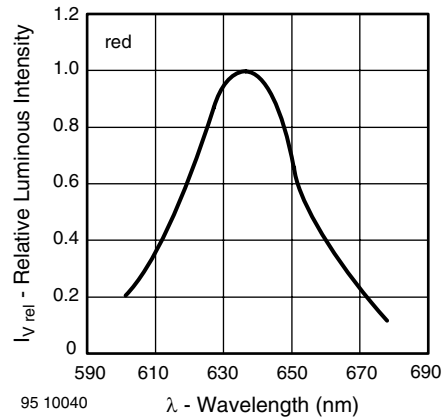


Figure 8. Relative Intensity vs. Wavelength

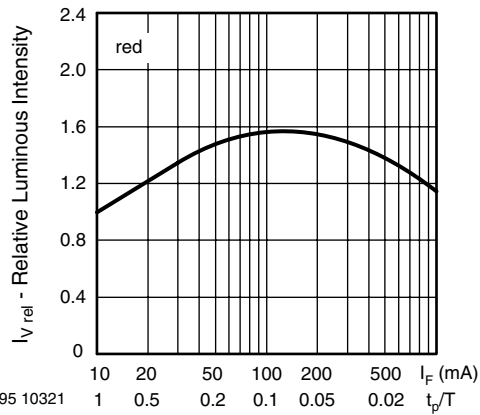


Figure 6. Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle

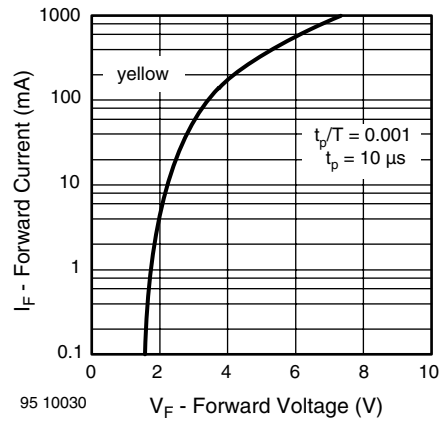


Figure 9. Forward Current vs. Forward Voltage

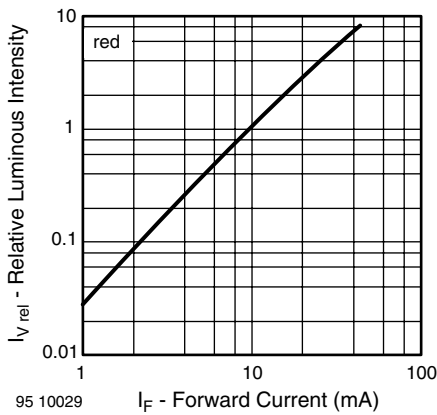


Figure 7. Relative Luminous Intensity vs. Forward Current

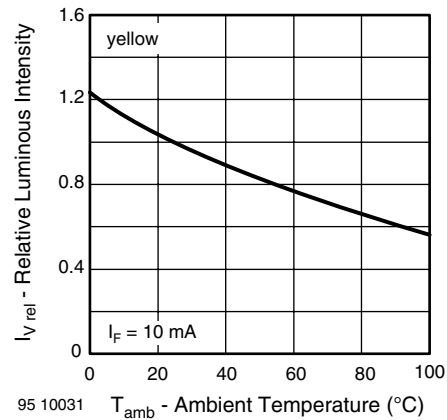


Figure 10. Rel. Luminous Intensity vs. Ambient Temperature

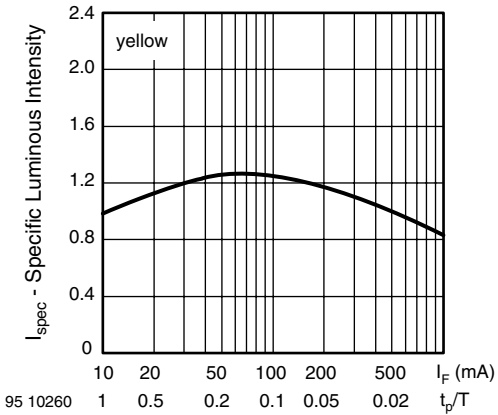


Figure 11. Rel. Lumin. Intensity vs. Forw. Current/Duty Cycle

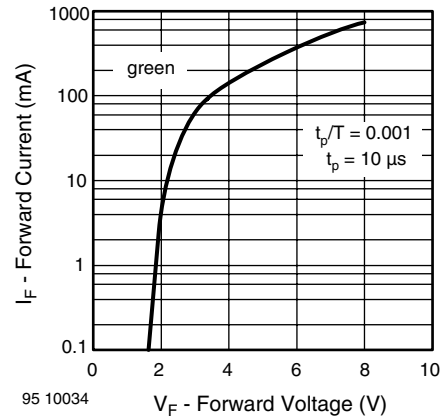


Figure 14. Forward Current vs. Forward Voltage

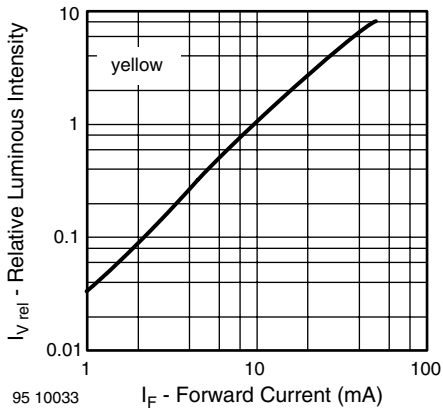


Figure 12. Relative Luminous Intensity vs. Forward Current

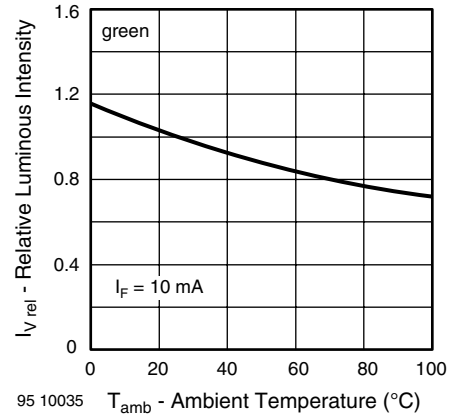


Figure 15. Rel. Luminous Intensity vs. Ambient Temperature

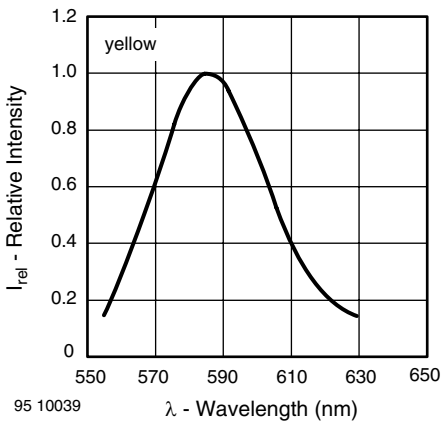


Figure 13. Relative Intensity vs. Wavelength

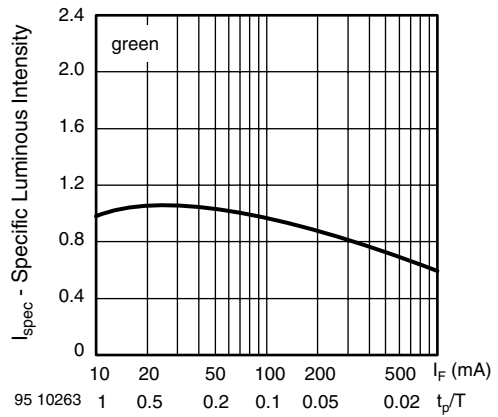


Figure 16. Specific Luminous Intensity vs. Forward Current

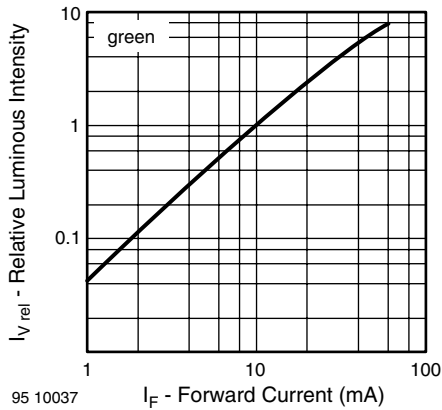


Figure 17. Relative Luminous Intensity vs. Forward Current




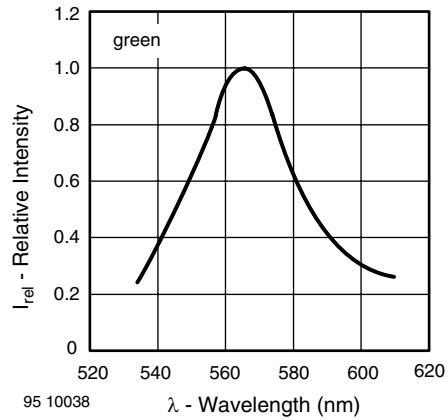


Figure 18. Relative Intensity vs. Wavelength

## PACKAGE DIMENSIONS in millimeters

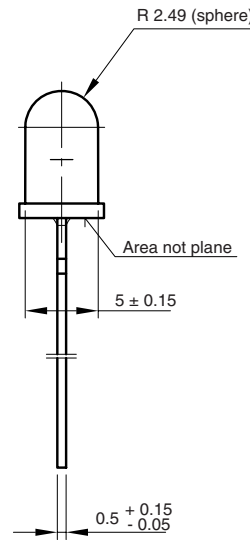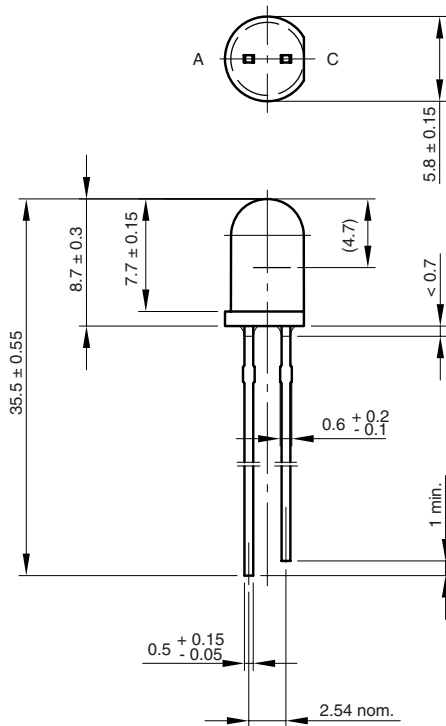

6.544-5259.02-4  
Issue: 8; 19.05.09  
95 10917

## REEL

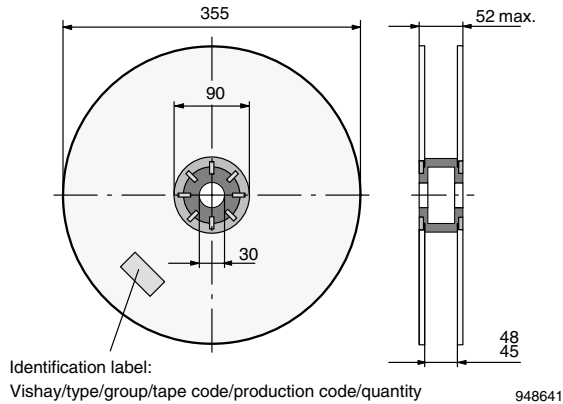


Figure 19. Reel Dimensions

AS12 = cathode leaves tape first  
AS21 = anode leaves tape first

## AMMOPACK

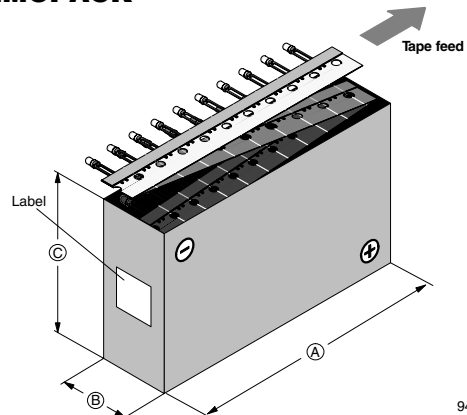


Figure 21. Tape Direction

Note:  
AS12Z and AS21Z still valid for already existing types BUT NOT FOR NEW DESIGN

## TAPE


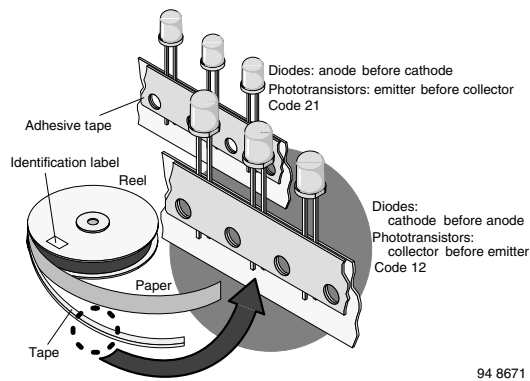


Figure 20. LED in Tape

## TAPE DIMENSIONS in millimeters



| Option | Dim. "H" ± 0.5 mm | Dim. "X" ± 0.5 mm |
|--------|-------------------|-------------------|
| AS     | 17.3              |                   |
| BT     | 20.0              | 16.0              |
| CS     | 22.0              |                   |
| MS     | 25.5              |                   |

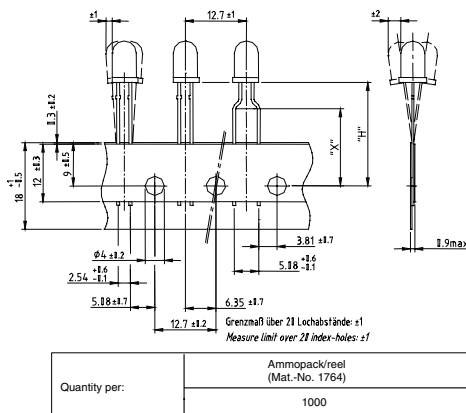

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.