PV4 Series

Illuminated | Water Protection | Heavy Duty | Front Panel Mount | RoHS

ANTI-VANDAL

Double Throw Style

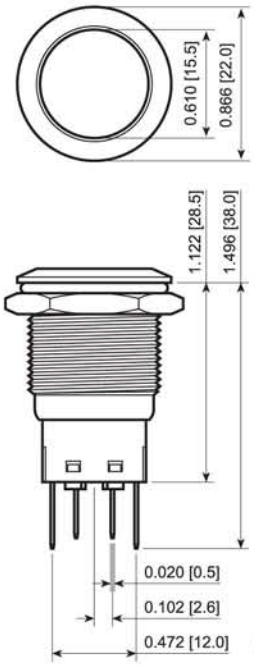

Suggested Panel Cutout

Maximum Panel Thickness: 0.394 [10.0]

Illumination Options



FEATURES:

- Vandal and Water Resistant
- Long Life Expectancy
- Colored Bezel and Actuator Options

SPECIFICATIONS:

RATING: 2A 24VDC; .7A 125VAC (cURus)
ILLUMINATION BASE RATING:
Red, Yellow, and Orange: 20mA 1.8V
Blue, Green, and White: 20mA 2.8V
TEMPERATURE: -20°C to 55°C
ELECTRICAL LIFE: 50,000 Cycles
CONTACT RESISTANCE: 50mΩ Max. at 1A 12VDC
INSULATION RESISTANCE: 1,000MΩ Min. 500VDC
DIELECTRIC STRENGTH: 2,000VAC for 1 Minute
INTRUSION PROTECTION: IP65

MATERIALS:

BUSHING: Stainless Steel
Aluminum
ACTUATOR: Stainless Steel
Aluminum
BASE: Polybutylene Terephthalate, UL94 V-2
SEALING: Silicone
INNER ASSEMBLY: Polyamide 6/6
Brass
SPRING: Stainless Steel
CONTACT: Silver Plated Brass
TERMINALS: Silver Plated Brass
HARDWARE: Nickel Plated Brass

Double Break Style

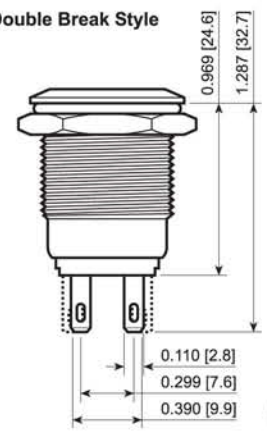

Illumination Options



PV4F2Y01S-343

PV4F2Y0SS-244

PV4F2Y0SS

PV4F2Y0SS-314

Series	Actuator Options	Terminal	Function	Rating	Body Finish	Actuator Finish	Contact Material	Lens Style	Lens Color	Illumination Voltage
PV4	F - Flat	2 - Solder 6 - Screw (*)	*1 Pole:* 3 - On-On B - On-(On) *2 Pole:* G - On-On H - On-(On) *Double Break:* Y - 1P Off-(On) + 1P On-(Off)	0 - 2A 48VDC	1 - Black S - Stainless Steel	1 - Black S - Stainless Steel	None - Silver G - Gold	2 - Dot 3 - Ring	0 - White 1 - Red 2 - Orange 3 - Green 4 - Blue 5 - Yellow	1 - Base Voltage 3 - 6V 4 - 12V 5 - 24V 6 - 125V 7 - 250V

For Illuminated Switches Only

Notes:
** = Availble with Y function only*
Additional material, illumination and marking options available. Please ask your sales person.

EXAMPLE PART NUMBERS:

PV4F2Y0SS-201 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Clear Dot Illum., 2V

PV4F2Y0SS-211 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Red Dot Illum., 2V

PV4F2Y0SS-214 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Red Dot Illum., 12V

PV4F2Y0SS-216 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Red Dot Illum., 125V

PV4F2Y0SS-241 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Blue Dot Illum., 2V

PV4F2Y0SS-244 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Blue Dot Illum., 12V

PV4F2Y0SS-301 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Clear Ring Illum., 2V

PV4F2Y0SS-311 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Red Ring Illum., 2V

PV4F2Y0SS-314 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Red Ring Illum., 12V

PV4F2Y0SS-316 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Red Ring Illum., 125V

PV4F2Y0SS-341 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Blue Ring Illum., 2V

PV4F2Y0SS-344 *2P Off-(On), On-(Off)*
Stainless Steel Finish, Blue Ring Illum., 12V

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.