

Ultrafast high voltage rectifier

Table 1: Main product characteristics

$I_{F(AV)}$	60 A
V_{RRM}	400 V
T_J (max)	175 °C
V_F (typ)	0.83 V
t_{rr} (max)	50 ns

Features and benefits

- Ultrafast switching
- Low reverse current
- Low thermal resistance
- Reduces switching & conduction losses

Description

The STTH6004W uses ST 400V technology and is specially suited for use in switching power supplies, welding equipment and industrial applications, as an output rectification diode.

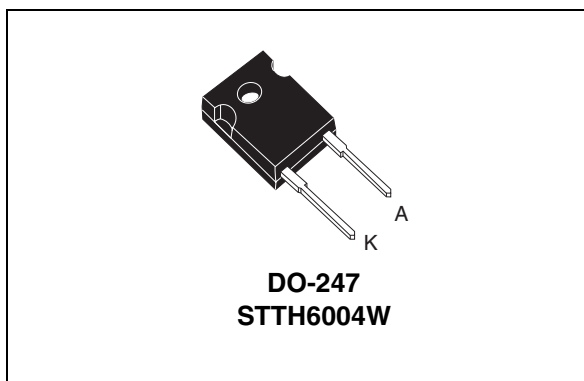


Table 2: Order codes

Part number	Marking
STTH6004W	STTH6004W

Table 3: Absolute ratings (limiting values)

Symbol	Parameter		Value	Unit
V_{RRM}	Repetitive peak reverse voltage		400	V
$I_{F(RMS)}$	RMS forward current		90	A
$I_{F(AV)}$	Average forward current	$T_C = 125\text{ °C} \quad \delta = 0.5$	60	A
I_{FSM}	Surge non repetitive forward current	$t_p = 10\text{ ms sinusoidal}$	600	A
T_{stg}	Storage temperature range		-65 to + 175	°C
T_J	Maximum operating junction temperature		175	°C

Table 4: Thermal Resistance

Symbol	Parameter	Value (max).	Unit
$R_{th(j-c)}$	Junction to case	0.70	°C/W

Table 5: Static electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ	Max.	Unit
I_R^*	Reverse leakage current	$T_j = 25\text{ °C}$			50	μA
		$T_j = 150\text{ °C}$			100	
V_F^{**}	Forward voltage drop	$T_j = 25\text{ °C}$			1.2	V
		$T_j = 150\text{ °C}$			0.83	

Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

$t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses use the following equation: $P = 0.8 \times I_{F(AV)} + 0.0033 I_F^2 (RMS)$

Table 6: Dynamic characteristics

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
t_{rr}	Reverse recovery time	$T_j = 25\text{ °C}$			66	ns
		$I_F = 1\text{ A}$ $di_F/dt = 50\text{ A}/\mu\text{s}$ $V_R = 30\text{ V}$			90	
I_{RM}	Reverse recovery current	$T_j = 25\text{ °C}$			36	A
		$I_F = 1\text{ A}$ $di_F/dt = 200\text{ A}/\mu\text{s}$ $V_R = 30\text{ V}$			50	
S_{factor}	Softness factor	$T_j = 125\text{ °C}$			15	A
		$I_F = 60\text{ A}$ $V_R = 200\text{ V}$ $di_F/dt = 100\text{ A}/\mu\text{s}$			0.4	
t_{fr}	Forward recovery time	$T_j = 125\text{ °C}$			600	ns
		$I_F = 60\text{ A}$ $di_F/dt = 100\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$			3.2	
V_{FP}	Forward recovery voltage	$T_j = 25\text{ °C}$				V
		$I_F = 60\text{ A}$ $di_F/dt = 200\text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \times V_{Fmax}$				

Figure 1: Conduction losses versus average forward current

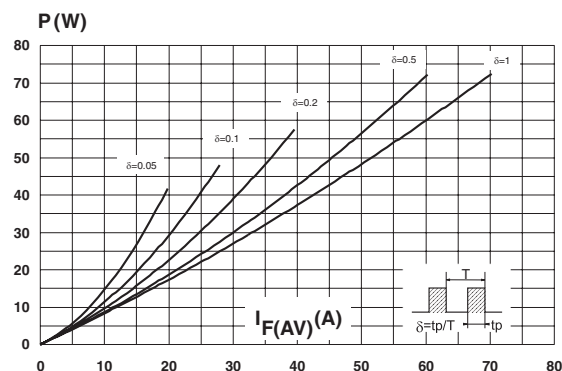


Figure 2: Forward voltage drop versus forward current

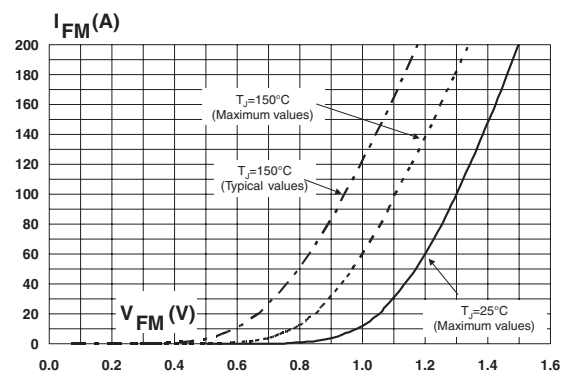


Figure 3: Relative variation of thermal impedance junction to case versus pulse duration

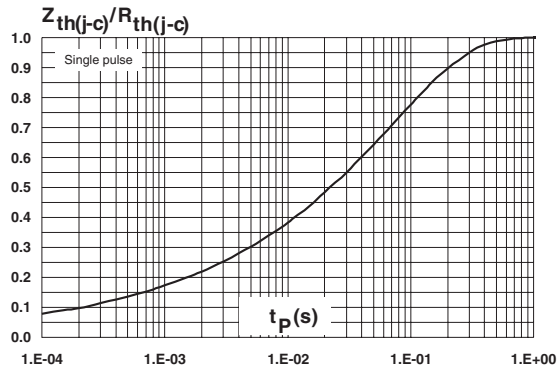


Figure 4: Peak reverse recovery current versus di_F/dt (typical values)

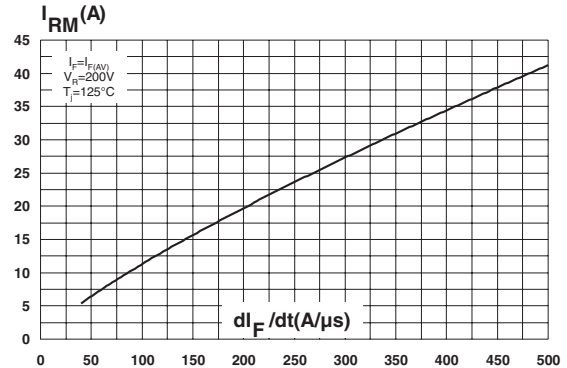


Figure 5: Reverse recovery time versus di_F/dt (typical values)

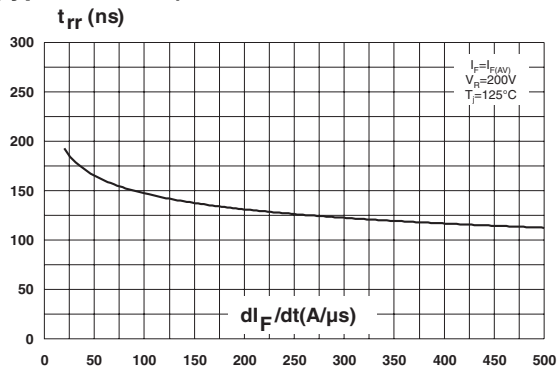


Figure 6: Reverse recovery charges versus di_F/dt (typical values)

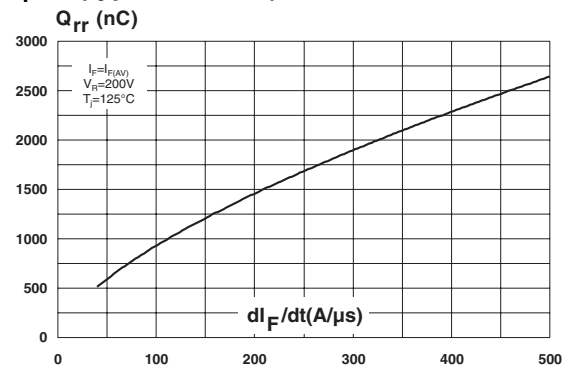


Figure 7: Reverse recovery softness factor versus di_F/dt (typical values)

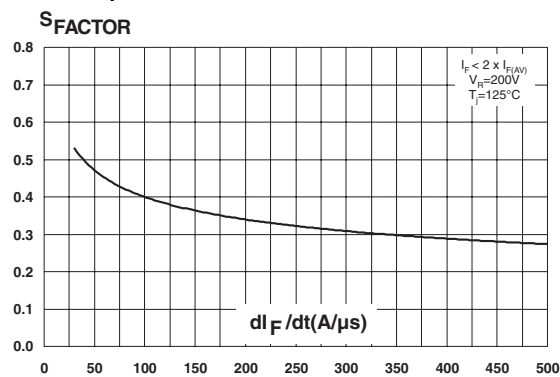


Figure 8: Relative variations of dynamic parameters versus junction temperature

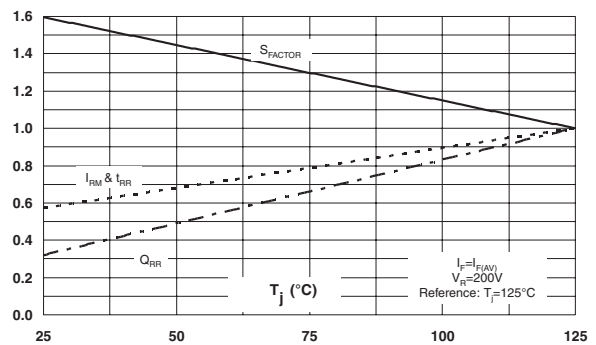


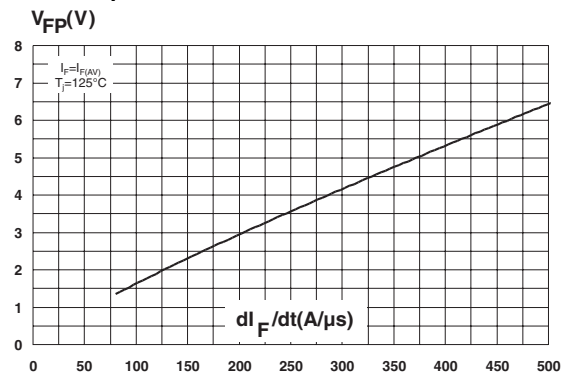
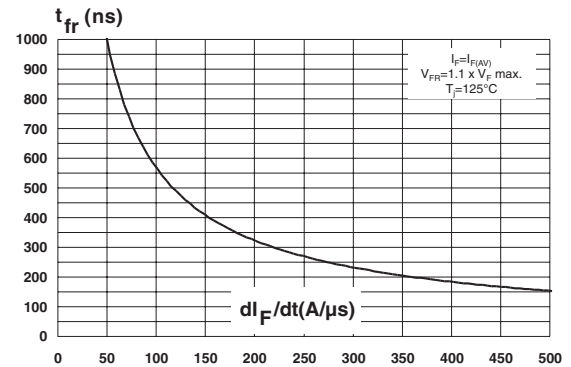
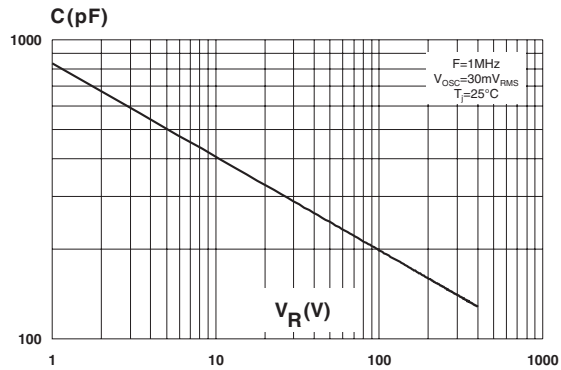
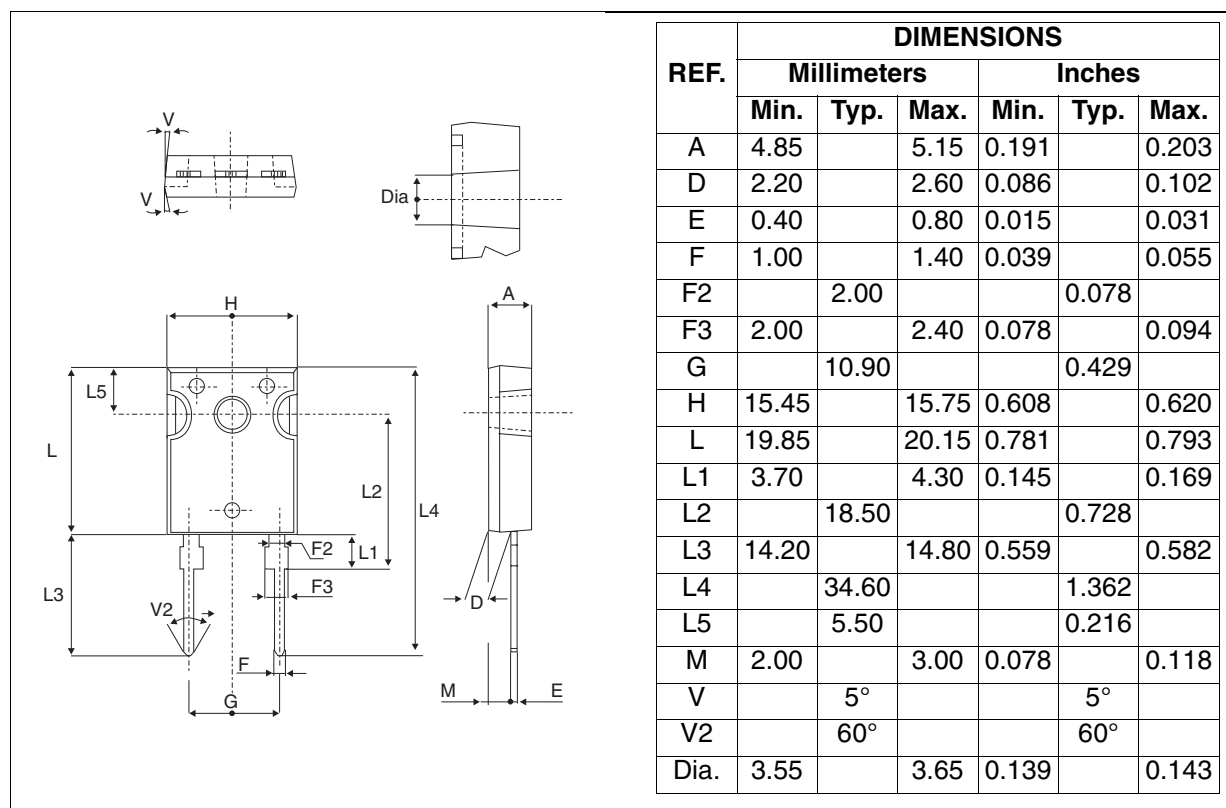
Figure 9: Transient peak forward voltage versus di_F/dt (typical values)**Figure 10: Forward recovery time versus di_F/dt (typical values)****Figure 11: Junction capacitance versus reverse voltage applied (typical values)**

Figure 12: DO-247 Package mechanical data



In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

Table 7: Ordering information

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STTH6004W	STTH6004W	DO-247	4.40 g	30	Tube

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.8 Nm.
- Maximum torque value: 1.0 Nm.

Table 8: Revision history

Date	Revision	Description of Changes
18-Oct-2005	1	First issue

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America
www.st.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.