

## Passive module - VIP-2/SC/FLK10/ROC AO - 2905298

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOfACE Professional (VIP) board for the ROC800 controller

### Product Features

- These system-specific interface modules for the ROC800 controller are used in combination with the relevant system cables
- Interface from field wiring to ROC800 controller
- Compact design reduces space requirements in the control cabinet
- Field side I/O marking clearly identified when device is mounted.
- Integrated ZB marker provides per-channel labeling
- Rugged metal mounting foot allows easy DIN rail installation and removal.



### Key Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Packing unit                         | 1 pc          |
| Weight per Piece (excluding packing) | 100.0 g       |
| Country of origin                    | United States |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Width  | 34.5 mm |
| Height | 65 mm   |
| Depth  | 44.2 mm |

#### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

#### General

## Passive module - VIP-2/SC/FLK10/ROC AO - 2905298

### Technical data

#### General

|                                 |              |
|---------------------------------|--------------|
| Max. perm. operating voltage    | 60 V AC/DC   |
| Max. perm. current (per branch) | 1 A          |
| Number of positions             | 10           |
| Status display                  | No           |
| Mounting position               | any          |
| Standards/regulations           | IEC 60664    |
|                                 | DIN EN 50178 |
|                                 | IEC 62103    |
| Degree of pollution             | 2            |
| Overvoltage category            | II           |

#### Connection data for connection 1

|                                  |   |
|----------------------------------|---|
| Connection name                  | Field level                                 |
| Connection in acc. with standard | IEC / EN                                    |
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm  |
| Screw thread                     | M 3   |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 12                                   |
| Number of positions              | 8   |

#### Connection data for connection 2

|                       |                             |
|-----------------------|-----------------------------|
| Connection name       | Controller level            |
| Connection method     | IDC/FLK pin strip (2.54 mm) |
| Number of connections | 1                           |
| Number of positions   | 10                          |
| Pitch                 | 2.54 mm                     |

#### Supported controller

|                     |                |
|---------------------|----------------|
| Controller          | Emerson ROC800 |
| - suitable I/O card | ROC800 AO      |

#### Standards and Regulations

|                       |              |
|-----------------------|--------------|
| Standards/regulations | IEC 60664    |
|                       | DIN EN 50178 |
|                       | IEC 62103    |
| Degree of pollution   | 2            |
| Overvoltage category  | II           |

# Passive module - VIP-2/SC/FLK10/ROC AO - 2905298

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27250313 |
| eCl@ss 4.1 | 27250313 |
| eCl@ss 5.0 | 27250313 |
| eCl@ss 5.1 | 27250313 |
| eCl@ss 6.0 | 27242608 |
| eCl@ss 7.0 | 27141152 |
| eCl@ss 8.0 | 27141152 |
| eCl@ss 9.0 | 27141152 |

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001434 |
| ETIM 3.0 | EC001604 |
| ETIM 4.0 | EC001604 |
| ETIM 5.0 | EC002780 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211824 |
| UNSPSC 7.0901 | 39121421 |
| UNSPSC 11     | 39121421 |
| UNSPSC 12.01  | 39121421 |
| UNSPSC 13.2   | 39121421 |

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

#### Approval details

# Passive module - VIP-2/SC/FLK10/ROC AO - 2905298

## Approvals

|                                |       |
|--------------------------------|-------|
| UL Recognized                  |       |
| mm <sup>2</sup> /AWG/kcmil     | 30-12 |
| Nominal current I <sub>N</sub> | 1 A   |
| Nominal voltage U <sub>N</sub> | 60 V  |

|                                |       |
|--------------------------------|-------|
| cUL Recognized                 |       |
| mm <sup>2</sup> /AWG/kcmil     | 30-12 |
| Nominal current I <sub>N</sub> | 1 A   |
| Nominal voltage U <sub>N</sub> | 60 V  |

|                  |  |
|------------------|--|
| cULus Recognized |  |
|------------------|--|

## Accessories

### Accessories

#### System cable

Cable - VIP-CAB-FLK10/0,14/0,5M - 2318305



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 0.5 m

Cable - VIP-CAB-FLK10/0,14/1,0M - 2318318



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1 m

## Passive module - VIP-2/SC/FLK10/ROC AO - 2905298

### Accessories

#### Cable - VIP-CAB-FLK10/0,14/1,5M - 2318321



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 1.5 m

---

#### Cable - VIP-CAB-FLK10/0,14/2,0M - 2318334



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 2 m

---

#### Cable - VIP-CAB-FLK10/0,14/3,0M - 2318347



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 3 m

---

#### Cable - VIP-CAB-FLK10/0,14/4,0M - 2318350



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 4 m

---

#### Cable - VIP-CAB-FLK10/0,14/6,0M - 2318363



Assembled round cable with two molded 10-pos. socket strips (1:1 connection). The cable has a 90° punched on connector and a 180° punched on connector, cable length: 6 m

---

### Required add-on products

# Passive module - VIP-2/SC/FLK10/ROC AO - 2905298

## Accessories


Front adapters - FLKM 10-PA-ROC800 - 2904889



VARIOFACE front adapters for ROC800 controller

## Drawings

Circuit diagram

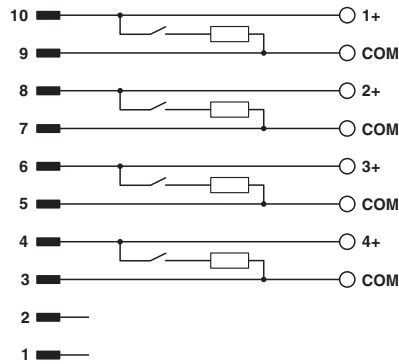



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.