


T3/DS3/E3/STS-1 TRANSFORMERS

Designed for T3, DS3, E3 and STS-1 Interfaces

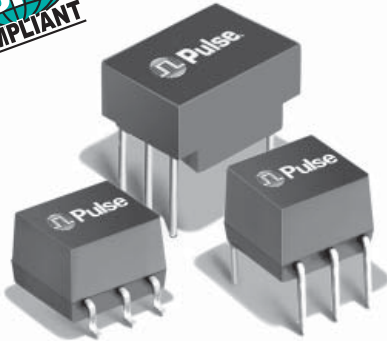

- RoHS peak reflow temperature rating: 245°C
- Return loss meets requirements of G.703
- Fast rise time compatible with standards
- Through hole and surface mount packages available
- UL recognized

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

| RoHS Compliant Part Number | Turns Ratio (±2%) | OCL Primary (μH MIN) | OCL @ -40°C (μH MIN) | LL (μH MAX) | C _{w/w} (PF MAX) | Bandwidth 75 Ω System (MHz TYP) | Isolation Voltage (V _{rms} MIN) | Package/ Schematic | Primary Pins |
|----------------------------|-------------------|----------------------|----------------------|-------------|---------------------------|---------------------------------|--|--------------------|--------------|
| PE-65663NL | 1:1 | 40 | 30 | .12 | 13 | — | 1500 | QC-1/A THT | 2-6 |
| PE-65664NL | 1:2CT | 35 | 20 | .12 | 10 | — | 1500 | QC-1/B THT | 2-6 |
| PE-65779NL | 1:4CT | 150 | — | .30 | 15 | — | 1500 | QC-1/B THT | 2-6 |
| PE-65856NL | 1:1.73CT | 50 | — | .10 | 12 | .060-300 | 1500 | LC-1/C THT | 4-6 |
| PE-65966NL | 1:1 | 40 | — | .10 | 10 | .200-340 | 1500 | LC-1/E THT | 4-6 |
| PE-65967NL | 1:1 | 40 | — | .10 | 10 | .200-340 | 1500 | LS-1/E SMT | 4-6 |
| PE-65968NL | 1:2CT | 19 | — | .06 | 10 | .250-500 | 1500 | LS-1/C SMT | 4-6 |
| PE-65969NL | 1:2CT | 19 | — | .06 | 10 | .250-500 | 1500 | LC-1/C THT | 4-6 |
| PE-68629NL | 1:1 | 40 | — | .10 | 5 | — | 3000 ⁴ | HC-1/A THT | 1-5 |
| PE-68630NL | 1:2CT | 19 | — | .06 | 10 | — | 3000 ⁴ | HC-1/D THT | 1-5 |

Electrical Specifications @ 25°C

| RoHS Compliant Part Number | Turns Ratio (Pri:Sec ±5%) | OCL @ 25°C (mHMIN) | C _{w/w} (pF MAX) | L _L (μH MAX) | DCR Pri (Ω MAX) | DCR Sec (Ω MAX) | Isolation Voltage (V _{rms} MIN) | Package/ Schematic | Primary Pins |
|----------------------------|---------------------------|--------------------|---------------------------|-------------------------|-----------------|-----------------|--|--------------------|--------------|
| PE-64934NL | 1:1 | 1.20 | 25 | 0.50 | 0.70 | 0.70 | 1500 | HC-1/1S | 1-2 |

Packaging Information

| Package | Type | Part Weight | Parts/Tube | Parts/Reel | Reel Diameter | Tape Width | Pitch |
|---------|------|-------------|------------|------------|---------------|------------|-------|
| LS-1 | SMT | 0.6 grams | 70 | 600 | 13 inches | 24mm | 16mm |
| LC-1 | THT | 0.6 grams | 65 | — | — | — | — |
| HC-1 | THT | 1.2 grams | 60 | — | — | — | — |
| QC-1 | THT | 0.8 grams | 60 | — | — | — | — |

T3/DS3/E3/STS-1 TRANSFORMERS


Designed for T3, DS3, E3 and STS-1 Interfaces



Mechanical

Schematic


QC-1

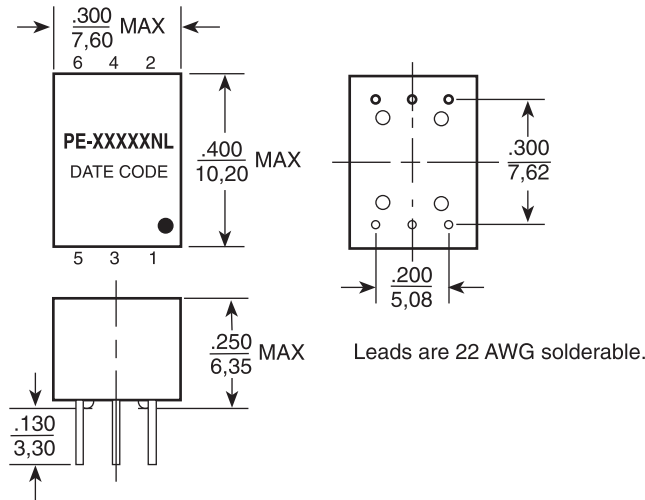


Leads are 22 AWG solderable.

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified all tolerances are $\pm \frac{.010}{0,25}$

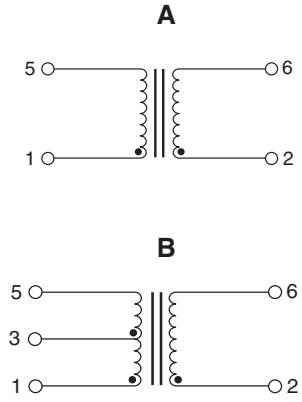


LC-1

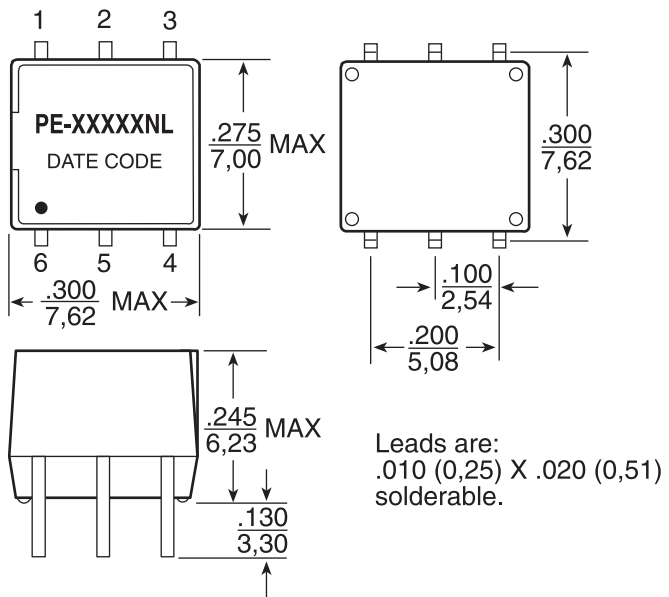

Leads are: .010 (0,25) X .020 (0,51) solderable.

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified all tolerances are $\pm \frac{.010}{0,25}$

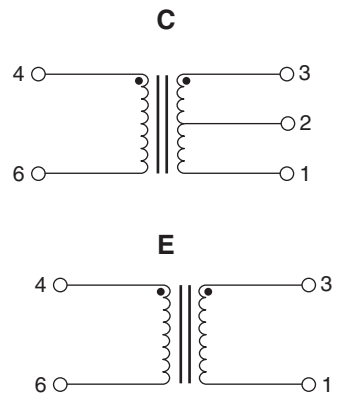

T3/DS3/E3/STS-1 TRANSFORMERS



Designed for T3, DS3, E3 and STS-1 Interfaces



Mechanical

Schematic




HC-1

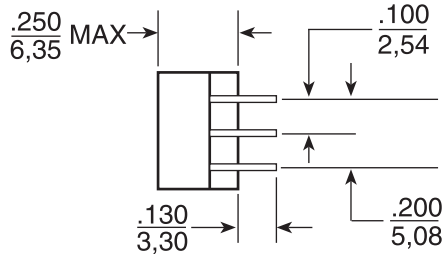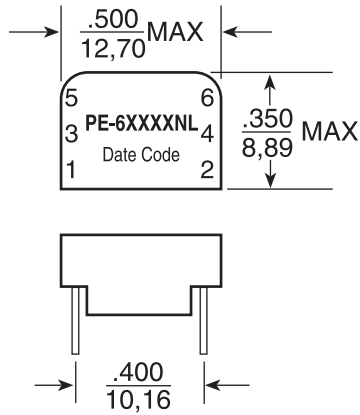



Notes: Leads are 24 AWG solderable.
Unused pins not provided.

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified all tolerances are $\pm \frac{.010}{0,25}$

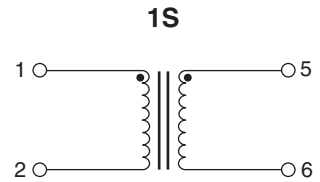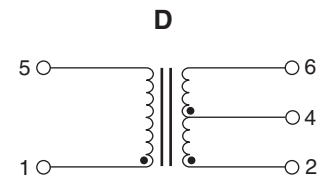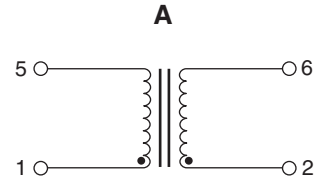

LS-1


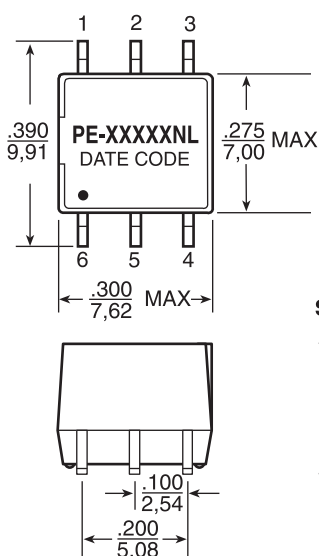


SUGGESTED PAD LAYOUT



Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified all tolerances are $\pm \frac{.010}{0,25}$

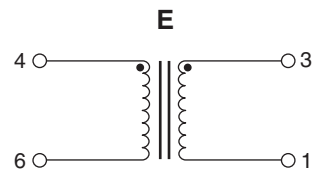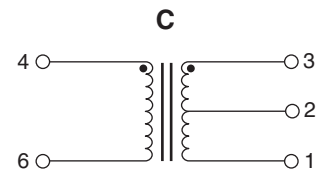

T3/DS3/E3/STS -1 TRANSFORMERS

Designed for T3, DS3, E3 and STS-1 Interfaces



Transformer Selection Guide

| Chip Manufacturer | IC | Surface Mount | | Through Hole (1500 VRMS) | | Through Hole (3000 VRMS) | |
|-------------------|-------------------------------|---------------|------------|--------------------------|------------|--------------------------|------------|
| | | Transmit | Receive | Transmit | Receive | Transmit | Receive |
| Lucent | T7296 | PE-65967NL | — | PE-65966NL | — | PE-68629NL | — |
| Exar | XR-T7296 | PE-65967NL | — | PE-65966NL | — | PE-68629NL | — |
| Silicon Systems | SSI 78P236, DS3 | PE-65968NL | PE-65967NL | PE-65969NL | PE-65966NL | PE-68630NL | PE-68629NL |
| | SSI 78P7200, DS3 | PE-65968NL | PE-65967NL | PE-65969NL | PE-65966NL | PE-68630NL | PE-68629NL |
| | SSI 78P7200, E3 | PE-65968NL | PE-65968NL | PE-65969NL | PE-65969NL | PE-68630NL | PE-68630NL |
| | SSI 78P2361, STS-1 | PE-65968NL | PE-65967NL | PE-65969NL | PE-65966NL | PE-68630NL | PE-68629NL |
| | SSI 78P2362, E3 | PE-65968NL | PE-65967NL | PE-65969NL | PE-65966NL | PE-68630NL | PE-68629NL |
| Transwitch | MRT TXC-02050 ⁴ E3 | PE-65968NL | PE-65967NL | PE-65969NL | PE-65966NL | PE-68630NL | PE-68629NL |
| | ART 02020 DS3, STS-1 | PE-65967NL | PE-65967NL | PE-65966NL | PE-65966NL | PE-68629NL | PE-68629NL |

Application Notes

- The transformers have been developed for use as transmit and receive transformers in T3 or DS3 links, using bit rates of 44.736 Mbps and B3ZS coding on coaxial cable. The characteristics allow compliance with the pulse templates of CCITT G.703 as well as ATT T.A.34. The transformers are also suitable for the E3 interface at 34.368 Mbps with HDB3 coding or STS-1 applications, at 51.84 Mbps according to Bellcore TA-NWT-000253. The LC-1 and QC-1 packages are pin-compatible with T1-1 and T4-1 6-pin DIP packages.
- Bandwidth specifications are typical in a 75 Ω system. Return loss meets the requirements of G.703. Materials used in the products are UL94-V0 recognized. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).
- The surface mount LS-1 package is available with optional Tape & Reel packaging. To order, add a "T" suffix to the part number (e.g. PE-65967NLT).
- The Transwitch MRT TXC-02050 chip is also designed to operate in 6.312 and 8.448 Mbps interfaces. A 1:1 transformer (PE-64934) is recommended.

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Rd. West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Rd.
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Rd.
Zhongli City
Taoyuan County 320
Taiwan R. O. C.

Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.