




MICROPROCESSOR
CORE MODULE

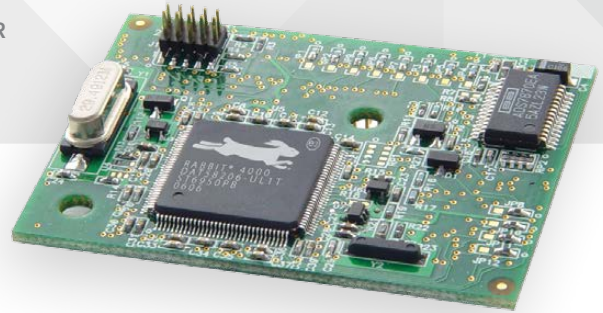

RABBITCORE® RCM4100 SERIES

A compact core module ideal for device control for embedded applications that require I/O control, data handling and peripheral connectivity

The RabbitCore RCM4100 series is the entry platform for the Rabbit® 4000 family of core modules. The RCM4100 is designed to mount directly to a user-supplied motherboard and acts as the microprocessor of the embedded system. The microprocessor features 40 GPIO lines shared with up to six CMOS-compatible serial ports, and four levels of alternate pin functions that include variable phase PWM, quadrature decoder, and input capture.

The RCM4100 series, with its robust feature set, ample memory, low-power modes and analog channels, is available for multiple peripheral connectivity options such as a cellular modem or ZigBee device.

Evaluation of the RCM4100 is easy with the RabbitCore RCM4100 development kit, which provides all the necessary hardware and software to quickly get started.

BENEFITS

- Rabbit 4000 running up to 59 MHz
- 512K Flash, 256K / 512K Data SRAM
- Up to 40 GPIO, up to 6 CMOS-compatible serial ports
- Auxiliary I/O feature for reducing processor bus loading
- 8 channels 12-bit A/D converter (RCM4100)
- Ideal for device intelligence and control
- Well suited for easy integration with peripheral technologies such as GPS, cellular modems, RFID readers, sensors, etc.

RELATED PRODUCTS



RabbitCore®
RCM3100
Series



RabbitCore®
RCM4000
Series



RabbitCore®
RCM4300
Series




Rabbit MiniCore®
RCM6700
Series



Dynamic C®

APPLICATION EXAMPLE

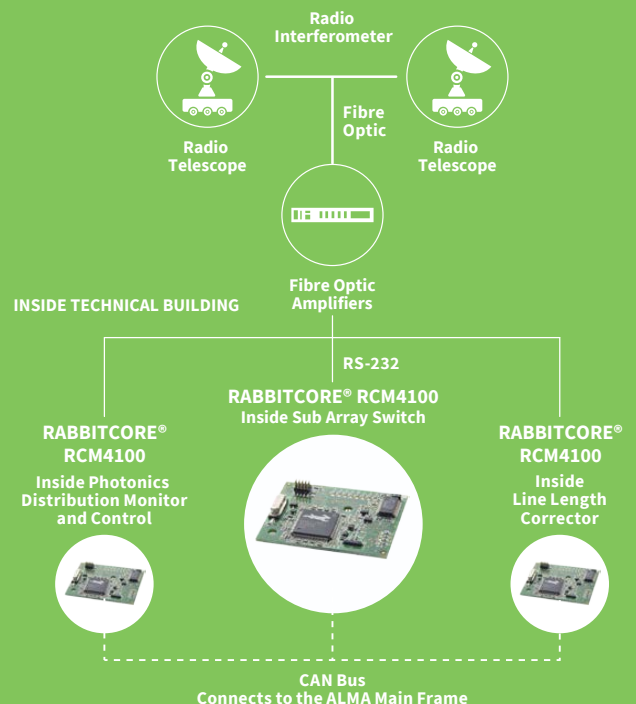

SPECIFICATIONS	RCM4100 RCM4110 RCM4120		
FEATURES			
MICROPROCESSOR	Rabbit® 4000 at 59 MHz	Rabbit® 4000 at 29 MHz	Rabbit® 4000 at 59 MHz
FLASH MEMORY	512K		
DATA SRAM	512K	256K	512K
FAST PROGRAM-EXECUTION SRAM	512K	None	512K
BACKUP BATTERY	Connection for user-supplied backup battery (to support RTC and data SRAM)		
GENERAL PURPOSE I/O	29 parallel digital I/O lines: Configurable with 4 layers of alternate functions	40 parallel digital I/O lines: Configurable with 4 layers of alternate functions	
ADDITIONAL INPUTS	Startup mode (2), reset in, CONVERT	Startup mode (2), reset in	
ADDITIONAL OUTPUTS	Status, reset out, analog VREF	Status, reset out	
ANALOG INPUTS - A/D CONVERTER RESOLUTION	8 channels single-ended or 4 channels differential. Programmable gain 1, 2, 4, 5, 8, 10, 16 and 20 V/V	None	None
- A/D CONVERTER RESOLUTION	12 bits (11 bits single-ended)		
- A/D CONVERSION TIME (INCLUDING 120 MS RAW COUNT AND DYNAMIC C	180 µs		
AUXILIARY I/O BUS	Can be configured for 8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write		
SERIAL PORTS	6 high-speed, CMOS-compatible ports: - All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC 1 asynchronous clocked serial port shared with programming port 1 clocked serial port shared with A/D converter	6 high-speed, CMOS-compatible ports: - All 6 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 2 as SDLC/HDLC 1 asynchronous clocked serial port shared with programming port	
SERIAL RATE	Maximum asynchronous baud rate = CLK/8		
SLAVE INTERFACE	Slave port allows the RCM4100 to be used as an intelligent peripheral device slaved to a master processor		
REAL TIME CLOCK	Yes		
TIMERS	Ten 8-bit timers (6 cascadable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers		
WATCHDOG/SUPERVISOR	Yes		
PULSE-WIDTH MODULATORS	4 channels synchronized PWM with 10-bit counter; 4 channels variable-phase or synchronized PWM with 16-bit counter		
INPUT CAPTURE	2-channel input capture can be used to time input signals from various port pins		
QUADRATURE DECODER	2-channel quadrature decoder accepts inputs from external incremental encoder modules		
POWER (PINS UNLOADED)	3.0– 3.6 VDC		
	125 mA @ 3.3V	65 mA @ 3.3V	125 mA @ 3.3V
OPERATING TEMPERATURE	-40° C to +85° C	0° C to +70° C	-40° C to +85° C
HUMIDITY	5% to 95%, non-condensing		
CONNECTORS	One 2 × 25, 1.27 mm pitch IDC signal header; One 2 × 5, 1.27 mm pitch IDC programming header		
BOARD SIZE	1.41" × 1.88" × 0.49" (36 mm × 48 mm × 12 mm)		

PART NUMBERS	DESCRIPTION
20-101-1093	RCM4110
20-101-1105	RCM4100
20-101-1154	RCM4120

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2016 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001605
C2/816

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.