


SERIES: PQMC1-S | DESCRIPTION: DC-DC CONVERTER
FEATURES


- 1 W isolated output
- smaller package
- single/dual regulated output
- 1,500 Vdc isolation
- continuous short circuit, over current protection
- temperature range (-40~105°C)
- high efficiency at light load
- efficiency up to 81%

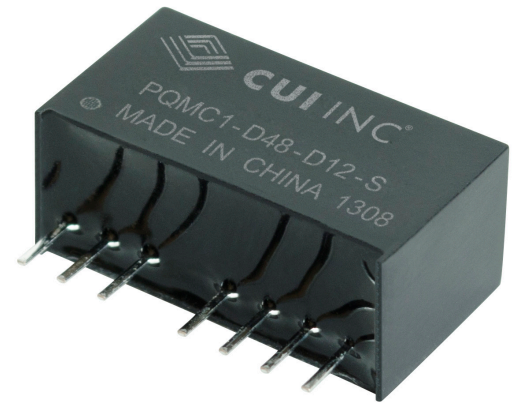

MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple and noise ¹ max (mVp-p)	efficiency typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
PQMC1-D5-S5-S	5	4.5~9	5	10	200	1	75	72
PQMC1-D5-S12-S	5	4.5~9	12	4	83	1	75	75
PQMC1-D5-S15-S	5	4.5~9	15	3	67	1	75	75
PQMC1-D5-D5-S	5	4.5~9	±5	±5	±100	1	75	73
PQMC1-D5-D12-S	5	4.5~9	±12	±2	±41	1	75	75
PQMC1-D5-D15-S	5	4.5~9	±15	±2	±33	1	75	75
PQMC1-D12-S5-S	12	9~18	5	10	200	1	75	76
PQMC1-D12-S12-S	12	9~18	12	4	83	1	75	80
PQMC1-D12-S15-S	12	9~18	15	3	67	1	75	81
PQMC1-D12-D5-S	12	9~18	±5	±5	±100	1	75	77
PQMC1-D12-D12-S	12	9~18	±12	±2	±41	1	75	80
PQMC1-D12-D15-S	12	9~18	±15	±2	±33	1	75	80
PQMC1-D24-S5-S	24	18~36	5	10	200	1	75	76
PQMC1-D24-S12-S	24	18~36	12	4	83	1	75	81
PQMC1-D24-S15-S	24	18~36	15	3	67	1	75	81
PQMC1-D24-S24-S	24	18~36	24	2	42	1	75	81
PQMC1-D24-D5-S	24	18~36	±5	±5	±100	1	75	80
PQMC1-D24-D12-S	24	18~36	±12	±2	±41	1	75	80
PQMC1-D24-D15-S	24	18~36	±15	±2	±33	1	75	80
PQMC1-D48-S5-S	48	36~75	5	10	200	1	75	76
PQMC1-D48-S12-S	48	36~75	12	4	83	1	75	81
PQMC1-D48-S15-S	48	36~75	15	3	67	1	75	81
PQMC1-D48-D5-S	48	36~75	±5	±5	±100	1	75	76
PQMC1-D48-D12-S	48	36~75	±12	±2	±41	1	75	80
PQMC1-D48-D15-S	48	36~75	±15	±2	±33	1	75	78

Notes: 1. ripple and noise are measured at 20 MHz BW by "parallel cable" method

PART NUMBER KEY

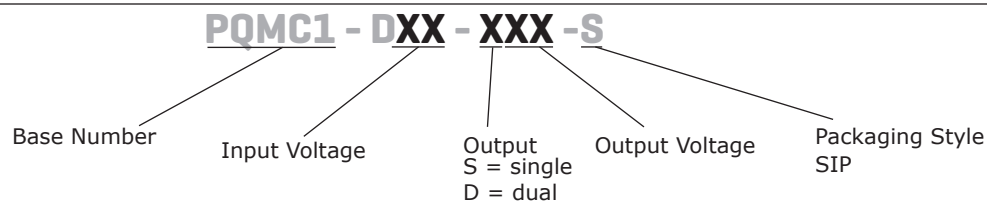

INPUT

parameter	conditions/description	min	typ	max	units
operating input voltage	5 V input models	4.5	5	9	Vdc
	12 V input models	9	12	18	Vdc
	24 V input models	18	24	36	Vdc
	48 V input models	36	48	75	Vdc
start-up voltage	5 V input models	3.5	4	4.5	Vdc
	12 V input models	4.5	8	9	Vdc
	24 V input models	11	16	18	Vdc
	48 V input models	24	33	36	Vdc
surge voltage	for maximum of 1 second				
	5 V input models	-0.7		12	Vdc
	12 V input models	-0.7		25	Vdc
	24 V input models	-0.7		50	Vdc
surge voltage	48 V input models	-0.7		100	Vdc
filter	capacitance filter				

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation	full load, input voltage from low to high		±0.2	±0.5	%
load regulation	5% to 100% load		±0.4	±0.75	%
voltage accuracy	5% to 100% load		±1	±3	%
no-load voltage accuracy			±1.5	±5	%
voltage balance	dual output, balanced loads		±0.3	±0.5	%
	dual output, unbalanced loads			±5	%
switching frequency	100% load, nominal input voltage		200		KHz
transient recovery time	25% load step change		0.5	2	ms
transient response deviation	25% load step change		±2.5	±5	%
temperature coefficient	100% load		±0.02	±0.03	%/°C

PROTECTIONS

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous, automatic recovery				
over current protection		120			%

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	for 1 minute at 1 mA max.	1,500			Vdc
isolation resistance	at 500 Vdc	1,000			MΩ
conducted emissions	CISPR22/EN55022, class B (external circuit required, see Figure 1-b)				
radiated emissions	CISPR22/EN55022, class B (external circuit required, see Figure 1-b)				
ESD ¹	IEC/EN61000-4-2, class B, contact ± 4kV/ air ± 8kV				
radiated immunity	IEC/EN61000-4-3, class A, 10V/m				
EFT/burst	IEC/EN61000-4-4, class B, ± 2kV (external circuit required, see Figure 1-a)				

Notes: 1. 24V input models can only meet ESD contact ±2kV with external circuit 1-c hooked up. 24V input models can meet ESD contact ±4kV with external circuit 1-a, 1-b, and 1-c hooked up.

SAFETY AND COMPLIANCE (CONTINUED)

parameter	conditions/description	min	typ	max	units
surge	IEC/EN61000-4-5, class B, ± 2kV (external circuit required, see Figure 1-a)				
conducted immunity	IEC/EN61000-4-6, class A, 3 Vr.m.s				
voltage dips & interruptions	IEC/EN61000-4-29, class B, 0%-70%				
MTBF	as per MIL-HDBK-217F @ 25°C	1,000,000			hours
RoHS compliant	yes				

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		105	°C
storage temperature		-55		125	°C
storage humidity	non-condensing			95	%
temperature rise	at full load, Ta=25°C		25		°C

SOLDERABILITY



parameter	conditions/description	min	typ	max	units
hand soldering	1.5 mm from case for 10 seconds			300	°C
wave soldering	see wave soldering profile			260	°C

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	22.00 x 9.50 x 12.00 (0.866 x 0.374 x 0.472 inch)				mm
case material	plastic (UL94-V0)				
weight			4.92		g



MECHANICAL DRAWING

units: mm[inch]
tolerance: ±0.25[±0.010]
pin section tolerance: ±0.10[±0.004]

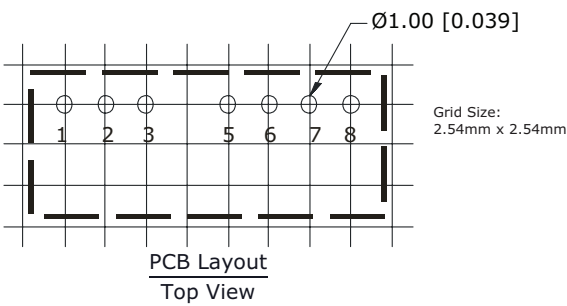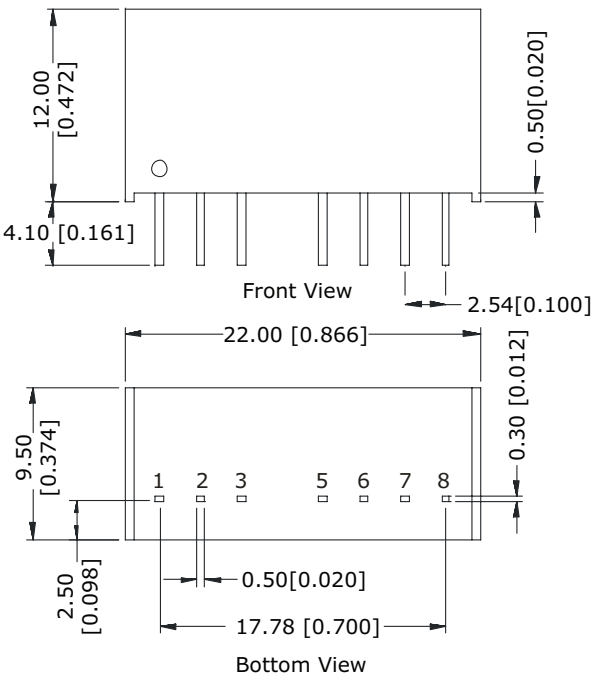


PIN CONNECTIONS		
PIN	Single Output	Dual Output
1	GND	GND
2	Vin	Vin
3	CTRL	CTRL
5	NC	NC
6	+Vo	+Vo
7	0V	0V
8	CS	-Vo

DERATING CURVES

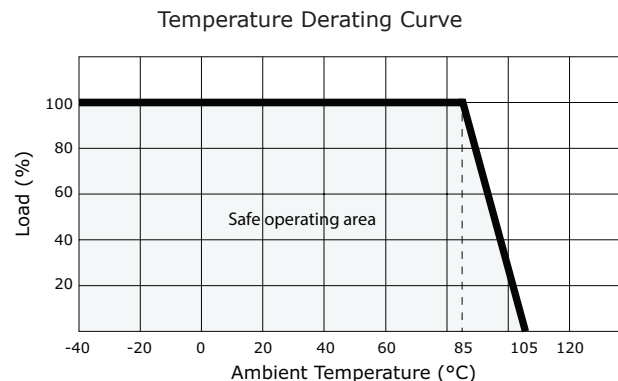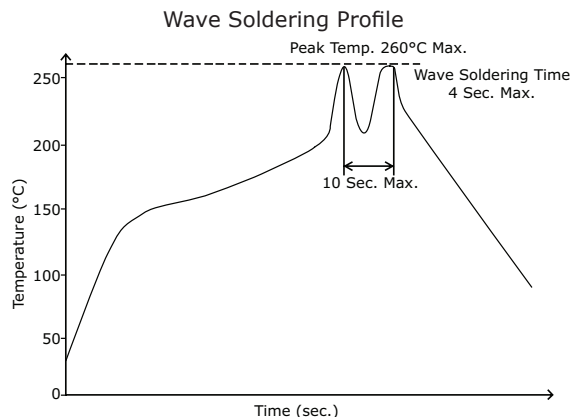


EMC RECOMMENDED CIRCUIT

Figure 1

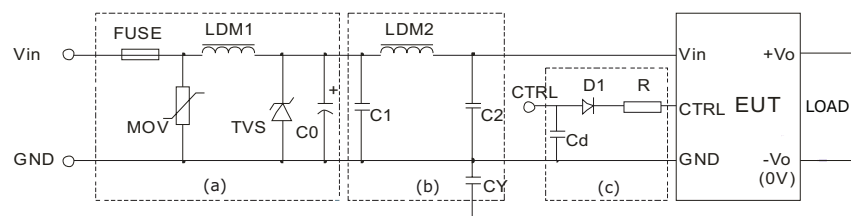

Recommended external circuit components				
Vin (Vdc)	5	12	24	48
FUSE	choose according to practical input current			
MOV	--	--	10D560	10D101
LDM1	--	--	56μH	56μH
TVS	SMCJ13A	SMCJ28A	SMCJ48A	SMCJ90A
C0	680μF/25V	680μF/25V	120μF/50V	120μF/100V
C1	4.7μF/50V	4.7μF/50V	4.7μF/50V	4.7μF/100V
LDM2	12μH	12μH	12μH	12μH
C2	4.7μF/50V	4.7μF/50V	4.7μF/50V	4.7μF/100V
CY	1nF/2KV	1nF/2KV	1nF/2KV	1nF/2KV
D1	RB160M-60/1A	RB160M-60/1A	RB160M-60/1A	RB160M-60/1A
R	Follows: $R = \frac{V_C - V_D - 1.0}{I_C} - 300$			
Cd	47nF/100V	47nF/100V	47nF/100V	47nF/100V

TEST CONFIGURATION

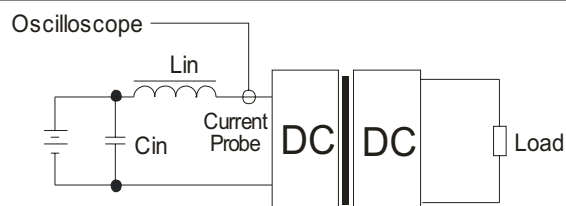

External components	
Lin	4.7μH
Cin	220μF, ESR < 1.0Ω at 100 KHz

Note: Input reflected-ripple current is measured with an inductor Lin and Capacitor Cin to simulate source impedance.

APPLICATION NOTES

1. Output load requirement

To ensure this module can operate efficiently and reliably, the minimum output load may not be less than 5% of the full load during operation. If the actual output power is low, connect a resistor at the output end in parallel to increase the load.

2. Recommended circuit

This series has been tested according to the following recommended testing circuit before leaving the factory. This series should be tested under load (see Figure 2). If you want to further decrease the input/output ripple, you can increase the capacitance accordingly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be appropriate. If the capacitance is too high, a startup problem might arise. For every channel of the output, to ensure safe and reliable operation, the maximum capacitance must be less than the maximum capacitive load (see Table 1).

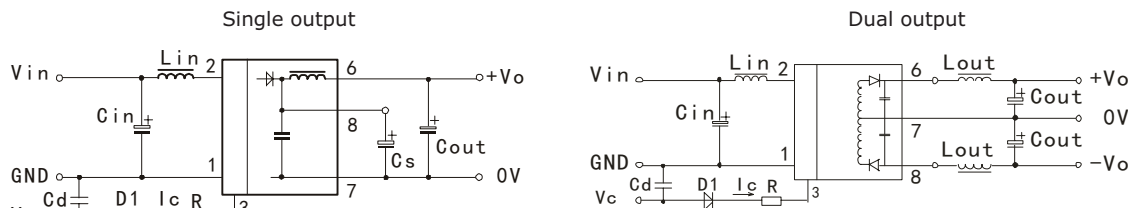


Figure 2

Table 1

Vin (Vdc)	Cin (μ F)	Lin (μ H)	Cs ¹ (μ F)	Cout (μ F)	Lout ² (μ H)	Cd (nF/V)
5	100	4.7-120	10-22	100	2.2-10	47/100
12	100	4.7-120	10-22	100	2.2-10	47/100
24	10	4.7-120	10-22	100	2.2-10	47/100
48	10	4.7-120	10-22	100	2.2-10	47/100

Note: 1. For single output only
2. For dual output only

3. CTRL Terminal

When open or applied high impedance, the converter will turn on. When it's pulled high, the converter will shutdown. The input current should be between 5-10mA. Exceeding the maximum 20mA will cause permanent damage to the converter. The value for R can be derived as follows:

$$R = \frac{V_C - V_D - 1.0}{I_C} - 300$$

4. Input Current

When it is used in an unregulated condition, make sure that the input fluctuations and ripple voltage do not exceed the module standard. Refer to Figure 3 for the startup current of this dc-dc module.

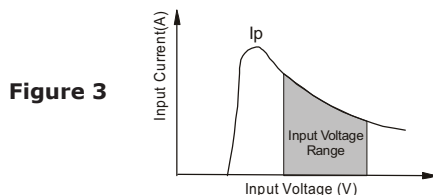


Figure 3

Vin (Vdc)	Ip (mA)
5	490
12	230
24	110
48	53

Note: 1. Minimum load shouldn't be less than 5%, otherwise ripple may increase dramatically. Operation under minimum load will not damage the converter, however, they may not meet all specifications listed.
2. Maximum capacitive load is tested at input voltage range and full load.
3. All specifications are measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

REVISION HISTORY

rev.	description	date
1.0	initial release	03/20/2013

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC®**

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.