


Features

- ◆ Highest power density in SIP package
- ◆ Ultra wide 4:1 input range
- ◆ Small footprint: 21.8 x 9.2 mm
- ◆ Temperature range -40° to +85°C
- ◆ High efficiency up to 81%
- ◆ Excellent load and line regulation
- ◆ Short-circuit protection
- ◆ I/O isolation 1500 VDC
- ◆ Remote On/Off control
- ◆ 3-year product warranty

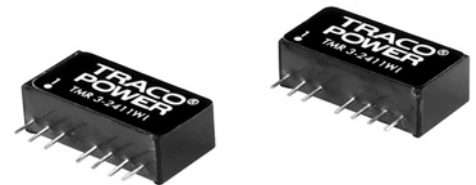

The TMR-3WI series is a new family of isolated 3W DC/DC converters with regulated output, featuring ultra-wide 4:1 input voltage range. The product comes in a ultra-compact SIP plastic package with a small footprint occupying only 2.0 cm² (0.3 square in.) of board space. An excellent efficiency allows -40° to +85°C operation temperatures.

Further features include remote On/Off control and continuous short circuit protection. The very compact dimensions of these converters make them an ideal solution for many space critical applications in battery-powered equipment and instrumentation.

Models

Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMR 3-1210WI	4.5 – 18 VDC (12 VDC nominal)	3.3 VDC	700 mA	74 %
TMR 3-1211WI		5 VDC	600 mA	78 %
TMR 3-1212WI		12 VDC	250 mA	80 %
TMR 3-1213WI		15 VDC	200 mA	80 %
TMR 3-1221WI		± 5 VDC	± 300 mA	80 %
TMR 3-1222WI		± 12 VDC	± 125 mA	80 %
TMR 3-1223WI		± 15 VDC	± 100 mA	80 %
TMR 3-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	700 mA	75 %
TMR 3-2411WI		5 VDC	600 mA	80 %
TMR 3-2412WI		12 VDC	250 mA	81 %
TMR 3-2413WI		15 VDC	200 mA	81 %
TMR 3-2421WI		± 5 VDC	± 300 mA	79 %
TMR 3-2422WI		± 12 VDC	± 125 mA	80 %
TMR 3-2423WI		± 15 VDC	± 100 mA	81 %
TMR 3-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	700 mA	74 %
TMR 3-4811WI		5 VDC	600 mA	79 %
TMR 3-4812WI		12 VDC	250 mA	79 %
TMR 3-4813WI		15 VDC	200 mA	79 %
TMR 3-4821WI		± 5 VDC	± 300 mA	79 %
TMR 3-4822WI		± 12 VDC	± 125 mA	79 %
TMR 3-4823WI		± 15 VDC	± 100 mA	80 %

Input Specifications

Input current at full load	12 Vin models: 340 mA max. 24 Vin models: 170 mA max. 48 Vin models: 85 mA max.
Input current at no load	12 Vin models: 40 mA max. 24 Vin models: 25 mA typ. 48 Vin models: 15 mA typ.
Surge voltage (100 msec. max.)	12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.
Input filter	internal capacitor
ESD (electrostatic discharge)	EN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A
Radiated immunity	EN 61000-4-3, 10 V/m, perf. criteria A
Fast transient / Surge	EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 1 kV perf. criteria A With external input capacitor e.g. Nippon chemi-con KY 100 μ F, 100 V, ESR 110 mOhm
Conducted immunity	EN 61000-4-6, 10 Vrms, perf. criteria A

Output Specifications

Voltage set accuracy	± 1 % max
Regulation	– Input variation Vin min. to Vin max. – Load variation 0 – 100% – Load cross regulation 25/100% single output models: dual output models:
	0.2 % max. 1.0 % max. 1.0 % max. balanced load 5.0 % max. (dual output models)
Minimum load	not required
Temperature coefficient	0.02 %/K
Ripple and noise (20 MHz Bandwidth)	30 mVpk-pk max.
Start up time	30 ms typ.
(constant resistive load)	30 ms typ.
Transient response setting time (25% load step change)	250 μ s typ.
Short circuit protection	continuous, automatic recovery
Capacitive load	3.3 VDC models: 1'760 μ F max. 5 VDC models: 1'000 μ F max. 12 VDC models: 170 μ F max. 15 VDC models: 110 μ F max. ± 5 VDC models: ± 470 μ F max. ± 12 VDC models: ± 100 μ F max. ± 15 VDC models: ± 47 μ F max.

General Specifications

Temperature ranges	– Operating – Case temperature – Storage	–40°C to +85°C +100°C max. –55°C to +125°C
Load derating		3.3 %/K above 70°C
Humidity (non condensing)		95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F @ 25°C, ground benign)		>1.7 Mio h

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


General Specifications

Isolation voltage (60 sec)	– Input/Output	1'500 VDC
Isolation capacity	– Input/Output	200 pF max.
Isolation resistance	– Input/Output (500 VDC)	>1 GOhm
Switching frequency		100 kHz (PWM)
Remote On/Off	– On: – Off: – Off stand by input current	open or high impedance 2...4 mA to applied via 1 kOhm resistor 2.5 mA max.
Vibration and thermal shock		MIL-STD-810E
Safety standards		UL /cUL 60950-1, EN 60950-1, IEC 60950-1
Safety approvals	– UL/cUL	pending
Environmental compliance	– Reach – RoHS	www.tracopower.com/products/tmr3wi-reach.pdf RoHS Directive 2002/95/EC
Application notes		www.tracopower.com/products/tmr3wi-application.pdf

Physical Specifications

Casing material	non-conductive plastic
Potting material	silicon, UL 94V-0 rated
Weight	4.8g (0.17oz)

Outline Dimensions

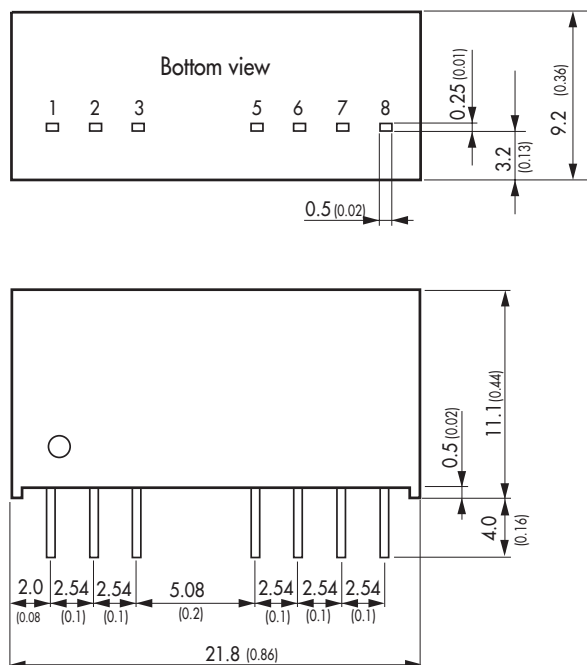

Pin-Out		
Pin	Single	Dual
1	–Vin (GND)	–Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	No con.	No con.
6	+Vout	+Vout
7	–Vout	Common
8	No con.	–Vout

Dimensions in [mm], () = Inch
Pin dimension tolerances 0.1 (0.004)
Pin pitch tolerances: ±0.25 (±0.01)
Tolerances: ±0.5 (±0.02)

Specifications can be changed any time without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.