


VITESSE®

16-Port Integrated Layer-2 Gigabit Ethernet Smart Switch with Transceivers



16-PORT WEB-MANAGED SMB SWITCH:



FEATURES:	BENEFITS:
▶ 16 Gigabit Ethernet Ports with Non-blocking Wire-speed Performance	▶ Ensures Maximum Data Throughput on Even Highly Loaded Networks
▶ 8 Integrated Tri-speed (10/100/1000 Mbps) Copper Transceivers (IEEE 802.3ab™ compliant) and 8 Tri-speed SGMII Ports	 Reduces 8 External PHYs Thereby Significantly Reducing the Overall Systems Cost – by Only Needing 1 External Octal PHYs
▶ 500 kb On-chip Frame Buffer	▶ Eliminates the Need for External Buffer Memory While Maintaining High Peak Load Performance
 Per-port Data Rate Policer and Shaper with a Granularity of 64 kbps for Both Ingress and Egress Direction 	▶ Enables Pre-arranged Bandwidth Control and Billing
▶ Selection Between On-chip V-Core CPU or Off-chip 8-bit CPU for Fully Managed Applications	▶ Enables Advanced Switch Management Using Run-time Protocols, in Addition to Low Cost Unmanaged and Web-managed Operation
▶ DSCP Remarking for Both IPv4 and IPv6 Frames	▶ Enables LAN Edge Products to Generate Standard Priority which can be Used in the Core Network
▶ Jumbo Frame Support on all Ports	▶ Provides the Support of Frame Sizes up to 12.2 k Sized Jumbo Frames
▶ Programmable Classifier for QoS, Including IEEE Std 802.1p TM and DSCP for IPv4 and IPv6, with 4 Classes of Service	 Optimizes Network Performance to Support any Digital Stream, from Internet Browsing to VoIP and Video
▶ 8 k MAC Addresses and 4 k VLANs (IEEE Std 802.1Q TM)	Stores a Large Amount of Stations at Wire Speed in the On-chip MAC Table, Ensuring Optimal Network Performance
▶ Flexible Link Aggregation Compliant to IEEE Std 802.3ad™	▶ Provides High Bandwidth Uplinking Abilities
▶ Full-duplex Flow Control (IEEE Std 802.3x [™]) and Half-duplex Back Pressure, Symmetric and Asymmetric	▶ Ensures Loss-less Data Transmission while Supporting Existing Legacy Ethernet Equipment
▶ Multicast and Broadcast Storm Control as well as Flooding Control	▶ Eliminates Unwanted Flooding of Ports and Thereby Increases Overall Network Performance
▶ Vitesse VeriPHY™ Cable Diagnostics	▶ Enables Sophisticated Real Time Cable Diagnostics
Multiple Protocol Support: IEEE Std 802.1D™, IEEE Std 802.1w™, IEEE Std 802.1s™ and IEEE Std 802.1X™	Supports Complex Network Topologies with Fast Failure Recovery and Access Control

APPLICATIONS:

- ▶ 16-Port Unmanaged Gigabit Ethernet SMB/SME/SOHO Switch
- ▶ 16-Port Web-Managed Smart Gigabit Ethernet SMB/SME/SOHO Switch

16-Port Integrated Layer-2 Gigabit Ethernet Smart Switch with Transceivers

GENERAL DESCRIPTION:



VSC7389 SparX-G16™ is the highly integrated, singlechip Gigabit Ethernet switch with 8 Integrated GbE Copper PHY ports. As part of the Vitesse SparX™ Family of Switches, SparX-G16 delivers high performance with easy migration paths, and comprehensive system solutions that enable ultra-short time-to-market and market-leading system cost.

A Vitesse Switch Family Member

SparX-G16 is a part of the Vitesse SparX[™] Family of Unmanaged or Web-Managed Switches and takes the family into a new generation of integration. With its 8 tri-speed Gigabit Ethernet copper ports and 8 SGMII ports, it is specifically targeted at SMB, SME, and SOHO unmanaged applications, and with its on-chip V-Core CPU and parallel CPU interface, it enables web-managed and managed switch applications.

Being a member of the SparXTM switch family provides a number of unique advantages when designing with the device, including software compatibility between members. Software written for SparX-G16 can therefore easily be ported from or used with other switch configurations in the family, and vice-versa.

Additionally, building a product family is easy when designing with Vitesse switches. Upgrading designs to higher port counts, or migrating to other configurations or future technology is achievable with a minimum of effort and time.

The Vitesse SparX Family Of Switches

SparX-G16, as part of the Vitesse SparX Family of Switches, shares the unique traits of the family.

The highly integrated switches require no external memory, and the integration of copper PHY as well as internal oscillator circuits simplifies the design effort. The requirement of needing only 2 power supply rails reduces the additional DC/DC converter cost. Further trimming down system cost is the persistently low power dissipation of the family. In addition, the value-added features in SparX-G16 enables the customer to provide advanced features without the need of enterprise class silicon.

SPECIFICATIONS:

- ▶ 25-MHz, 125-MHz LVTTL Reference Clock
- ▶ 3.3 V Interface Power Supply
- ▶ 1.2 V Core Power Supply
- ▶ Thermally Enhanced PBGA Package

The switches provide non-blocking, wire-speed performance designs with wire-speed MAC address learning or CPU-based address learning.

Designing both unmanaged and managed solutions is straightforward. The devices offer both an internal V-Core CPU and serial and parallel CPU interfaces, and support a host of management protocols such as GxRP, SNMP, and three flavors of Spanning Tree: Standard STP, Multiple STP, and Rapid STP.

Controlling networks operated by the Vitesse switches is simple; advanced classification with IPv4 and IPv6 support, along with port DSCP remarking and 802.1x authentication support, provide flexible QoS operation. This is backed up by Layer 2–4 link aggregation and VLAN support, enabling managed switches to be deployed.

With its unique low power dissipation, SparX-G16 reduces thermal management cost for system design and thereby provides for higher system reliability to the benefit of the user.


Designing with Vitesse SparX Family of Switches means designing with the whole Vitesse Solution:

The outstanding Vitesse web-managed switch software system that runs on the on-chip V-Core CPU is provided. This is in addition to the unmanaged and smart managed software systems for an external 8051, which are also included. For homegrown software development, our full platform and OS independent switch API is supplied.

Accompanying the software systems are the Vitesse Switch Reference Systems. These are production-ready hardware designs that also serve as evaluation platforms for our switches.

The Vitesse Solution is supplied with a comprehensive collateral package, which includes software source code, full documentation, and an in-depth qualification report for easy pre-evaluation.

BLOCK DIAGRAM:

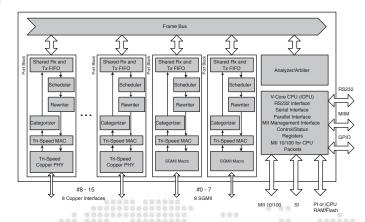

Trademarks T

Vitesse, ASIC-Friendly, FibreTimer, TimeStream, Snoop Loop, Super FEC, FOCUSConnect, Meigs-IIe, Lansing, Campbell-I, Barrington, PaceMaker, HOVCAT48, HOVCAT48e, HOVCAT49e, HOVCAT192e, Micro PHY, FOCUS32, FOCUS16, IQ2200, VersaCAT, GigaStream, HawX, SparX, StaX, VstaX, SimpliPHY, VeriPHY, ActiPHY, XFP PRO, SFP PRO, Smart-LINK, OctalMAC, EQ Technology are trademarks in the United States and/or other jurisdictions of Vitesse Semiconductor Corporation. All other trademarks or registered trademarks mentioned herein are the property of their respective holders.

Copyright © 2005

Vitesse Semiconductor Corporation ("Vitesse") retains the right to make changes to its products or specifications to improve performance, reliability or manufacturability. All information in this document, including descriptions of features, functions, performance, technical specifications and availability, is subject to change without notice at any time. While the information furnished herein is held to be accurate and reliable, no responsibility will be assumed by Vitesse for its use. Furthermore, the information contained herein does not convey to the purchaser of microelectronic devices any license under the patent right of any manufacturer.

741 Calle Plano Camarillo, CA 93012, USA Tel: +1 805.388.3700 Fax: +1 805.987.5896 www.vitesse.com sales@vitesse.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001:
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина,

дом 2, корпус 4, литера А.