



## SERIES: VHK200W | DESCRIPTION: DC-DC CONVERTER

### FEATURES

- up to 200 W isolated output
- rugged metal enclosure with integrated heat sink
- 4:1 input range (10~36 Vdc, 18~75 Vdc)
- single output from 12~48 Vdc
- 1,500 Vdc isolation
- over current, over temperature, over voltage, and short circuit protections
- remote on/off
- efficiency up to 88%




| MODEL           | input<br>voltage<br>range<br>(Vdc) | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple<br>and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br><br>typ<br>(%) |
|-----------------|------------------------------------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|------------------------------|
| VHK200W-Q24-S12 | 10 ~ 36                            | 12                         | 16.7                            | 200                           | 150                                                | 84                           |
| VHK200W-Q24-S15 | 10 ~ 36                            | 15                         | 13.3                            | 200                           | 150                                                | 84                           |
| VHK200W-Q24-S24 | 10 ~ 36                            | 24                         | 8.3                             | 200                           | 240                                                | 84                           |
| VHK200W-Q24-S28 | 10 ~ 36                            | 28                         | 7.14                            | 200                           | 280                                                | 87                           |
| VHK200W-Q24-S48 | 10 ~ 36                            | 48                         | 4.2                             | 200                           | 480                                                | 87                           |
| VHK200W-Q48-S12 | 18 ~ 75                            | 12                         | 16.7                            | 200                           | 150                                                | 86                           |
| VHK200W-Q48-S15 | 18 ~ 75                            | 15                         | 13.3                            | 200                           | 150                                                | 86                           |
| VHK200W-Q48-S24 | 18 ~ 75                            | 24                         | 8.3                             | 200                           | 240                                                | 86                           |
| VHK200W-Q48-S28 | 18 ~ 75                            | 28                         | 7.14                            | 200                           | 280                                                | 87                           |
| VHK200W-Q48-S48 | 18 ~ 75                            | 48                         | 4.2                             | 200                           | 480                                                | 88                           |

Note:

1. Ripple and noise are measured at full load, 20 MHz BW with 10 $\mu$ F tantalum capacitor and 1 $\mu$ F ceramic capacitor across output. The 48 Vdc output models require a 10 $\mu$ F aluminum capacitor and 1 $\mu$ F ceramic capacitor across the output.
2. An external input capacitor of 470 $\mu$ F for 24 Vdc input models and 47 $\mu$ F for 48 Vdc input models is recommended to reduce input ripple voltage.

### PART NUMBER KEY

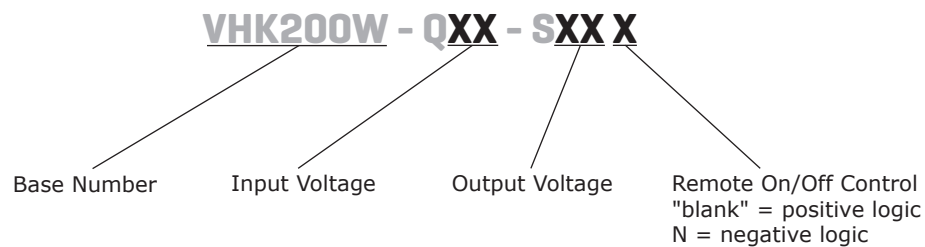

## INPUT

| parameter               | conditions/description                                                          |                                       | min | typ | max | units |
|-------------------------|---------------------------------------------------------------------------------|---------------------------------------|-----|-----|-----|-------|
| operating input voltage | 24 Vdc input models                                                             |                                       | 10  | 24  | 36  | Vdc   |
|                         | 48 Vdc input models                                                             |                                       | 18  | 48  | 75  | Vdc   |
| under voltage shutdown  | 24 Vdc input                                                                    | power up                              |     | 9.5 |     | Vdc   |
|                         |                                                                                 | power down                            |     | 8.5 |     | Vdc   |
|                         | 48 Vdc input                                                                    | power up                              |     | 17  |     | Vdc   |
|                         |                                                                                 | power down                            |     | 16  |     | Vdc   |
| CTRL <sup>1</sup>       | positive logic                                                                  | models ON (>3.5 Vdc or open circuit)  |     |     |     |       |
|                         |                                                                                 | models OFF (0~1.2 Vdc)                |     |     |     |       |
|                         | negative logic                                                                  | models ON (0~1.2 Vdc)                 |     |     |     |       |
|                         |                                                                                 | models OFF (>3.5 Vdc or open circuit) |     |     |     |       |
| filter                  | pi filter                                                                       |                                       |     |     |     |       |
| input fuse              | 40A time delay fuse for 24 Vin models,<br>20A time delay fuse for 48 Vin models |                                       |     |     |     |       |

Note: 1. Open collector refer to -Vin

## OUTPUT

| parameter                    | conditions/description               | min | typ | max   | units  |
|------------------------------|--------------------------------------|-----|-----|-------|--------|
| maximum capacitive load      | 12, 15, & 24 V output models         |     |     | 2,200 | μF     |
|                              | 28 V output models                   | 100 |     | 2,200 | μF     |
|                              | 48 V output models                   | 47  |     | 2,200 | μF     |
| line regulation <sup>2</sup> | measured from low line to high line  |     |     | ±0.2  | %      |
| load regulation <sup>2</sup> | measured from zero load to full load |     |     | ±0.2  | %      |
| voltage accuracy             |                                      |     |     | ±1.5  | %      |
| adjustability                |                                      |     |     | ±10   | %      |
| switching frequency          |                                      |     |     | 250   | kHz    |
| transient response           | 25% step load change                 |     |     |       | 500 μs |
| temperature coefficient      |                                      |     |     | ±0.03 | %/°C   |

Note: 2. A 100 μF aluminum capacitor is required on the output for the 28 Vdc output models. A 47 μF aluminum capacitor is required on the output for 48 Vdc output models.

## PROTECTIONS

| parameter                   | conditions/description | min | typ | max | units |
|-----------------------------|------------------------|-----|-----|-----|-------|
| short circuit protection    | continuous             |     |     |     |       |
| over current protection     | at 90% output voltage  | 110 |     | 160 | %     |
| over voltage protection     |                        | 115 |     | 140 | %     |
| over temperature protection | shutdown               |     | 110 |     | °C    |

## SAFETY AND COMPLIANCE

| parameter            | conditions/description                                          | min   | typ | max | units |
|----------------------|-----------------------------------------------------------------|-------|-----|-----|-------|
| isolation voltage    | for 1 minute: input to output; input to case;<br>output to case | 1,500 |     |     | Vdc   |
| isolation resistance |                                                                 | 10    |     |     | MΩ    |
| RoHS                 | 2011/65/EU (CE)                                                 |       |     |     |       |

## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | -40 |     | 85  | °C    |
| storage temperature   |                        | -55 |     | 105 | °C    |

MECHANICAL




| parameter     | conditions/description                        | min | typ | max | units |
|---------------|-----------------------------------------------|-----|-----|-----|-------|
| dimensions    | 4.23 x 4.01 x 1.50 (107.5 x 101.76 x 38.0 mm) |     |     |     | inch  |
| case material | steel and aluminum extrusion                  |     |     |     |       |
| weight        |                                               |     | 502 |     | g     |

MECHANICAL DRAWING

units: inch[mm]  
tolerance: X.XX =  $\pm 0.02[\pm 0.5]$   
              X.XXX =  $\pm 0.010[\pm 0.25]$


wire range: 22~12 AWG  
screw size: #6-32

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | -Vo      |
| 2               | -S       |
| 3               | trim     |
| 4               | +S       |
| 5               | +Vo      |
| 6               | case     |
| 7               | on/off   |
| 8               | -Vin     |
| 9               | +Vin     |

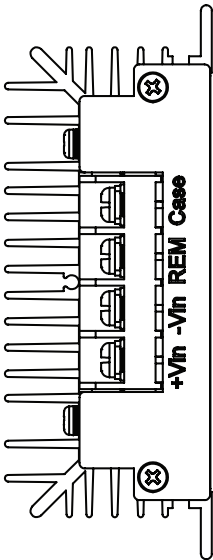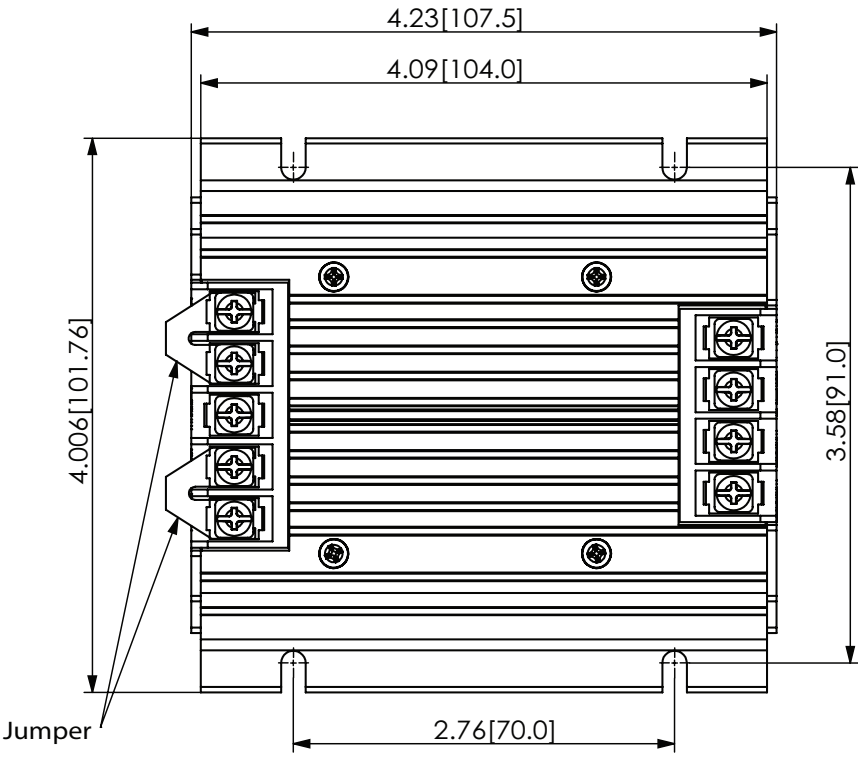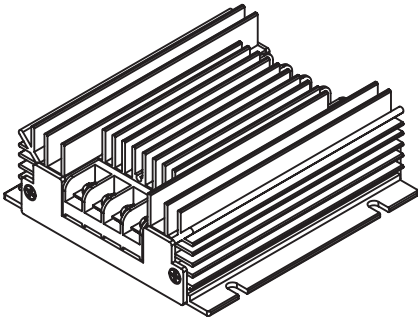

DERATING CURVES

VHK200W Power Derating Curves At Nominal Input

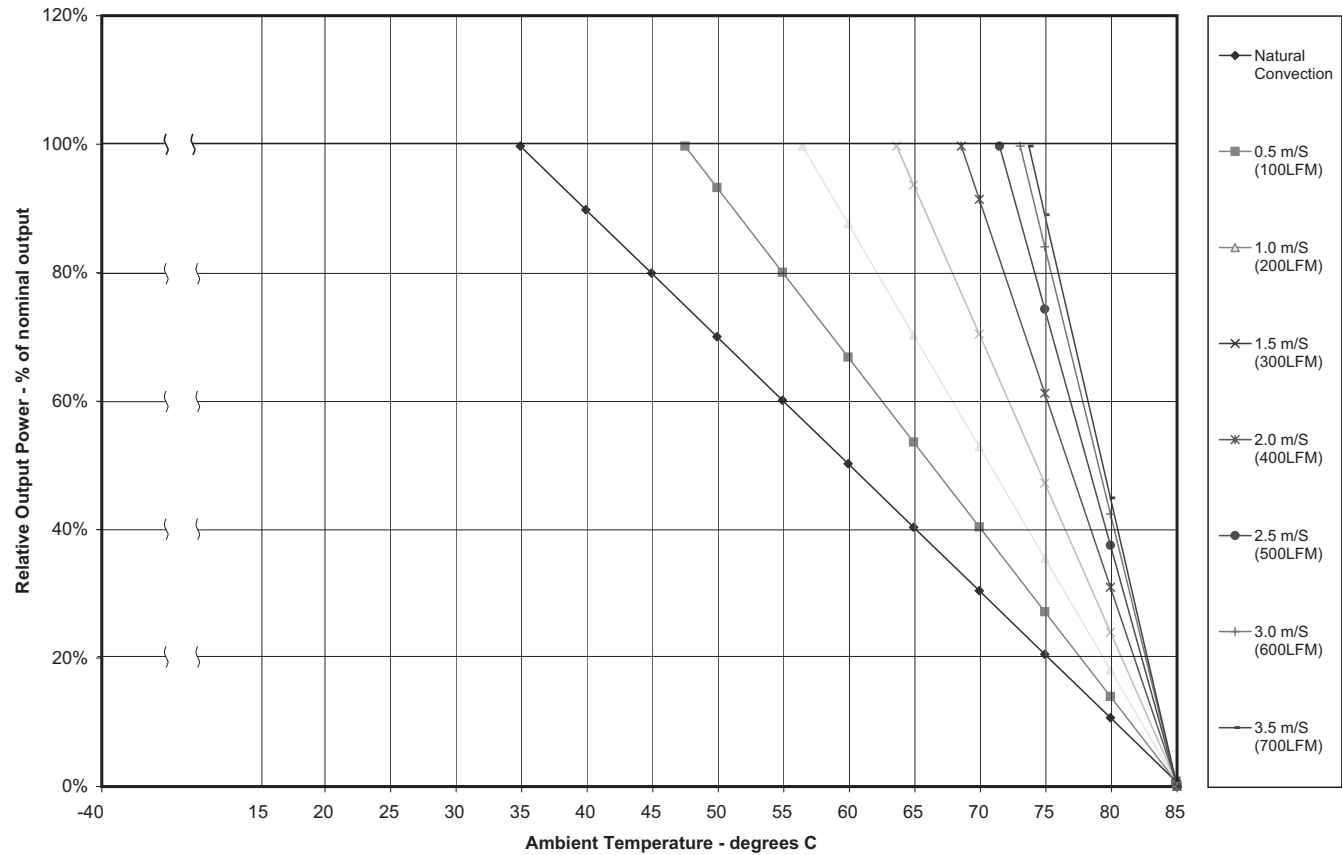

TEST CONFIGURATION

Figure 1

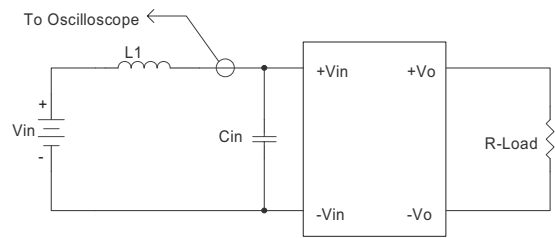


Table 1


| External components     |                              |
|-------------------------|------------------------------|
| for 24 Vdc input models |                              |
| L1                      | 1.2μH                        |
| Cin                     | 470μF, ESR < 0.2Ω at 100 KHz |
| for 48 Vdc input models |                              |
| L1                      | 12μH                         |
| Cin                     | 47μF, ESR < 0.7Ω at 100 KHz  |

Note: Input reflected-ripple current is measured with an inductor L1 to simulate source impedance.


## EMC RECOMMENDED CIRCUITS

### EN55022 CLASS A

**Figure 2**  
Recommended Circuit for EN55022 Class A  
(for all 12, 15, 24, & 28 Vdc output models)

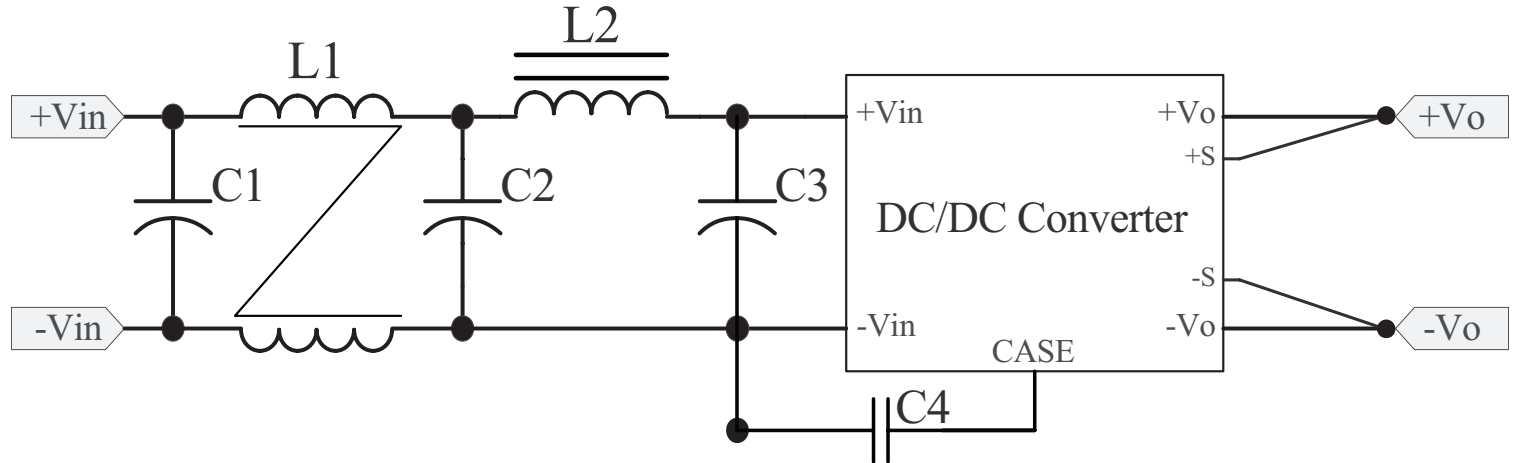

**Figure 3**  
Recommended Circuit for EN55022 Class A  
(for all 48 Vdc output models)

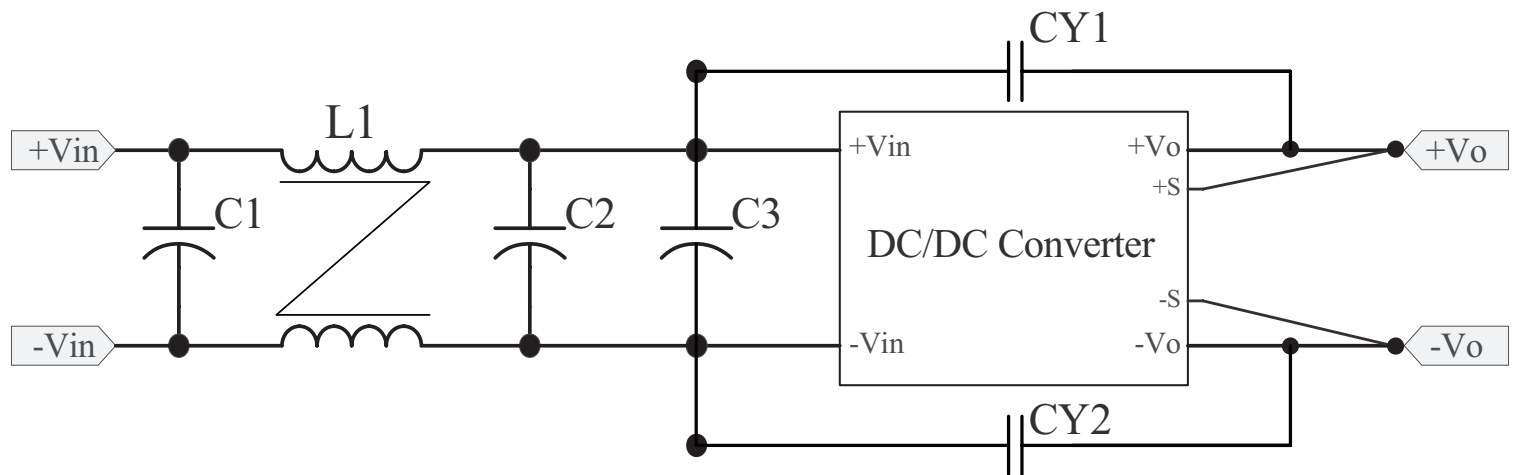

**Table 2**  
Class A Recommended Components

| Model           | C1 <sup>1</sup>   | C2 <sup>1</sup>   | C3 <sup>1</sup>   | CY1 <sup>2</sup> | CY2 <sup>2</sup> | L1     | L2    |
|-----------------|-------------------|-------------------|-------------------|------------------|------------------|--------|-------|
| VHK200W-Q24-S12 | 120 $\mu$ F/100 V | 120 $\mu$ F/100 V | NC                | NC               | NC               | 0.5 mH | SHORT |
| VHK200W-Q24-S15 | 47 $\mu$ F/100 V  | 47 $\mu$ F/100 V  | NC                | NC               | NC               | 0.5 mH | SHORT |
| VHK200W-Q24-S24 | 100 $\mu$ F/100 V | 100 $\mu$ F/100 V | NC                | NC               | NC               | 0.5 mH | SHORT |
| VHK200W-Q24-S28 | 100 $\mu$ F/100 V | 100 $\mu$ F/100 V | NC                | NC               | NC               | 0.5 mH | SHORT |
| VHK200W-Q24-S48 | 100 $\mu$ F/100 V | 100 $\mu$ F/100 V | 100 $\mu$ F/100 V | 680 pF/2 KV      | 680 pF/2 KV      | 1.0 mH | NC    |
| VHK200W-Q48-S12 | 82 $\mu$ F/100 V  | 82 $\mu$ F/100 V  | NC                | NC               | NC               | 0.5 mH | SHORT |
| VHK200W-Q48-S15 | 82 $\mu$ F/100 V  | 82 $\mu$ F/100 V  | NC                | NC               | NC               | 0.5 mH | SHORT |
| VHK200W-Q48-S24 | 82 $\mu$ F/100 V  | 82 $\mu$ F/100 V  | NC                | NC               | NC               | 0.7 mH | SHORT |
| VHK200W-Q48-S28 | 150 $\mu$ F/100 V | 150 $\mu$ F/100 V | NC                | NC               | NC               | 0.5 mH | SHORT |
| VHK200W-Q48-S48 | 100 $\mu$ F/100 V | 100 $\mu$ F/100 V | 100 $\mu$ F/100 V | 680 pF/2 KV      | 680 pF/2 KV      | 1.0 mH | NC    |

Notes: 1. Aluminum capacitors.  
2. Ceramic capacitors.


## APPLICATION NOTES

### 1. Output Voltage Trimming

Leave open if not used.

**Figure 4**

Application Circuit for Trim pin

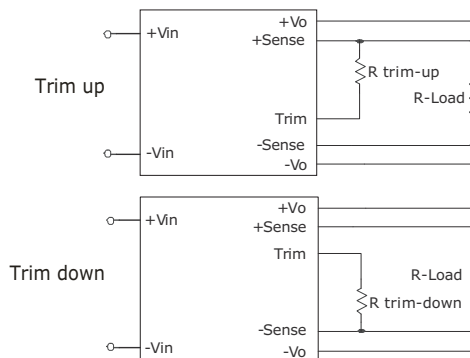

### Formula for Trim Resistor

$$\Delta\% = \left( \frac{V_{o, nom} - V_o}{V_{o, nom}} \right) 100$$

#### Trim-Up Formula

(for all 12, 15, 24, & 28<sup>1</sup> Vdc Output Models)

$$R_{trim - up} = \left( \frac{5.11V_{o, nom}(100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{511}{\Delta\%} - 10.22 \right) (K\Omega)$$

#### Trim-Up Formula

(for all 48 Vdc Output Models)

$$R_{trim - up} = \left( \frac{20V_{o, nom}(100 + \Delta\%)}{1.225 \times \Delta\%} - \frac{2000}{\Delta\%} - 40 \right) (K\Omega)$$

#### Trim-Down Formula

(for all 12, 15, 24, & 28<sup>1</sup> Vdc Output Models)

$$R_{trim - down} = \left( \frac{511}{\Delta\%} - 10.22 \right) (K\Omega)$$

#### Trim-Down Formula

(for all 48 Vdc Output Models)

$$R_{trim - down} = \left( \frac{2000}{\Delta\%} - 40 \right) (K\Omega)$$

Note:  $R_{trim-up}$  is the external resistor in K $\Omega$   
 $R_{trim-down}$  is the external resistor in K $\Omega$   
 $V_{o, nom}$  is the nominal output voltage  
 $V_o$  is the desired output voltage

Notes: 1. For the 28 Vdc output models, a minimum input voltage of 10.8 Vdc is required to trim the 24 Vdc input models up 10%, and a minimum input voltage of 19 Vdc is required to trim the 48 Vdc input models up 10%.  
 2. All specifications are measured at Ta=25°C, nominal input voltage and full output load unless otherwise specified.

## REVISION HISTORY

| rev. | description                        | date       |
|------|------------------------------------|------------|
| 1.0  | initial release                    | 10/11/2006 |
| 1.01 | new template applied               | 12/21/2011 |
| 1.02 | misc. updates and corrections      | 03/13/2012 |
| 1.03 | updated mechanical drawing         | 03/27/2012 |
| 1.04 | V-Infinity branding removed        | 06/27/2012 |
| 1.05 | updated spec                       | 03/18/2013 |
| 1.06 | updated spec                       | 05/08/2013 |
| 1.07 | added trimming and EMI information | 12/16/2013 |

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC®**

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.