




Features

- ◆ High Power Density in DIP-24 Metal Package
- ◆ Ultra wide 4:1 Input Voltage Range
- ◆ High Efficiency up to 88%
- ◆ Operating Temperature Range: -40°C to +85°C
- ◆ Remote On/Off
- ◆ Under Voltage Lockout
- ◆ Shielded Metal Case with insulated Base plate
- ◆ Lead free Design, RoHS compliant
- ◆ 3 Year Product Warranty

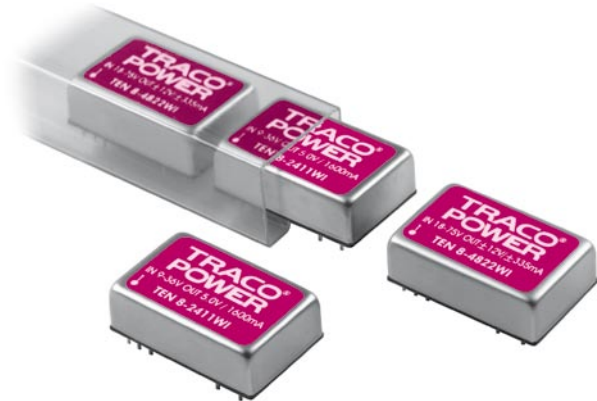

The TEN 8WI series is a family of high performance 8W DC/DC converter modules featuring ultra wide 4:1 input voltage ranges in a DIP-24 package with industry-standard footprint. A very high efficiency allows an operating temperature range of -40°C to +85°C. Full SMD-design with exclusive use of ceramic capacitors guarantees a high reliability and long product lifetime. Further standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. Typical applications for these converters are battery operated equipment, instrumentation, communication and industrial electronics, everywhere where isolated, tightly regulated voltages are required.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 8-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	2'000 mA	85 %
TEN 8-2411WI		5 VDC	1'500 mA	87 %
TEN 8-2412WI		12 VDC	665 mA	86 %
TEN 8-2413WI		15 VDC	535 mA	86 %
TEN 8-2421WI		± 5 VDC	± 800 mA	84 %
TEN 8-2422WI		±12 VDC	± 335 mA	86 %
TEN 8-2423WI		±15 VDC	± 265 mA	86 %
TEN 8-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	2'000 mA	85 %
TEN 8-4811WI		5 VDC	1'500 mA	87 %
TEN 8-4812WI		12 VDC	665 mA	87 %
TEN 8-4813WI		15 VDC	535 mA	88 %
TEN 8-4821WI		± 5 VDC	± 800 mA	84 %
TEN 8-4822WI		±12 VDC	± 335 mA	86 %
TEN 8-4823WI		±15 VDC	± 265 mA	87 %

Input Specifications

Input current (no load)	9–36 Vin, 3.3VDC & 5VDC output models:	40 mA typ.
	9–36 Vin other output models:	25 mA typ.
	18–75 Vin, 3.3VDC & 5VDC output models:	20 mA typ.
	18–75 Vin other output models:	13 mA typ.
Input current (full load)	9–36 Vin models:	410 mA typ
	18–75 Vin models:	210 mA typ
Input voltage variation (dv/dt)		5 V/ms, max. (complies with ETS300 132 part 4.4)
Start-up voltage / under voltage lockout	9–36 Vin models:	9.0 VDC / 8.0 VDC (typ.)
	18–75 Vin models:	18 VDC / 16 VDC (typ.)
Surge voltage (100 msec. max.)	9–36 Vin models:	50 V max..
	18–75 Vin models:	100 V max.
Conducted noise (input)		EN 55022 level A/B, FCC part 15, level A/B with external components. See application note: www.tracopower.com/products/ten8wi_application.pdf
ESD (input)		EN 61000-4-2, Perf. Criteria B
Fast Transient (input)		EN 61000-4-4, Perf. Criteria B
Surge (input)		EN 61000-4-5, Perf. Criteria B

Output Specifications

Voltage set accuracy		± 1 %
Regulation	– Input variation Vin min. to Vin max	0.2 % max.
	– Load variation 10 – 100 % single output models:	0.5 % max.
	dual output models:	1 % max.
	– Load cross variation 25 % / 100 %	5 % max.
Temperature coefficient		± 0.02 % /K
Ripple and noise (20 MHz Bandwidth)		50 mVpk-pk max.
Start up time (constant resistive load)	– Power On	450 ms typ.
	– Remote On	5 ms max.
Transient Response (25% load step change)		250 µs typ.
Short circuit protection		indefinite (automatic recovery)
Over load protection		150% of lout max. typ.
Over voltage protection	3.3 V output:	3.9 V
	5 V output:	6.2 V
	12 V output:	15 V
	15 V output:	18 V
Capacitive load		tba
Temperature ranges	– Operating	–40 °C ... +85 °C
	– Case temperature	+100 °C max.
	– Storage	–55 °C ... +125 °C
Derating		see graph below
Humidity (non condensing)		95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217 F)		1 Mio. h @ +25°C
Isolation voltage (60 sec)	– Input / Output	1'500 VDC
Isolation resistance	– Input / Output	> 1'000 M Ohm
Isolation capacity	– Input / Output	300 pF max.
Switching frequency		300 kHz typ. (pulse width modulation PWM)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications

Vibration	10-55Hz, 10G, 30 minutes along X,Y,Z
Safety standards	UL/cUL 60950-1, IEC/EN 60950-1
Safety approvals	UL/cUL File tba
Remote On/Off	– On: – Off: – Off idle current: 3.5 ... 12 VDC or open circuit 0 ... 1.2 VDC or short circuit pin 1 and pin 2/3 2.5 mA


Application notes can be downloaded under:

www.tracopower.com/products/ten8wi_application.pdf

Note 1:

In order to meet conducted emissions EN55022-A an aluminium electrolytic capacitor (low ESR) has to be installed between +Vin and -Vin. The capacitor should be capable to handle 0.5A ripple current.

Power Derating

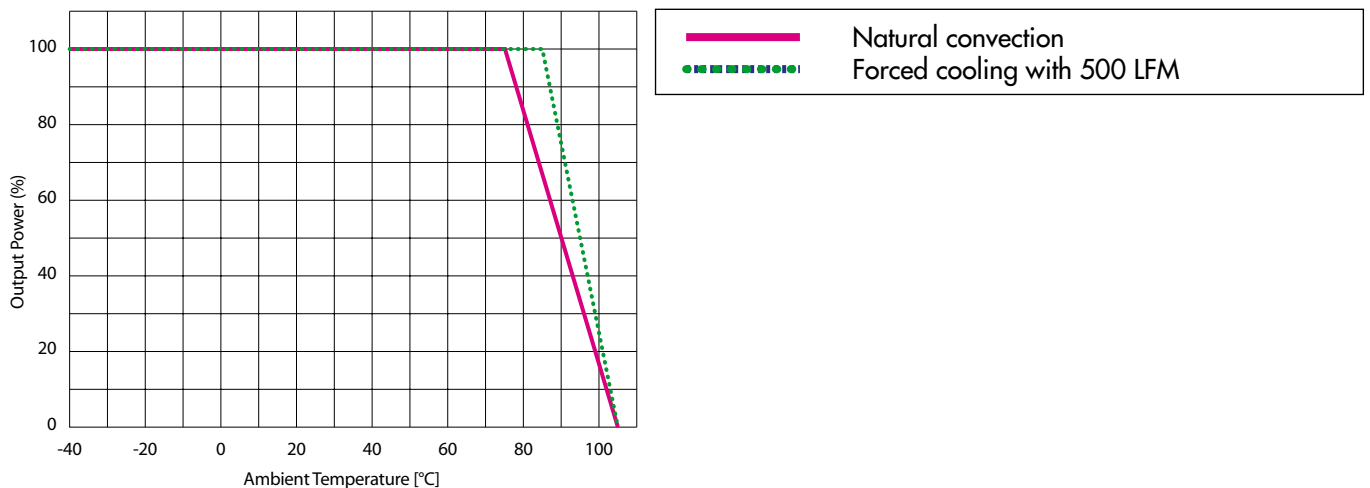


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Case material	copper, nickel plated
Baseplate material	non conductive FR4
Potting material	epoxy (UL94V-0 rated)
Weight	18 g (0.60 oz)
Soldering temperature	max. 265 °C / 10 sec.

Outline Dimensions

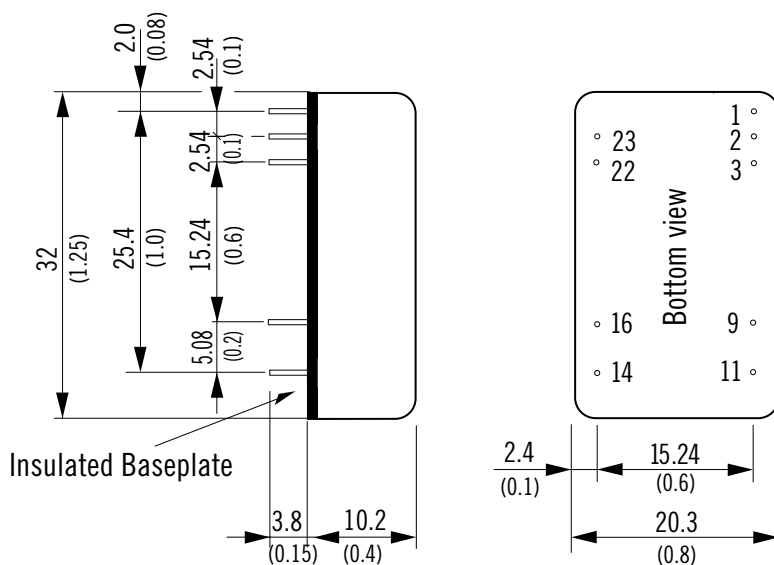

Pin-Out

Pin	Single	Dual
1	Remote On/Off	Remote On/Off
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No con.	Common
11	No con.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

Dimensions in [mm], () = Inch
Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 ± 0.002)
Tolerances ± 0.5 (0.02)
Pin pitch tolerances ± 0.35 (0.014)

Specifications can be changed any time without notice



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.