


## 1200 V power Schottky silicon carbide diode

Datasheet - production data

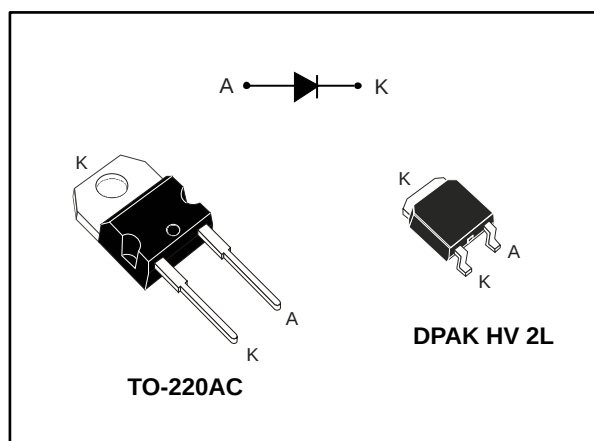

### Description

The SiC diode, available in TO-220AC and DPAK HV, is an ultrahigh performance power Schottky rectifier. It is manufactured using a silicon carbide substrate. The wide band-gap material allows the design of a low  $V_F$  Schottky diode structure with a 1200 V rating. Due to the Schottky construction, no recovery is shown at turn-off and ringing patterns are negligible. The minimal capacitive turn-off behavior is independent of temperature.

Especially suited for use in PFC and secondary side applications, this ST SiC diode will boost the performance in hard switching conditions. This rectifier will enhance the performance of the targeted application. Its high forward surge capability ensures a good robustness during transient phases.

### Features

- No or negligible reverse recovery
- Switching behavior independent of temperature
- Robust high voltage periphery
- Operating  $T_j$  from -40 °C to 175 °C
- Low  $V_F$
- ECOPACK®2 compliant

Table 1: Device summary

| Symbol      | Value  |
|-------------|--------|
| $I_{F(AV)}$ | 5 A    |
| $V_{RRM}$   | 1200 V |
| $T_j(max.)$ | 175 °C |
| $V_F(typ.)$ | 1.35 V |

# 1 Characteristics

**Table 2: Absolute ratings (limiting values at 25 °C, unless otherwise specified)**

| Symbol       | Parameter                                                                     |                                                                          | Value                                         | Unit |
|--------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------|------|
| $V_{RRM}$    | Repetitive peak reverse voltage ( $T_J = -40\text{ °C}$ to $+175\text{ °C}$ ) |                                                                          | 1200                                          | V    |
| $I_{F(RMS)}$ | Forward rms current                                                           |                                                                          | 20                                            | A    |
| $I_{F(AV)}$  | Average forward current                                                       | $T_C = 160\text{ °C}$ , DC current<br>$T_C = 125\text{ °C}$ , DC current | 5<br>10                                       | A    |
| $I_{FRM}$    | Repetitive peak forward current                                               | $T_C = 160\text{ °C}$ , $T_J = 175\text{ °C}$ , $\delta = 0.1$           | 19                                            | A    |
| $I_{FSM}$    | Surge non repetitive forward current                                          | $t_p = 10\text{ ms}$ sinusoidal                                          | $T_C = 25\text{ °C}$<br>$T_C = 150\text{ °C}$ | A    |
|              |                                                                               |                                                                          | 35<br>30                                      |      |
|              |                                                                               | $t_p = 10\text{ }\mu\text{s}$ square                                     | $T_C = 25\text{ °C}$                          |      |
| $T_{stg}$    | Storage temperature range                                                     |                                                                          | -65 to +175                                   | °C   |
| $T_J$        | Operating junction temperature range                                          |                                                                          | -40 to +175                                   | °C   |

**Table 3: Thermal parameters**

| Symbol        | Parameter        | Typ. | Max. | Unit |
|---------------|------------------|------|------|------|
| $R_{th(j-c)}$ | Junction to case | 1.0  | 1.4  | °C/W |

**Table 4: Static electrical characteristics**

| Symbol      | Parameter               | Test conditions       |                    | Min. | Typ. | Max. | Unit          |
|-------------|-------------------------|-----------------------|--------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_J = 25\text{ °C}$  | $V_R = V_{RRM}$    | -    | 2.5  | 30   | $\mu\text{A}$ |
|             |                         | $T_J = 150\text{ °C}$ |                    | -    | 15   | 200  |               |
| $V_F^{(2)}$ | Forward voltage drop    | $T_J = 25\text{ °C}$  | $I_F = 5\text{ A}$ | -    | 1.35 | 1.50 | V             |
|             |                         | $T_J = 150\text{ °C}$ |                    | -    | 1.75 | 2.25 |               |

**Notes:**

(1)Pulse test:  $t_p = 10\text{ ms}$ ,  $\delta < 2\%$

(2)Pulse test:  $t_p = 500\text{ }\mu\text{s}$ ,  $\delta < 2\%$

To evaluate the maximum conduction losses, use the following equation:

$$P = 1.08 \times I_{F(AV)} + 0.233 \times I_{F(RMS)}^2$$

**Table 5: Dynamic electrical characteristics**


| Symbol         | Parameter               | Test conditions                                                  | Min. | Typ. | Max. | Unit |
|----------------|-------------------------|------------------------------------------------------------------|------|------|------|------|
| $Q_{Cj}^{(1)}$ | Total capacitive charge | $V_R = 800\text{ V}$                                             | -    | 36   | -    | nC   |
| $C_j$          | Total capacitance       | $V_R = 0\text{ V}$ , $T_C = 25\text{ °C}$ , $F = 1\text{ MHz}$   | -    | 450  | -    | pF   |
|                |                         | $V_R = 800\text{ V}$ , $T_C = 25\text{ °C}$ , $F = 1\text{ MHz}$ | -    | 29   | -    |      |

**Notes:**


(1)Most accurate value for the capacitive charge:  $Q_{Cj}(V_R) = \int_0^{V_R} C_j(V) dV$

## 1.1 Characteristics (curves)


**Figure 1: Forward voltage drop versus forward current (typical values)**

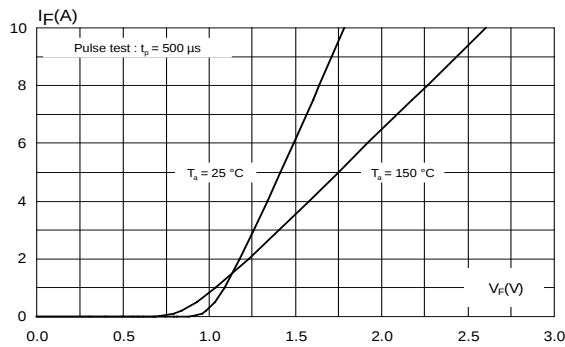


**Figure 2: Reverse leakage current versus reverse voltage applied (typical values)**

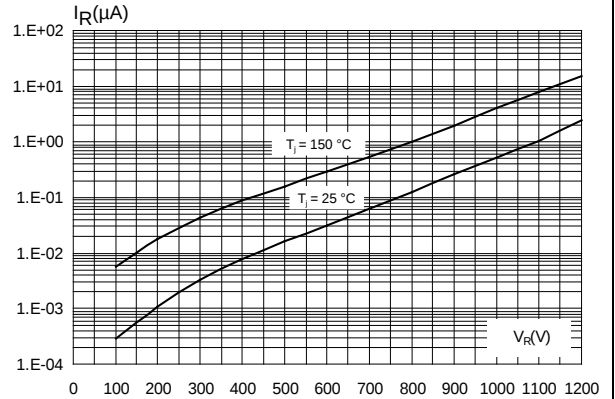


**Figure 3: Peak forward current versus case temperature**

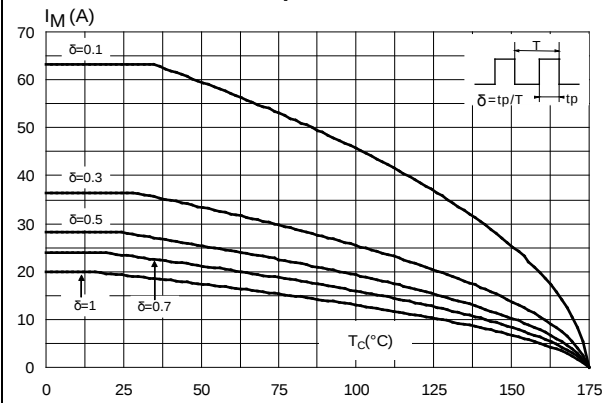

**Figure 4: Junction capacitance versus reverse voltage applied (typical values)**

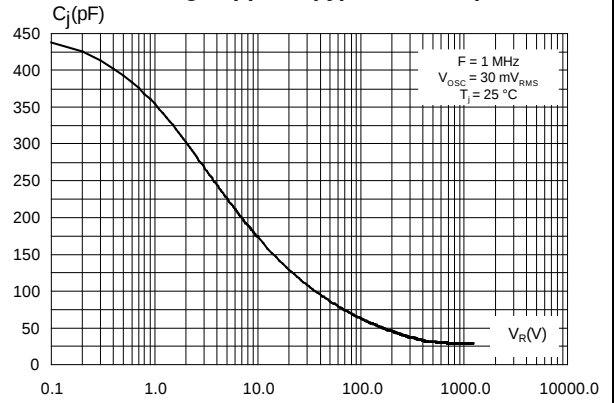

**Figure 5: Relative variation of thermal impedance junction to case versus pulse duration**

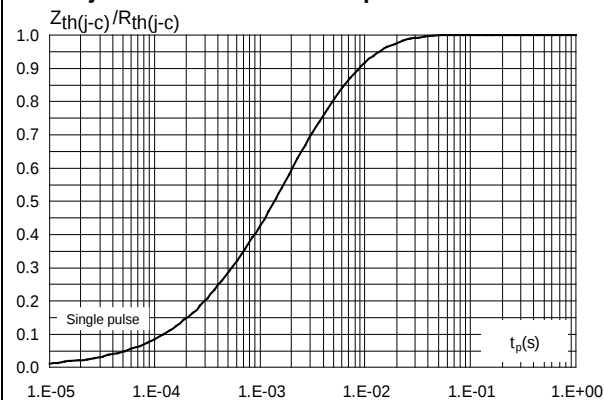

**Figure 6: Non-repetitive peak surge forward current versus pulse duration (sinusoidal waveform)**

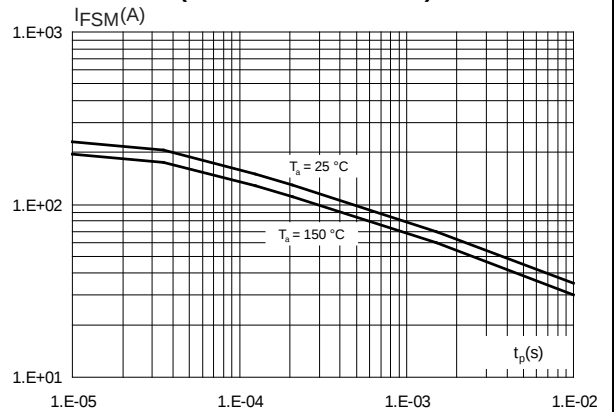


Figure 7: Total capacitive charges versus reverse voltage applied (typical values)


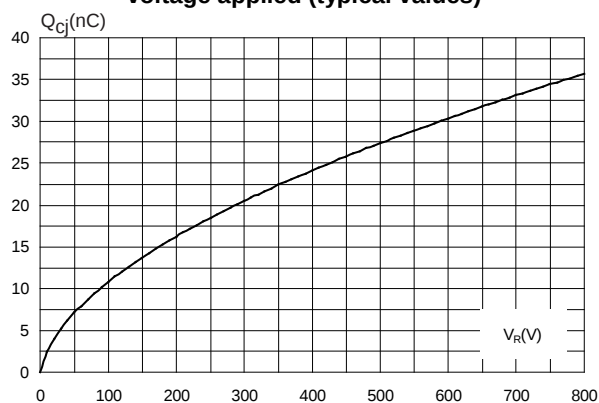


Figure 8: Thermal resistance junction to ambient versus copper surface under tab on epoxy printed board FR4,  $e_{Cu} = 35 \mu m$  (typical values)

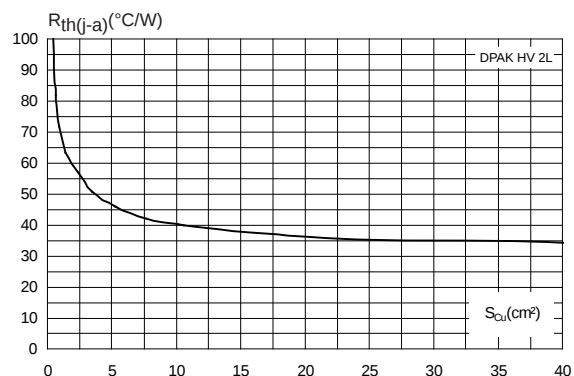

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

- Epoxy meets UL94, V0
- Cooling method: by conduction (C)
- Recommended torque value: 0.55 N·m
- Maximum torque value: 0.7 N·m

### 2.1 TO-220AC rectifier package information

Figure 9: TO-220AC package outline

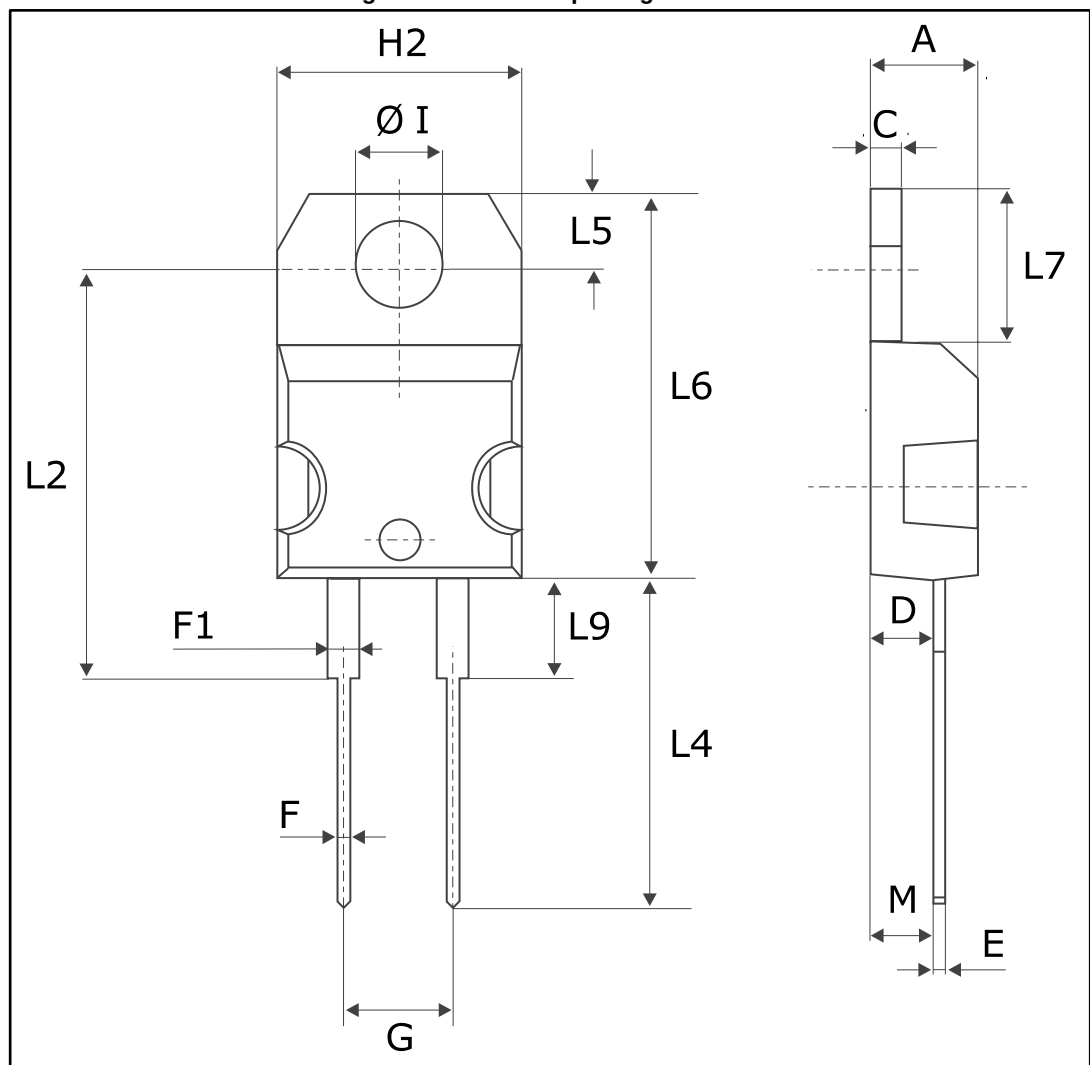


Table 6: TO-220AC package mechanical data

| Ref. | Dimensions  |       |            |       |
|------|-------------|-------|------------|-------|
|      | Millimeters |       | Inches     |       |
|      | Min.        | Max.  | Min.       | Max.  |
| A    | 4.40        | 4.60  | 0.173      | 0.181 |
| C    | 1.23        | 1.32  | 0.048      | 0.051 |
| D    | 2.40        | 2.72  | 0.094      | 0.107 |
| E    | 0.49        | 0.70  | 0.019      | 0.027 |
| F    | 0.61        | 0.88  | 0.024      | 0.034 |
| F1   | 1.14        | 1.70  | 0.044      | 0.066 |
| G    | 4.95        | 5.15  | 0.194      | 0.202 |
| H2   | 10.00       | 10.40 | 0.393      | 0.409 |
| L2   | 16.40 typ.  |       | 0.645 typ. |       |
| L4   | 13.00       | 14.00 | 0.511      | 0.551 |
| L5   | 2.65        | 2.95  | 0.104      | 0.116 |
| L6   | 15.25       | 15.75 | 0.600      | 0.620 |
| L7   | 6.20        | 6.60  | 0.244      | 0.259 |
| L9   | 3.50        | 3.93  | 0.137      | 0.154 |
| M    | 2.6 typ.    |       | 0.102 typ. |       |
| Diam | 3.75        | 3.85  | 0.147      | 0.151 |

## 2.2 DPAK HV 2L package information

Figure 10: DPAK HV 2L package outline


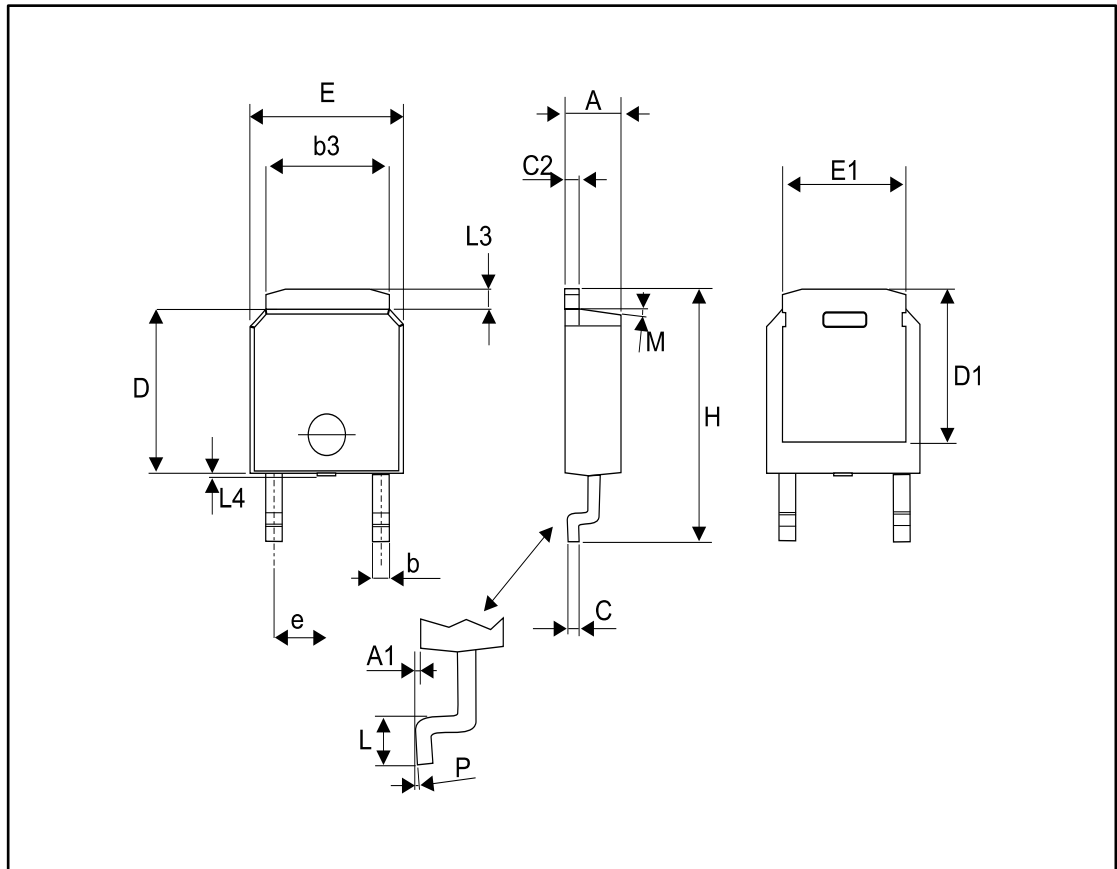


Table 7: DPAK HV 2L package mechanical data

| Ref.              | Dimensions  |      |       |           |       |       |
|-------------------|-------------|------|-------|-----------|-------|-------|
|                   | Millimeters |      |       | Inches    |       |       |
|                   | Min.        | Typ. | Max.  | Min.      | Typ.  | Max.  |
| A                 | 2.16        | 2.29 | 2.40  | 0.085     | 0.090 | 0.094 |
| A1                | 0.06        | 0.08 | 0.13  | 0.002     | 0.003 | 0.005 |
| b                 | 0.71        | 0.76 | 1.07  | 0.028     | 0.029 | 0.030 |
| b3                | 5.004       | 5.10 | 5.21  | 0.197     | 0.201 | 0.205 |
| c                 | 0.46        | 0.51 | 0.56  | 0.018     | 0.020 | 0.025 |
| c2                | 0.76        | 0.81 | 0.86  | 0.029     | 0.032 | 0.034 |
| D                 | 5.97        | 6.10 | 6.22  | 0.235     | 0.240 | 0.245 |
| D1                | 5.84 REF    |      |       | 0.230 REF |       |       |
| E                 | 6.48        | 6.60 | 6.73  | 0.255     | 0.260 | 0.265 |
| E1                | 4.95        | 5.08 | 5.21  | 0.195     | 0.200 | 0.205 |
| e                 | 2.29 REF    |      |       | 0.90 REF  |       |       |
| H                 | 9.70        | 9.83 | 10.08 | 0.382     | 0.387 | 0.397 |
| L                 | 1.02        | 1.14 | 1.40  | 0.040     | 0.045 | 0.055 |
| L3                |             |      | 1.14  |           |       | 0.045 |
| L4 <sup>(1)</sup> | 0.000       |      | 0.15  | 0.000     |       | 0.006 |
| M                 |             | 7°   |       |           | 7°    |       |
| P                 |             |      | 5°    |           |       | 5°    |

**Notes:**<sup>(1)</sup>Maximum plastic protrusion

Figure 11: Footprint (dimensions in mm)

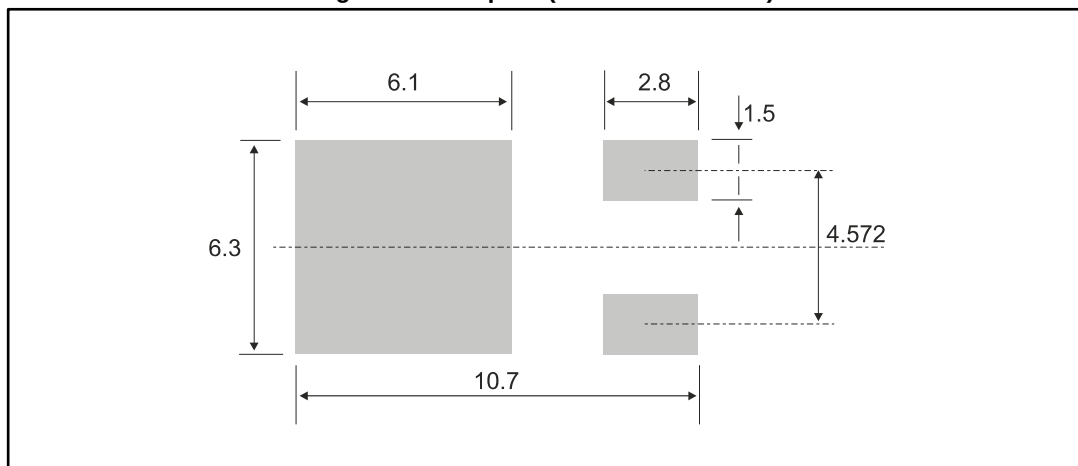

### 3 Ordering information

Table 8: Ordering information

| Order code     | Marking    | Package    | Weight  | Base qty. | Delivery mode |
|----------------|------------|------------|---------|-----------|---------------|
| STPSC5H12D     | STPSC5H12D | TO-220AC   | 1.86 g  | 50        | Tube          |
| STPSC5H12B-TR1 | STPSC 5H12 | DPAK HV 2L | 0.368 g | 2500      | Tape and reel |

### 4 Revision history

Table 9: Document revision history

| Date        | Revision | Changes          |
|-------------|----------|------------------|
| 24-Jan-2017 | 1        | Initial release. |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.