Mains Filters

Designed to reduce conducted mains borne EMI, this extensive range provides many solutions to EMI problems. To meet individual design requirements the filters are available with two attenuation options – standard and medical. Current ratings are from 1 to 10 amps with single or twin fused types also available.

The choice of mounting options will suit most applications with flange, snap to panel or base/bulkhead.

Flange and Snap Fit
PS00 Series 314-315
PS01 Series 314-315

Base Mounting and Bulkhead
PS02 Series 316-317
PS03 Series 316-317

Fused Inlets
PS20 Series 318-319
PS21 Series 318-319
PS25 Series 320-321
PS26 Series 320-321

IEC Power Inlets Flange and Snap Fit

Panel Mounting

Flange PS00/A

- 1, 3, 6 or 10 Amp Current Rating
- 3 Alternative Circuits
- No additional components
- 6.3mm tabs

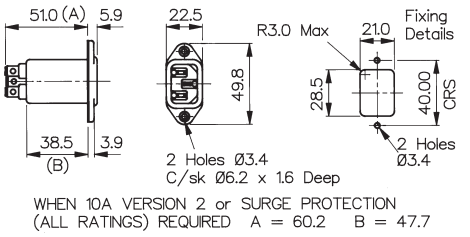

Snap Fit

Snap Fit PS01/A

- 1, 3, 6 or 10 Amp Current Rating
- 3 Alternative Circuits
- No additional components
- 6.3mm tabs
- 1, 1.5, 2 or 3mm panels

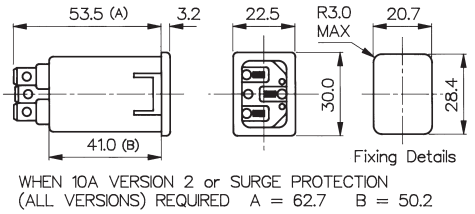

How to order -

PS00/A or PS01/A	XX	X	0	/	63	XX

Series	Rating	L/C Circuit	Additional Components	Tag Type and Configuration	Panel Thickness	Circuit Board Diagram
PS00/A	01 = 1A	1 = Version 1	0 = None	63 = 6.3mm tabs	00 = Flange	
PS01/A	03 = 3A	2 = Version 2			10 = 1.0mm	
	06 = 6A	3 = Version 3			15 = 1.5mm	
	10 = 10A				20 = 2.0mm	
					30 = 3.0mm	

Specification	PS00/Axxxx/xx00	PS01/Axxxx/xxxx	Part No. Example
Max. Working Voltage:	250V a.c. 50-400Hz	250V a.c. 50-400Hz	**PS00/A0120/6300**
Earth Leakage Current:	<0.35mA (250V, 50Hz)	<0.35mA (250V, 50Hz)	PS00 series, flange fitting, standard filtered IEC power inlet, rated at 1 ampere. L/C circuit version 2, i.e. L1 = 2 x 10mH, Cx = 15nF, Cy = 2 x 2.2nF. 6.3mm tabs.
Temperature Range:	–25ºC to +85ºC	–25ºC to +85ºC	
Max. Ambient Temp: (@ Full Load)	40ºC (derate linearly to 0A @ 85ºC)	40ºC (derate linearly to 0A @ 85ºC)	
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	
Approvals:			
Mating Connectors:	PX0587, PX0587/SE, PX0588	PX0587, PX0587/SE, PX0588	
RoHS	Compliant	Compliant	

Rating	Version	L1	Cx	Cy
1 AMP	1	2 x 2.8mH	1 x 15nF	2 x 2.2nF
“	2	2 x 10mH	1 x 15nF	2 x 2.2nF
“	3	2 x 10mH	1 x 47nF	2 x 2.2nF
3 AMP	1	2 x 0.75mH	1 x 15nF	2 x 2.2nF
“	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
“	3	2 x 1.8mH	1 x 47nF	2 x 2.2nF
6 AMP	1	2 x 0.3mH	1 x 15nF	2 x 2.2nF
“	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
“	3	2 x 0.7mH	1 x 47nF	2 x 2.2nF
10 AMP	1	2 x 0.17mH	1 x 15nF	2 x 2.2nF
“	2	2 x 0.35mH	1 x 15nF	2 x 2.2nF
“	3	2 x 0.17mH	1 x 47nF	2 x 2.2nF

Version 1

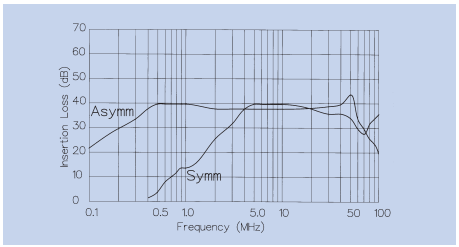

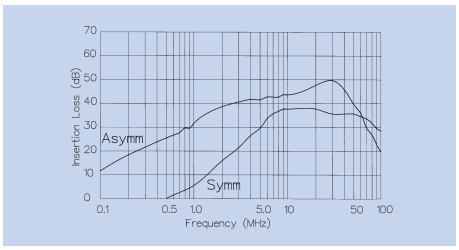

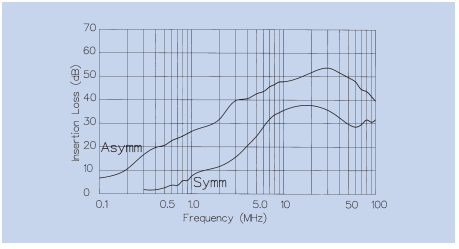

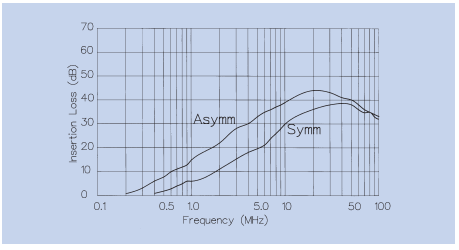

Version 2

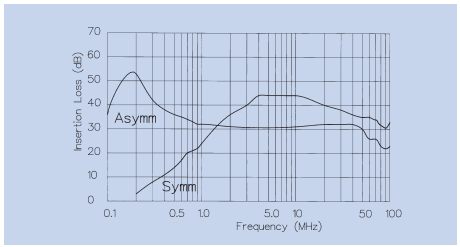

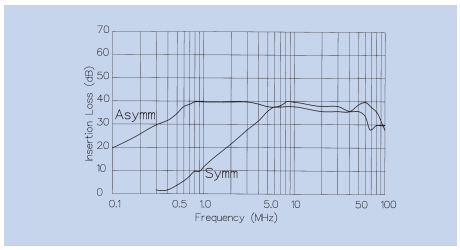

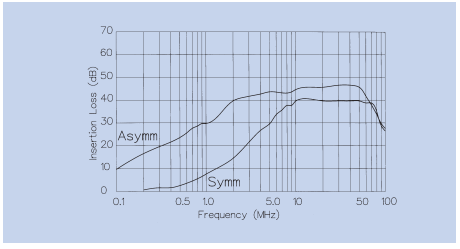

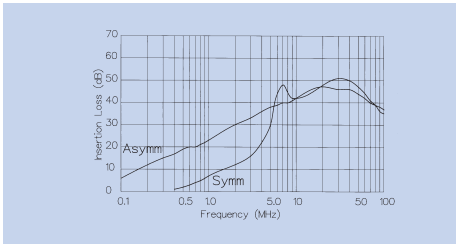

Version 3

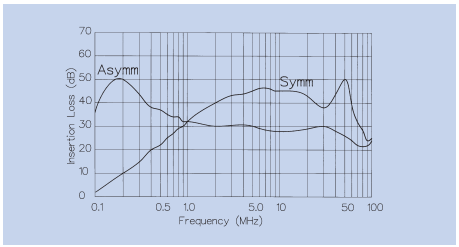

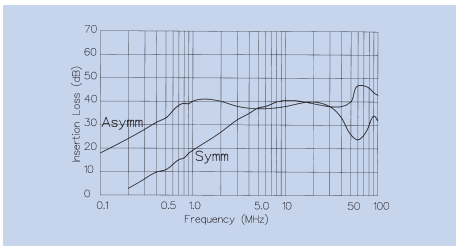

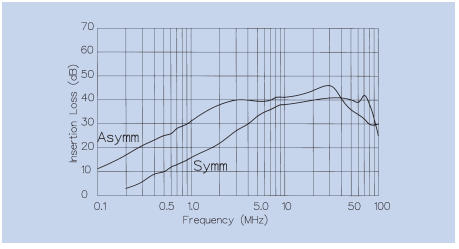

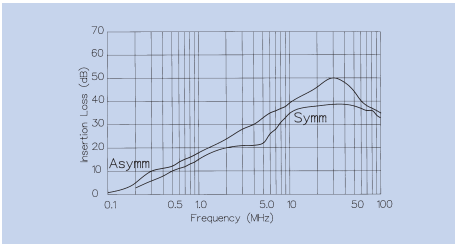

Base Mounting and Bulkhead

Base Mounting

Base Mounting PS02/A

- 1, 3, 6 or 10 Amp Current Rating
- 3 Alternative Circuits
- No additional components
- 6.3mm tabs



Bulkhead Mounting

Bulkhead Mounting PS03/A

- 1, 3, 6 or 10 Amp Current Rating
- 3 Alternative Circuits
- No additional components
- 6.3mm tabs

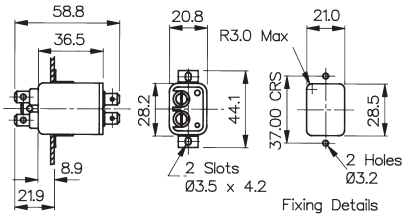

How to order -

PS02/A or PS03/A	XX	X	0	/	63

Series	Rating	L/C Circuit	Additional Components	Tag Type and Configuration	Circuit Board Diagram
PS02/A	01 = 1A	1 = Version 1	0 = None	63 = 6.3mm tabs	
PS03/A	03 = 3A	2 = Version 2			
	06 = 6A	3 = Version 3			
	10 = 10A				

Specification	PS02/Axxxx/xx	PS03/Axxxx/xx	Part No. Example
Max. Working Voltage:	250V a.c. 50-400Hz	250V a.c. 50-400Hz	PS02/A0120/63
Earth Leakage Current:	<0.35mA (250V, 50Hz)	<0.35mA (250V, 50Hz)	PS02 series, standard base mounting filter, rated at 3 amperes. L/C circuit version 1, i.e. L1 = 2 x 0.75mH, Cx = 15nF, Cy = 2 x 2.2nF with 2.8mm tabs.
Temperature Range:	–25ºC to +85ºC	–25ºC to +85ºC	
Max. Ambient Temp: (@ Full Load)	40ºC (derate linearly to 0A @ 85ºC)	40ºC (derate linearly to 0A @ 85ºC)	
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	
Approvals:			
RoHS	Compliant	Compliant	

PS02/Axxxx/xx & PS03/Axxxx/xx

Rating & Version Table

Rating	Version	L1	Cx	Cy
1 AMP	1	2 x 2.8mH	1 x 15nF	2 x 2.2nF
“	2	2 x 10mH	1 x 15nF	2 x 2.2nF
“	3	2 x 10mH	1 x 47nF	2 x 2.2nF
3 AMP	1	2 x 0.75mH	1 x 15nF	2 x 2.2nF
“	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
“	3	2 x 1.8mH	1 x 47nF	2 x 2.2nF
6 AMP	1	2 x 0.3mH	1 x 15nF	2 x 2.2nF
“	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
“	3	2 x 0.7mH	1 x 47nF	2 x 2.2nF
10 AMP	1	2 x 0.17mH	1 x 15nF	2 x 2.2nF
“	2	2 x 0.35mH	1 x 15nF	2 x 2.2nF
“	3	2 x 0.17mH	1 x 47nF	2 x 2.2nF

Version 1

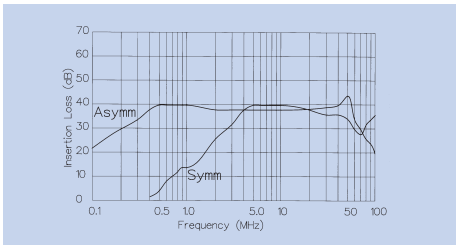

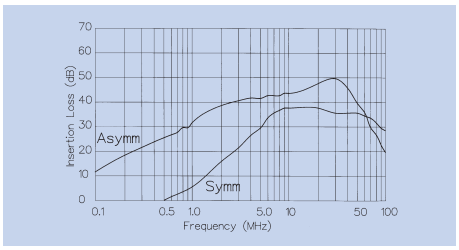

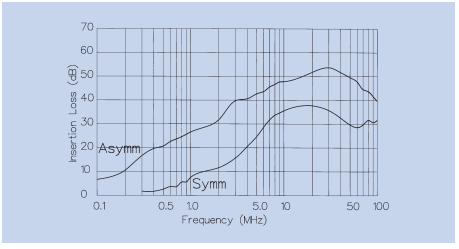

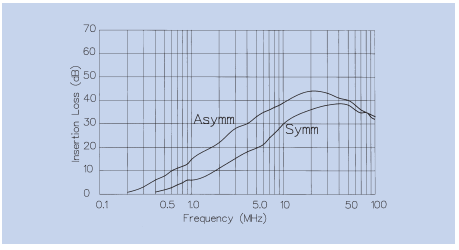

Version 2

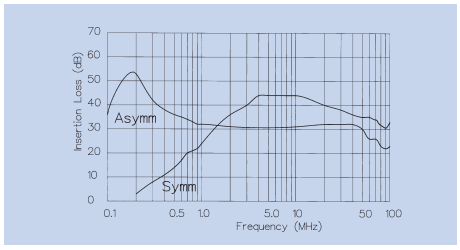

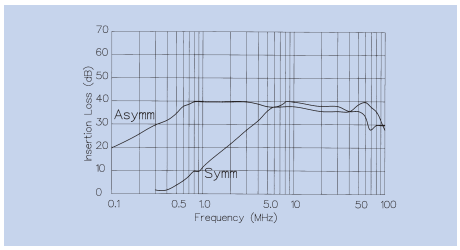

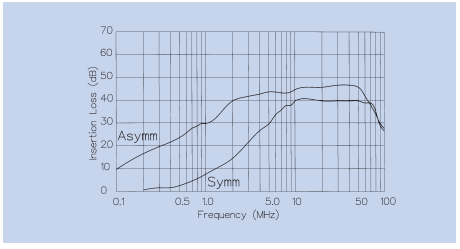

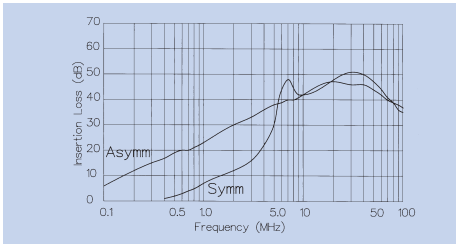

Version 3

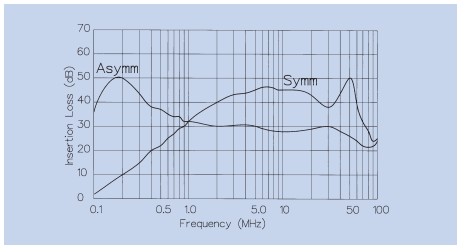

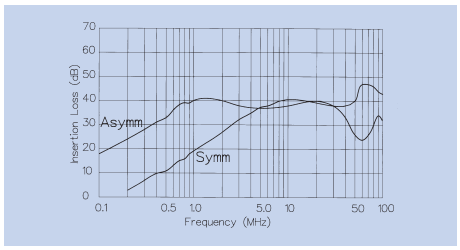

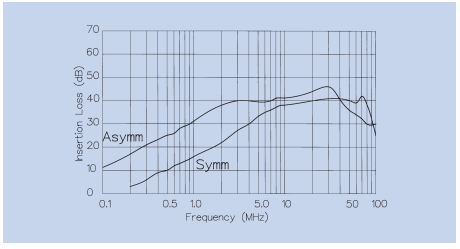

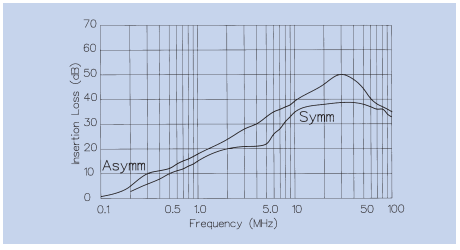

IEC Power Inlets (Single Fused)

Panel Mounting

PS20/A

- 1, 3, or 6 Amp Current Rating
- Single Fused
- 2 Alternative Circuits
- 6.3mm tabs

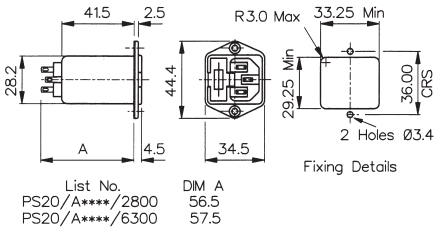

List No.	DIM A
PS20/A****/2800	56.5
PS20/A****/6300	57.5

Snap Fit



PS21/A

- 1, 3, or 6 Amp Current Rating
- Single Fused
- 2 Alternative Circuits
- 6.3mm tabs
- 1, 1.5, 2 or 3mm panels

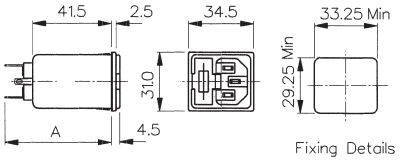

List No.	DIM A
PS21/A****/28**	56.5
PS21/A****/63**	57.5

How to order -

PS02/A or PS03/A	XX	X	0	/	63	/	XX
Series	**Rating**	**L/C Circuit**	**Additional Components**		**Tag Type and Configuration**		**Panel Thickness**
PS00/A	01 = 1A	2 = Version 2	0 = None		63 = 6.3mm tabs		00 = Flange
PS01/A	03 = 3A	3 = Version 3					10 = 1.0mm
	06 = 6A						15 = 1.5mm
							20 = 2.0mm
							30 = 3.0mm

Circuit Board Diagram



Specification	PS20/Axxx0/xx00	PS21/Axxx0/xxxx	Part No. Example
Max. Working Voltage:	250V a.c. 50-400Hz	250V a.c. 50-400Hz	PS20/A0620/63
Earth Leakage Current:	<0.35mA (250V, 50Hz)	<0.35mA (250V, 50Hz)	PS20 series, flange fitting, standard filtered IEC power inlet, single fused, rated at 6 amperes. L/C circuit version 2, i.e L1 = 2 x 0.7mH, Cx = 1 x 15nF, Cy = 2 x 2.2nF. 6.3mm tabs.
Temperature Range:	–25ºC to +85ºC	–25ºC to +85ºC	
Max. Ambient Temp: (@ Full Load)	40ºC (derate linearly to 0A @ 85ºC)	40ºC (derate linearly to 0A @ 85ºC)	
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	
Approvals:			
RoHS	Compliant	Compliant	

Rating	Version	L1	Cx	Cy
1 AMP	1			
“	2			
“	3	2 x 10mH	1 x 47nF	2 x 2.2nF
3 AMP	1			
“	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
“	3	2 x 6.5mH	1 x 47nF	2 x 2.2nF
6 AMP	1			
“	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
“	3	2 x 2mH	1 x 47nF	2 x 2.2nF

Version 2

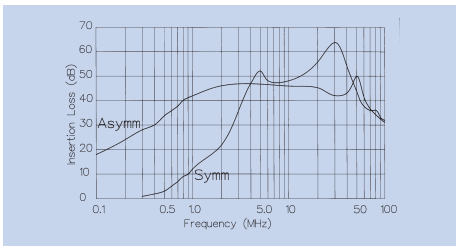

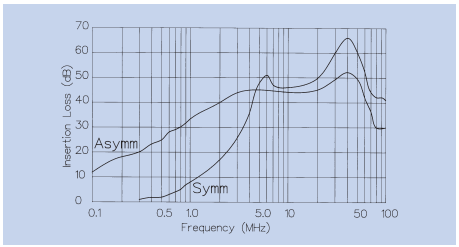

Version 3

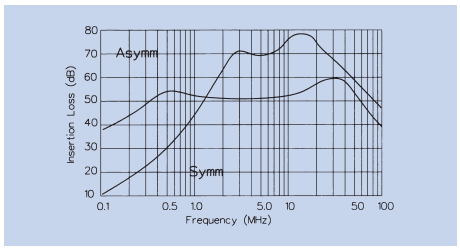

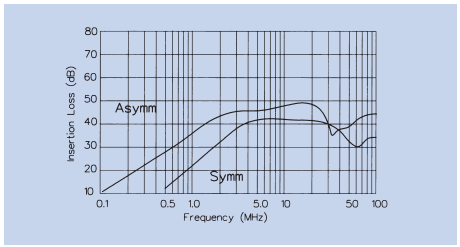

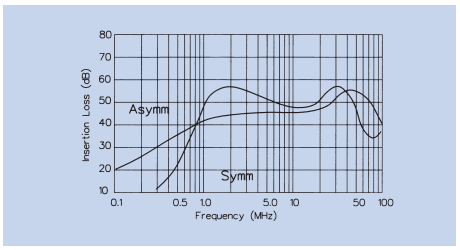

IEC Power Inlets Flange and Snap Fit (Twin Fused)

Base Mounting



PS25/A

- 2 or 4 Amp Current Rating
- Twin Fused
- No additional components
- 6.3mm tabs

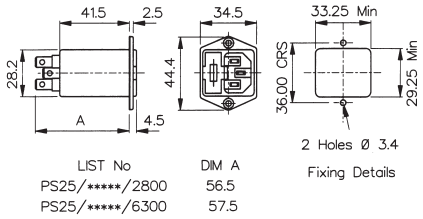

LIST No	DIM A
PS25/*****/2800	56.5
PS25/*****/6300	57.5

Snap Fit



PS26/A

- 2 or 4 Amp Current Rating
- Twin Fused
- No additional components
- 6.3mm tabs
- 1, 1.5, 2 or 3mm panels

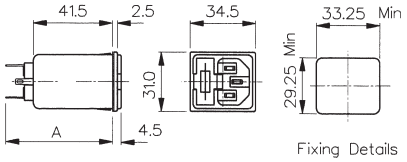

List No.	DIM A
PS23/A****/28**	56.5
PS23/A****/63**	57.5

How to order -

PS25/A or PS26/A	X	2	0	/ 63	/ XX

Series	Rating	L/C Circuit	Additional Components	Tag Type and Configuration	Panel Thickness	Circuit Board Diagram
PS25/A	02 = 2A	2 = Version 2	0 = None	63 = 6.3mm tabs	00 = Flange	
PS26/A	04 = 4A				10 = 1.0mm	
					15 = 1.5mm	
					20 = 2.0mm	
					30 = 3.0mm	

Specification	PS25/Axx2x/xx00	PS26/Axx2x/xxxx	Part No. Example
Max. Working Voltage:	250V a.c. 50-400Hz	250V a.c. 50-400Hz	PS20/A0620/63
Earth Leakage Current:	2.5W per fuse	2.5W per fuse	PS20 series, flange fitting, standard filtered IEC power inlet, single fused, rated at 6 amperes. L/C circuit version 2, i.e L1 = 2 x 0.7mH, Cx = 1 x 15nF, Cy = 2 x 2.2nF. 6.3mm tabs.
Temperature Range:	<0.35mA (250V, 50Hz)	<0.35mA (250V, 50Hz)	
Max. Ambient Temp: (@ Full Load)	40ºC (derate linearly to 0A @ 85ºC)	40ºC (derate linearly to 0A @ 85ºC)	
Test Voltage:	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	2700V d.c. 2 secs. Lines to Earth 1100V d.c. 2 secs. Live to Neutral	
Approvals:			
Mating Connectors	PX0587, PX0587/SE, PX0588	PX0587, PX0587/SE, PX0588	
Accessories	P.No. 14340 (see page 151)	P.No. 14340 (see page 151)	
RoHS	Compliant	Compliant	

Rating	Version	L1	Cx	Cy
1 AMP	1			
“	2	2 x 1.8mH	1 x 15nF	2 x 2.2nF
“	3			
3 AMP	1			
“	2	2 x 0.7mH	1 x 15nF	2 x 2.2nF
“	3			

Version 2

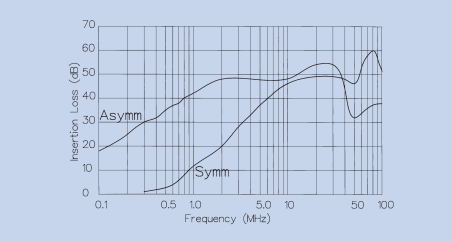

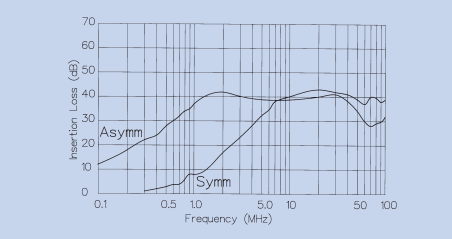

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.