

## **SPECIFICATION**

### **G21 GSM Hercules Gen.II Penta Band Cellular Antenna**

- Part No. : **G21.B.301111**
- Product Name : Hercules Gen.II Penta Band Cellular Antenna  
Screw-mount (Permanent mount)
- Features : GSM/GPRS/CDMA/EVDO/UMTS/HSPA/WCDMA  
850/900/1800/1900/2100MHz  
Low profile - Height 29mm, diameter 49mm  
Heavy duty screw mount  
UV and Vandal resistant PC housing  
IP67 & IP69K  
3M Cable RG174 Standard  
SMA(M) Connector Standard  
Cable and Connector are Customizable  
**ROHS Compliant**



## **1. INTRODUCTION**

The G21 (Generation II) Hercules is a high performance, steel thread-mount, Penta-band cellular antenna for external use on vehicles and outdoor assets worldwide. Omni-directional high gain across all bands ensures constant reception and transmission. The durable UV resistant PC housing is resistant to vandalism and direct attack.

With IP67 and IP69K waterproof rating, the G21 can be screw mounted on vehicles and outdoor/indoor assets via its extra thick thread. The antenna has a compact dimension at only 28.5mm in height and 49mm in diameter. The enclosure is designed to not catch on tree-branches.

Taoglas recommend a minimum cable length of 300mm when used on a ground plane to achieve an efficiency of greater than 30%.

This antenna can be mounted on metal structures. The G21 is an ideal solution for cellular external applications where it can operate with or without the ground plane.


## 2. SPECIFICATION

ELECTRICAL-On 30x30cm Ground Plane						
Standard	AMPS	GSM	DCS	PCS	3G	
Band (MHz)	850	900	1800	1900	2100	
Frequency (MHz)	824-896	880-960	1710-1880	1850-1990	1920 -2170	
<b>Return Loss (dB)</b>						
Cable length (meter)	0.3	-6.0	-5.2	-6.1	-6.2	-5.8
	1.0	-7.8	-8.7	-11.4	-15.3	-13.7
	2.0	-8.1	-9.3	-16.5	-20.3	-19.5
	3.0	-11.0	-12.4	-17.5	-18.3	-18.1
	5.0	-11.8	-13.6	-17.6	-17.8	-17.8
<b>Efficiency (%)</b>						
Cable length (meter)	0.3	51.1	41.4	38.0	46.5	33.3
	1.0	39.4	40.2	42.2	43.4	31.3
	2.0	24.3	27.5	28.4	28.2	29.6
	3.0	24.6	27.6	22.0	23.8	24.6
	5.0	17.1	16.4	15.7	15.0	12.0
<b>Peak Gain (dBi)</b>						
Cable length (meter)	0.3	2.0	1.5	4.0	4.3	4.2
	1.0	1.7	2.7	1.8	1.9	1.8
	2.0	1.4	2.1	0.8	-0.3	-0.7
	3.0	1.0	1.0	-0.9	-1.1	-1.1
	5.0	-0.8	-0.3	-4.2	-3.9	-4.2
<b>Polarization</b>			Linear			
<b>Impedance</b>			50 ohms			
<b>Max Input Power</b>			10 watts			
<b>VSWR</b>			<3.5:1			

<b>ELECTRICAL-On 60x60cm Ground Plane</b>						
<b>Standard</b>		<b>AMPS</b>	<b>GSM</b>	<b>DCS</b>	<b>PCS</b>	<b>3G</b>
<b>Return Loss (dB)</b>						
Cable length (meter)	0.3	-6.0	-5.6	-8.8	-8.5	-7.8
	1.0	-7.8	-8.2	-13.6	-13.8	-16.3
	2.0	-8.9	-11.1	-16.7	-19.6	-19.5
	3.0	-11.0	-13.6	-17.8	-18.3	-18.6
	5.0	-12.3	-14.8	-19.1	-19.1	-18.2
<b>Efficiency (%)</b>						
Cable length (meter)	0.3	31.0	30.3	47.1	43.6	41.6
	1.0	28.0	29.3	39.2	33.5	31.2
	2.0	26.3	28.5	28.8	29.6	30.7
	3.0	19.2	18.6	21.3	22.1	25.2
	5.0	11.4	12.8	13.7	11.6	12.3
<b>Peak Gain (dBi)</b>						
Cable length (meter)	0.3	2.1	2.3	3.1	3.0	2.8
	1.0	1.0	0.6	1.9	1.6	0.9
	2.0	0.6	0.2	0.8	-0.2	-0.8
	3.0	-0.5	0.1	0.2	-0.1	-1.1
	5.0	-2.3	-2.2	-2.9	-3.4	-3.9
<b>ELECTRICAL-FREE SPACE</b>						
<b>Return Loss (dB)</b>						
Cable length (meter)	0.3	-6.2	-5.3	-5.8	-6.4	-5.6
	1.0	-8.1	-8.3	-10.9	-15.8	-13.2
	2.0	-8.5	-12.3	-15.8	-17.6	-17.2
	3.0	-11.6	-12.9	-16.9	-17.9	-18.3
	5.0	-11.8	-15.6	-18.6	-18.4	-18.8
<b>Efficiency (%)</b>						
Cable length (meter)	0.3	53.2	51.3	42.8	43.6	46.7
	1.0	24.3	32.6	32.8	40.2	27.8
	2.0	24.1	25.8	27.8	31.2	26.2
	3.0	23.3	24.2	23.4	22.8	23.6
	5.0	13.6	20.8	12.1	11.8	10.3
<b>Peak Gain (dBi)</b>						
Cable length (meter)	0.3	0.4	0.9	2.4	2.5	2.2
	1.0	0.2	0.2	0.9	0.9	1.8
	2.0	-1.7	-1.3	1.1	-0.4	-1.5
	3.0	-1.8	-1.1	-1.2	-1.8	-1.9
	5.0	-3.3	-2.3	-4.1	-4.6	-4.7

<b>MECHANICAL</b>	
<b>Dimensions</b>	Height = 29 mm and Diameter = 49mm
<b>Cable</b>	3M RG174 – Fully Customizable
<b>Connector</b>	SMA-Male – Fully Customizable
<b>Casing</b>	UV Resistant PC
<b>Base and Thread</b>	Nickel plated steel
<b>Thread Diameter</b>	18 mm
<b>Weather proof gasket</b>	CR4305 foam with 3M9448B double-side adhesive
<b>Sealant</b>	Rubber Stopper
<b>ENVIRONMENTAL</b>	
<b>Protection</b>	IP67 & IP69K
<b>Corrosion</b>	5% NaCl for 48hrs - Nickel plated steel base and thread
<b>Temperature Range</b>	-40°C to +85°C
<b>Thermal Shock</b>	100 cycles -40°C to +85°C
<b>Humidity</b>	Non-condensing 65°C 95% RH
<b>Shock (Drop Test)</b>	1m drop on concrete 6 axes
<b>Cable Pull</b>	8 Kgf
<b>Recommended Mounting Torque</b>	24.5N·m
<b>Maximum Mounting Torque</b>	29.5N·m
<b>Weight</b>	150g


### 3. TEST SETUP

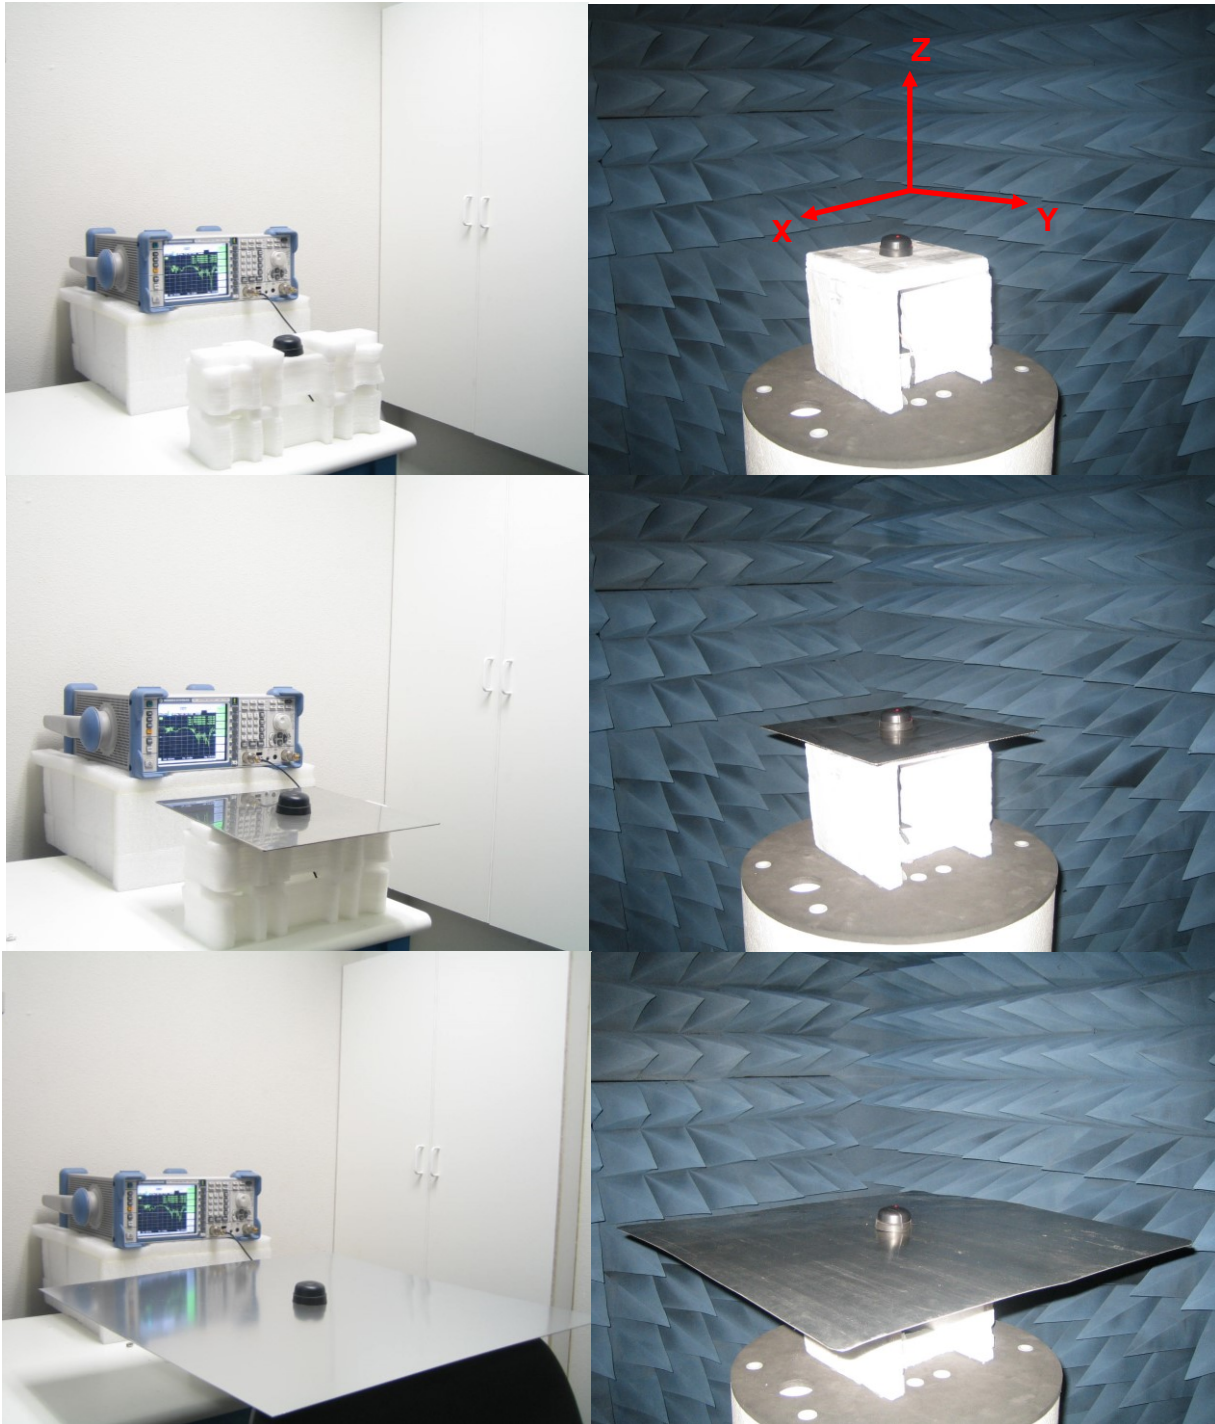


**Figure 1.** G21 Antenna test set up in free space, 30x30 cm metal plate, and 60x60 cm metal plate, R&SZVL6 VNA (left) and R&S4100 CTIA 3D Chamber (Right).

## 4. ANTENNA PARAMETERS


### 4.1 Return Loss

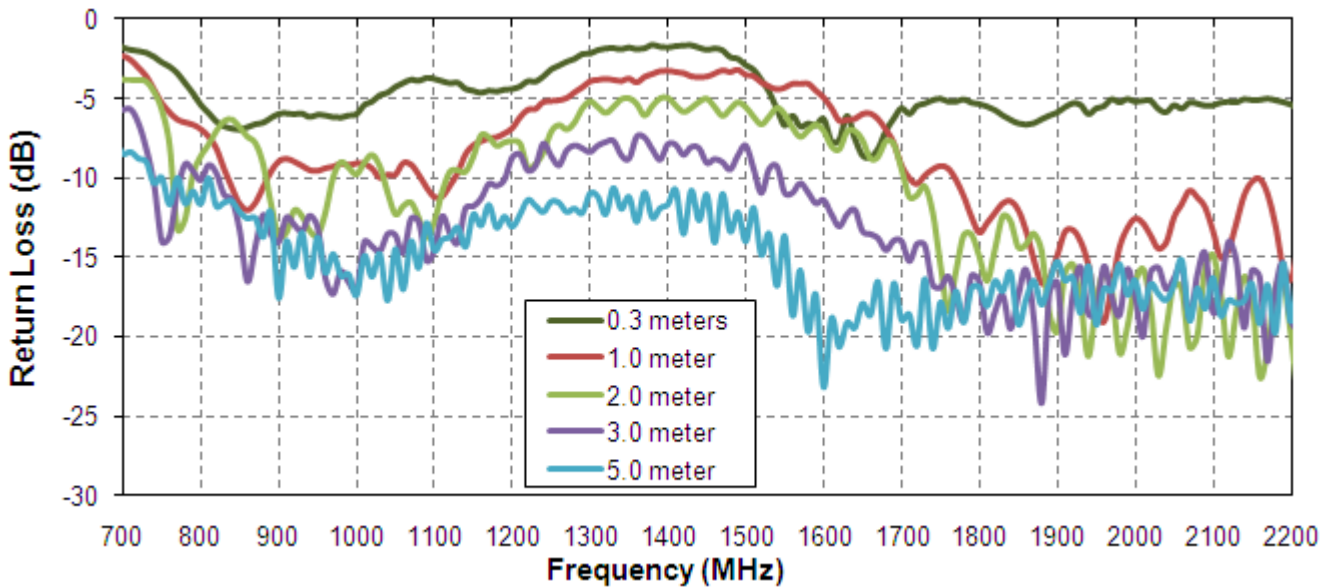

**Figure 2.** Return Loss of G21 Hercules antenna in free space.

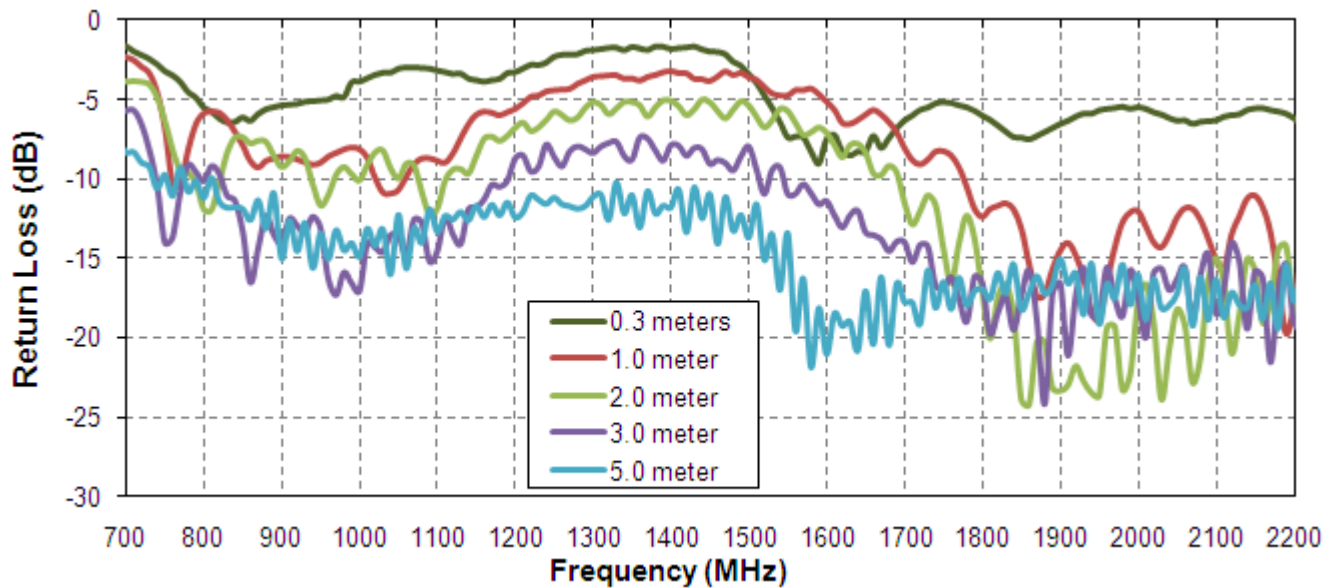


**Figure 3.** Return loss of G21 Hercules antenna on 30 cm metal plate.

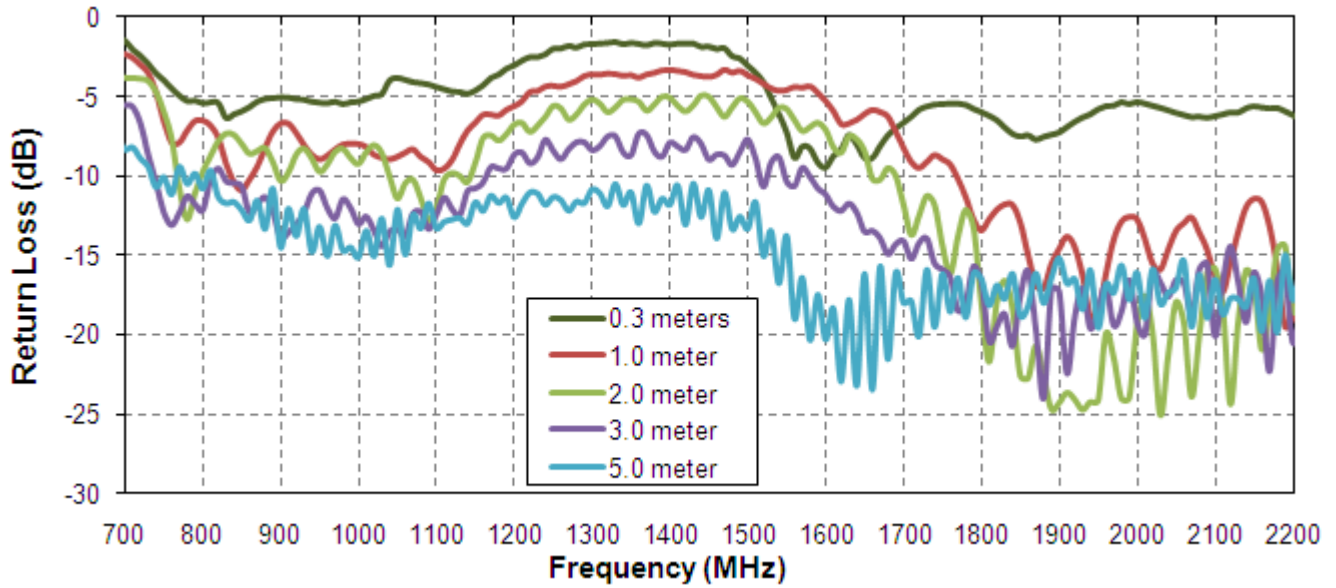


**Figure 4.** Return loss of G21 Hercules antenna on 60 cm metal plate.




## 4.2 Efficiency

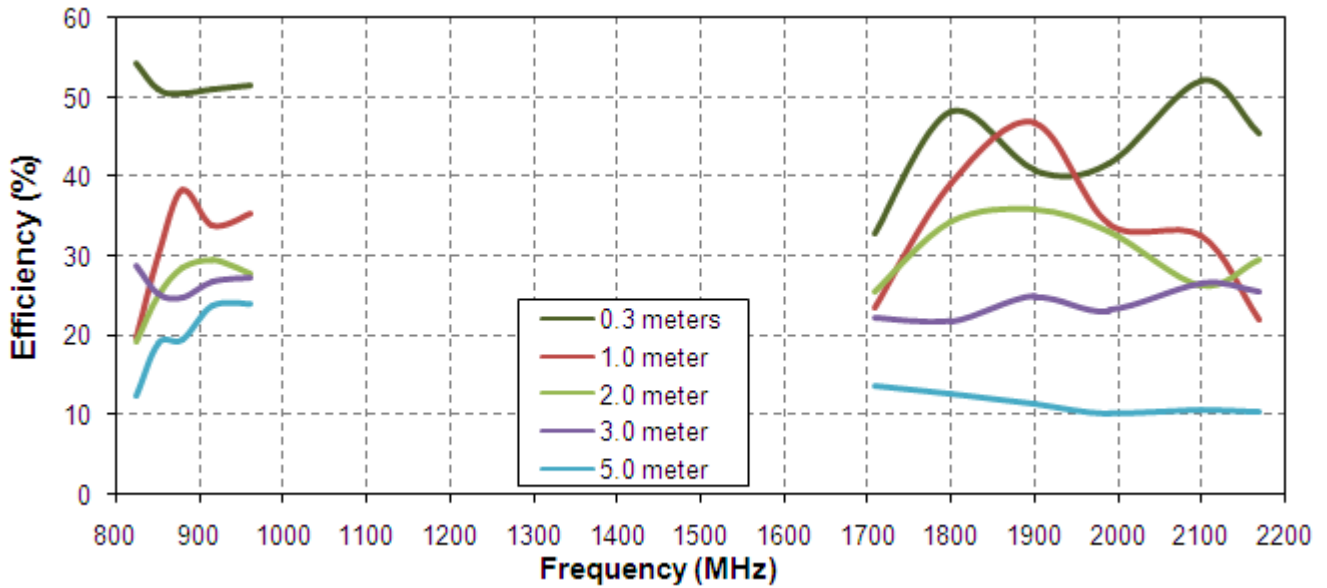

**Figure 5.** Efficiency of G21 Hercules antenna in free space.

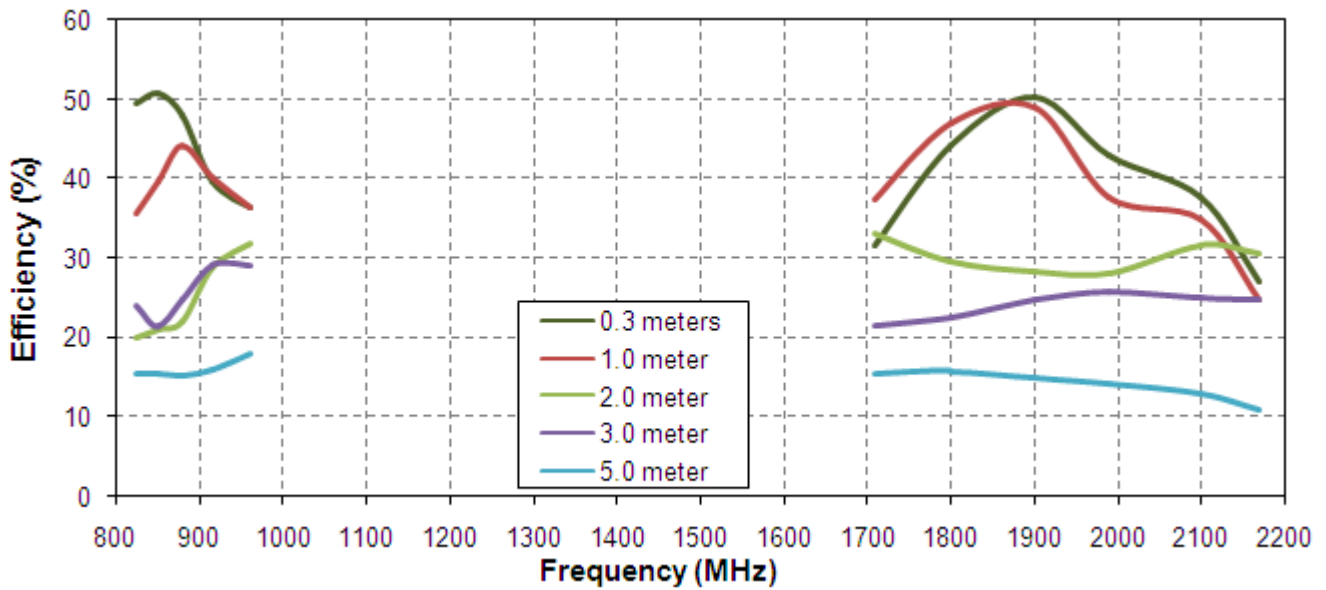


**Figure 6.** Efficiency of G21 Hercules antenna on 30 cm metal plate.

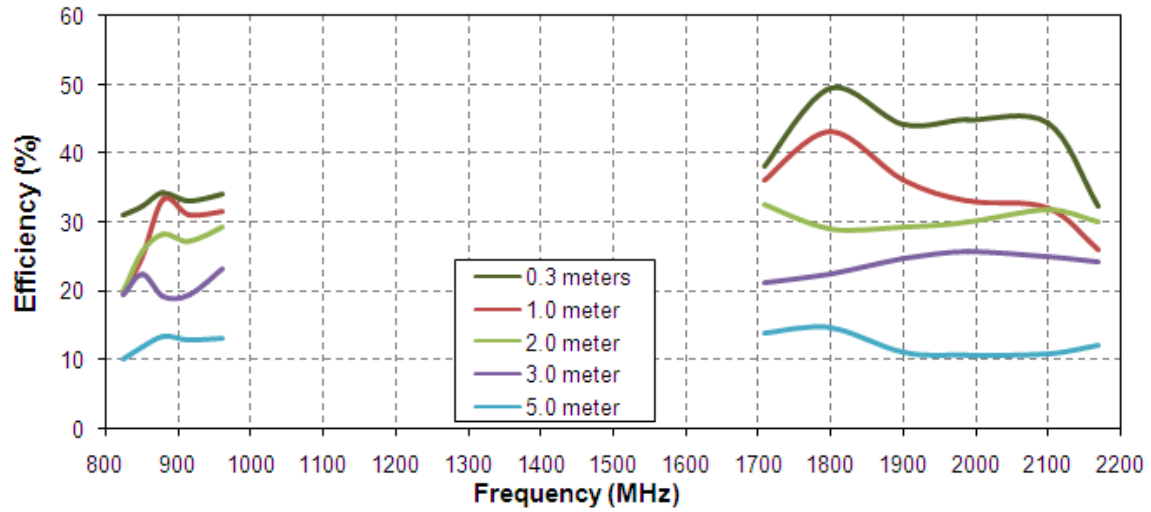


**Figure 7.** Efficiency of G21 Hercules antenna on 60 cm metal plate.


### 4.3 Peak Gain

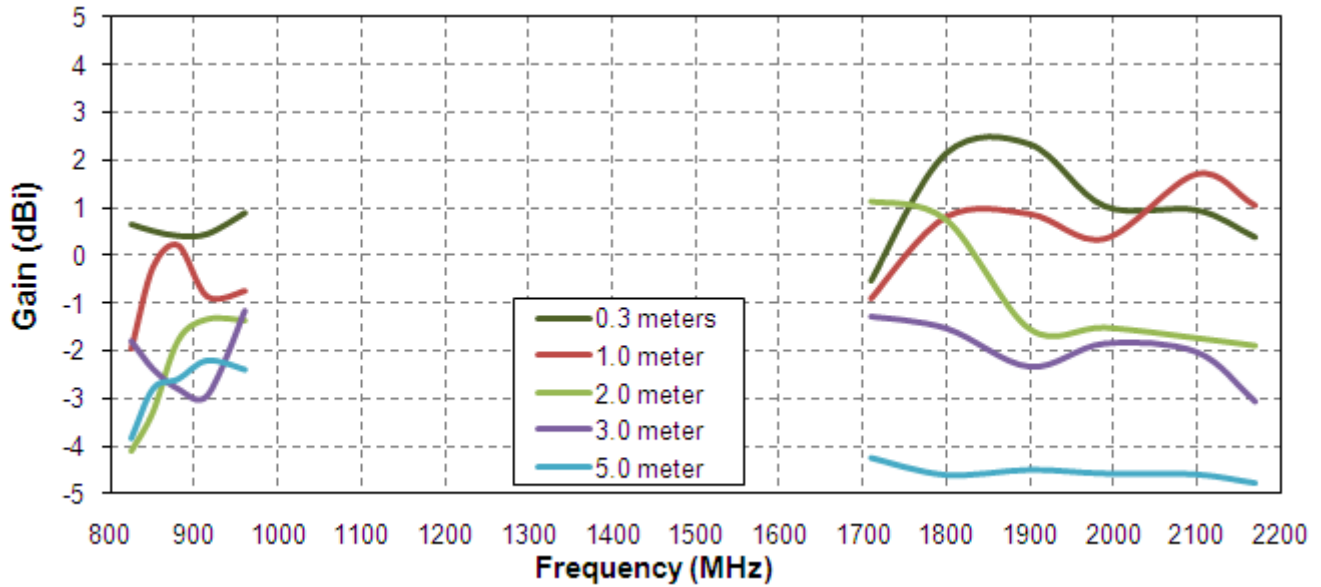

**Figure 8.** Peak Gain of G21 Hercules antenna in free space.

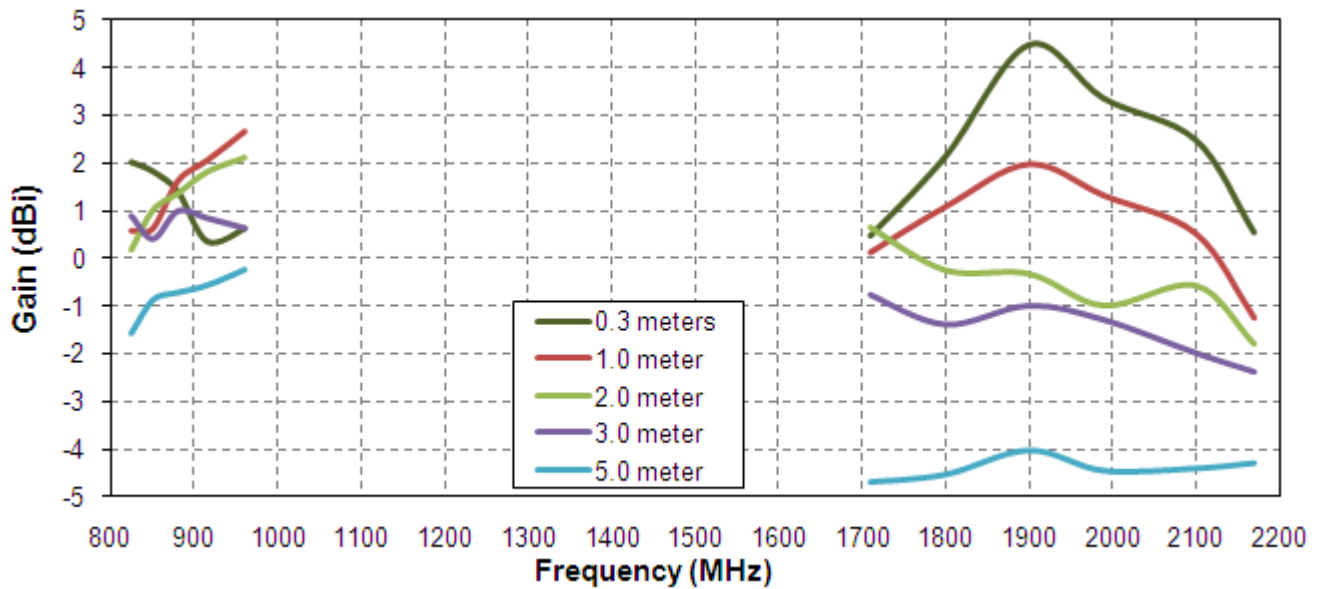


**Figure 9.** Peak Gain of G21 Hercules antenna on 30 cm metal plate.

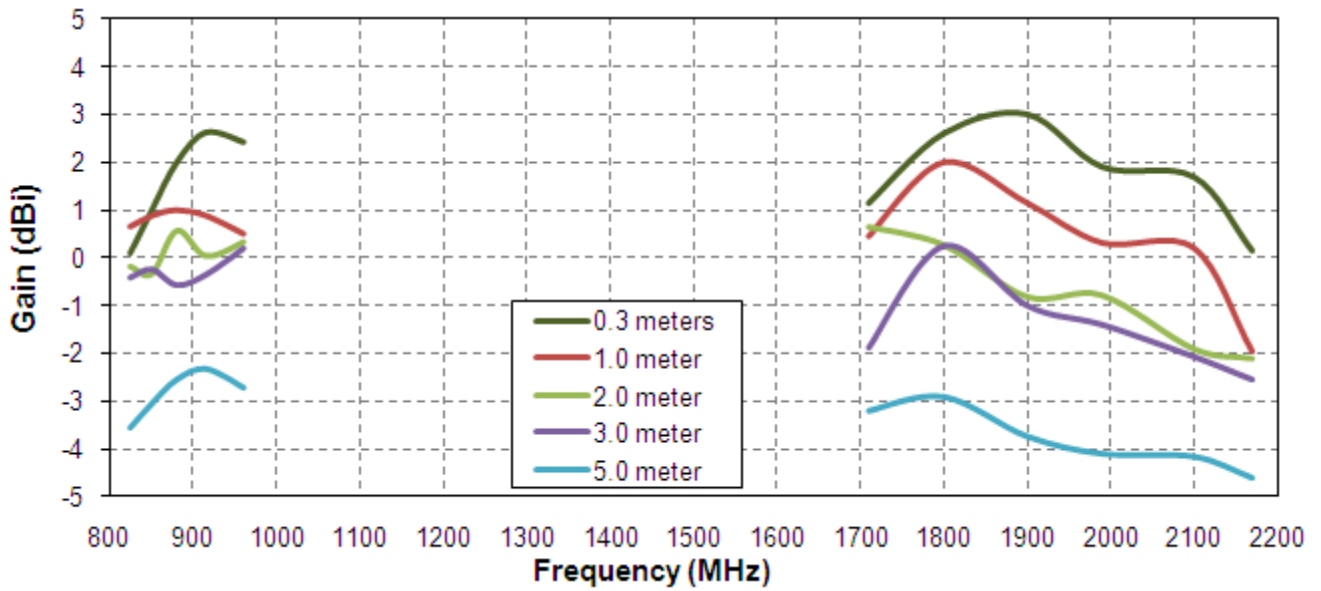


**Figure 10.** Peak Gain of G21 Hercules antenna on 60 cm metal plate.

## 5. Radiation Patterns


### 5.1 Radiation Patterns (Free Space)

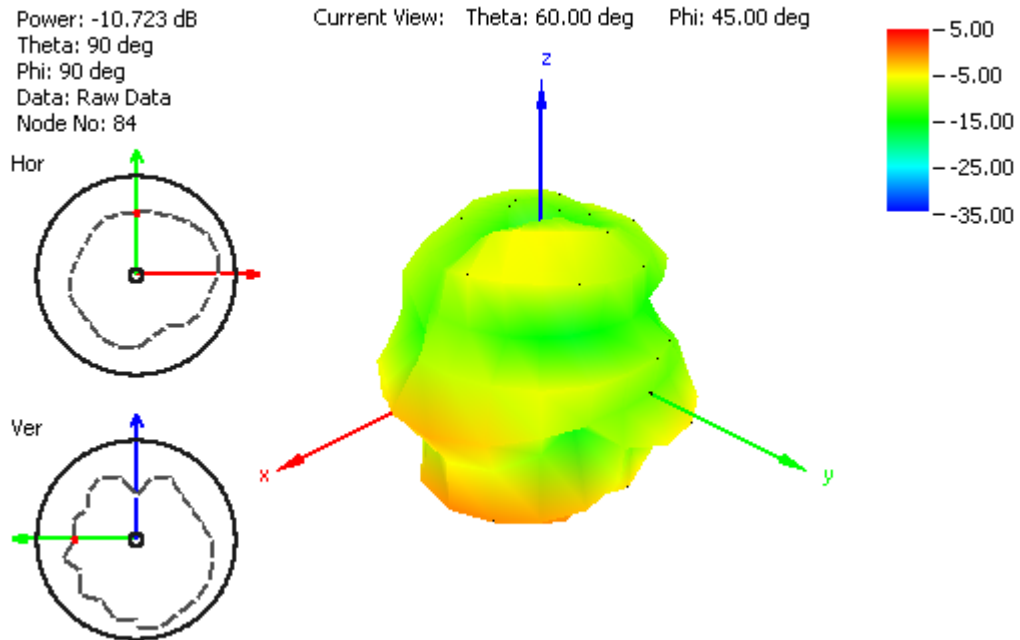


**Figure 11.** Radiation pattern at 849 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space

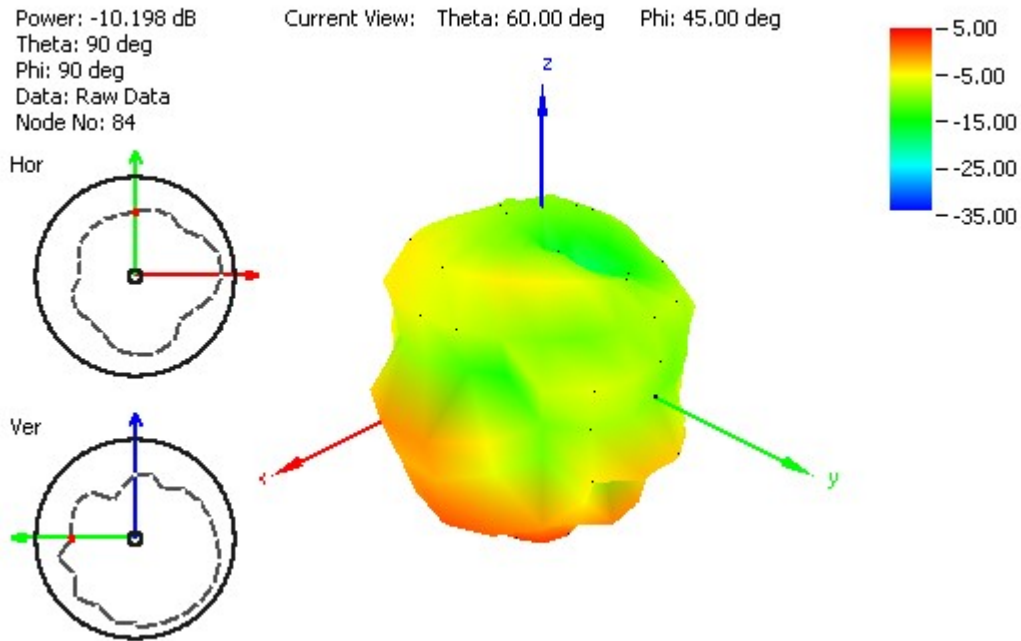


**Figure 12.** Radiation pattern at 915 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.

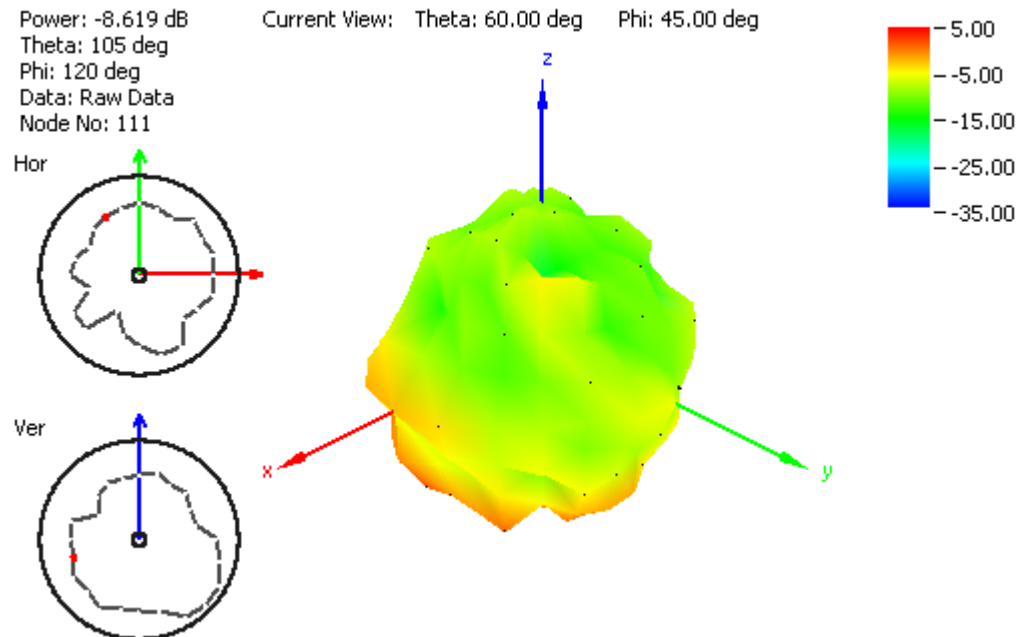

**Figure 13.** Radiation pattern at 1805 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.

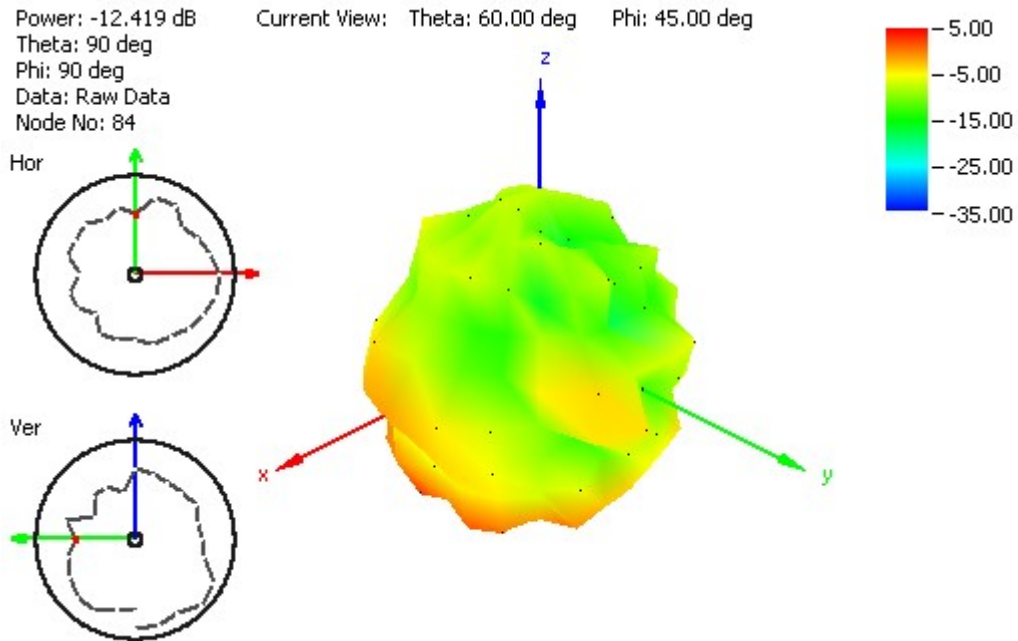


**Figure 14.** Radiation pattern at 1910 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.

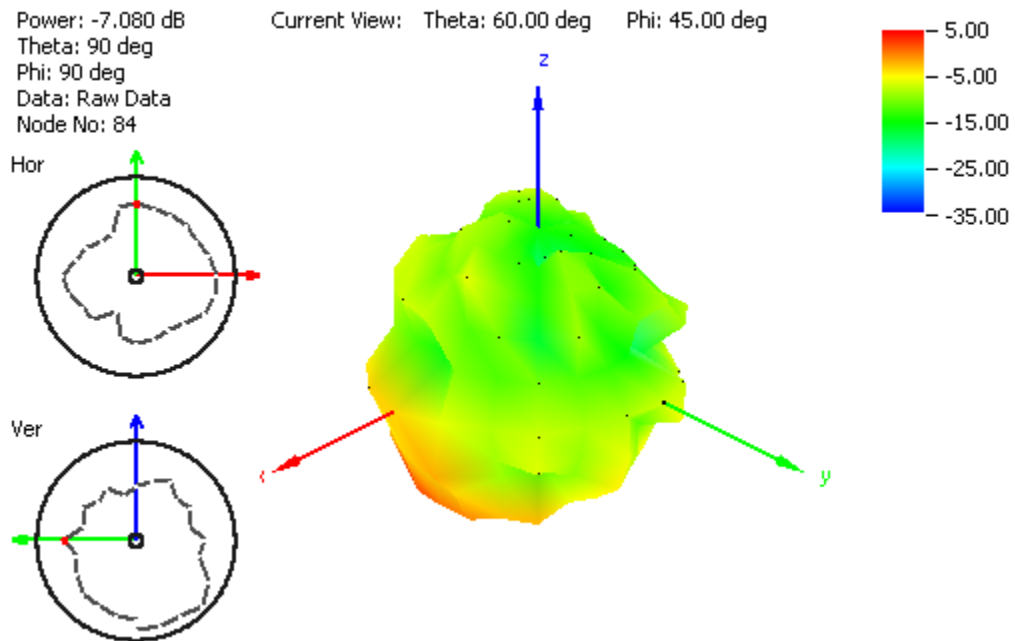


**Figure 15.** Radiation pattern at 2110 MHz, Figure 1 as reference (dB), with 2m RG174 cable and free space.

## 5.2 Radiation Patterns (30\*30cm Ground Plane)

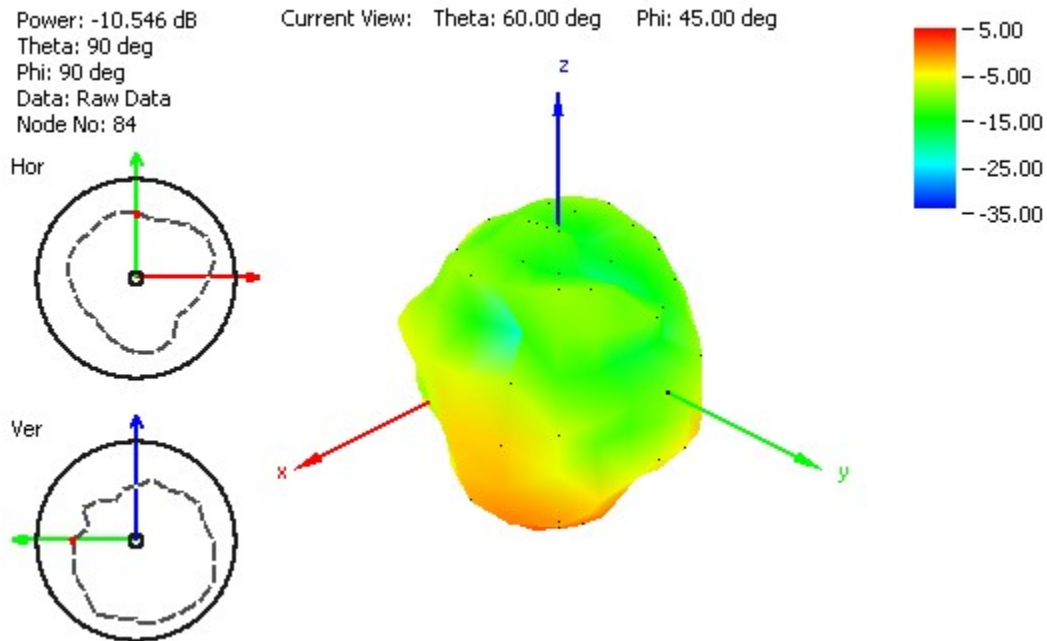


**Figure 16.** Radiation pattern at 849 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.

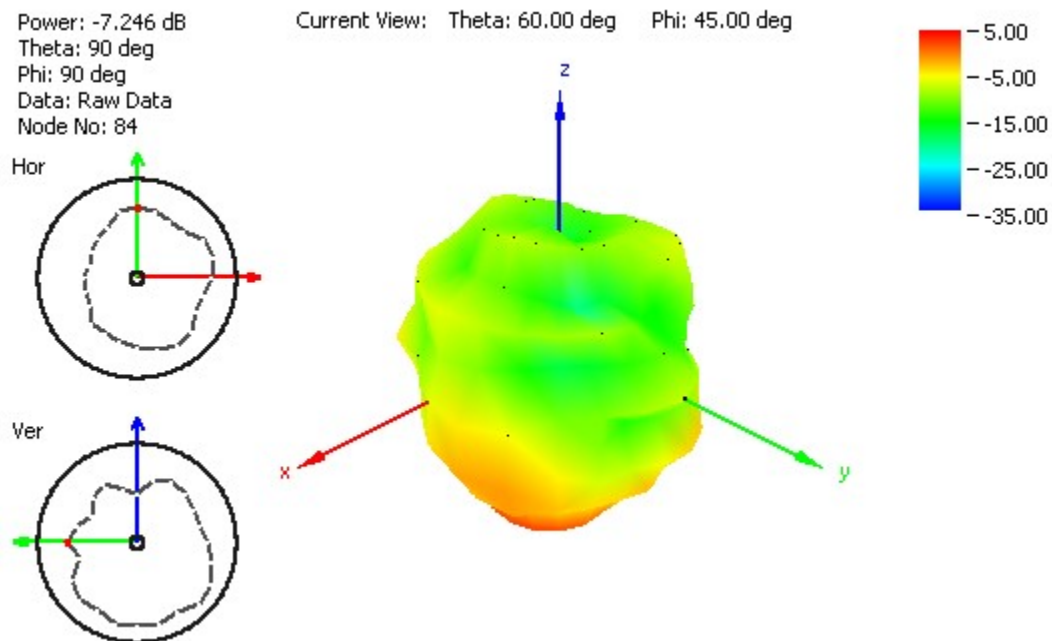


**Figure 17.** Radiation pattern at 915 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.




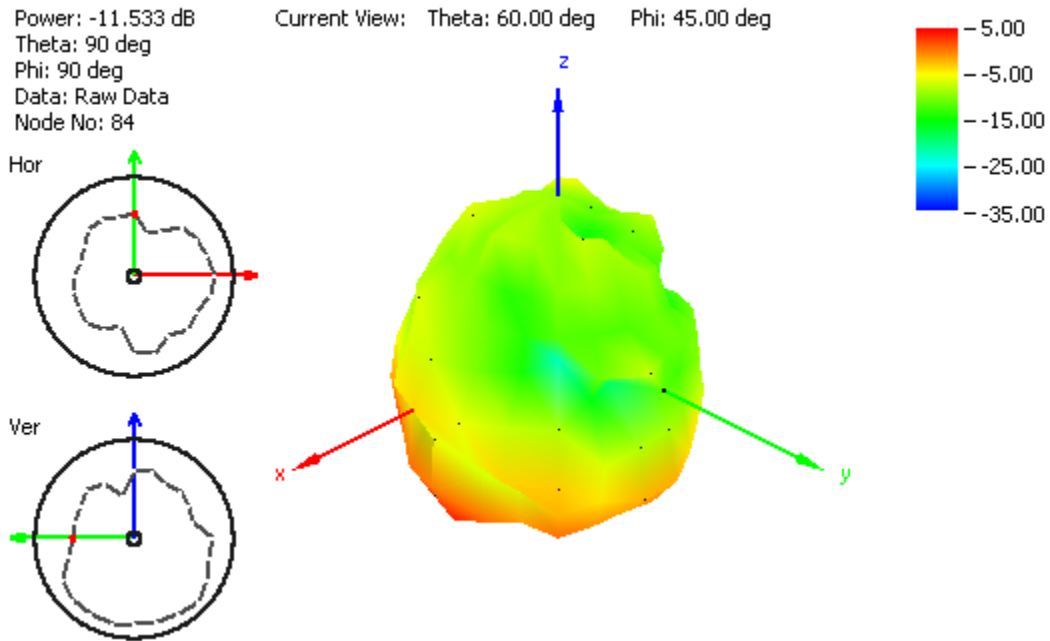

**Figure 18.** Radiation pattern at 1805 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.

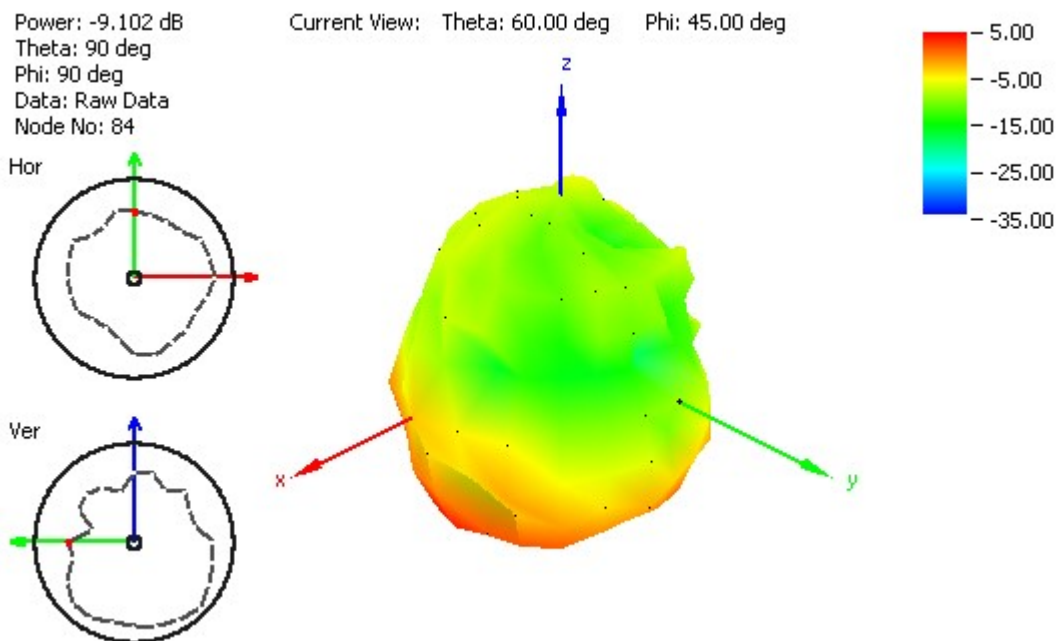


**Figure 19.** Radiation pattern at 1910 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.

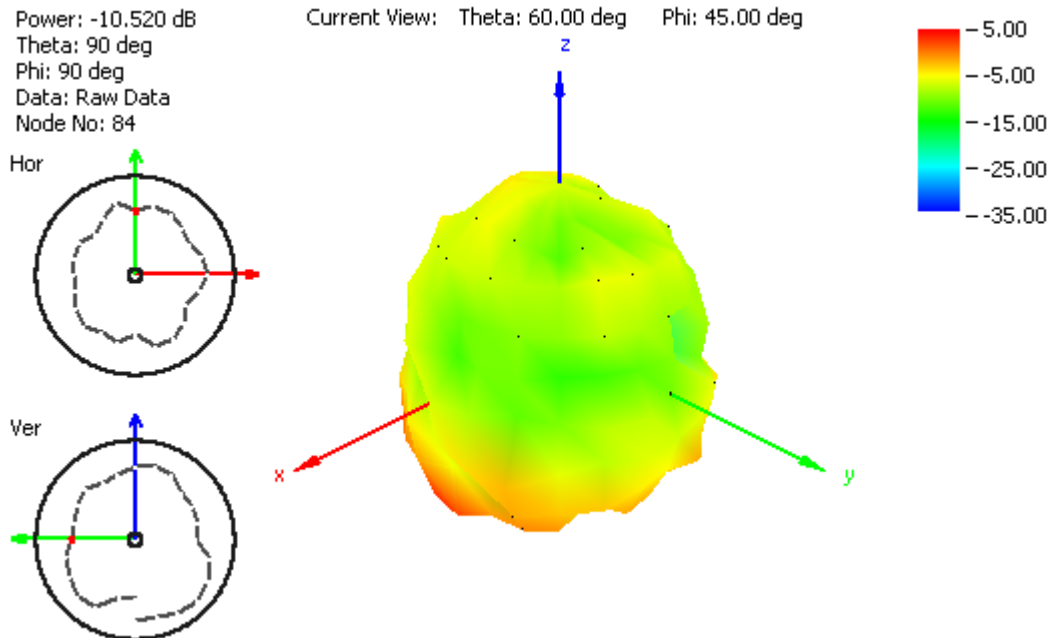


**Figure 20.** Radiation pattern at 2110 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 30x30 cm metal plate.


### 5.3 Radiation Patterns (60\*60cm Ground Plane)

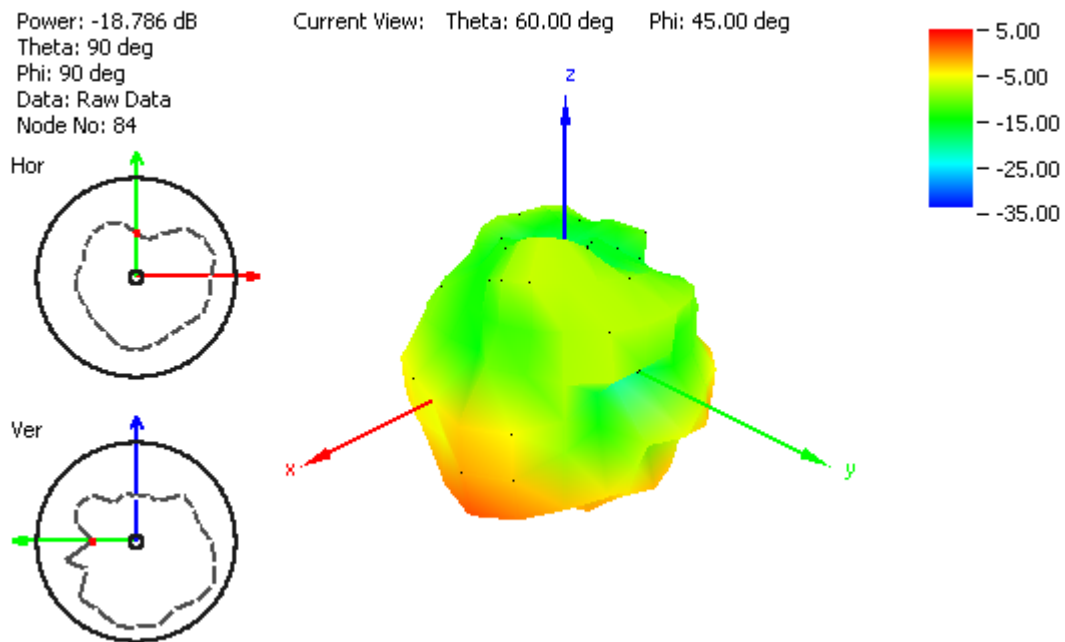


**Figure 21.** Radiation pattern at 849 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

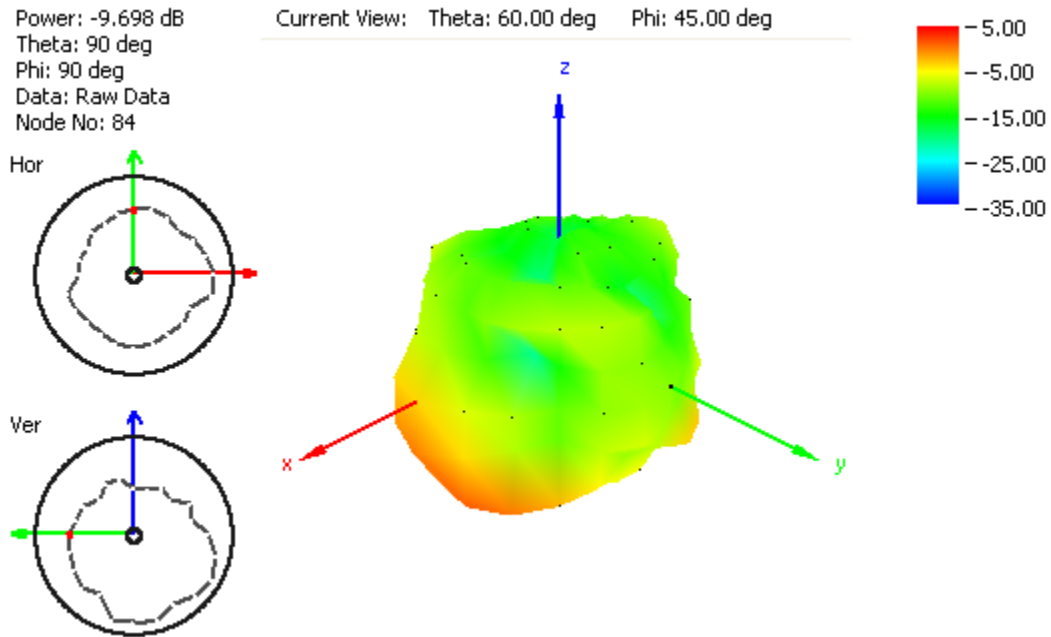


**Figure 22.** Radiation pattern at 915 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

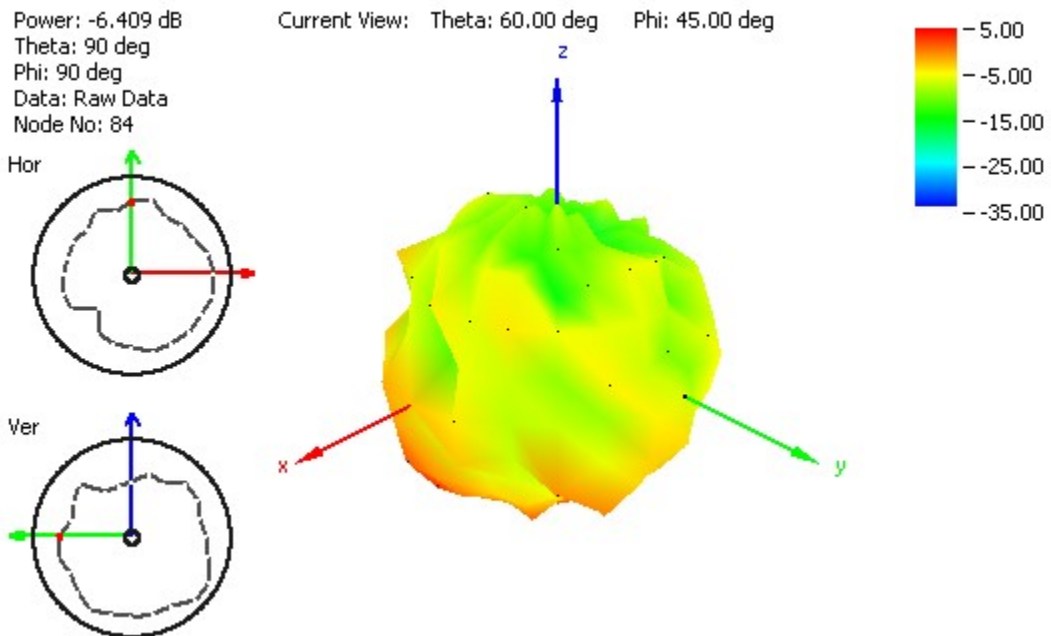

**Figure 23.** Radiation pattern at 1805 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

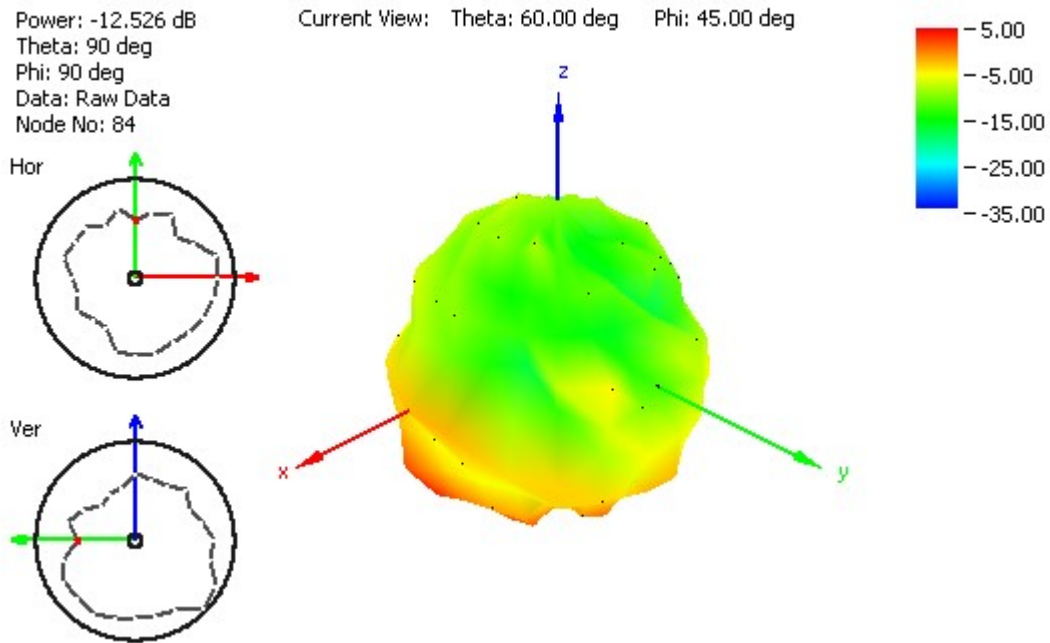


**Figure 24.** Radiation pattern at 1910 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.

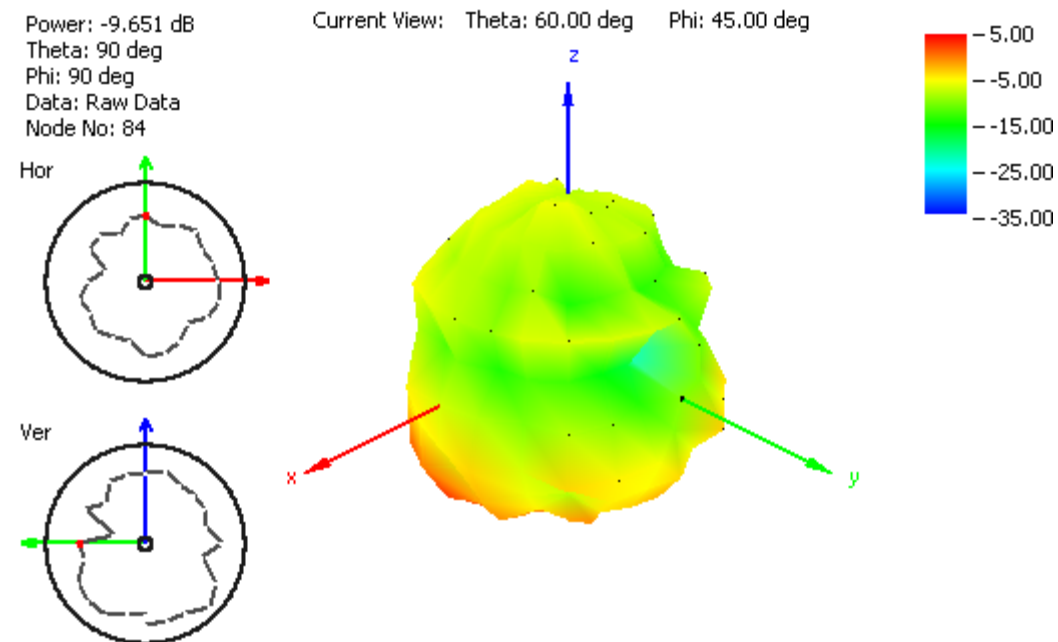

**Figure 25.** Radiation pattern at 2110 MHz, Figure 1 as reference (dB), with 2m RG174 cable and 60x60 cm metal plate.




## 6. MECHANICAL DRAWINGS

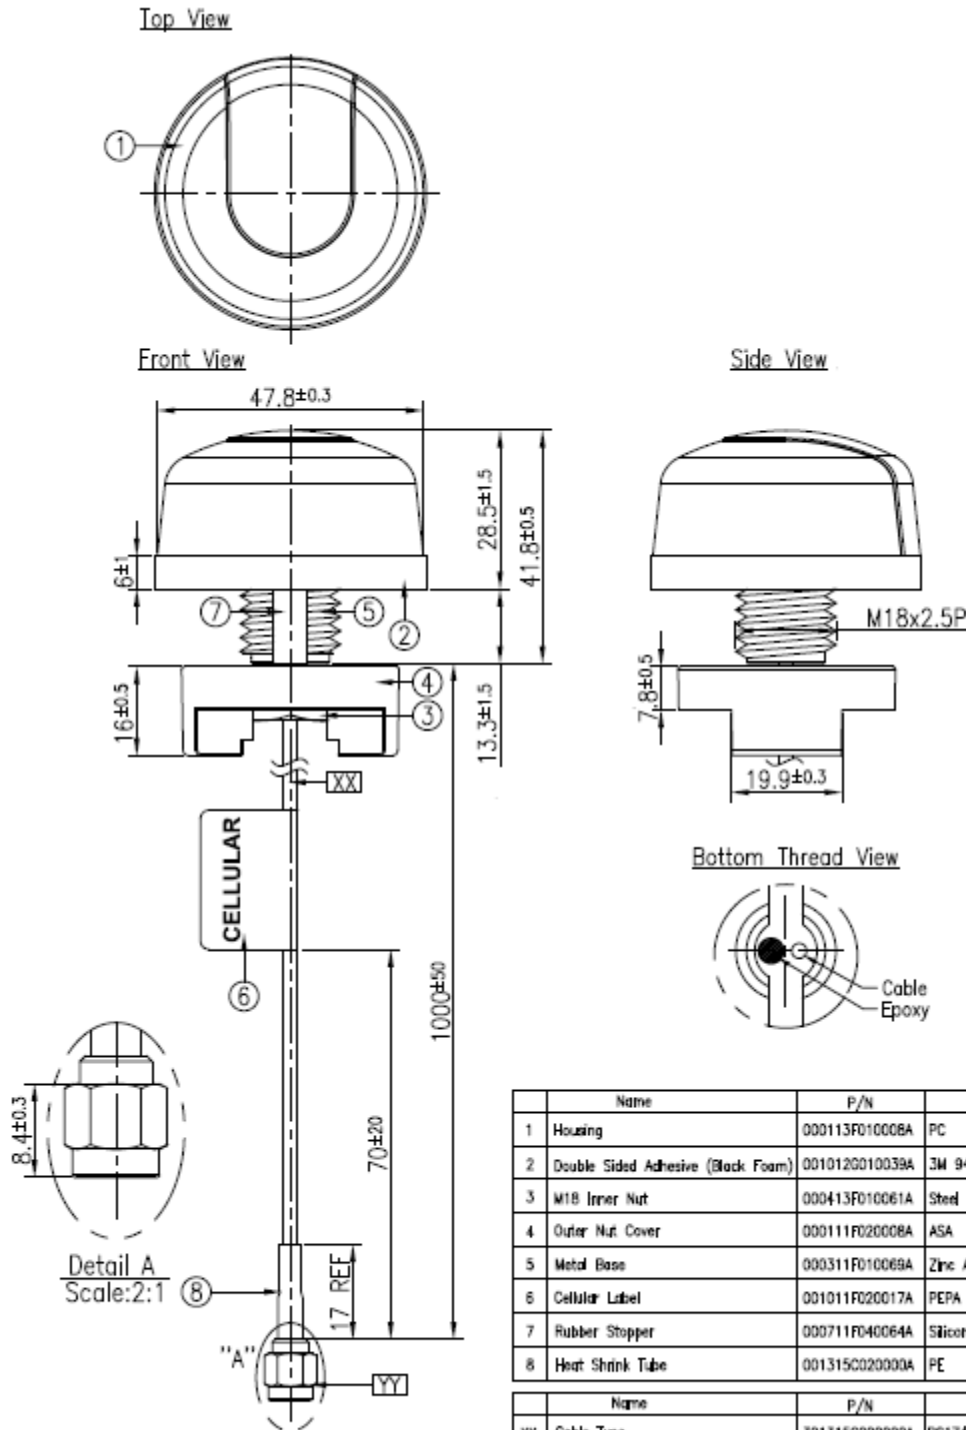

Name	P/N	Material	Finish	QTY
1 Housing	000113F010008A	PC	Black	1
2 Double Sided Adhesive (Black Foam)	0010120010039A	3M 9448BK+CR4305	White Liner	1
3 M18 Inner Nut	000413F010061A	Steel Carbon	Zn Plated	1
4 Outer Nut Cover	000111F020008A	ASA	Black	1
5 Metal Base	000311F010069A	Zinc Alloy	Ni Plated	1
6 Cellular Label	001011F020017A	PEPA	Blue	1
7 Rubber Stopper	000711F040064A	Silicone Rubber	Black	1
8 Heat Shrink Tube	001315C020000A	PE	Black	1

Name	P/N	Spec	Finish	QTY
XX Cable Type	301315C000000A	RG174	Black	1
YY Connector Type	200212C000013A	SMA(M)5T	Au Plated	1

## 7. Installation

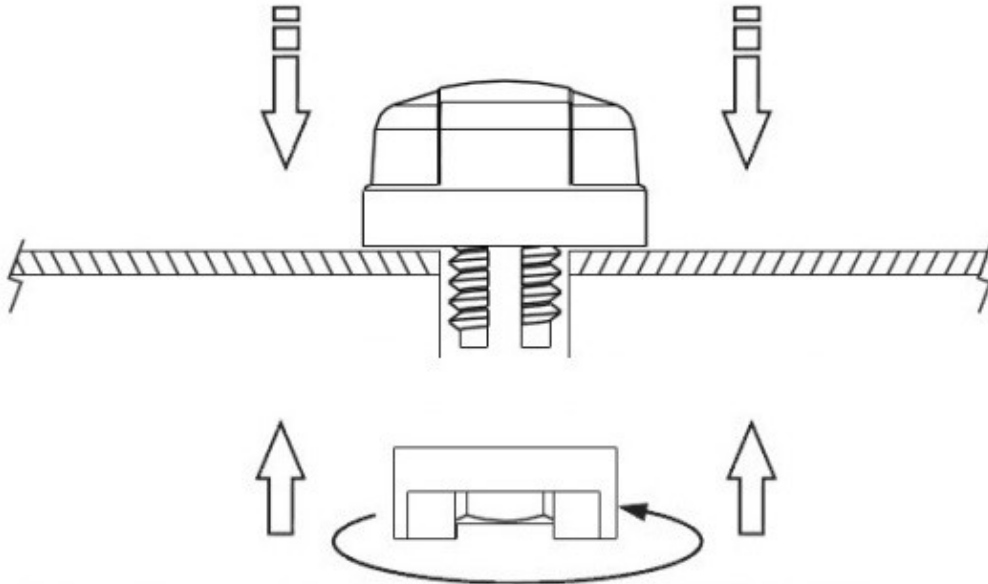

Recommended torque for Mounting is 24.5N·m  
Maximum torque for mounting is 29.4N·m




## 8. Packaging


1 G21.B.301111 per PE bag  
Small bag dimensions - 300\*100mm  
10 pcs per big bag  
Big bag dimensions 280\*450mm



100 PE bags per carton  
Carton Dimensions - 320\*250\*230mm

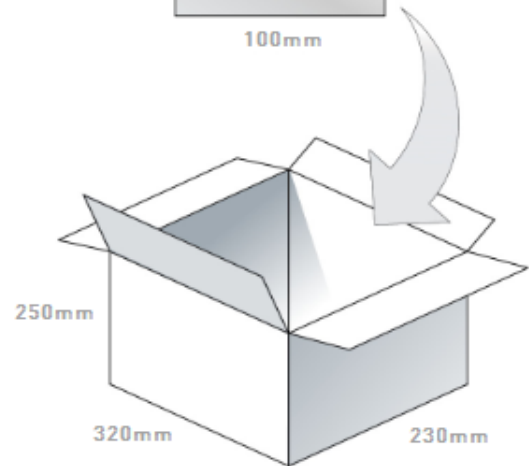

Pallet Dimensions 1200\*1200\*1500mm  
60 Cartons per pallet  
12 Cartons per layer  
5 Layers

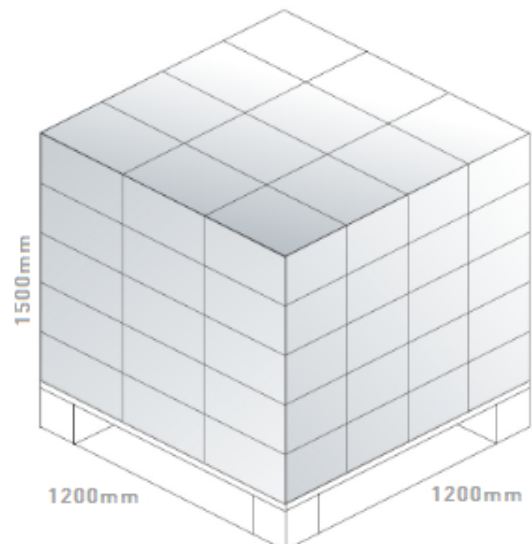



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.