

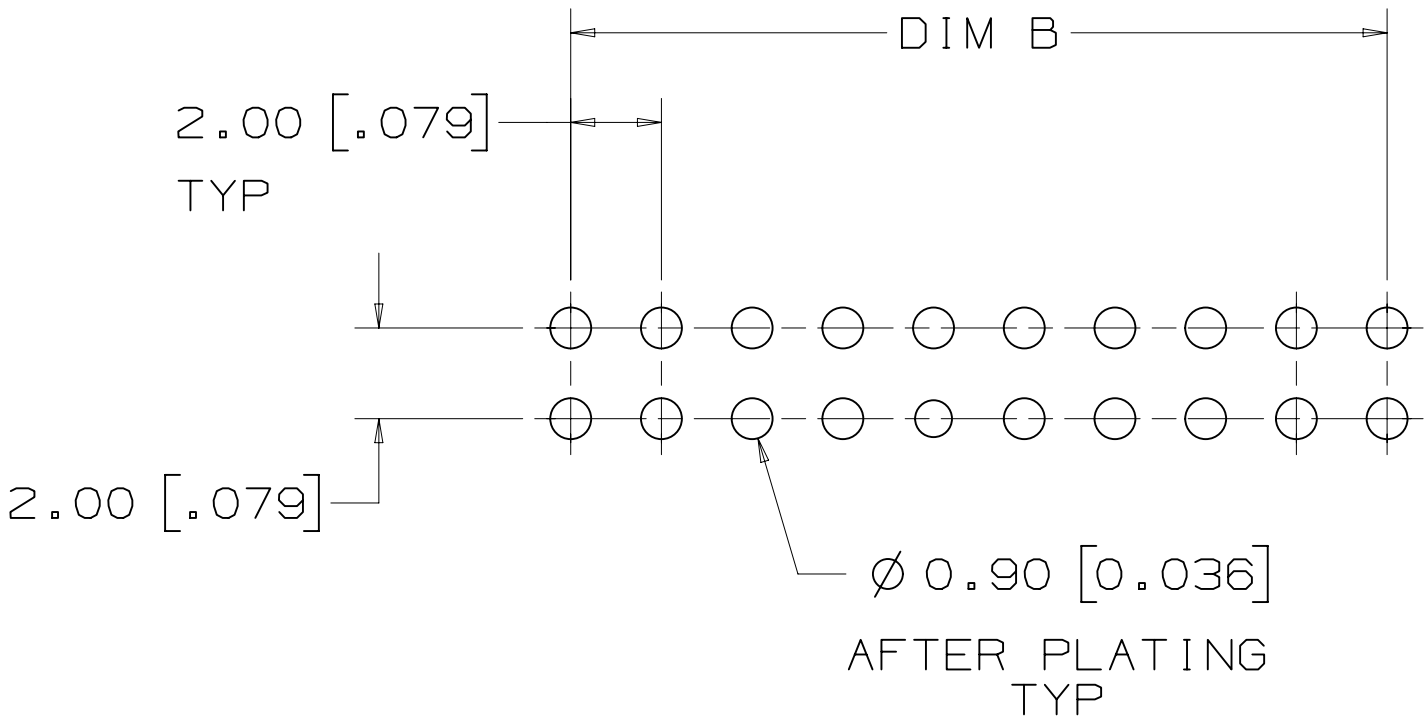
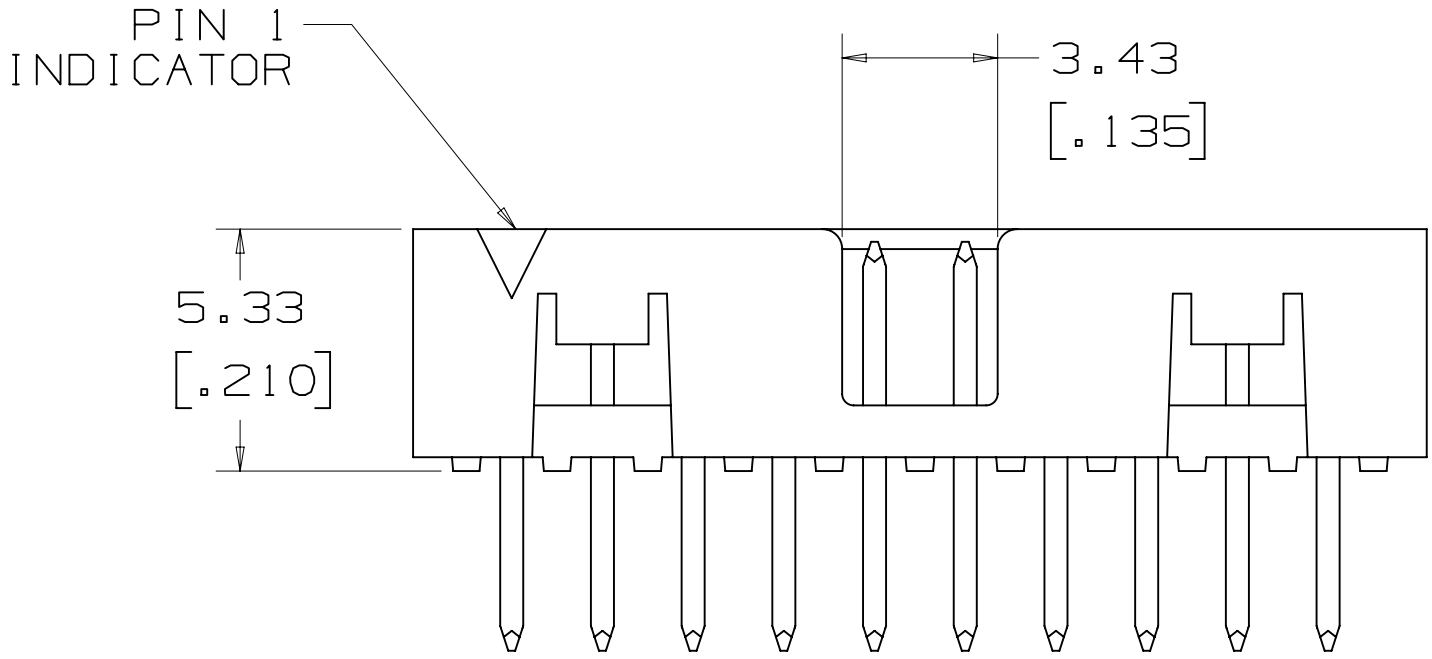
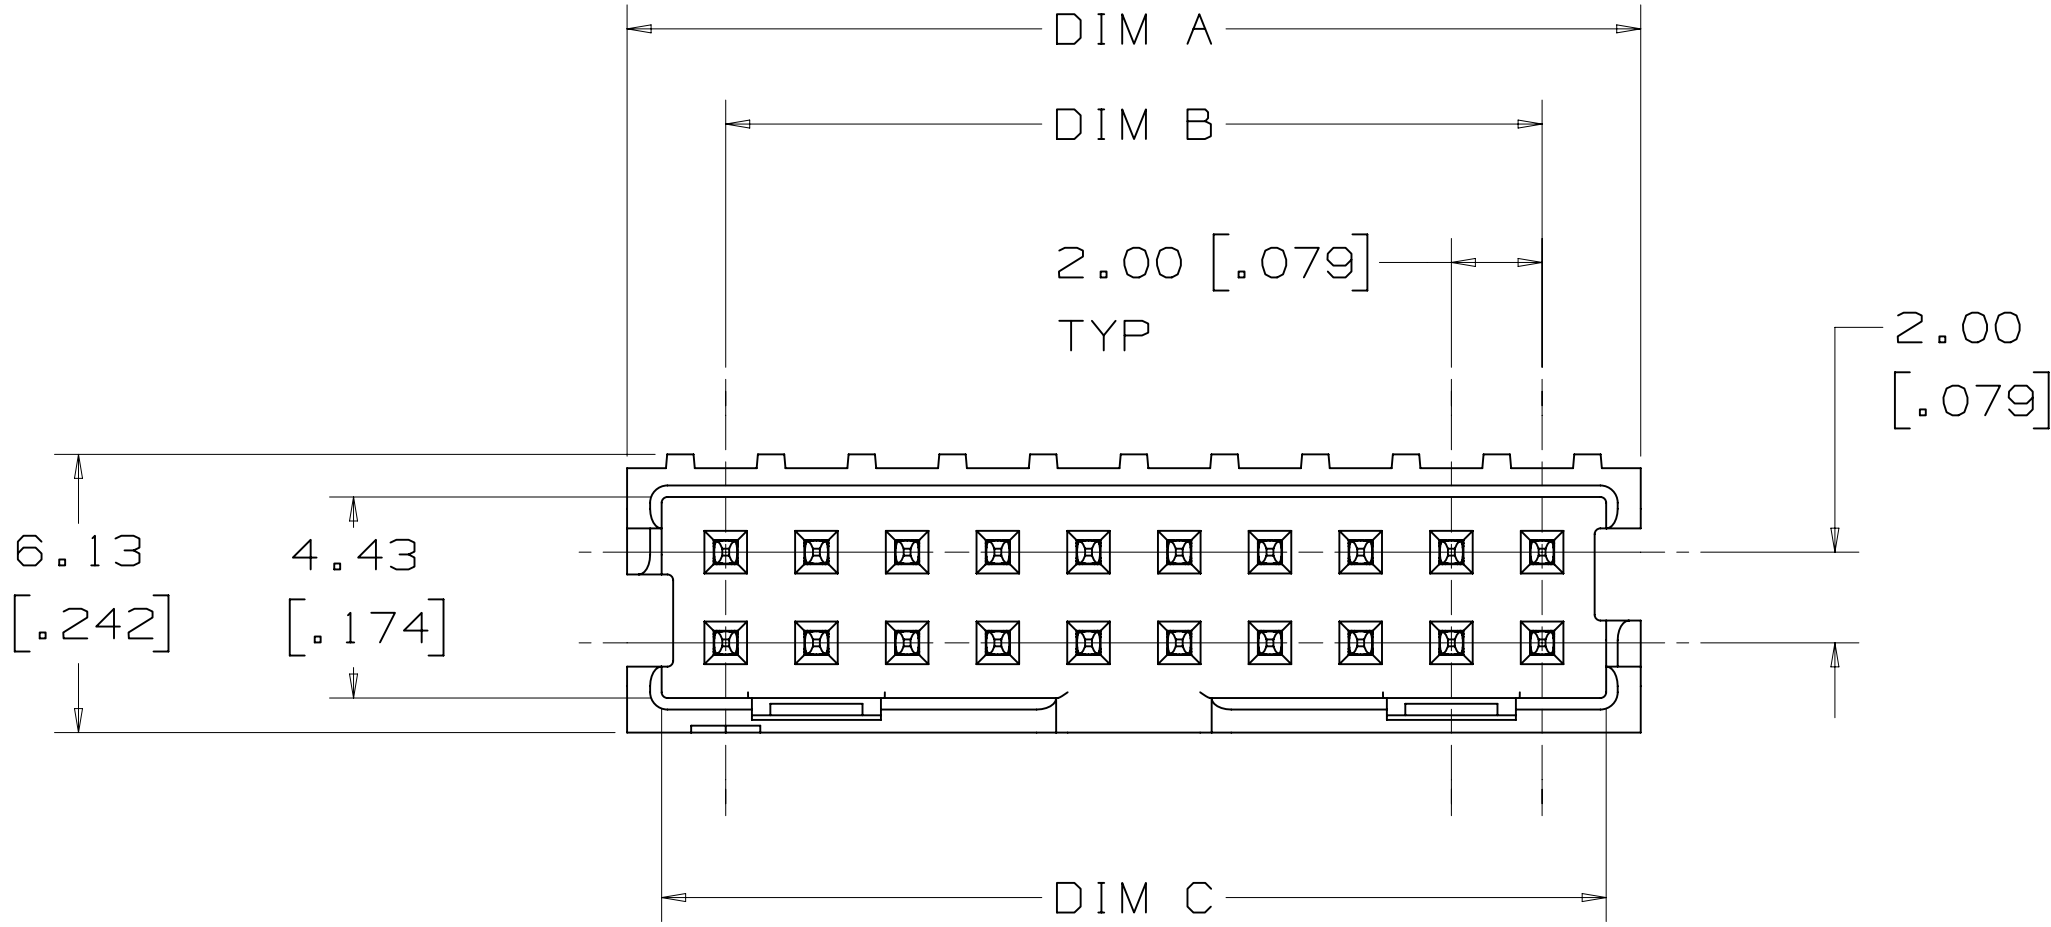
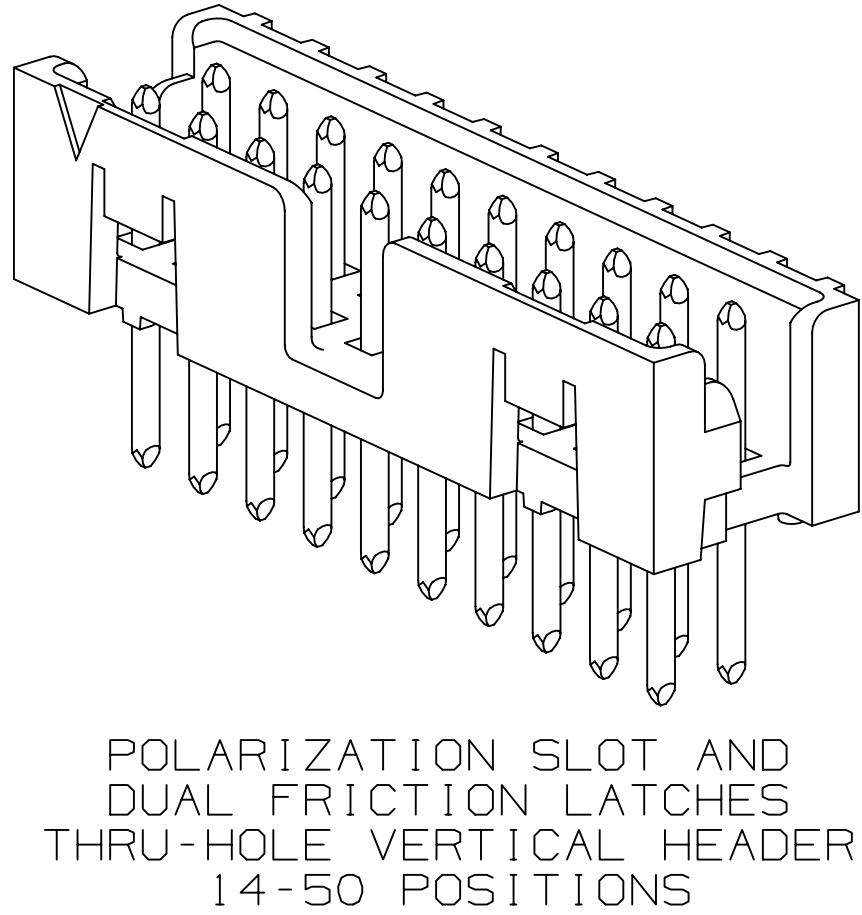
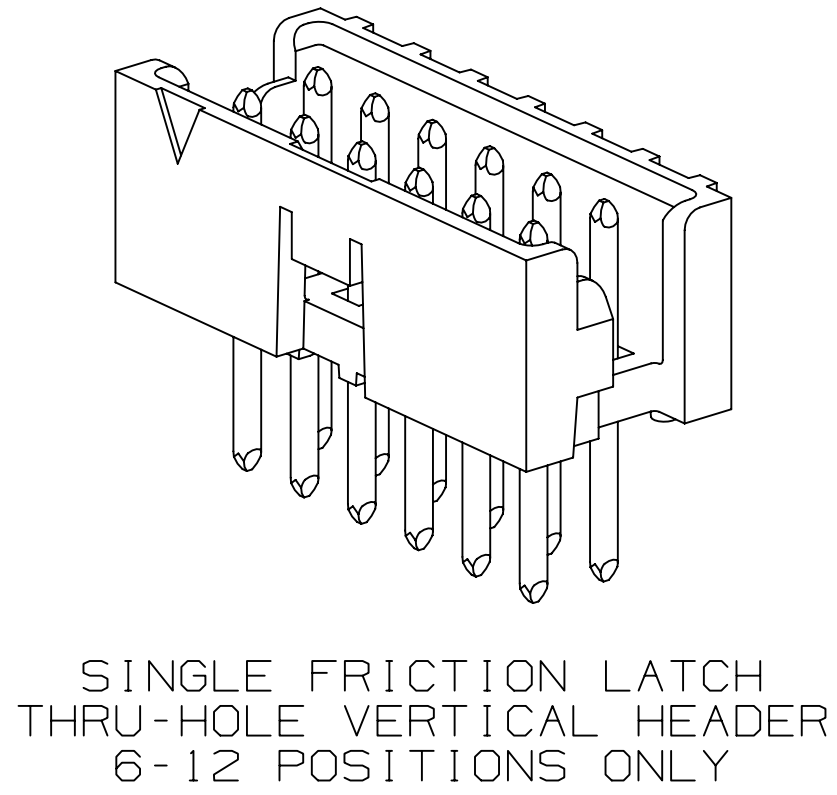


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

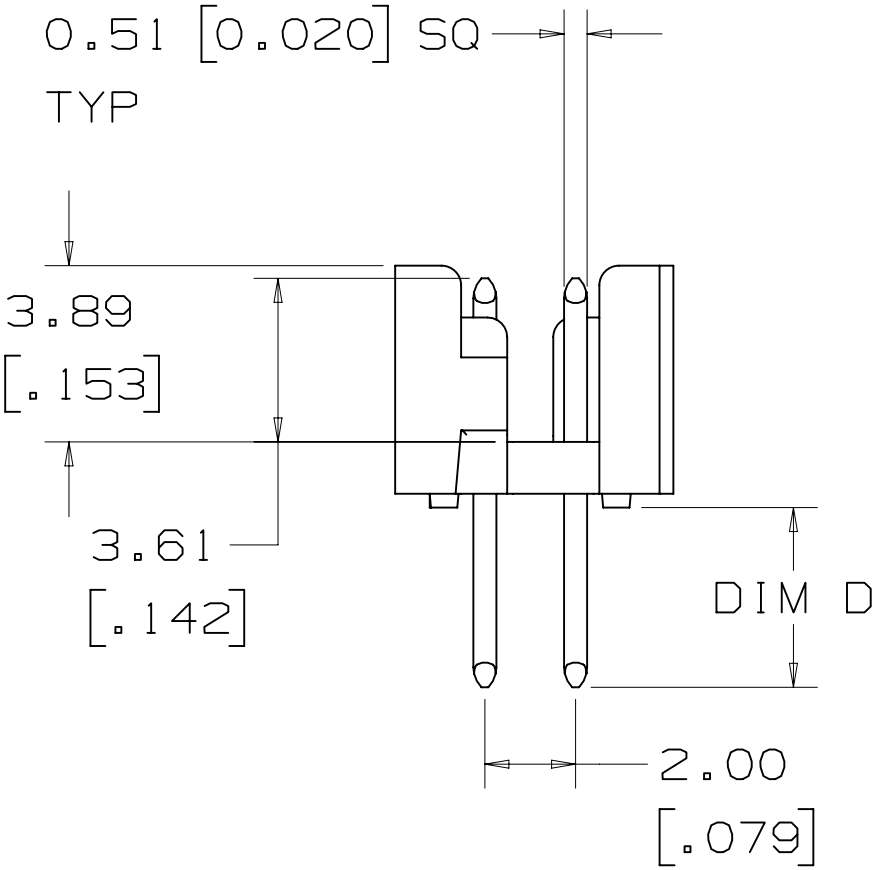

RECOMMENDED PCB HOLE PATTERN
TOLERANCE = 0.05 [.002]

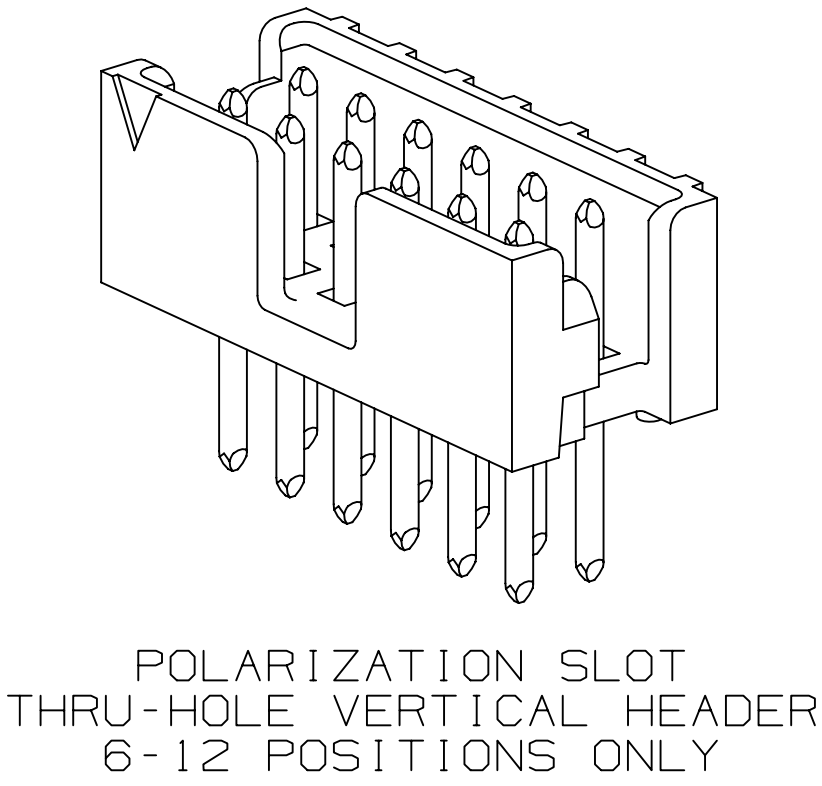

PERFORMANCE [5] [7]

CURRENT:	1A, 6 LINES ENERGIZED
INSULATION RESISTANCE:	>1 X 10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	500 VACrms AT SEA LEVEL
TEMPERATURE RATING:	-55° C TO +105° C
SOLDER PROCESS TEMPERATURE:	260° C MAX PER IPC/JEDEC J-STD-020D





REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS

METRIC [ENGLISH]


- NOTES
- MATERIAL:
BODY: HIGH TEMPERATURE GLASS FILLED LCP, BLACK UL94V-0
CONTACTS: COPPER ALLOY
 - PLATING:
2.03-3.81 μm [80-150 μin] NICKEL UNDERPLATE.
0.38 μm [15 μin] OR 0.76 μm [30 μin] AVG GOLD ON WIPING AREA.
5.08 μm [200 μin] MIN MATTE TIN ON SOLDER TAILS.
 - STANDARD LENGTH HEADERS MATE WITH 3M™ SOCKETS, 158 SERIES (REFERENCE 3M DRAWING 78-5100-2358-9).
 - EXTENDED LENGTH HEADERS MATE WITH 3M™ SOCKETS, 870 SERIES.
 - FOR PRODUCT SPECIFICATIONS AND WARRANTY INFORMATION SEE 3M 78-5102-0078-1.
 - SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "RoHS COMPLIANCE" SECTION OF WWW.3MCONNECTOR.COM FOR COMPLIANCE INFORMATION (RIA E1 & C1 APPLY).
 - IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPECIFICATION, THE PRODUCT SPECIFICATION TAKES PRECEDENT.

DESIGN REFERENCE		NEXT ASSEMBLY		A 30741		OCT 28, 2010		LDS	SF
DISTRIBUTION CODES		REV		ECO	INITIAL RELEASE				
DIVISION		DATE		DATE		DATE		DATE	
DO NOT SCALE DRAWING		L. SCHMIDT		JUL 29, 2010		MFG		APPROVAL	
THIRD ANGLE PROJECTION		CHKD		DATE		S FELDMAN		DATE	
INTERPRET PER ASME Y14.5 - 1994		DIVISION CODE		© 3M COPYRIGHT 2010		3M Center St. Paul, MN 55144		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	
MAX SURFACE ROUGHNESS 125 / ALL SURFACES		SCALE 1		TOLERANCES EXCEPT AS NOTED		TITLE		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES	
X MARKED ONLY		INCHES		MILLIMETERS		CAGE NUMBER		DRAWING NO.	
		0.00 ± 0.13		0 ± 0.00		D 78-5100-2359-7		REV.	
		0.00 ± 0.00		0.00 ± 0.00		MODEL		DET.	
		ANGLES ± 1°				LISTS		YES X NO	
						SHT		1 OF 4	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

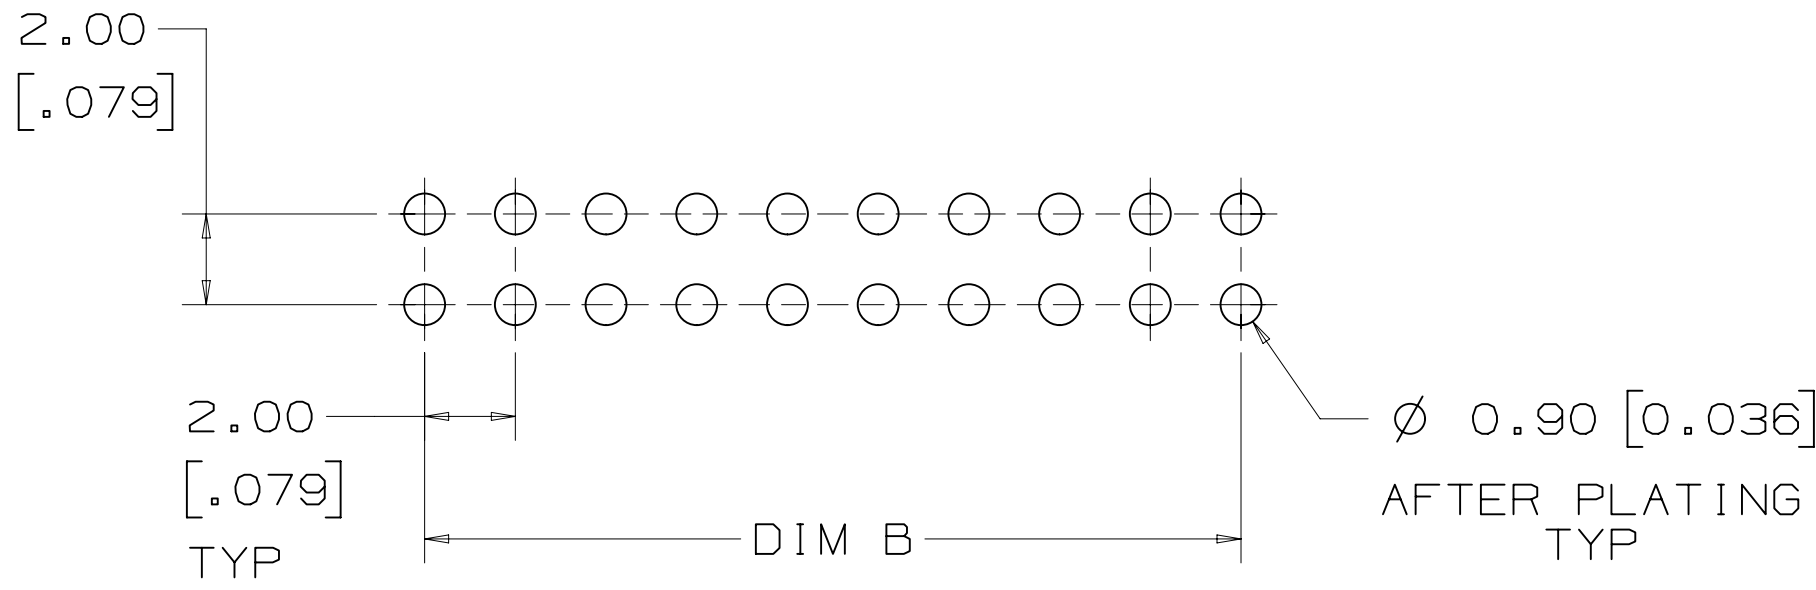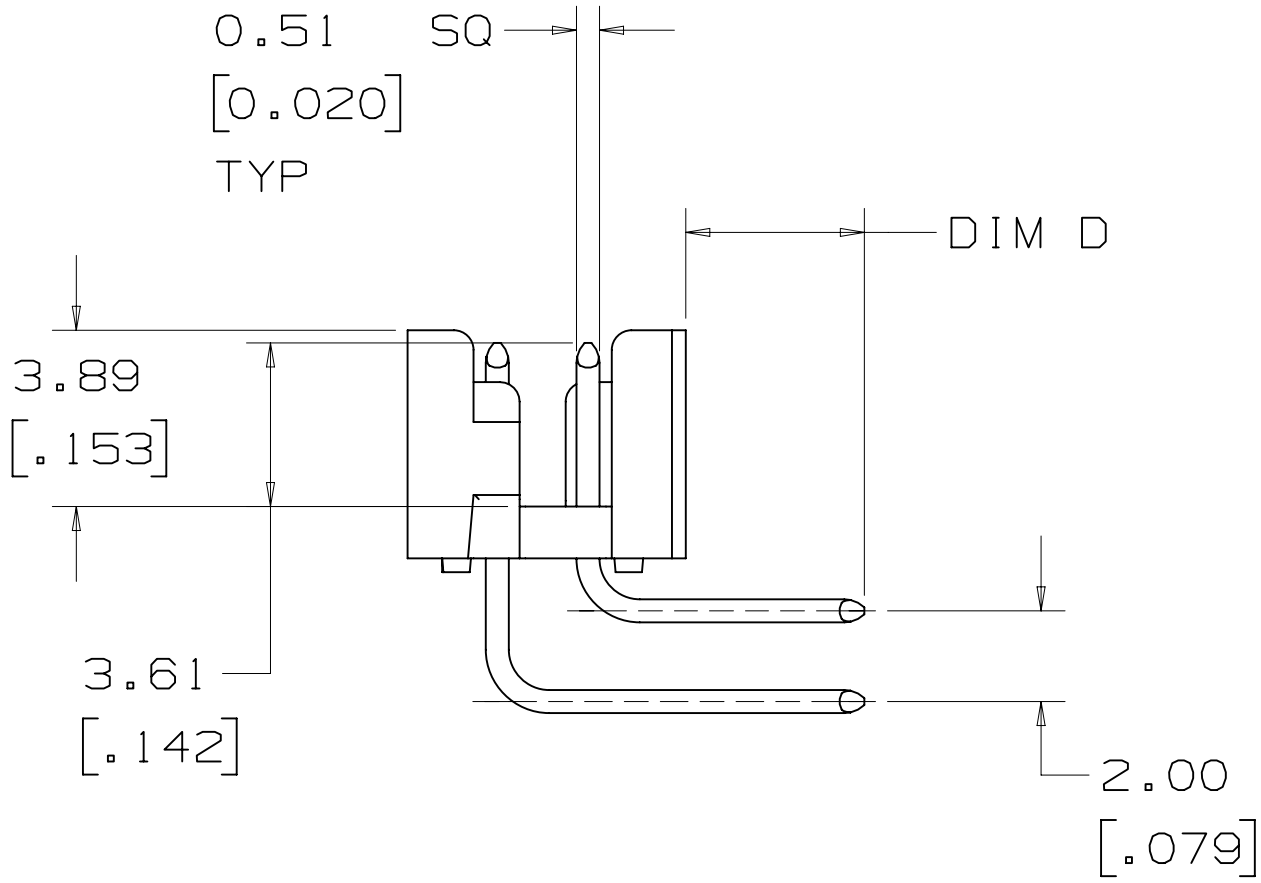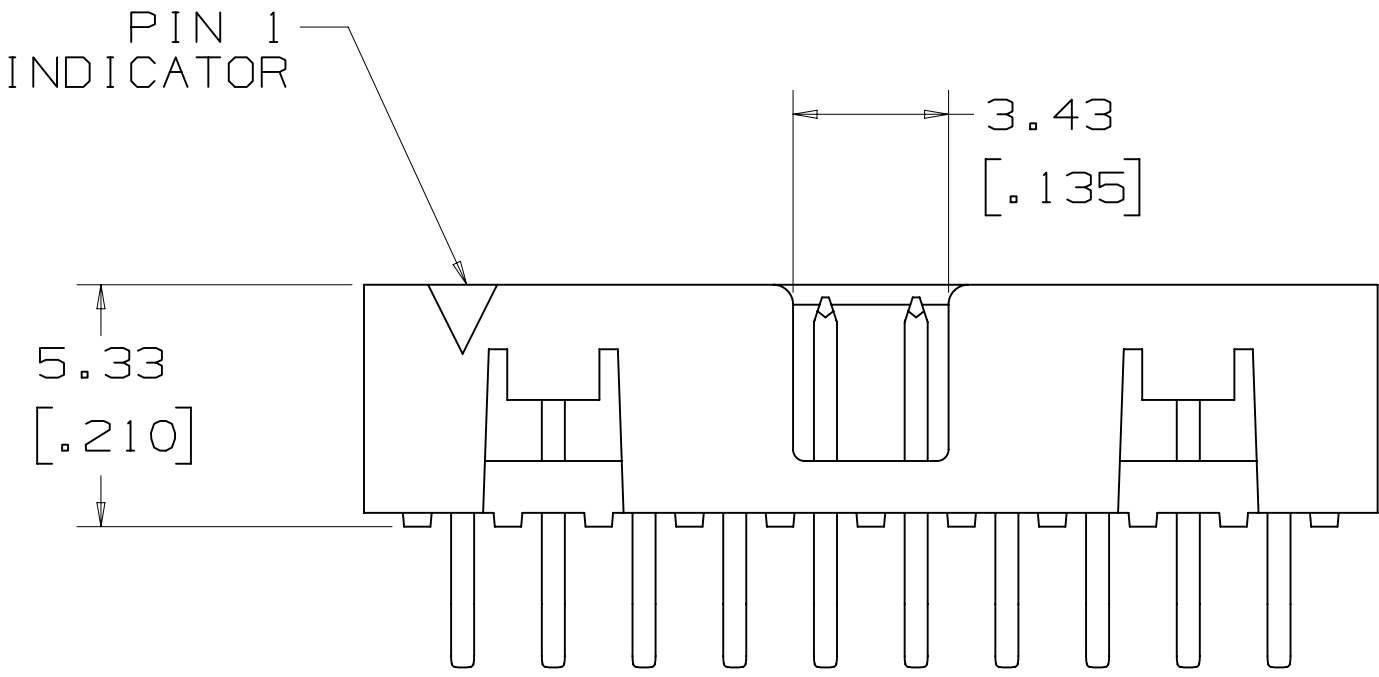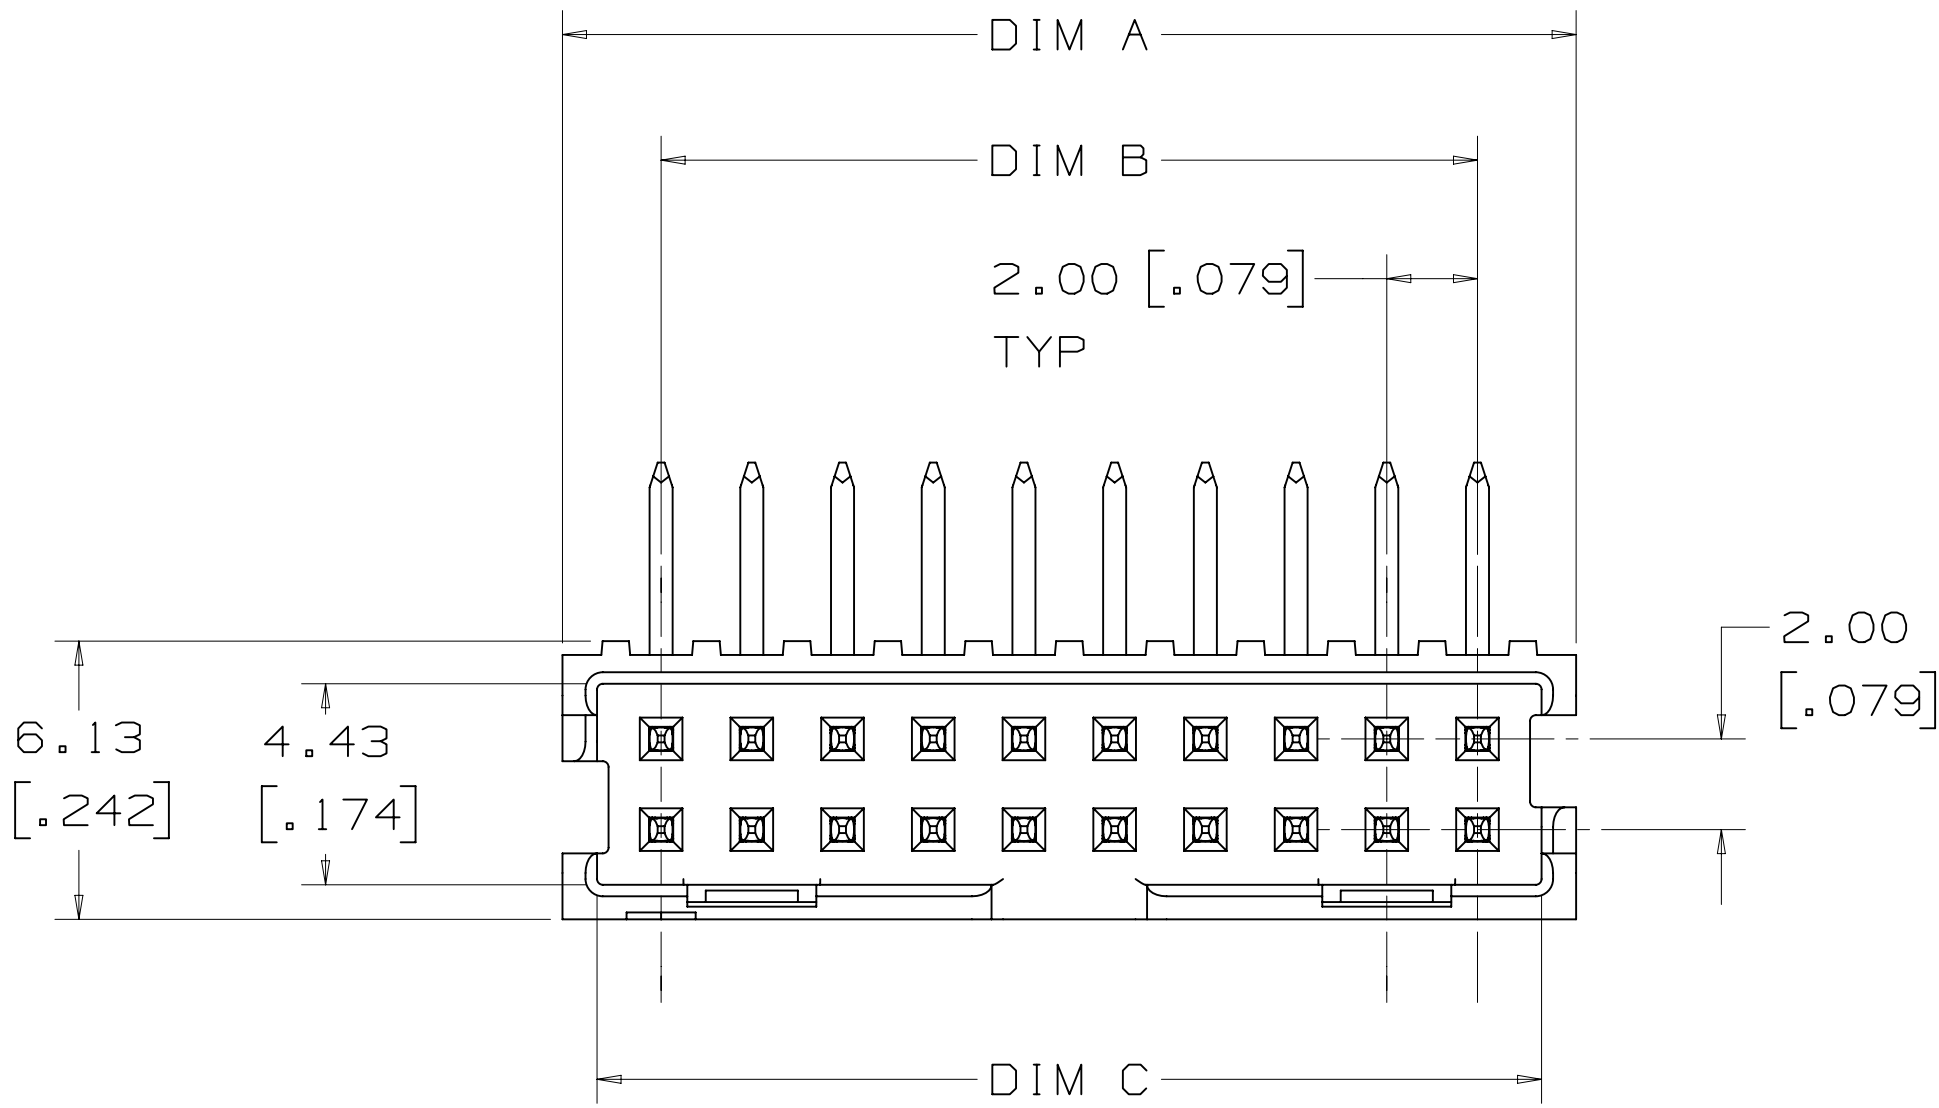


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = ±0.05 [.002]

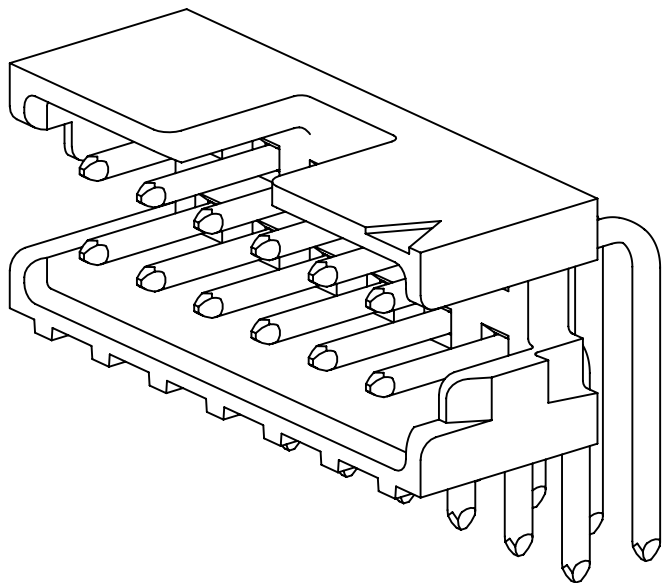

POLARIZATION SLOT
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

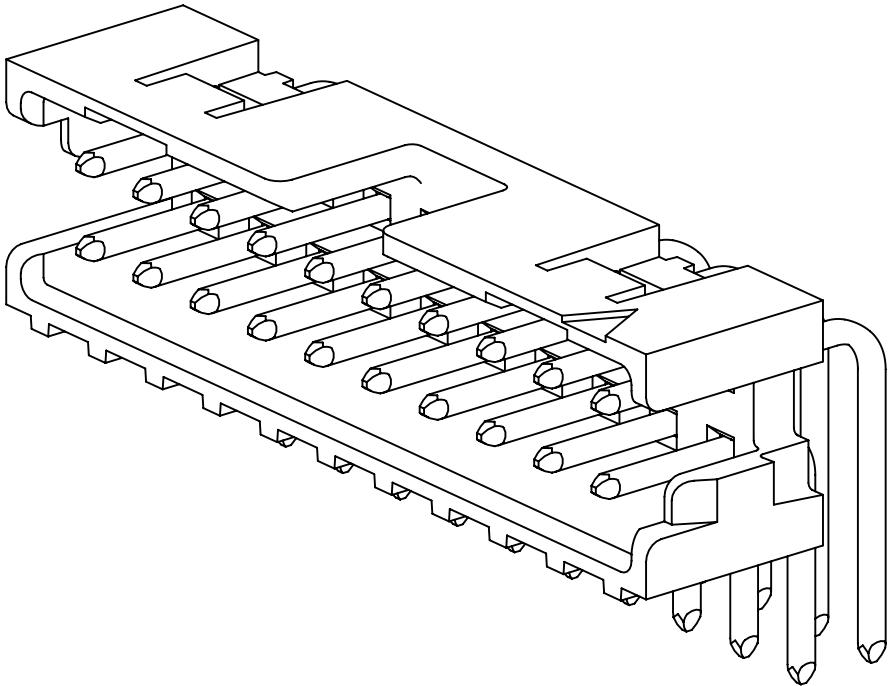

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
RIGHT ANGLE HEADER
14-50 POSITIONS

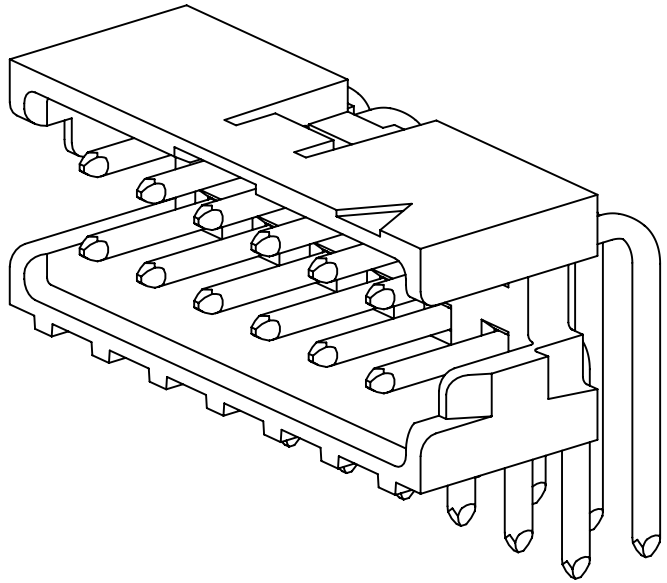





SINGLE FRICTION LATCH
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS


METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		DISTANCE		DRFT	ECO	DATE		DATE	DATE
L. SCHMIDT		JUL 29, 2010		DRFT	ECO	JUL 29, 2010		DATE	DATE
DIVISION		DIVISION CODE		CHKD	ECO	APPROVAL		DATE	DATE
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MAX SURFACE ROUGHNESS		125 / ALL SURFACES		MARKED ONLY	
ANGLES ±1°		ANGLES ±1°		CAGE NUMBER		DRAWING NO.		REV.	
125 / ALL SURFACES		125 / ALL SURFACES		D		78-5100-2359-7		A	
MODEL		MODEL		DET		YES		NO	
SHT 2 OF 4		SHT 2 OF 4		SHT 2 OF 4		SHT 2 OF 4		SHT 2 OF 4	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length and Extended Length

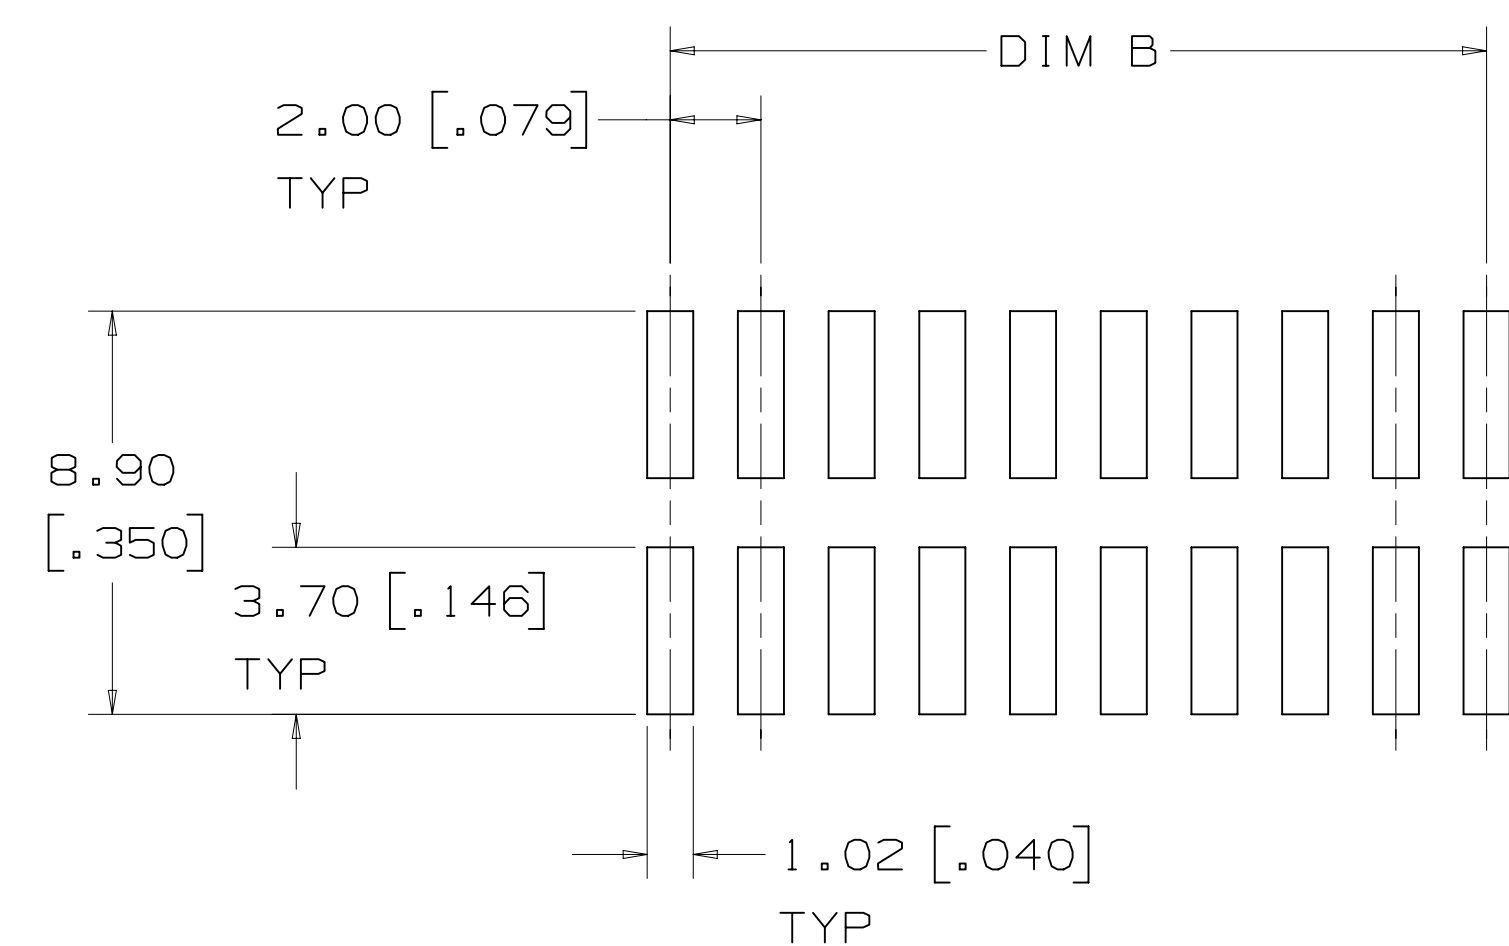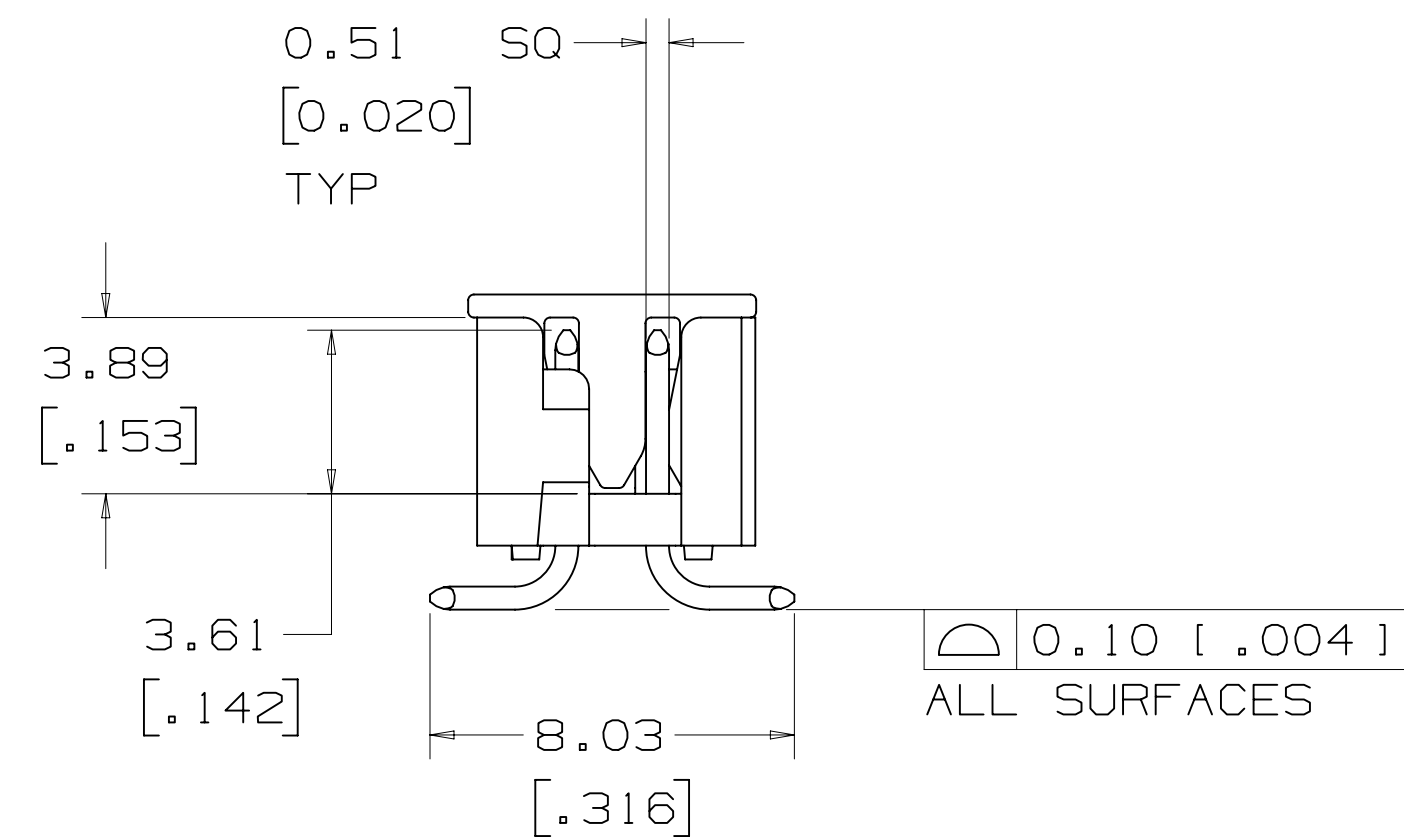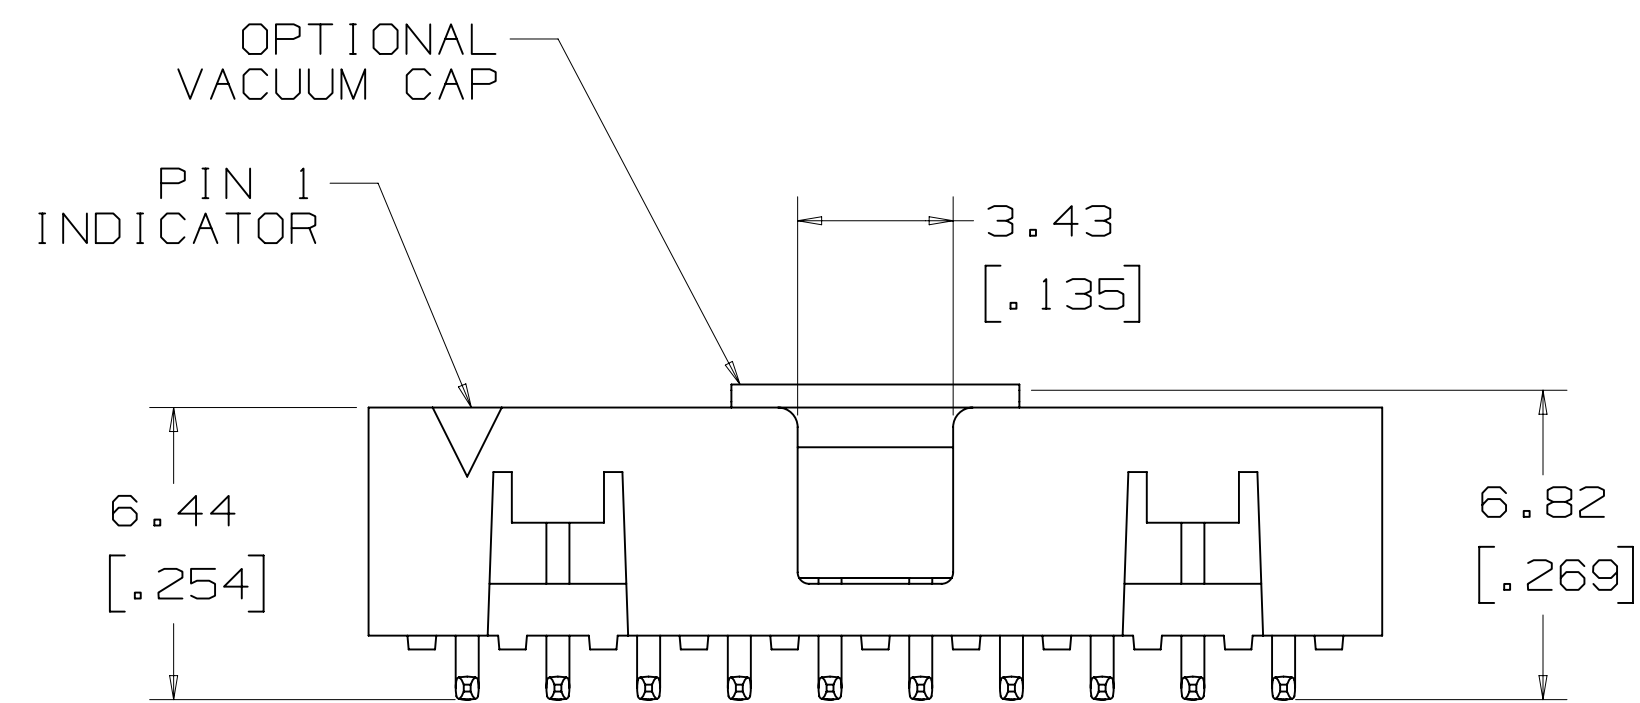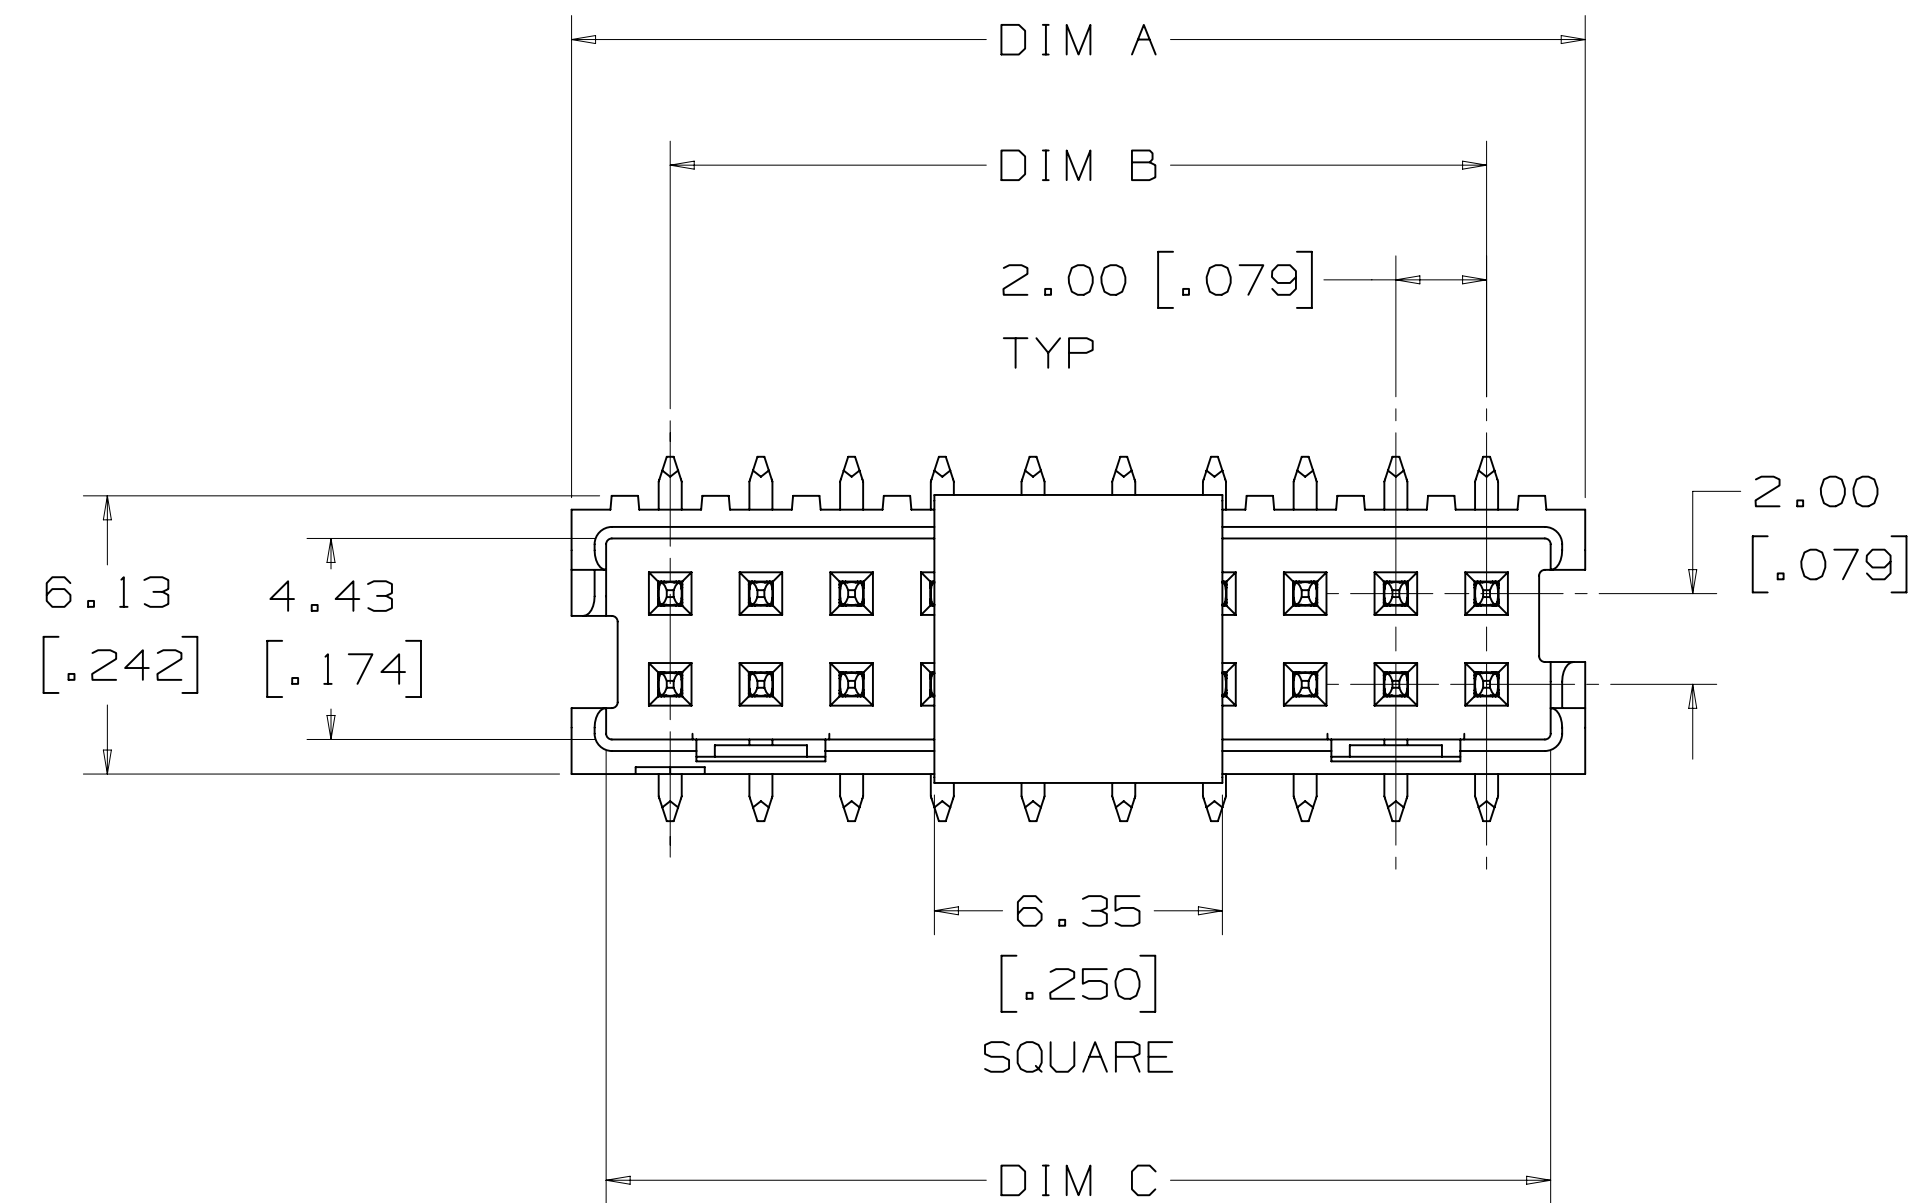


RECOMMENDED PCB PAD PATTERN
TOLERANCE = ± 0.08 [.003]

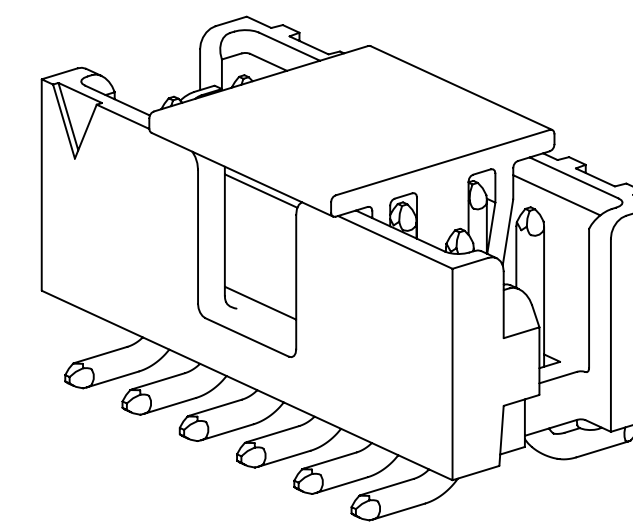

POLARIZATION SLOT
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY

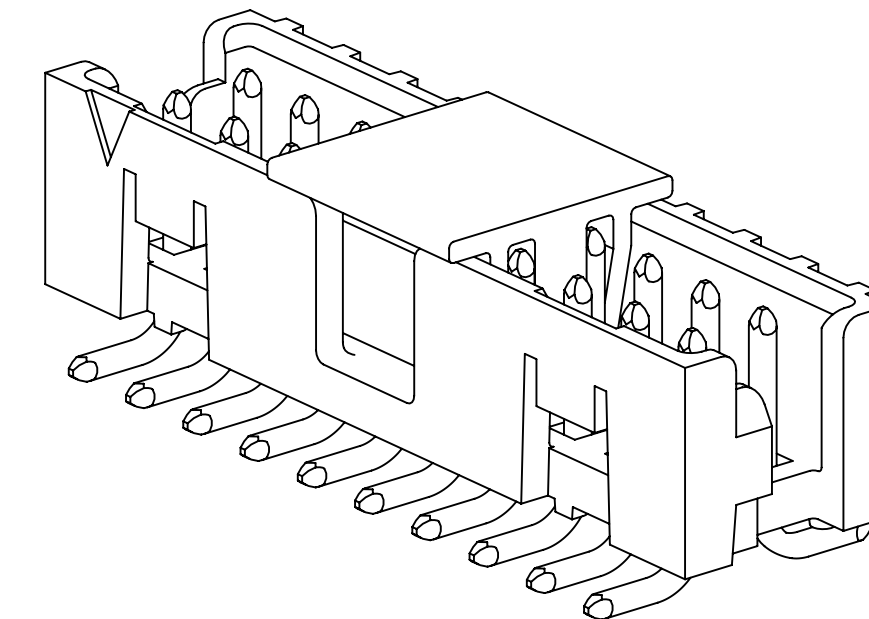



POLARIZATION SLOT AND
DUAL FRICTION LATCHES
SURFACE MOUNT HEADER
14-50 POSITIONS

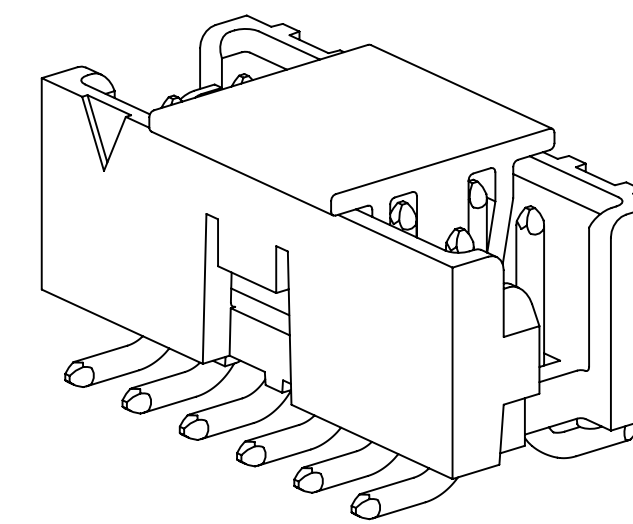

SINGLE FRICTION LATCH
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY


REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS

METRIC [ENGLISH]

				A 30741		OCT 28, 2010		LDS		SF	
				INITIAL RELEASE							
DESIGN REFERENCE				NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
BTSBTR-LEVEL CODES						DRW L	SCHMIDT		DATE JUL 29, 2010	WFO	DATE
						CHKD			DATE	APPROV S FELDMAN	DATE AUG 09, 2010
DIVISION				DIVISION CODE		© 3M COPYRIGHT 2010 3M Center St. Paul, MN 55144 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission or used or disclosed other than for 3M authorized purposes. All rights reserved.					
DO NOT SCALE DRAWING		SCALE 4 1		TOLERANCES EXCEPT AS NOTED							
						INCHES .0 ± .00 ± .009 ± .000 ±		TITLE 3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES			
THIRD ANGLE PROJECTION INTERPRET PER ASME Y14.5 - 1994				MILLIMETERS 0 ± 0.00 ± 0.03 ± 0.00 ±		CASE NUMBER SIZE D 78-5100-2359-7		REV. A			
MAX SURFACE ROUGHNESS 125 ☐ ALL SURFACES ☒ MARKED ONLY				ANGLES ± 1 °		MODEL		DET. LISTS ☐ YES ☒ NO SHT 3 OF 4			


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length 3

STANDARD LENGTH HEADERS
ARE AVAILABLE

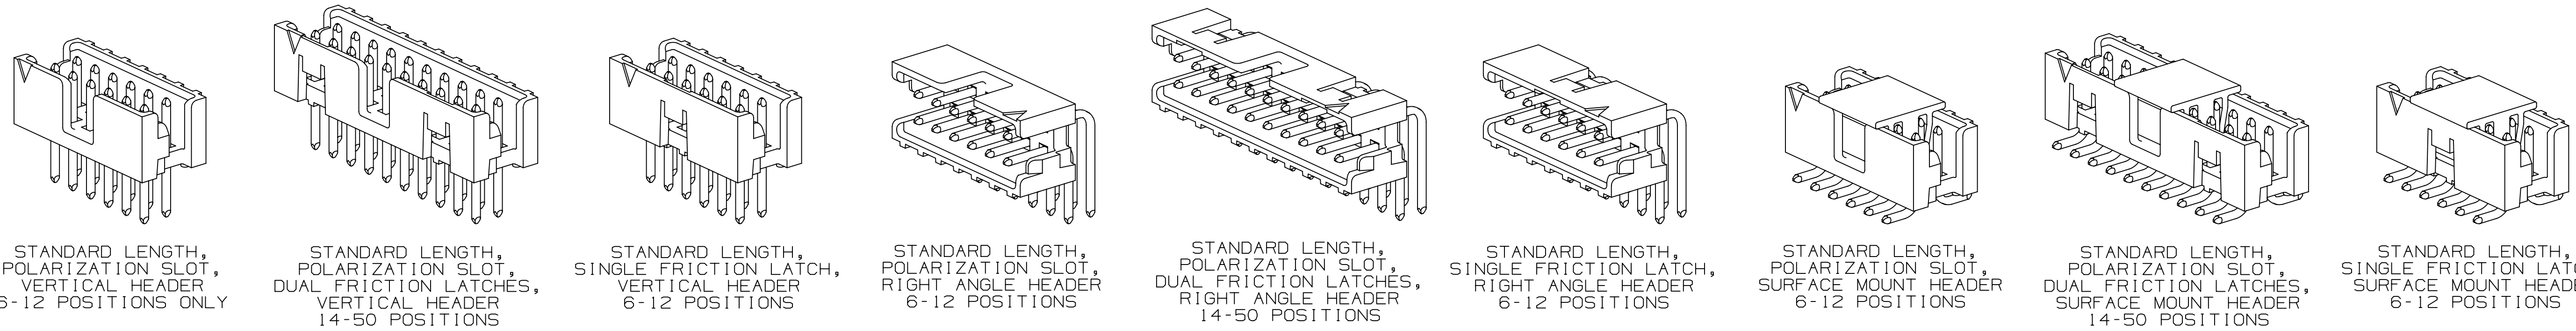

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Extended Length 4

CALL 3M INTERCONNECT SOLUTIONS
AT 800-225-5373 FOR AVAILABILITY
OF EXTENDED LENGTH HEADERS

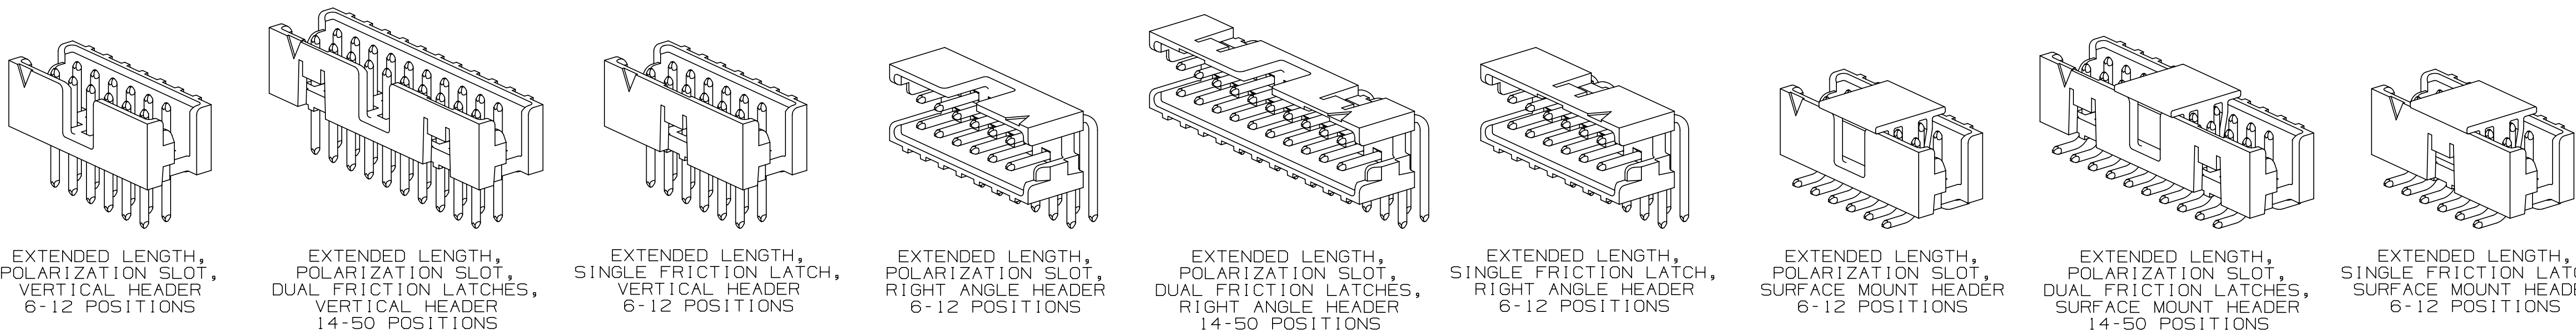

ORDERING INFORMATION

TIER 1 - BEST
1591XX-XXXX

TIER 1 = BEST 0.76 μ m
[30 μ in] GOLD

POSITION COUNT (SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

TIER 2 - BETTER
1592XX-XXXX

TIER 2 = BETTER 0.38 μ m
[15 μ in] GOLD

POSITION COUNT (SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

NUMBER OF POSITIONS	SHROUDED BOX HEADER						
	DIM A		DIM B	DIM C		DIM D	
	STANDARD	EXTENDED		STANDARD	EXTENDED		
6	8.35 [.329]	9.52 [.375]	4.00 [.157]	6.83 [.269]	7.99 [.315]	2.84 [.112]	3.94 [.155]
8	10.35 [.407]	11.52 [.453]	6.00 [.236]	8.83 [.347]	9.99 [.393]	2.84 [.112]	3.94 [.155]
10	12.35 [.486]	13.52 [.532]	8.00 [.315]	10.83 [.426]	11.99 [.472]	2.84 [.112]	3.94 [.155]
12	14.35 [.565]	15.52 [.611]	10.00 [.394]	12.83 [.505]	13.99 [.551]	2.84 [.112]	3.94 [.155]
14	16.36 [.644]	17.52 [.690]	12.00 [.472]	14.83 [.584]	15.99 [.630]	2.84 [.112]	3.94 [.155]
16	18.35 [.722]	19.52 [.768]	14.00 [.551]	16.83 [.662]	17.99 [.708]	2.84 [.112]	3.94 [.155]
20	22.35 [.880]	23.52 [.926]	18.00 [.709]	20.83 [.820]	21.99 [.866]	2.84 [.112]	3.94 [.155]
22	24.35 [.959]	25.52 [1.005]	20.00 [.787]	22.83 [.899]	23.99 [.945]	2.84 [.112]	3.94 [.155]
24	26.35 [1.037]	27.52 [1.083]	22.00 [.866]	24.83 [.977]	25.99 [1.023]	2.84 [.112]	3.94 [.155]
26	28.35 [1.116]	29.52 [1.162]	24.00 [.945]	26.83 [1.056]	27.99 [1.102]	2.84 [.112]	3.94 [.155]
30	32.35 [1.274]	33.52 [1.320]	28.00 [1.102]	30.83 [1.214]	31.99 [1.260]	2.84 [.112]	3.94 [.155]
34	36.35 [1.431]	37.52 [1.477]	32.00 [1.260]	34.83 [1.371]	35.99 [1.417]	2.84 [.112]	3.94 [.155]
40	42.35 [1.667]	43.52 [1.713]	38.00 [1.496]	40.83 [1.607]	41.99 [1.653]	2.84 [.112]	3.94 [.155]
44	46.35 [1.825]	47.52 [1.871]	42.00 [1.654]	44.83 [1.765]	45.99 [1.811]	2.84 [.112]	3.94 [.155]
50	52.35 [2.061]	53.52 [2.107]	48.00 [1.890]	50.83 [2.001]	51.99 [2.047]	2.84 [.112]	3.94 [.155]

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
101		102		L. SCHMIDT		DATE	JUL 29, 2010	DATE	
DIVISION		DIVISION CODE		CHKD		DATE		DATE	
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES			
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS		MILLIMETERS			
MAX SURFACE ROUGHNESS 125/		ALL SURFACES		MARKED ONLY		ANGLES $\pm$ 1°			
A 30741		OCT 28, 2010		LDS		SF			
INITIAL RELEASE		DATE		DATE		DATE			
3M		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2010		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
TITLE		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES		CAGE NUMBER		DRAWING NO.		REV.	
D 78-5100-2359-7		A		MODEL		LISTS		YES NO SHT 4 OF 4	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.