

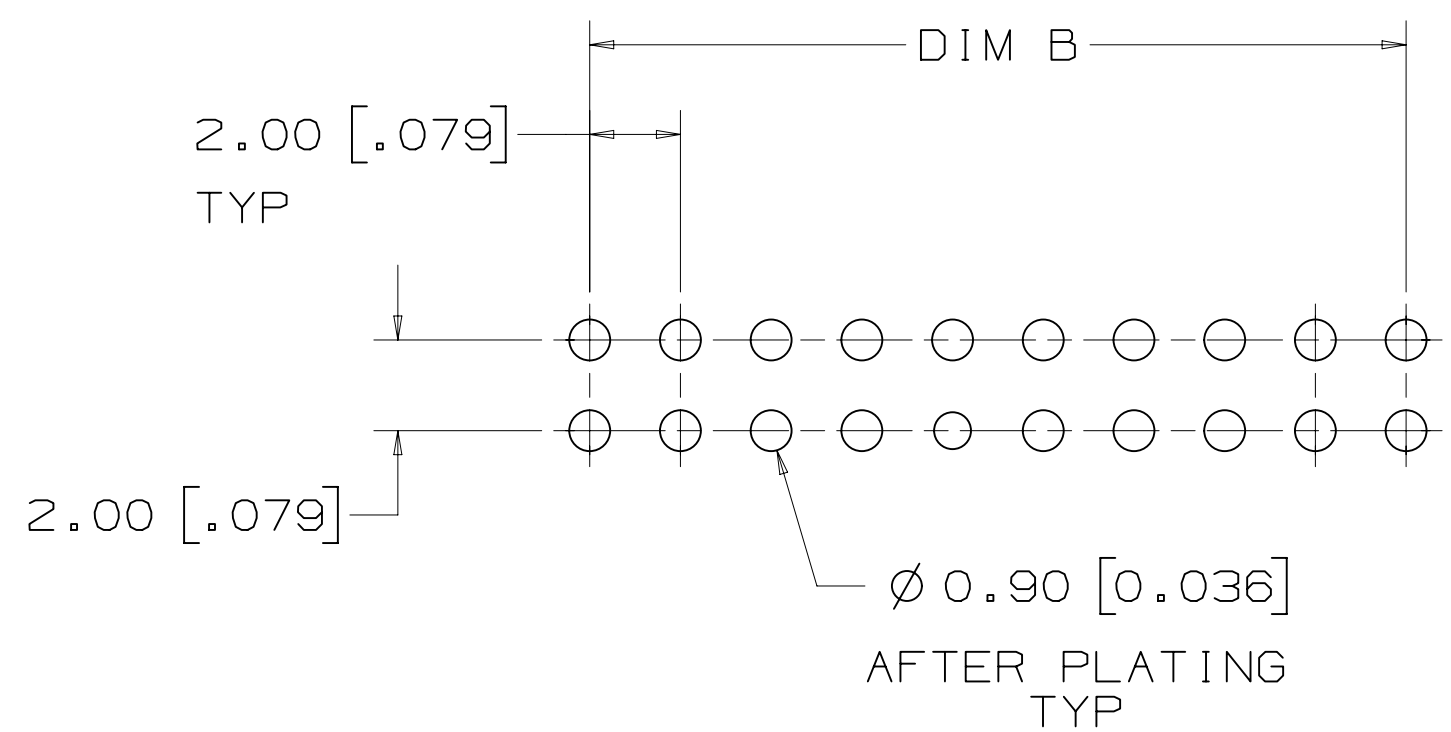
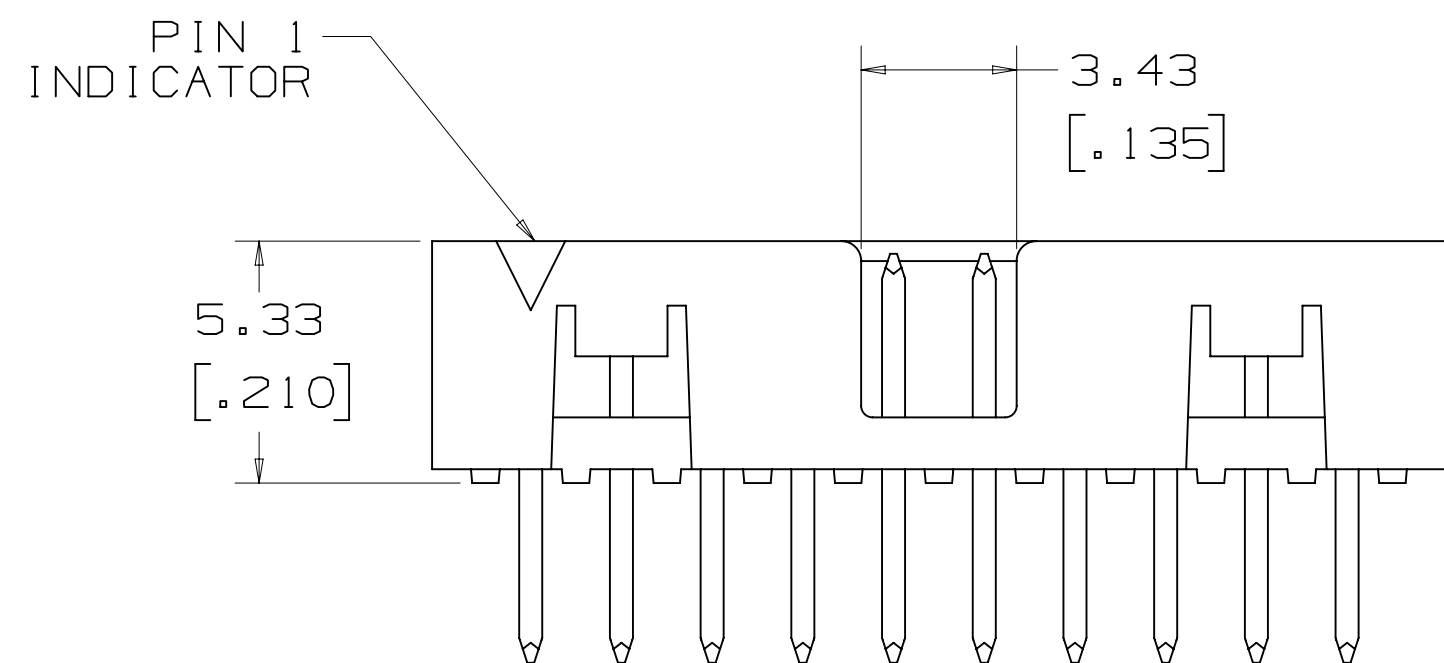



3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length and Extended Length

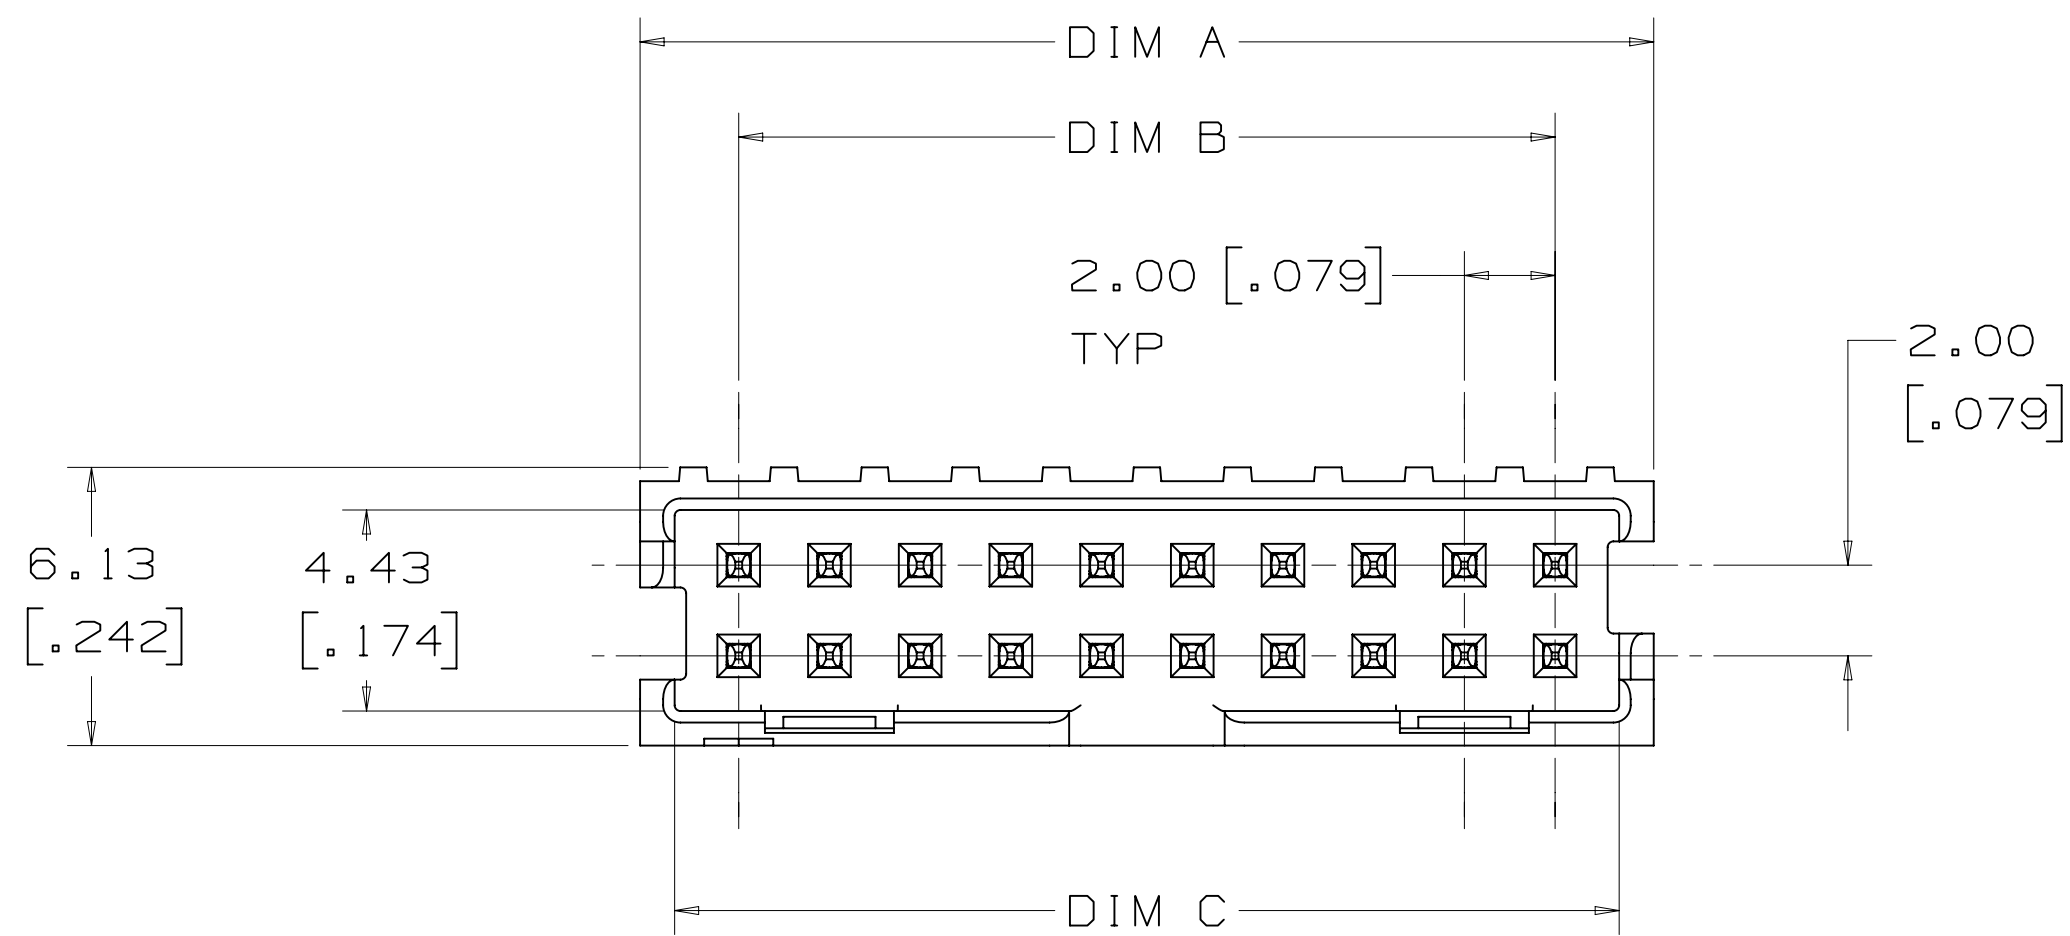


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = 0.05 [.002]

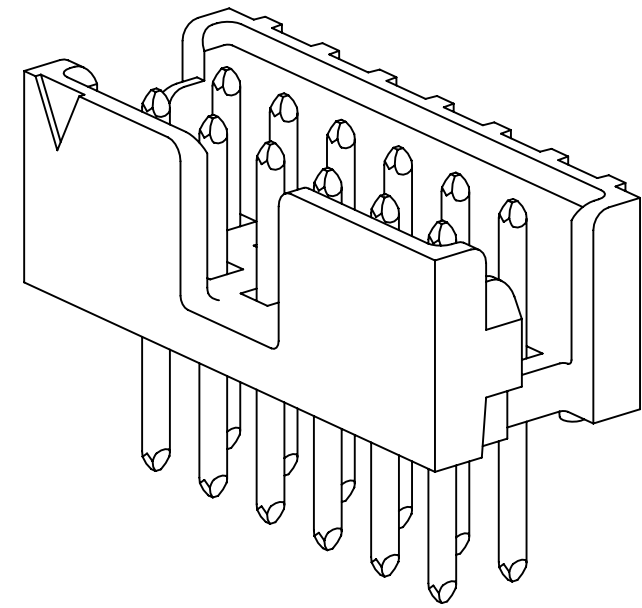

POLARIZATION SLOT
THRU-HOLE VERTICAL HEADER
6-12 POSITIONS ONLY

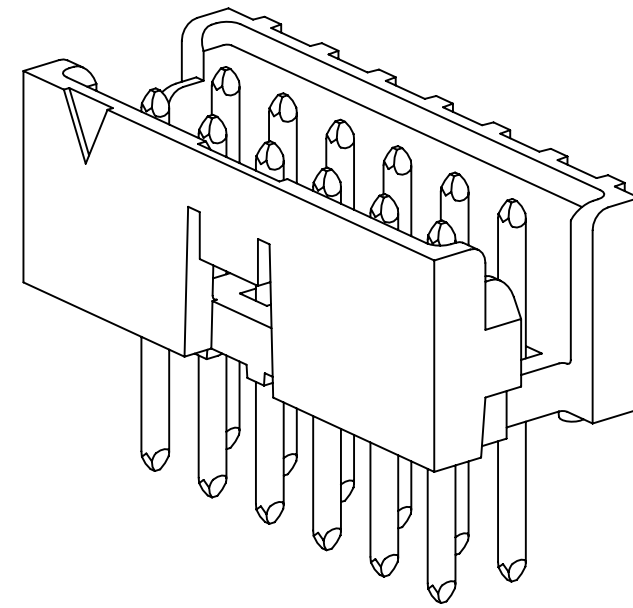

SINGLE FRICTION LATCH
THRU-HOLE VERTICAL HEADER
6-12 POSITIONS ONLY

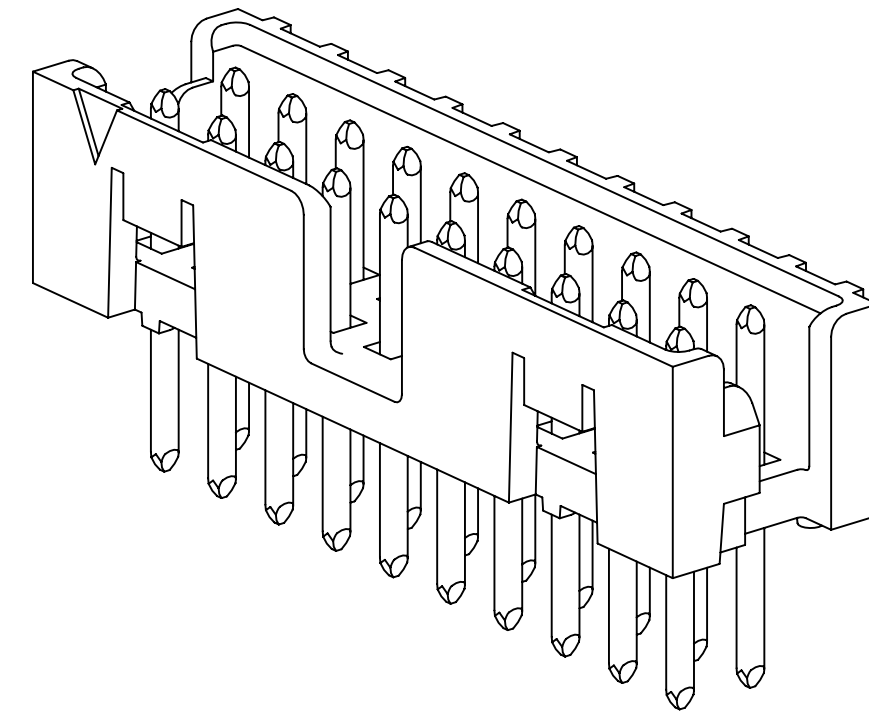

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
THRU-HOLE VERTICAL HEADER
14-50 POSITIONS





PERFORMANCE [5][7]	
CURRENT:	1A, 6 LINES ENERGIZED
INSULATION RESISTANCE:	>1 X 10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	500 VACrms AT SEA LEVEL
TEMPERATURE RATING:	-55°C TO +105°C
SOLDER PROCESS TEMPERATURE:	260°C MAX PER IPC/JEDEC J-STD-020D

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS


METRIC [ENGLISH]

A		30741		OCT 28, 2010				LDS		SF	
INITIAL RELEASE											
REV		ECO		ISSUE DATE AND DESCRIPTION				DRFT		CHKD	
DRFT		L		JUL 29, 2010				MFG		DATE	
CHKD		SCHMIDT		DATE				APPROV		DATE	
								S FELDMAN		AUG 09, 2010	
DIVISION				DIVISION CODE							
DO NOT SCALE DRAWING				SCALE 6 1		TOLERANCES EXCEPT AS NOTED					
				INCHES 0.0 0.00 0.000 0.0000							
THIRD ANGLE PROJECTION				MILLIMETERS 0 0.0 0.00 0.000		© 3M COPYRIGHT 2010 This document and the information it contains are 3M property and may not be reproduced or further distributed without the written permission of or disclosed other than for 3M authorized purposes. All rights reserved.					
INTERPRET PER ASME Y14.5 - 1994				TITLE 3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES							
MAX SURFACE ROUGHNESS 125				☐ ALL SURFACES ☒ MARKED ONLY		CASE NUMBER D 78-5100-2359-7				REV. A	
ANGLES ± 1°				MODEL		SET LISTS ☐ YES ☒ NO				SHT 1 OF 4	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

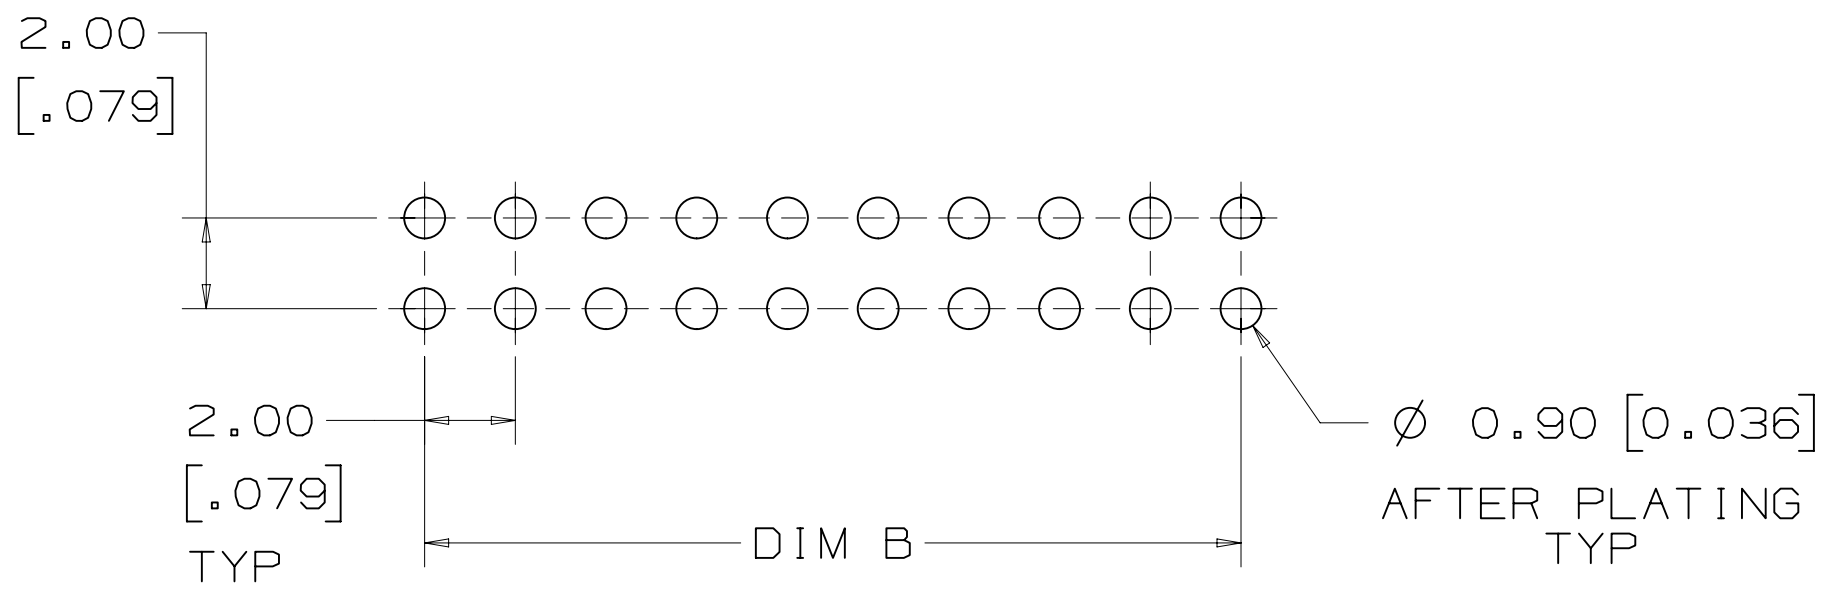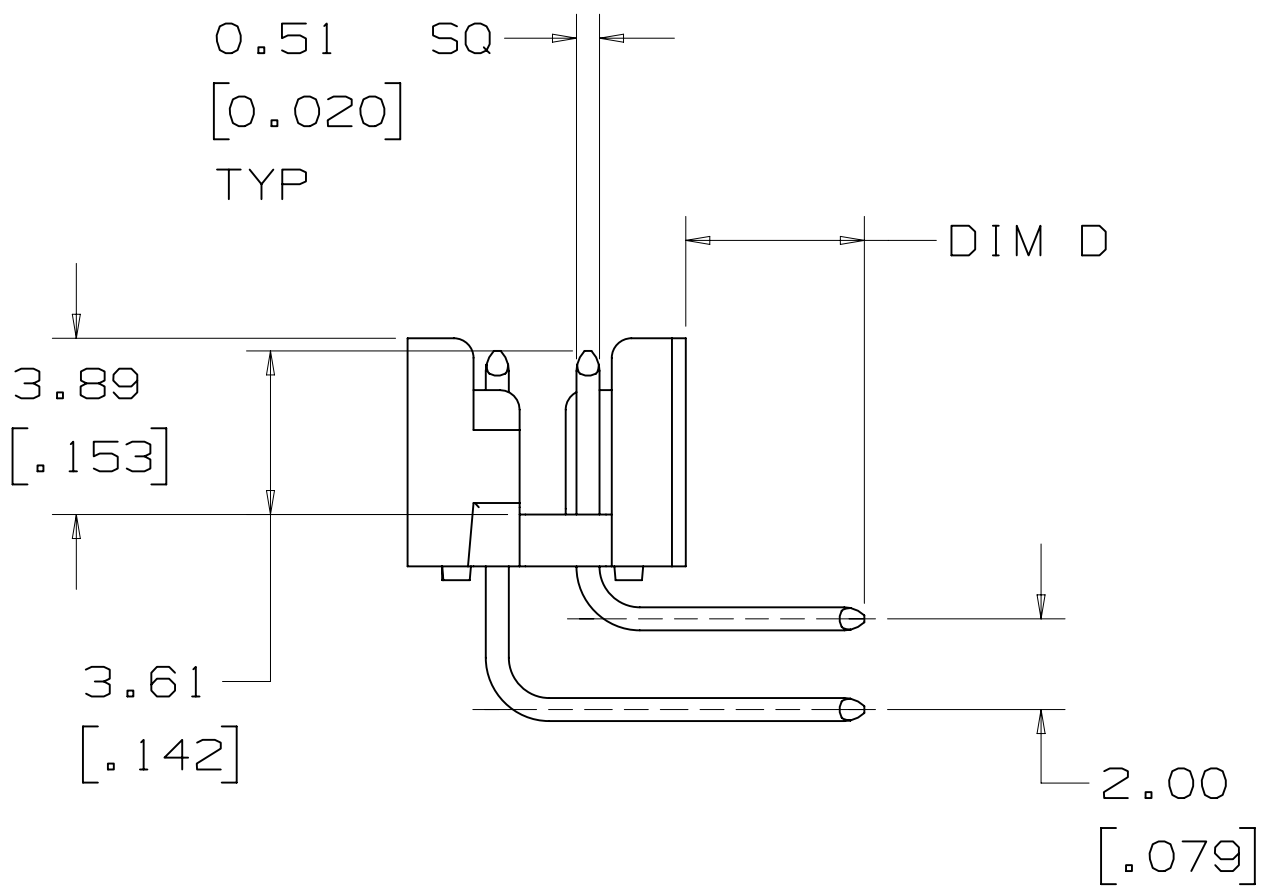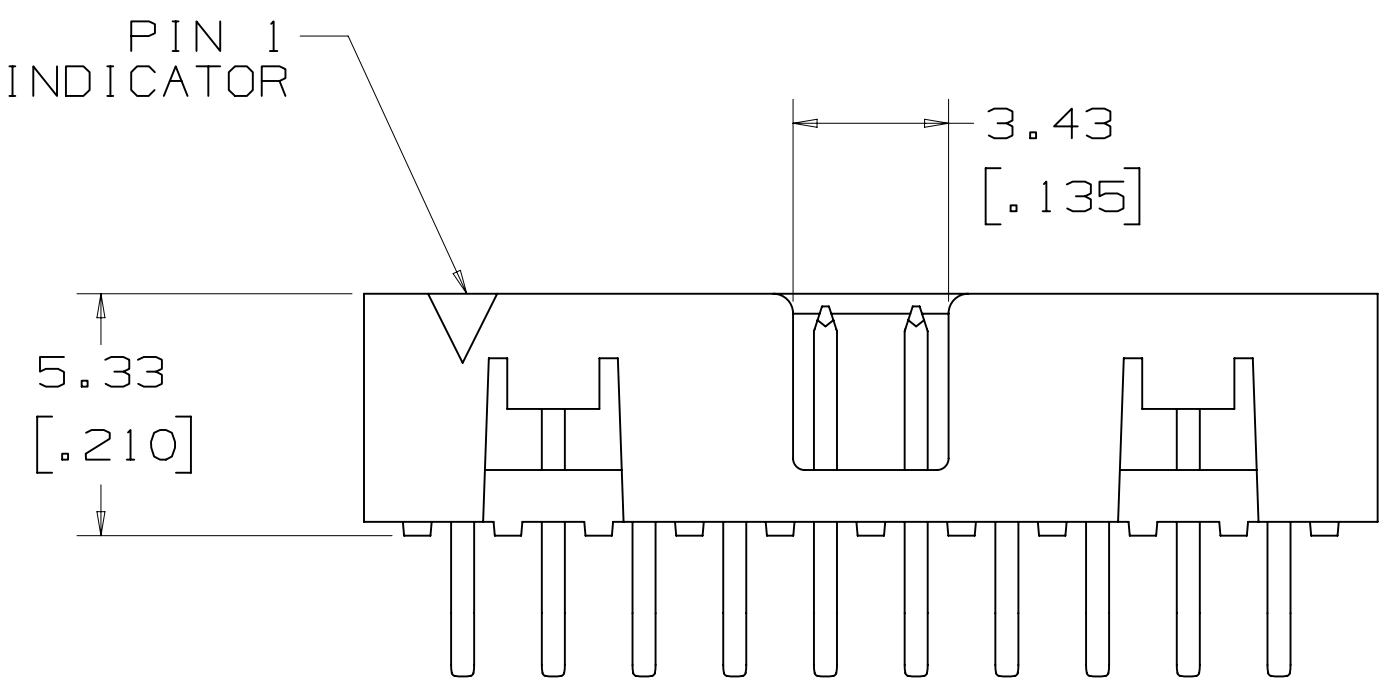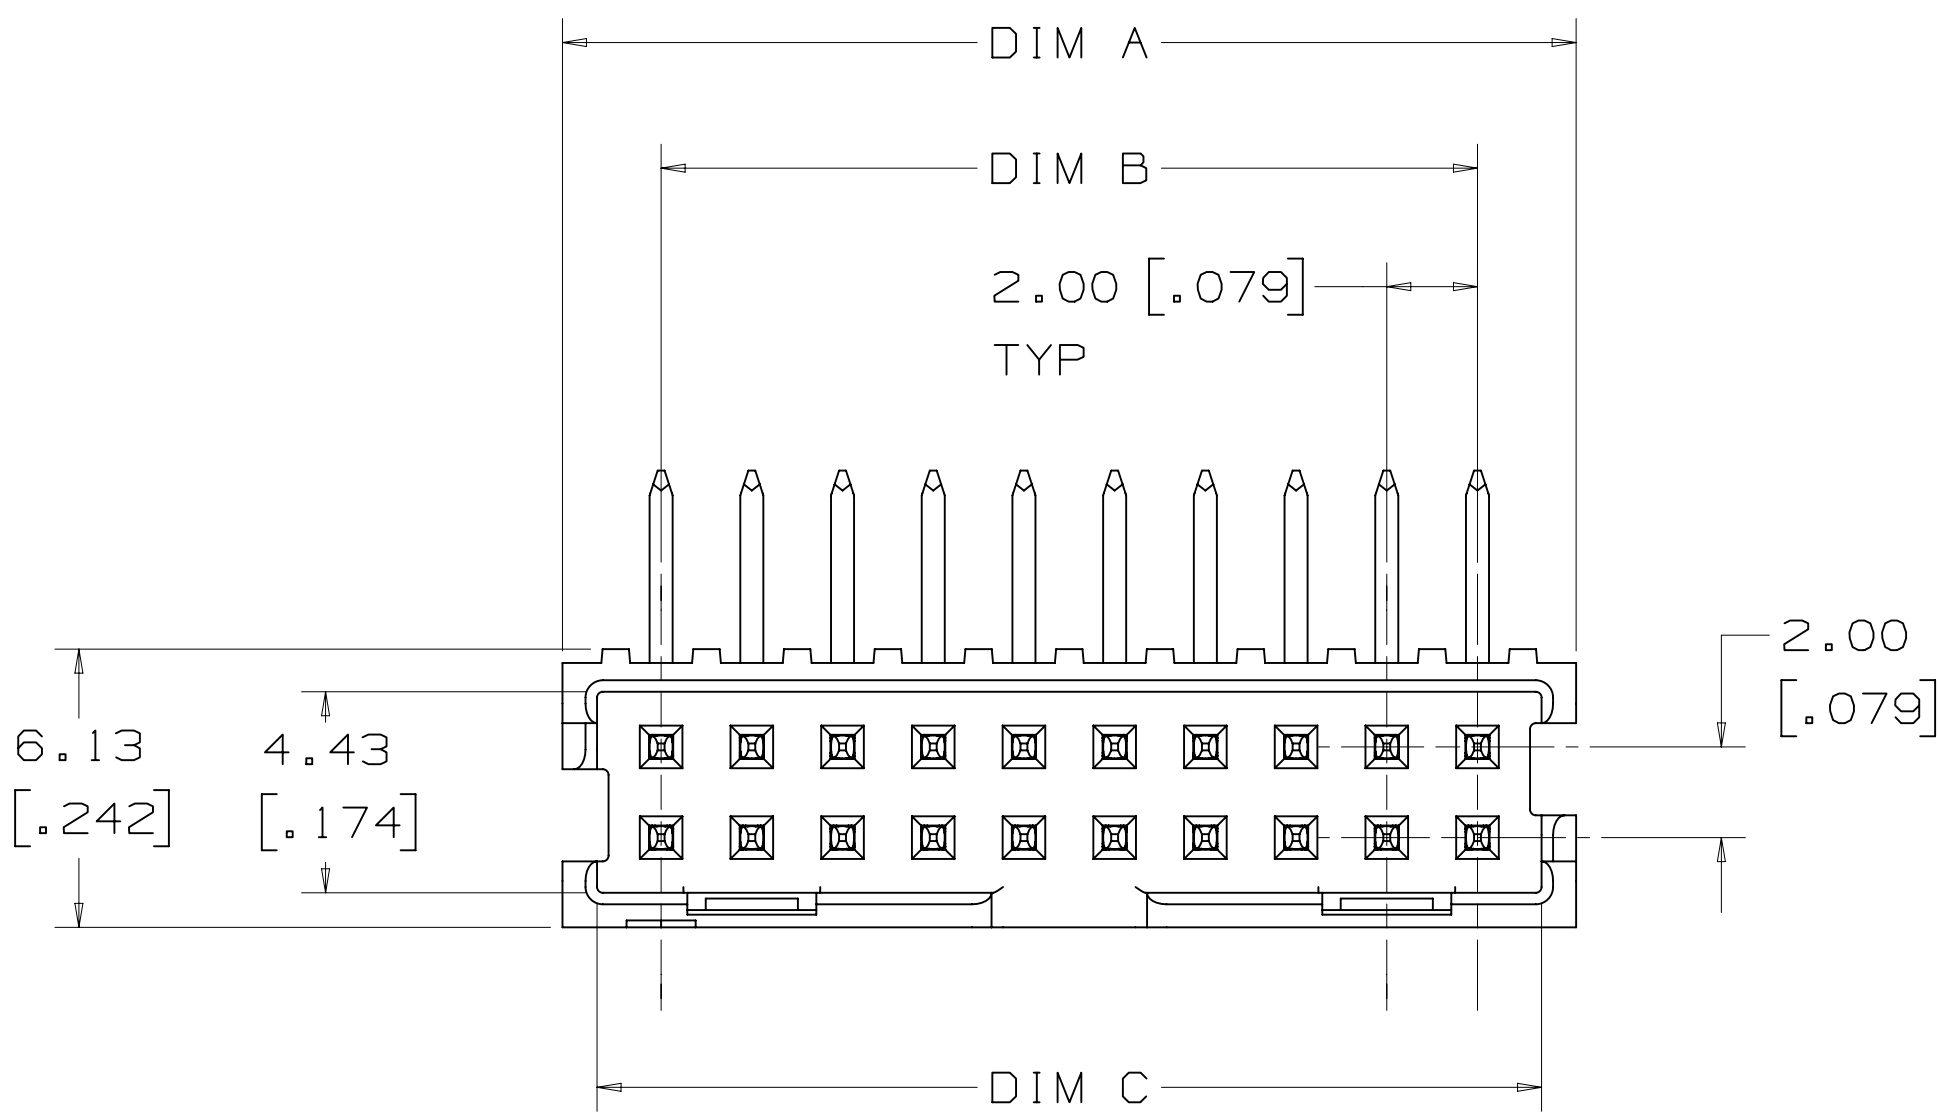


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = ±0.05 [.002]

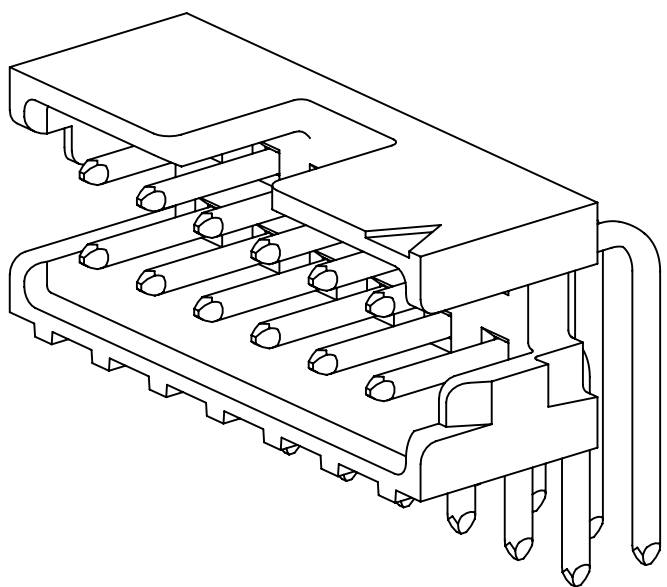

POLARIZATION SLOT
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

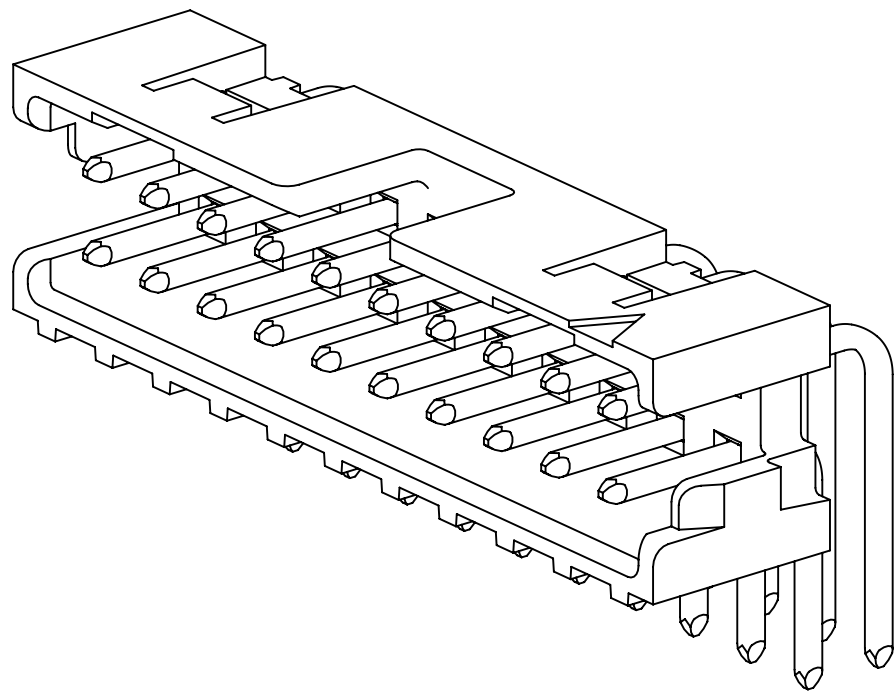

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
RIGHT ANGLE HEADER
14-50 POSITIONS

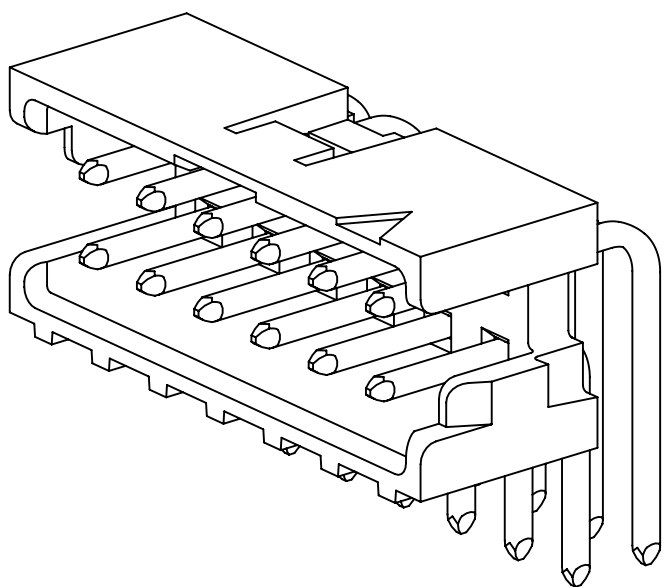





SINGLE FRICTION LATCH
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS


METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV		ECO		ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		CODES		L. SCHMIDT		JUL 29, 2010		MFG		DATE	
DIVISION		DIVISION CODE		S. FELDMAN		AUG 09, 2010		DATE		REV.	
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS		THIRD ANGLE PROJECTION	
INTERPRET PER ASME Y14.5 - 1994		MAX SURFACE ROUGHNESS		ALL SURFACES		MARKED ONLY		ANGLES ±1°		CAGE NUMBER	
125		D		78-5100-2359-7		A		SHT 2 OF 4		REV.	
TITLE		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES		CAGE NUMBER		DRAWING NO.		REV.		SHT 2 OF 4	
3M		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2010		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		DATE		REV.	
A		30741		OCT 28, 2010		INITIAL RELEASE		LDS		SF	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

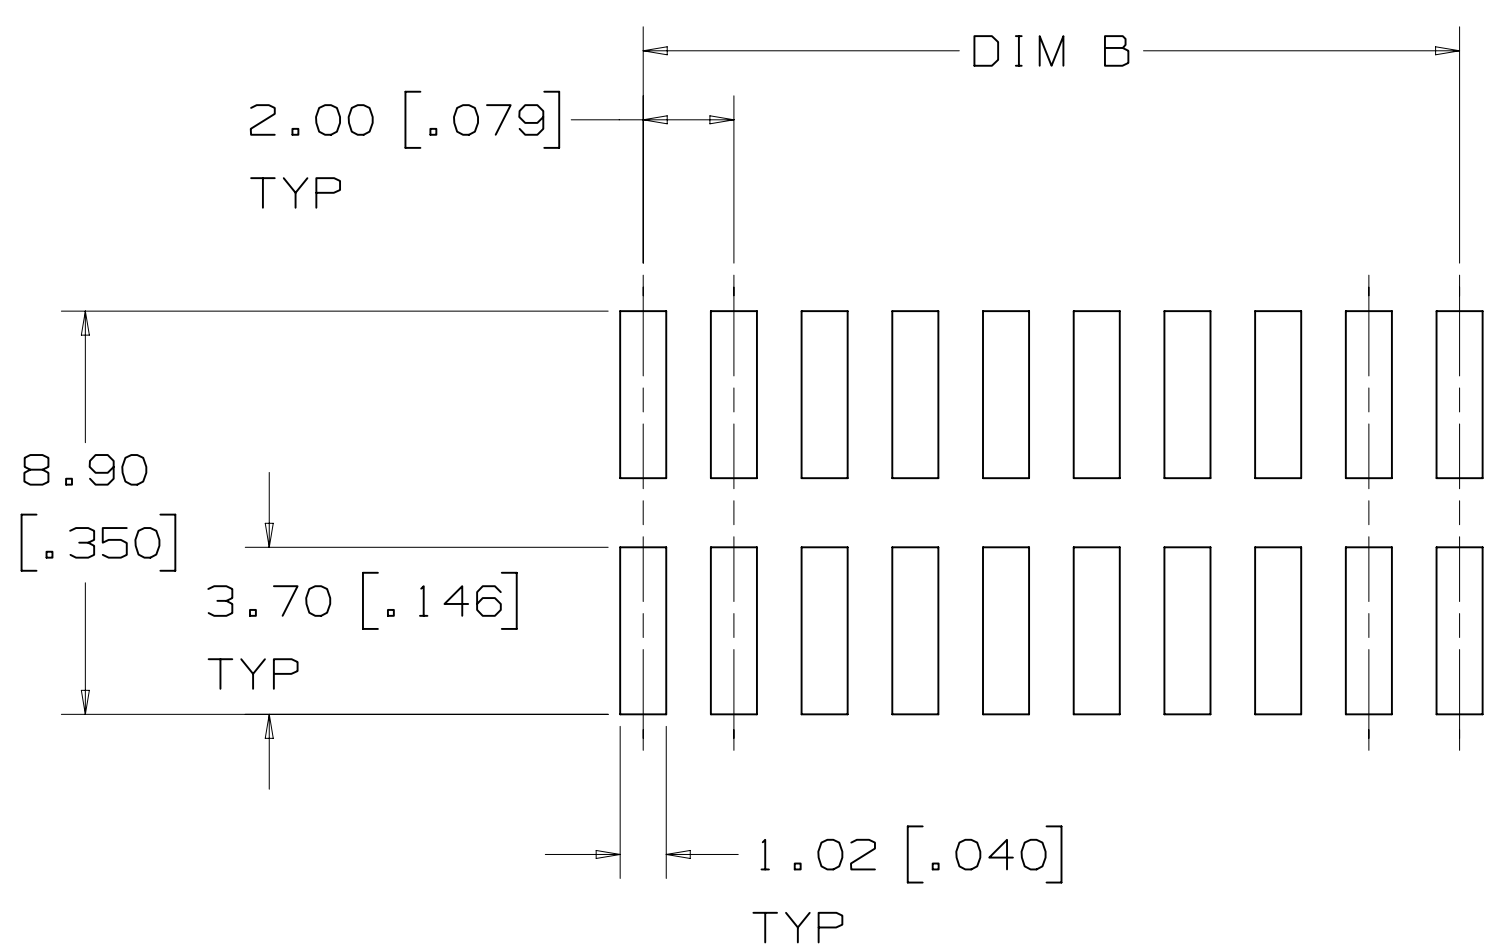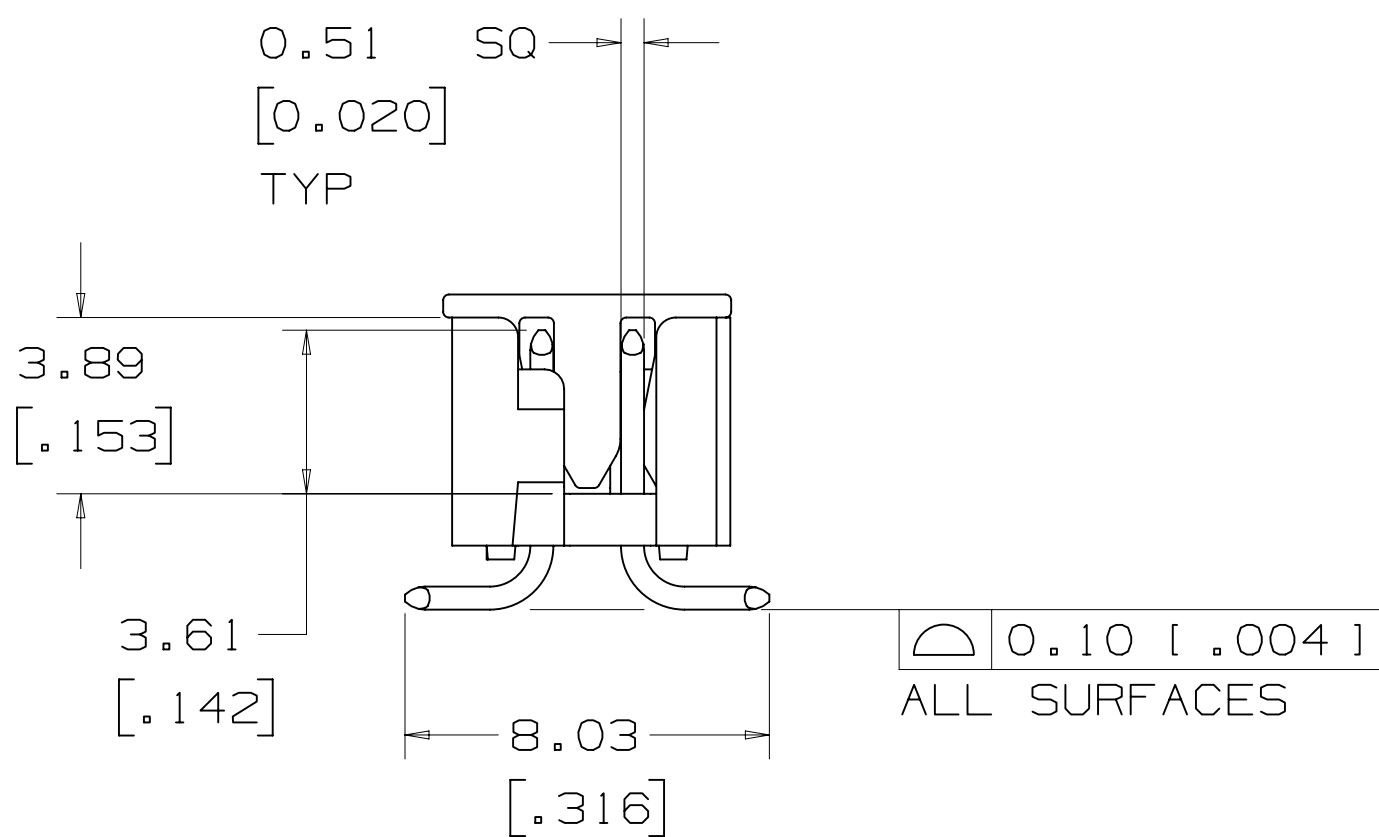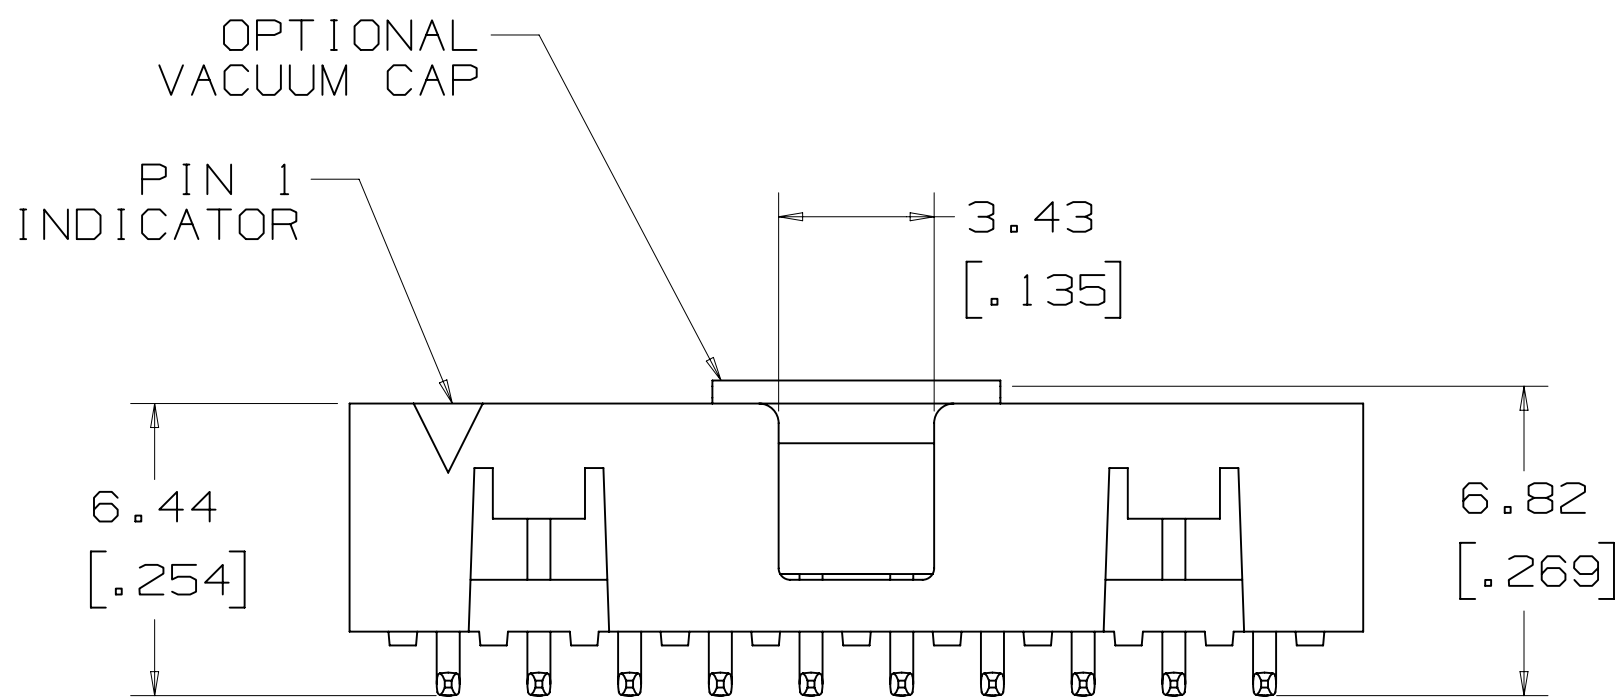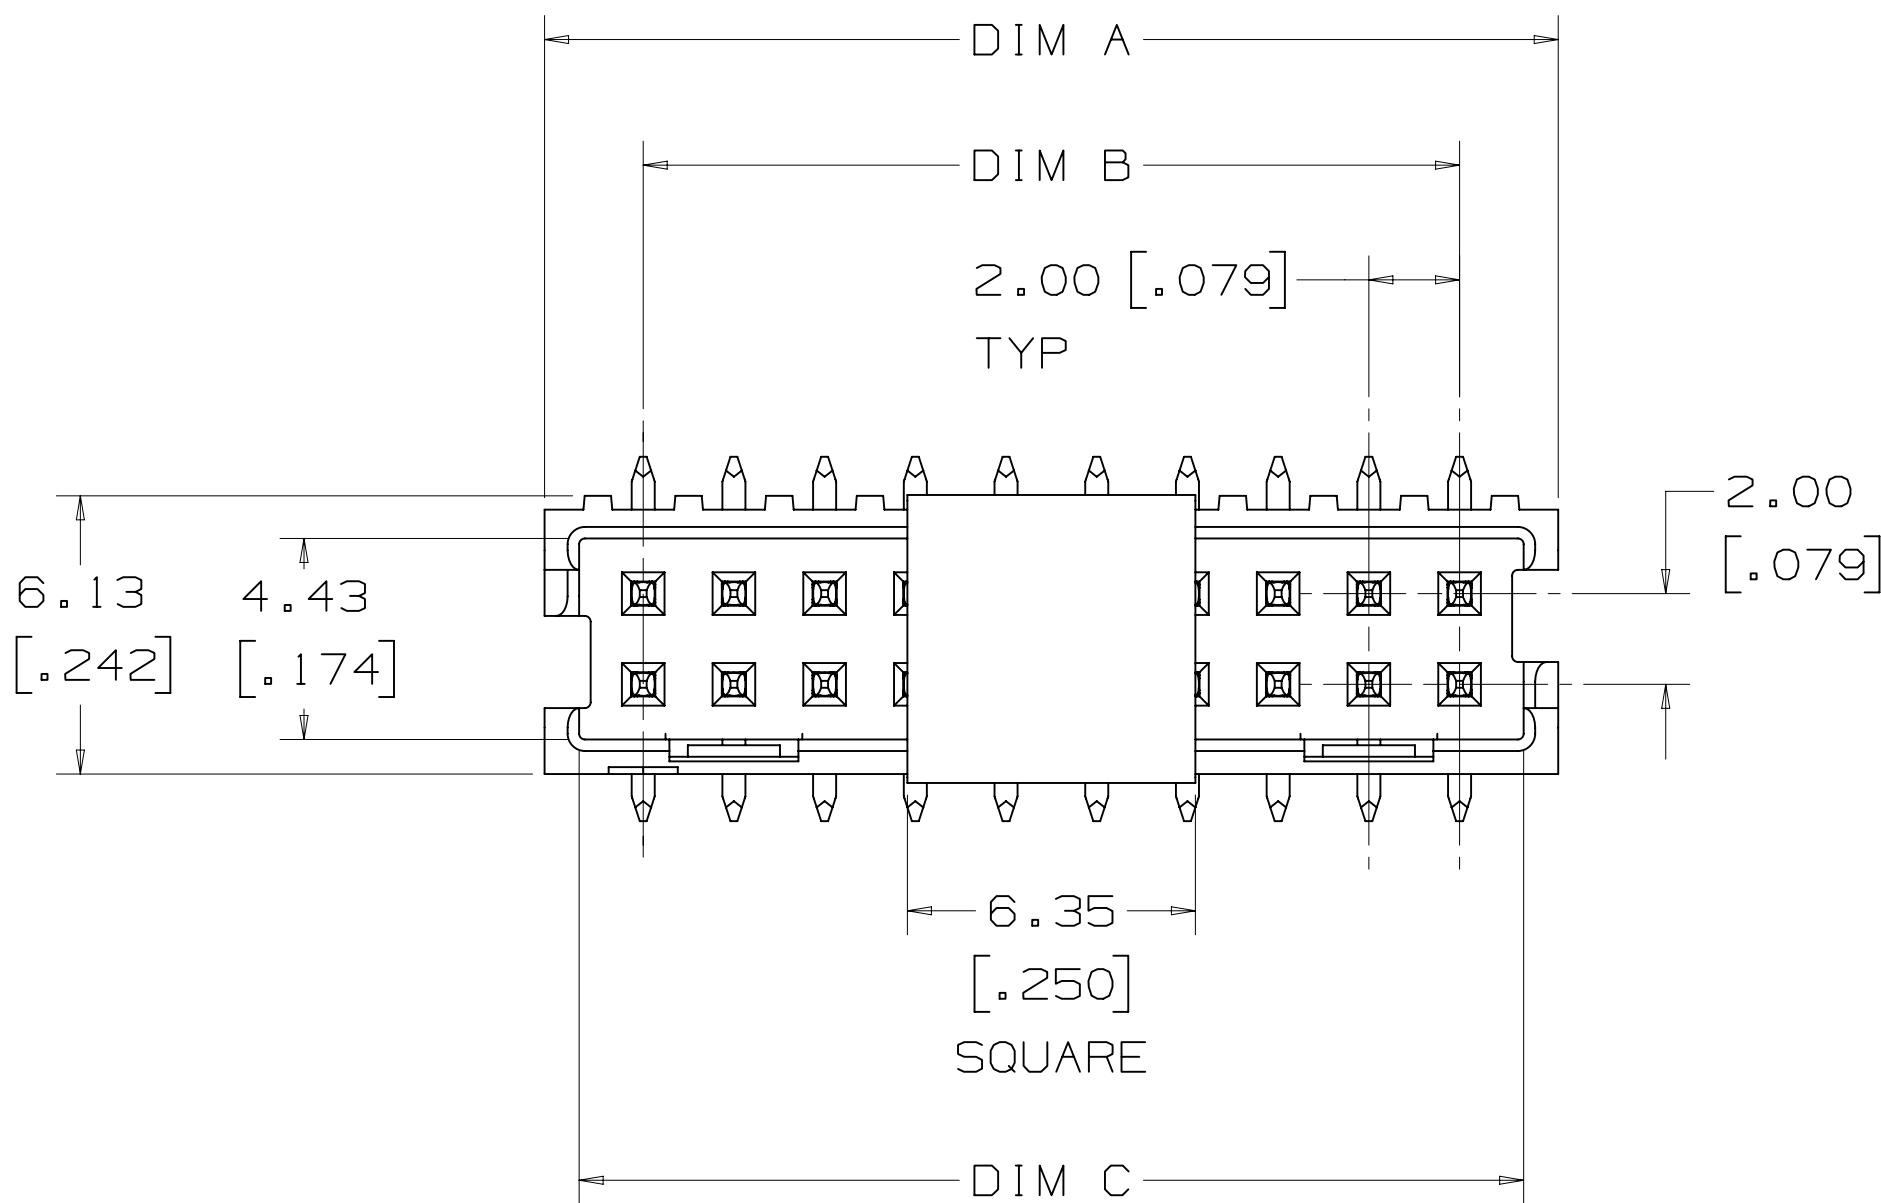


RECOMMENDED PCB PAD PATTERN
TOLERANCE = ±0.08 [0.003]

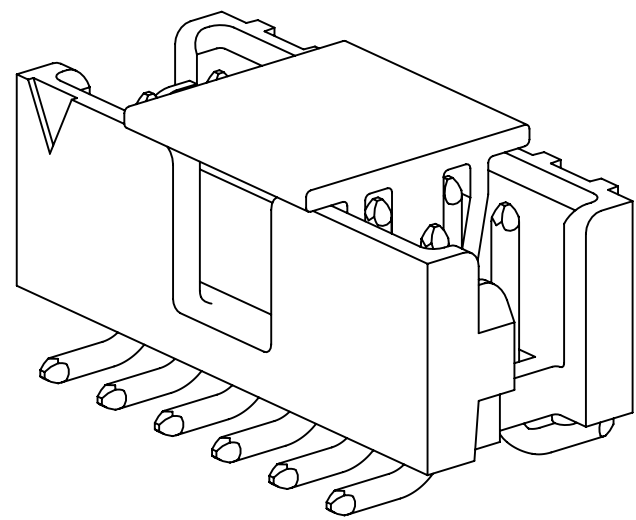

POLARIZATION SLOT
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY

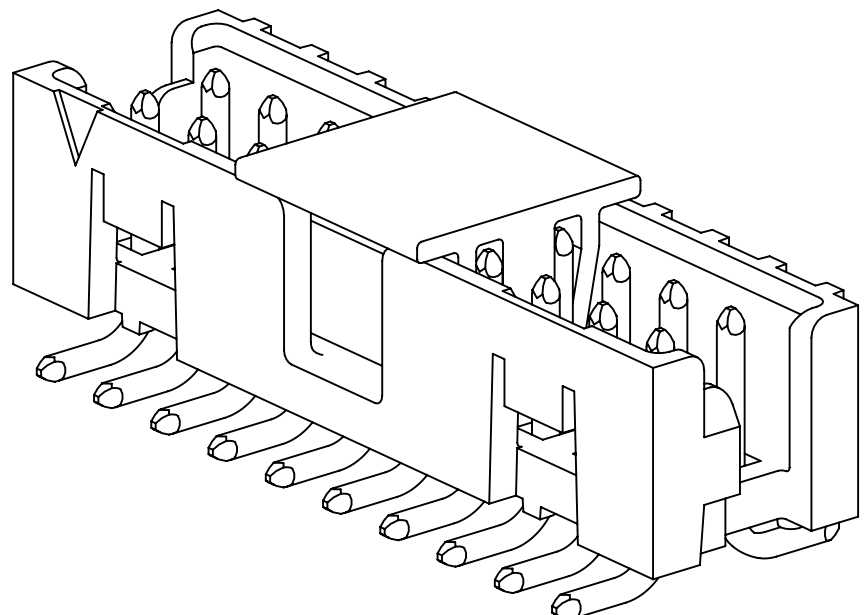

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
SURFACE MOUNT HEADER
14-50 POSITIONS

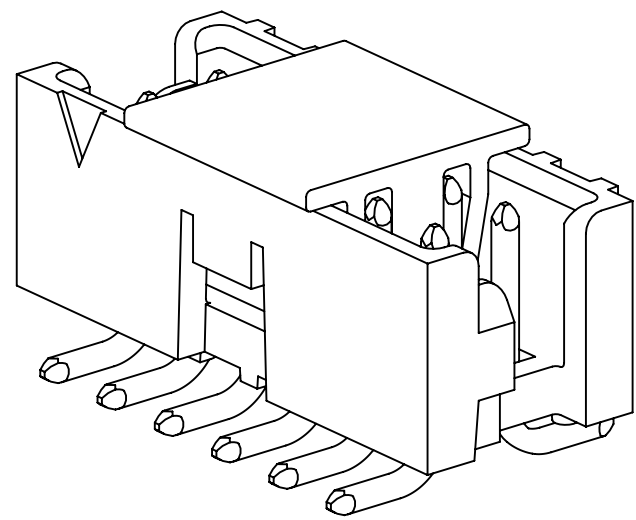

SINGLE FRICTION LATCH
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY


REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS

METRIC [ENGLISH]


DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		SCALE		DATE		MFG		DATE	
L. SCHMIDT		JUL 29, 2010		S. FELDMAN		AUG 09, 2010			
DIVISION		DIVISION CODE		3M Center		St. Paul, MN 55144		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.	
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MAX SURFACE ROUGHNESS		125/0.000 ±0.13		ALL SURFACES MARKED ONLY	
ANGLES ±1°		CAGE NUMBER		DRAWING NO.		REV.		MODEL	
125/0.000 ±0.13		D78-5100-2359-7		A		SHT 3 OF 4			

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length 3


STANDARD LENGTH HEADERS
ARE AVAILABLE

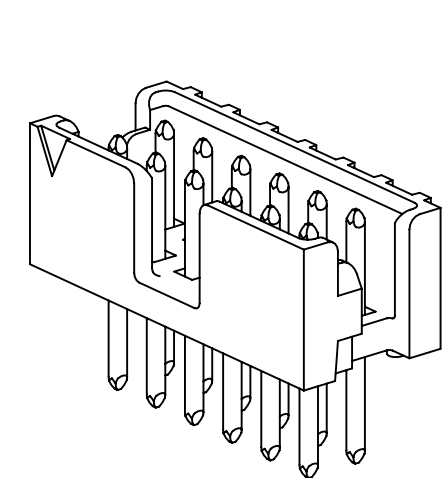


STANDARD LENGTH,
POLARIZATION SLOT,
VERTICAL HEADER
6-12 POSITIONS ONLY

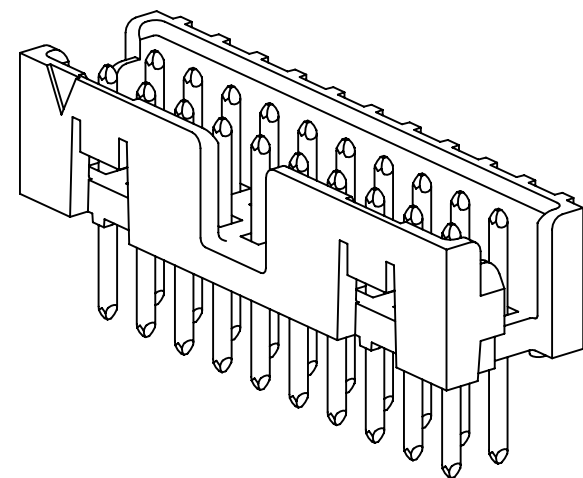


STANDARD LENGTH,
POLARIZATION SLOT,
DUAL FRICTION LATCHES,
VERTICAL HEADER
14-50 POSITIONS

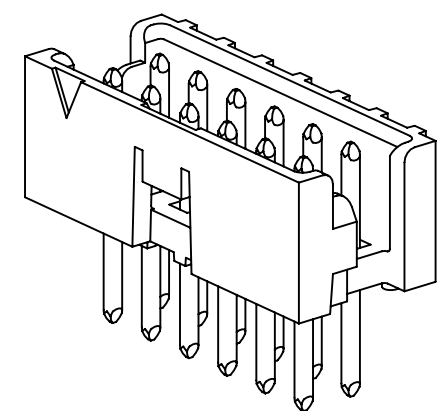


STANDARD LENGTH,
SINGLE FRICTION LATCH,
VERTICAL HEADER
6-12 POSITIONS

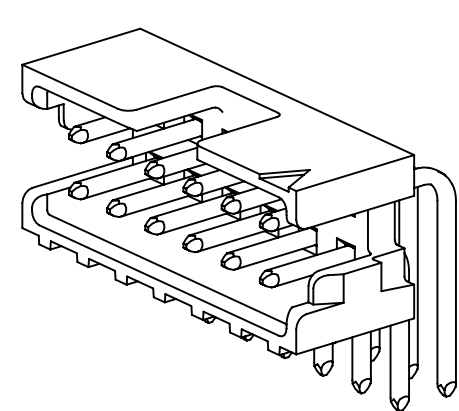


STANDARD LENGTH,
POLARIZATION SLOT,
RIGHT ANGLE HEADER
6-12 POSITIONS

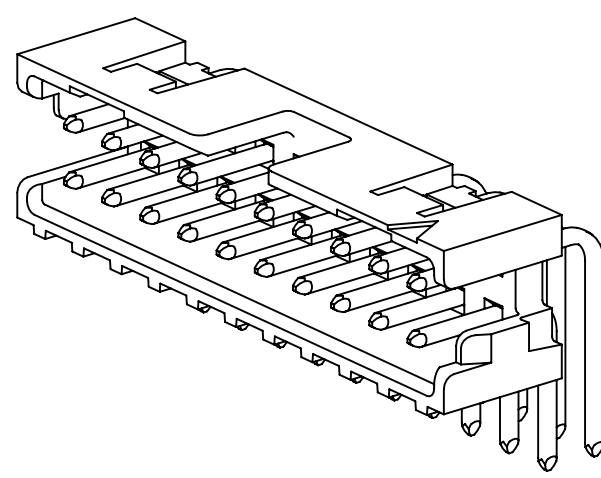


STANDARD LENGTH,
POLARIZATION SLOT,
DUAL FRICTION LATCHES,
RIGHT ANGLE HEADER
14-50 POSITIONS

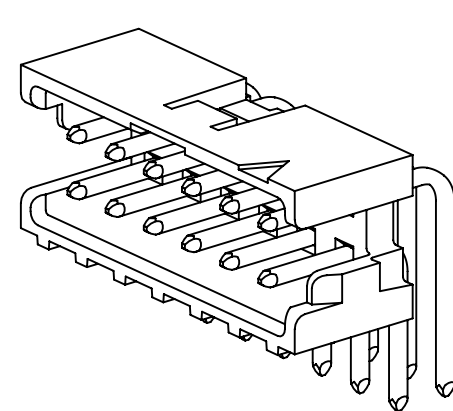


STANDARD LENGTH,
SINGLE FRICTION LATCH,
RIGHT ANGLE HEADER
6-12 POSITIONS

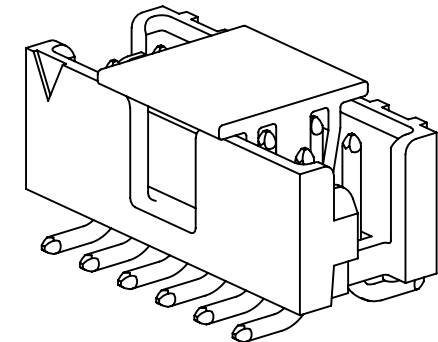

STANDARD LENGTH,
POLARIZATION SLOT,
SURFACE MOUNT HEADER
6-12 POSITIONS

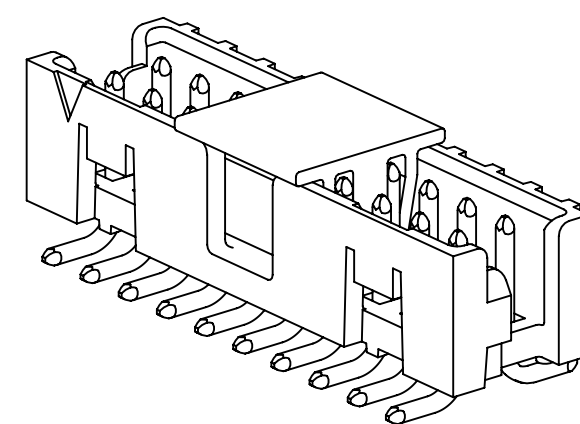


STANDARD LENGTH,
POLARIZATION SLOT,
DUAL FRICTION LATCHES,
SURFACE MOUNT HEADER
14-50 POSITIONS

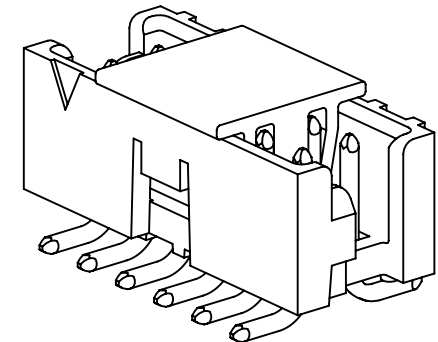


STANDARD LENGTH,
SINGLE FRICTION LATCH,
SURFACE MOUNT HEADER
6-12 POSITIONS

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Extended Length 4


CALL 3M INTERCONNECT SOLUTIONS
AT 800-225-5373 FOR AVAILABILITY
OF EXTENDED LENGTH HEADERS

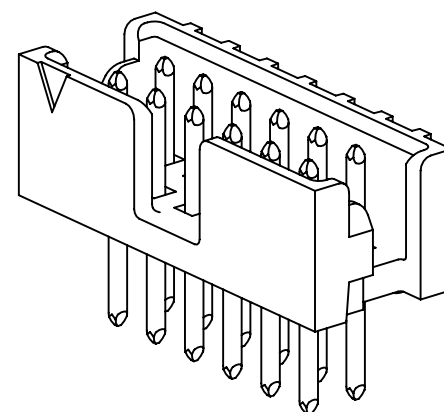


EXTENDED LENGTH,
POLARIZATION SLOT,
VERTICAL HEADER
6-12 POSITIONS

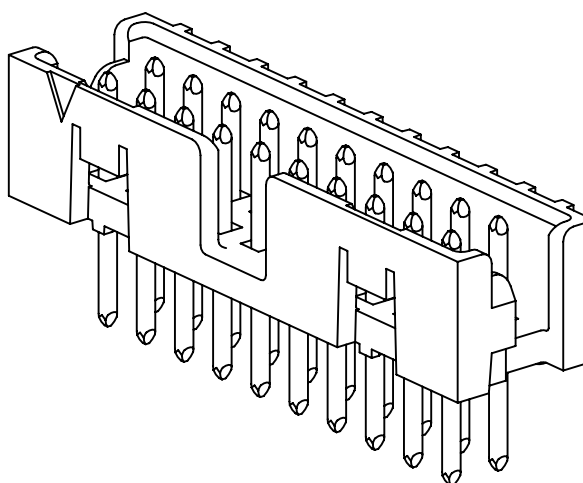


EXTENDED LENGTH,
POLARIZATION SLOT,
DUAL FRICTION LATCHES,
VERTICAL HEADER
14-50 POSITIONS

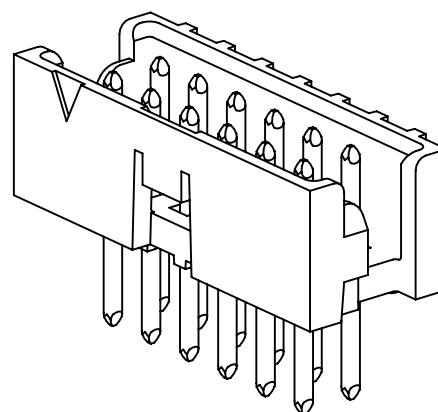


EXTENDED LENGTH,
SINGLE FRICTION LATCH,
VERTICAL HEADER
6-12 POSITIONS

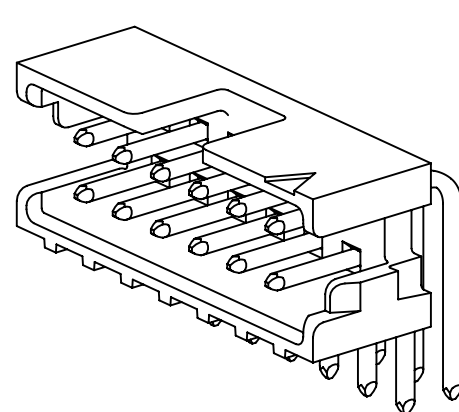


EXTENDED LENGTH,
POLARIZATION SLOT,
RIGHT ANGLE HEADER
6-12 POSITIONS

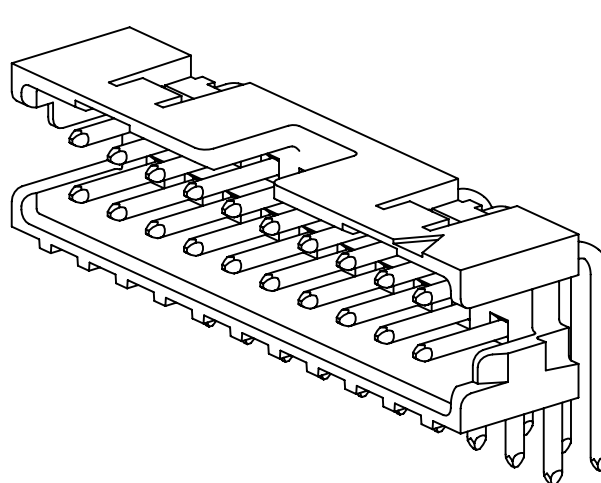


EXTENDED LENGTH,
POLARIZATION SLOT,
DUAL FRICTION LATCHES,
RIGHT ANGLE HEADER
14-50 POSITIONS

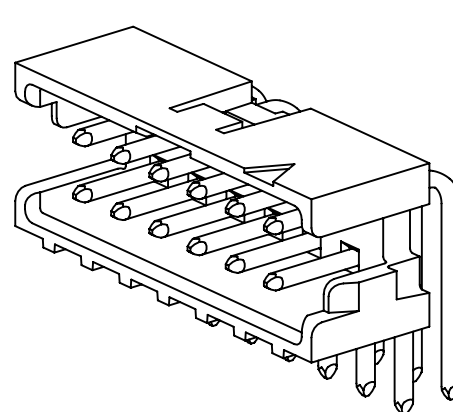


EXTENDED LENGTH,
SINGLE FRICTION LATCH,
RIGHT ANGLE HEADER
6-12 POSITIONS

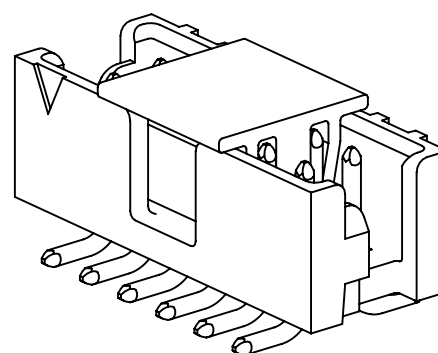

EXTENDED LENGTH,
POLARIZATION SLOT,
SURFACE MOUNT HEADER
6-12 POSITIONS

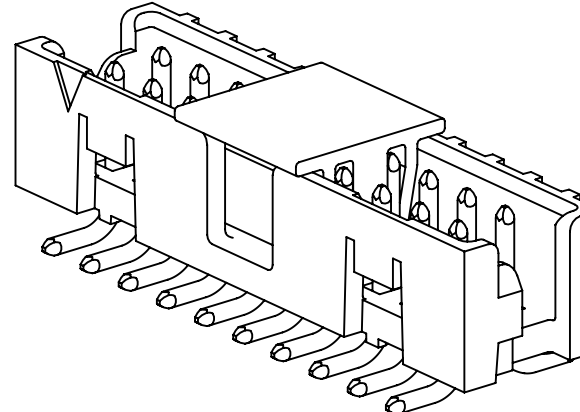

EXTENDED LENGTH,
POLARIZATION SLOT,
DUAL FRICTION LATCHES,
SURFACE MOUNT HEADER
14-50 POSITIONS

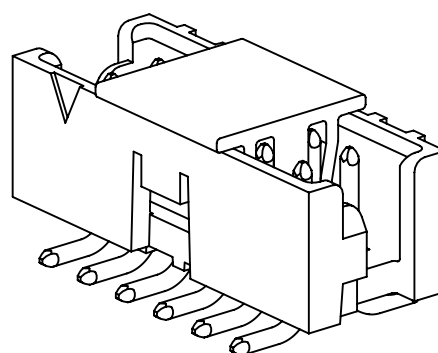

EXTENDED LENGTH,
SINGLE FRICTION LATCH,
SURFACE MOUNT HEADER
6-12 POSITIONS

ORDERING INFORMATION

TIER 1 - BEST
1591XX-XXXX

TIER 1 = BEST 0.76 μ m
[30 μ in] GOLD

POSITION COUNT (SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

TIER 2 - BETTER
1592XX-XXXX

TIER 2 = BETTER 0.38 μ m
[15 μ in] GOLD

POSITION COUNT (SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

SHROUDED BOX HEADER							
NUMBER OF POSITIONS	DIM A		DIM B	DIM C		DIM D	
	STANDARD	EXTENDED		STANDARD	EXTENDED		
6	8.35 [.329]	9.52 [.375]	4.00 [.157]	6.83 [.269]	7.99 [.315]	2.84 [.112]	3.94 [.155]
8	10.35 [.407]	11.52 [.453]	6.00 [.236]	8.83 [.347]	9.99 [.393]	2.84 [.112]	3.94 [.155]
10	12.35 [.486]	13.52 [.532]	8.00 [.315]	10.83 [.426]	11.99 [.472]	2.84 [.112]	3.94 [.155]
12	14.35 [.565]	15.52 [.611]	10.00 [.394]	12.83 [.505]	13.99 [.551]	2.84 [.112]	3.94 [.155]
14	16.36 [.644]	17.52 [.690]	12.00 [.472]	14.83 [.584]	15.99 [.630]	2.84 [.112]	3.94 [.155]
16	18.35 [.722]	19.52 [.768]	14.00 [.551]	16.83 [.662]	17.99 [.708]	2.84 [.112]	3.94 [.155]
20	22.35 [.880]	23.52 [.926]	18.00 [.709]	20.83 [.820]	21.99 [.866]	2.84 [.112]	3.94 [.155]
22	24.35 [.959]	25.52 [1.005]	20.00 [.787]	22.83 [.899]	23.99 [.945]	2.84 [.112]	3.94 [.155]
24	26.35 [1.037]	27.52 [1.083]	22.00 [.866]	24.83 [.977]	25.99 [1.023]	2.84 [.112]	3.94 [.155]
26	28.35 [1.116]	29.52 [1.162]	24.00 [.945]	26.83 [1.056]	27.99 [1.102]	2.84 [.112]	3.94 [.155]
30	32.35 [1.274]	33.52 [1.320]	28.00 [1.102]	30.83 [1.214]	31.99 [1.260]	2.84 [.112]	3.94 [.155]
34	36.35 [1.431]	37.52 [1.477]	32.00 [1.260]	34.83 [1.371]	35.99 [1.417]	2.84 [.112]	3.94 [.155]
40	42.35 [1.667]	43.52 [1.713]	38.00 [1.496]	40.83 [1.607]	41.99 [1.653]	2.84 [.112]	3.94 [.155]
44	46.35 [1.825]	47.52 [1.871]	42.00 [1.654]	44.83 [1.765]	45.99 [1.811]	2.84 [.112]	3.94 [.155]
50	52.35 [2.061]	53.52 [2.107]	48.00 [1.890]	50.83 [2.001]	51.99 [2.047]	2.84 [.112]	3.94 [.155]

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
101		102		L. SCHMIDT		DATE	JUL 29, 2010	DATE	
DIVISION		DIVISION CODE		CHKD		DATE		DATE	
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES			
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS		MILLIMETERS			
MAX SURFACE ROUGHNESS 125/		ALL SURFACES		MARKED ONLY		ANGLES $\pm$ 1°			
A 30741		OCT 28, 2010		INITIAL RELEASE		LDS		SF	
3M		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2010		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
TITLE		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES		CAGE NUMBER		DRAWING NO.		REV.	
125		D 78-5100-2359-7		A		MODEL		LISTS	
YES		NO		SHT 4 OF 4					



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.