

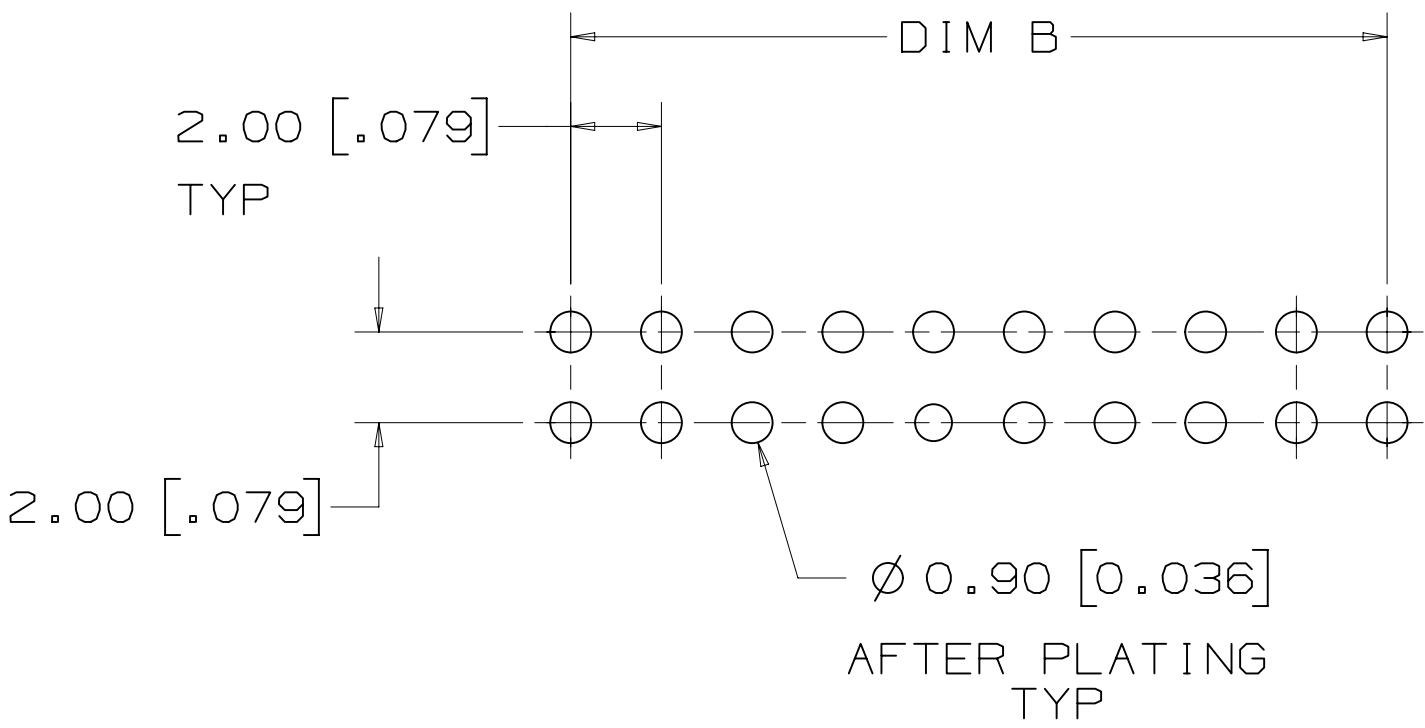
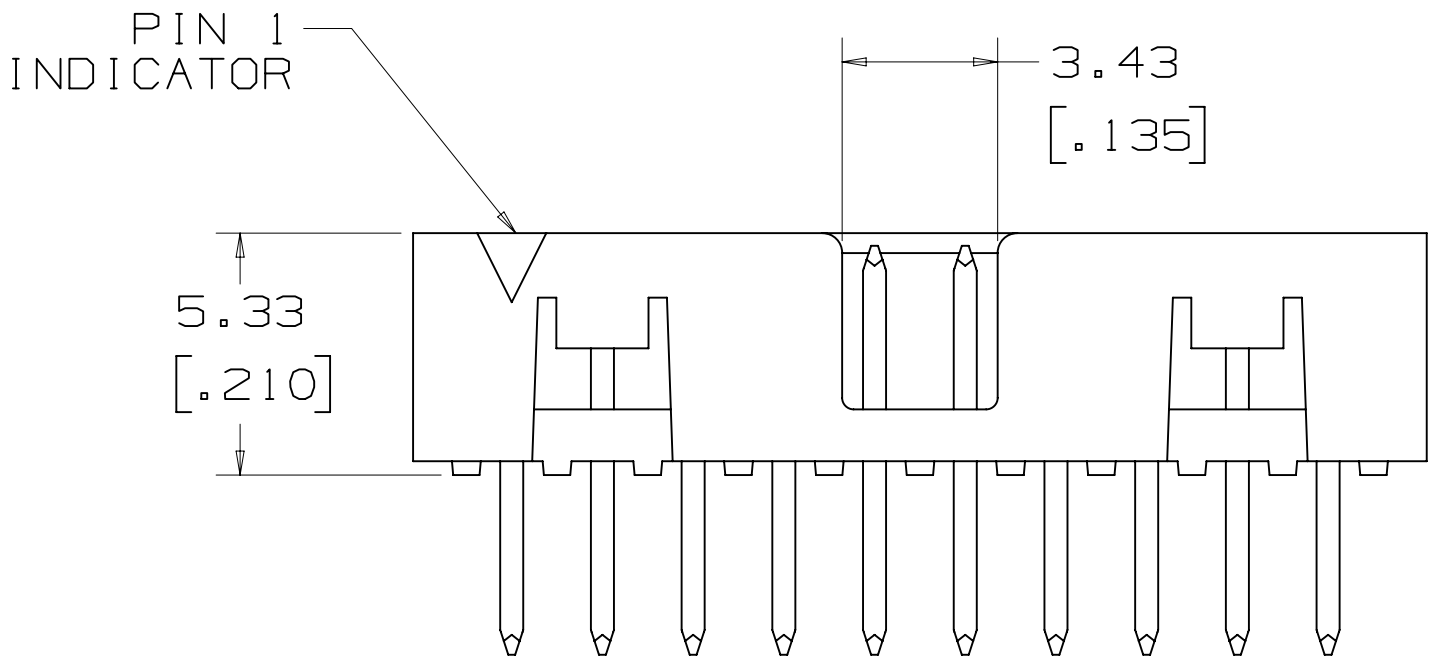
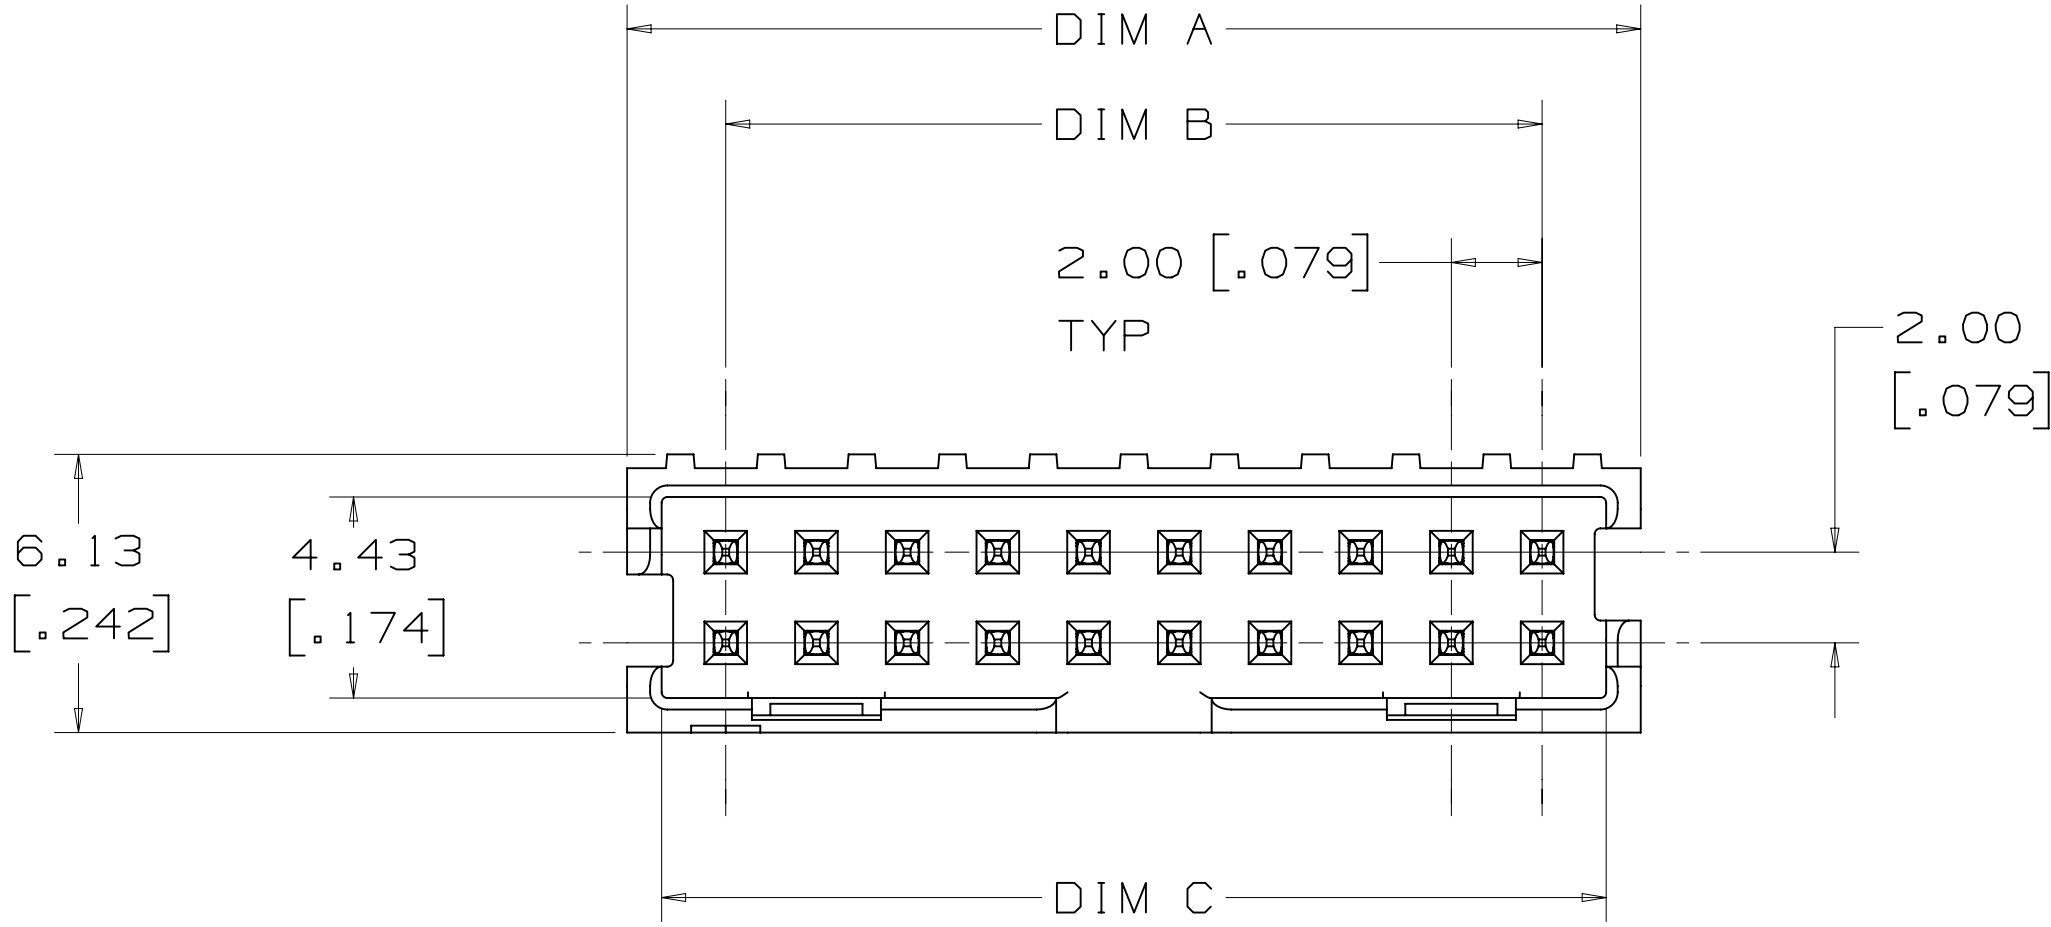
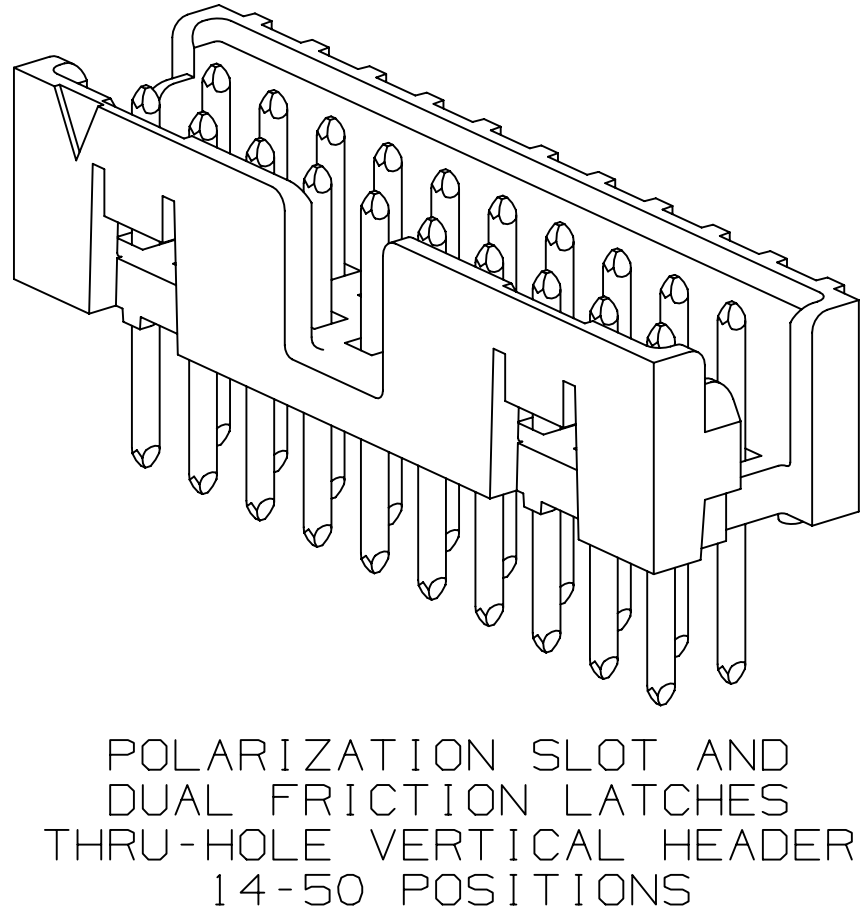
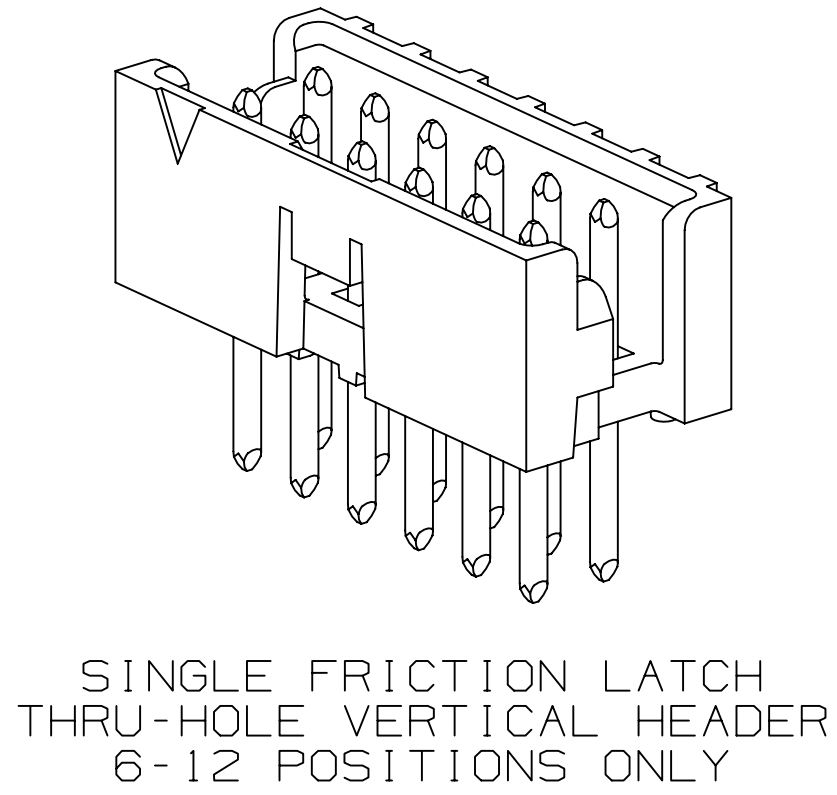


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

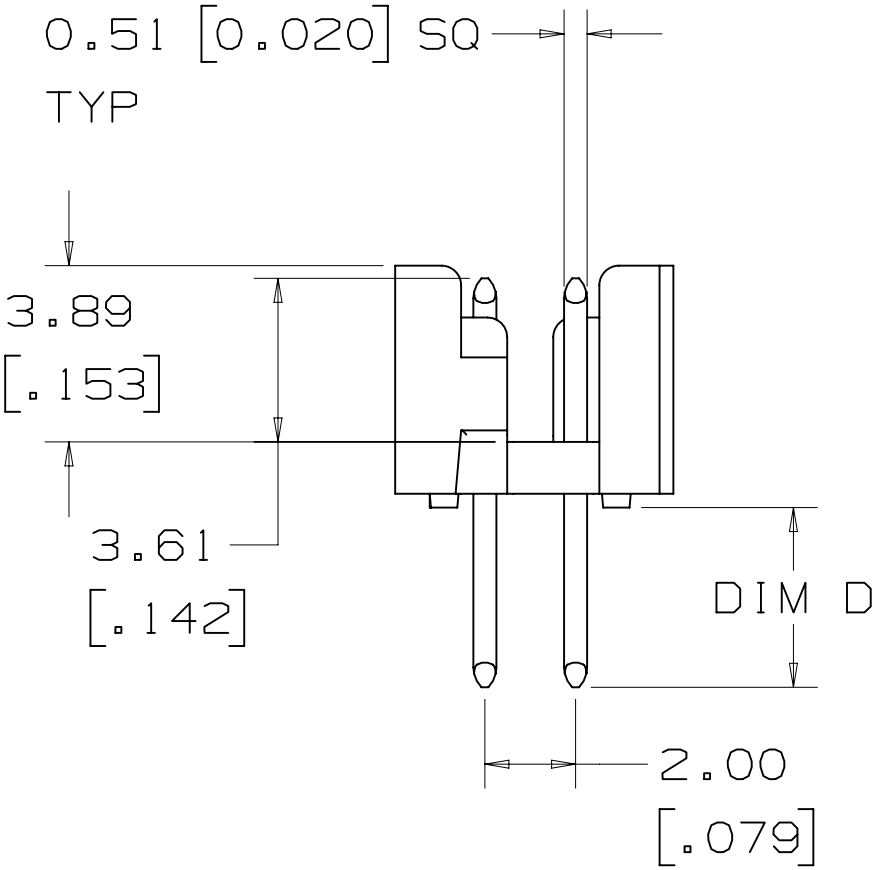

RECOMMENDED PCB HOLE PATTERN
TOLERANCE = 0.05 [.002]

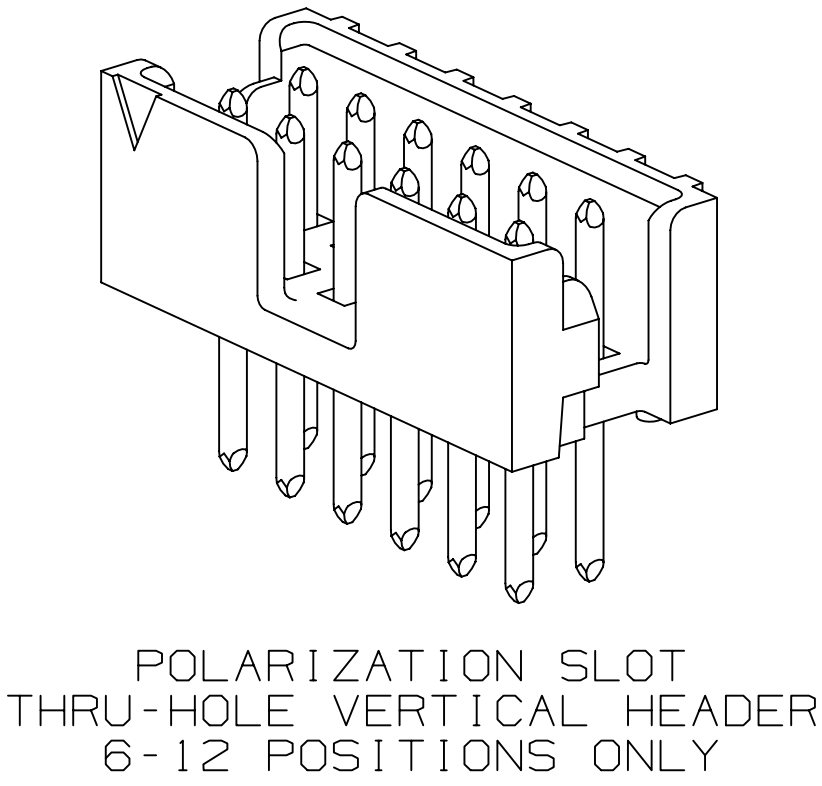

PERFORMANCE [5] [7]	
CURRENT:	1A, 6 LINES ENERGIZED
INSULATION RESISTANCE:	>1 X 10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	500 VACrms AT SEA LEVEL
TEMPERATURE RATING:	-55° C TO +105° C
SOLDER PROCESS TEMPERATURE:	260° C MAX PER IPC/JEDEC J-STD-020D

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS

METRIC [ENGLISH]

- NOTES
- 1

MATERIAL:
BODY: HIGH TEMPERATURE
GLASS FILLED LCP, BLACK
UL94V-0
CONTACTS: COPPER ALLOY
- 2

PLATING:
2.03-3.81 μ m [80-150 μ in]
NICKEL UNDERPLATE.
0.38 μ m [15 μ in] OR
0.76 μ m [30 μ in] AVG GOLD
ON WIPING AREA.
5.08 μ m [200 μ in] MIN
MATTE TIN ON SOLDER TAILS.
- 3

STANDARD LENGTH HEADERS
MATE WITH 3M™ SOCKETS,
158 SERIES (REFERENCE 3M
DRAWING 78-5100-2358-9).
- 4

EXTENDED LENGTH HEADERS
MATE WITH 3M™ SOCKETS,
870 SERIES.
- 5





FOR PRODUCT
SPECIFICATIONS AND
WARRANTY INFORMATION SEE
3M 78-5102-0078-1.
- 6

SEE THE REGULATORY
INFORMATION APPENDIX (RIA)
IN THE "RoHS COMPLIANCE"
SECTION OF
WWW.3MCONNECTOR.COM FOR
COMPLIANCE INFORMATION
(RIA E1 & C1 APPLY).
- 7


IN THE EVENT OF CONFLICT
BETWEEN THIS DATA AND
THAT CONTAINED IN THE
PRODUCT SPECIFICATION,
THE PRODUCT SPECIFICATION
TAKES PRECEDENT.

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DIST. PART CODES				DRP	L. SCHMIDT	DATE	JUL 29,2010	MFG	DATE
DIVISION		DIVISION CODE		CHKD		DATE		APPR	DATE
								S FELDMAN	AUG 09,2010
DO NOT SCALE DRAWING		SCALE 6 1		TOLERANCES EXCEPT AS NOTED		© 3M COPYRIGHT 2010 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		INCHES 0 ± 0.00 ± 0.002 ± 0.000		MILLIMETERS 0 ± 0.00 ± 0.13 ± 0.000			
MAX SURFACE ROUGHNESS 125 ✓ □ ALL SURFACES ✗ MARKED ONLY		ANGLES ±1°		TITLE 3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES		CAGE NUMBER D 78-5100-2359-7		REV. A	
				MODEL		DET LISTS		YES NO SHT 1 OF 4	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

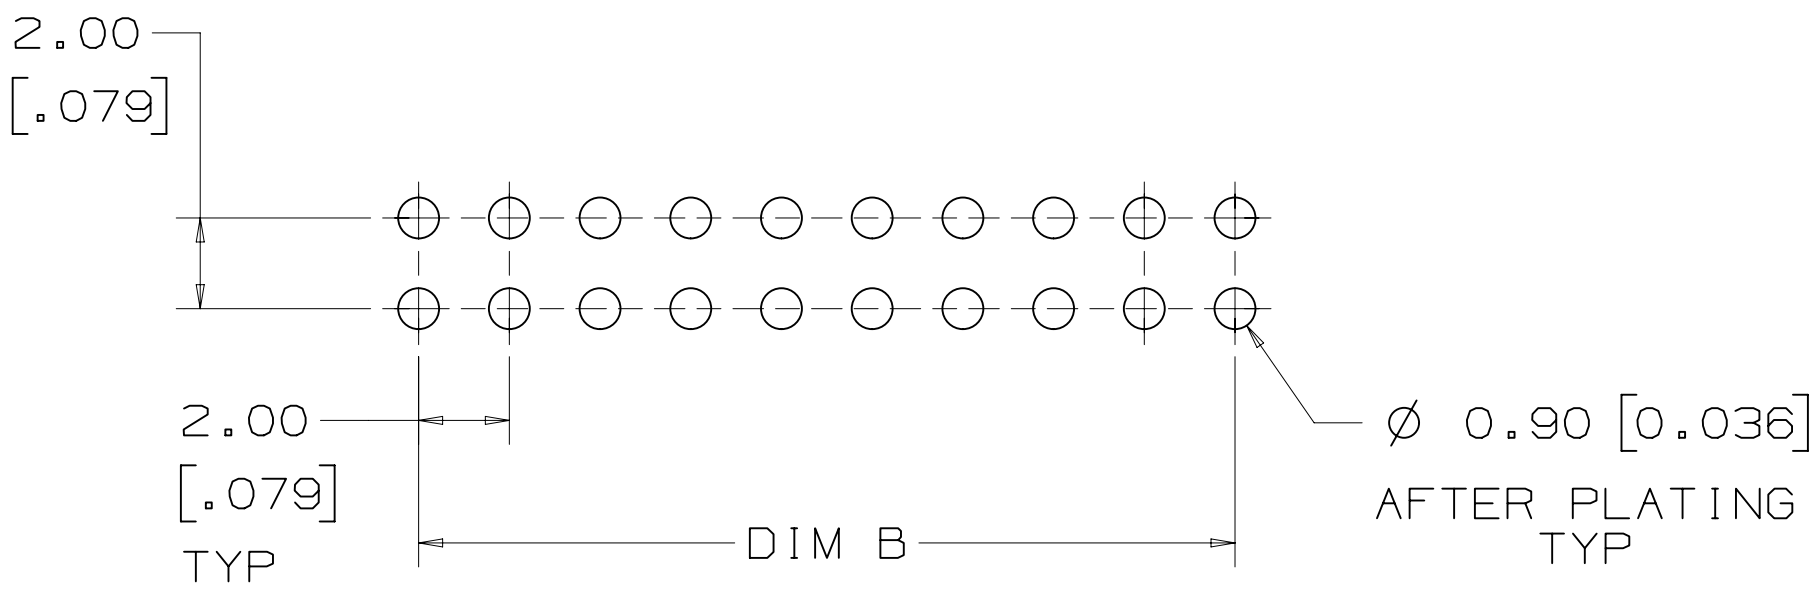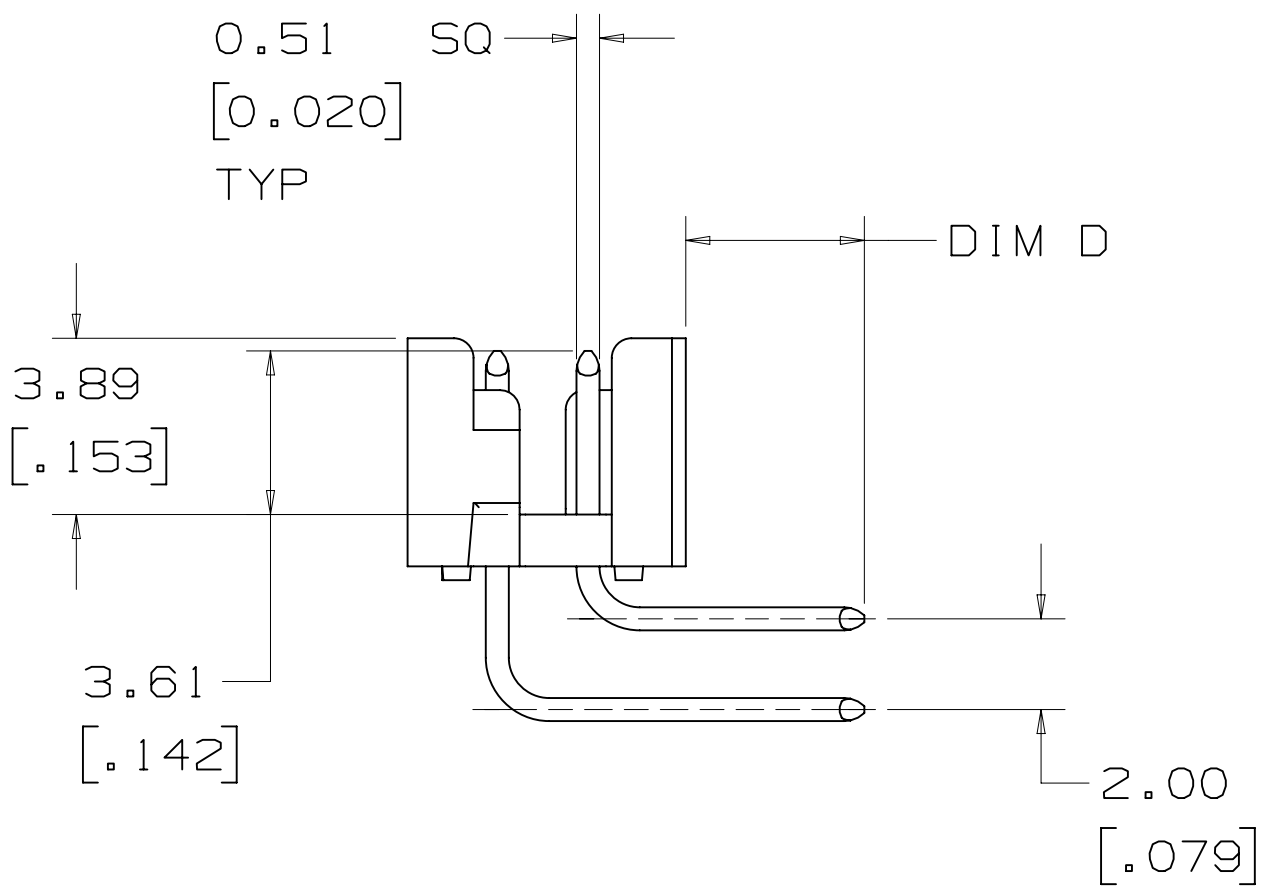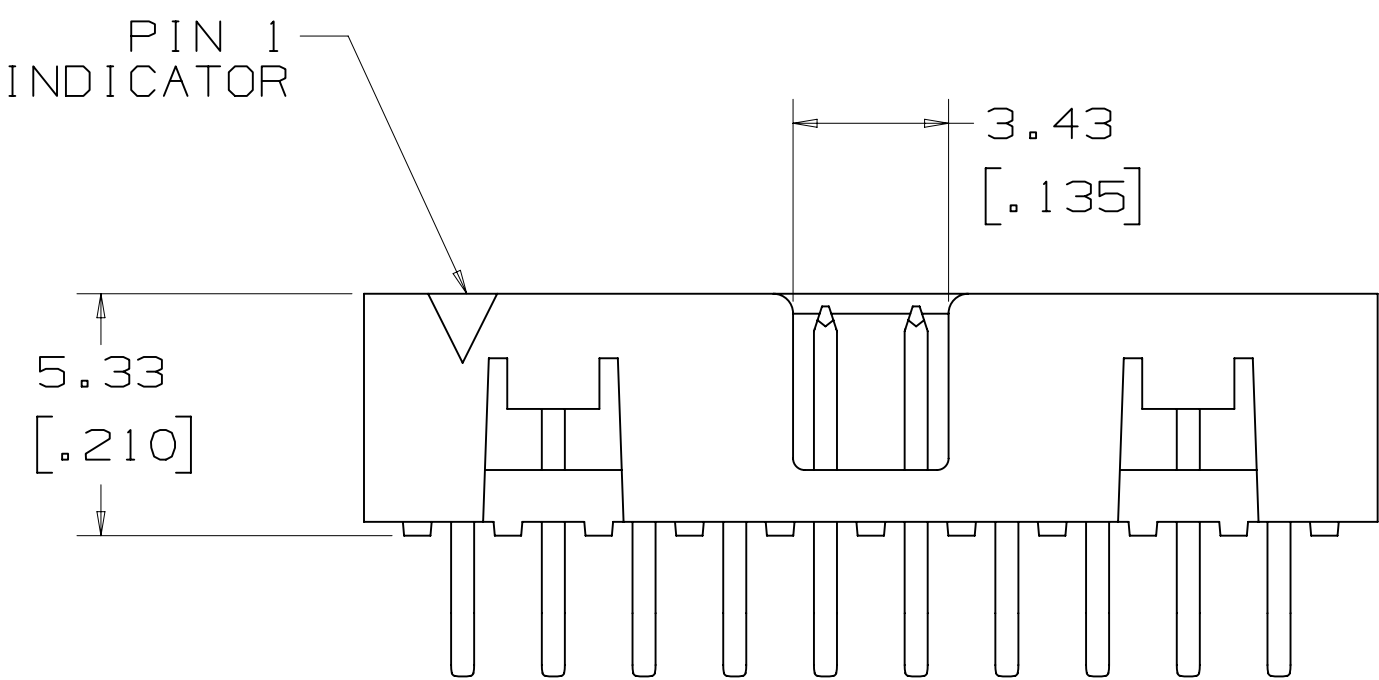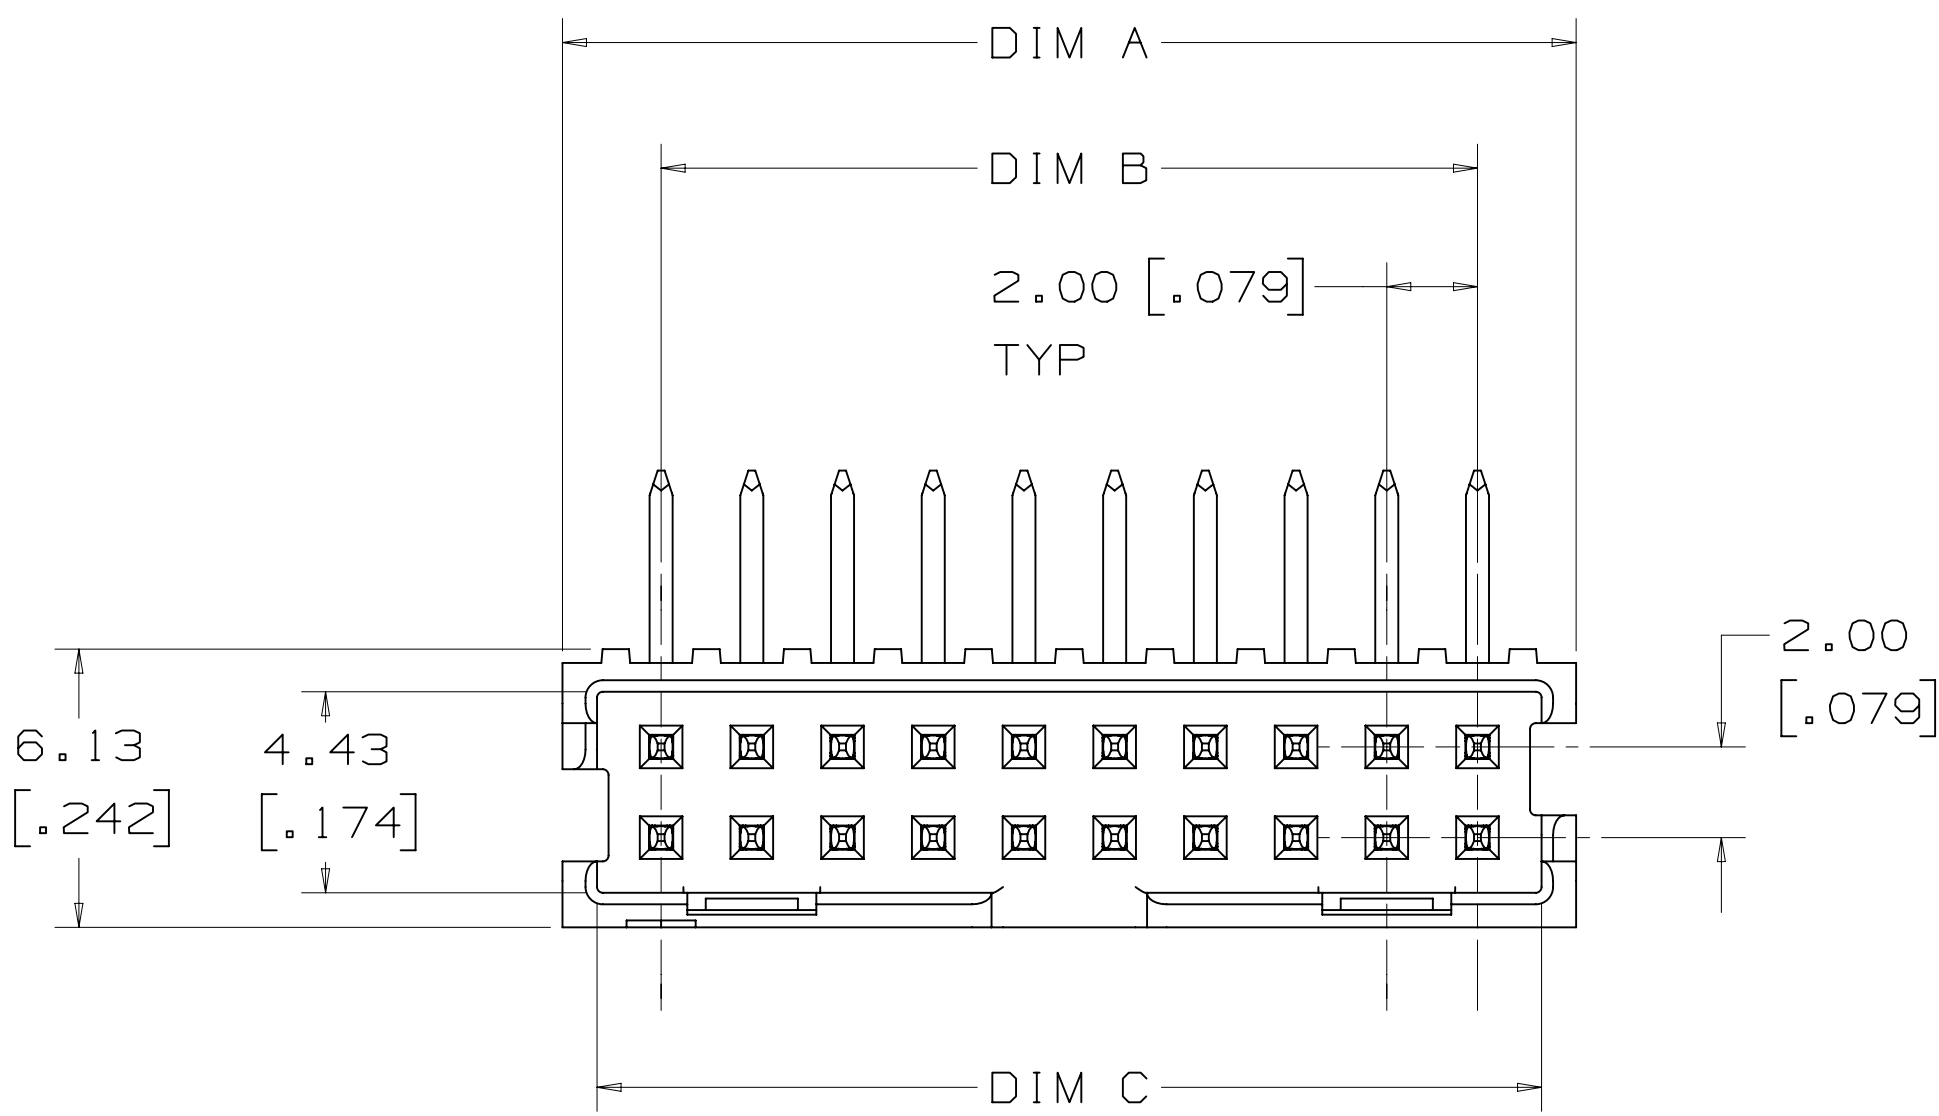


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = ±0.05 [.002]

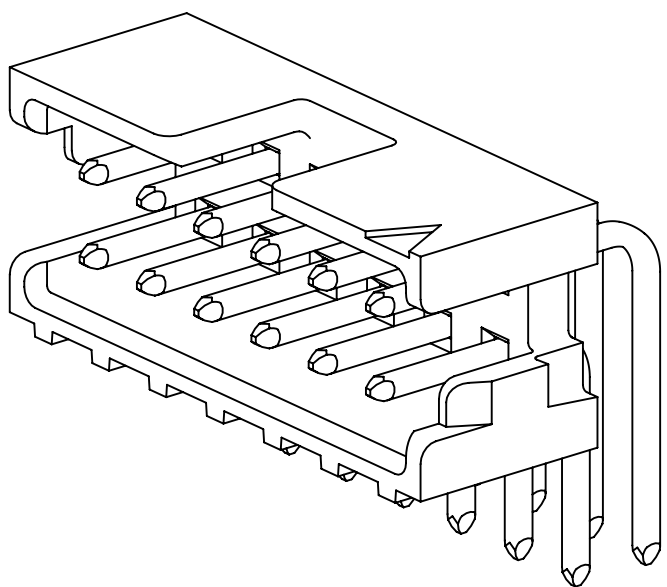

POLARIZATION SLOT
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

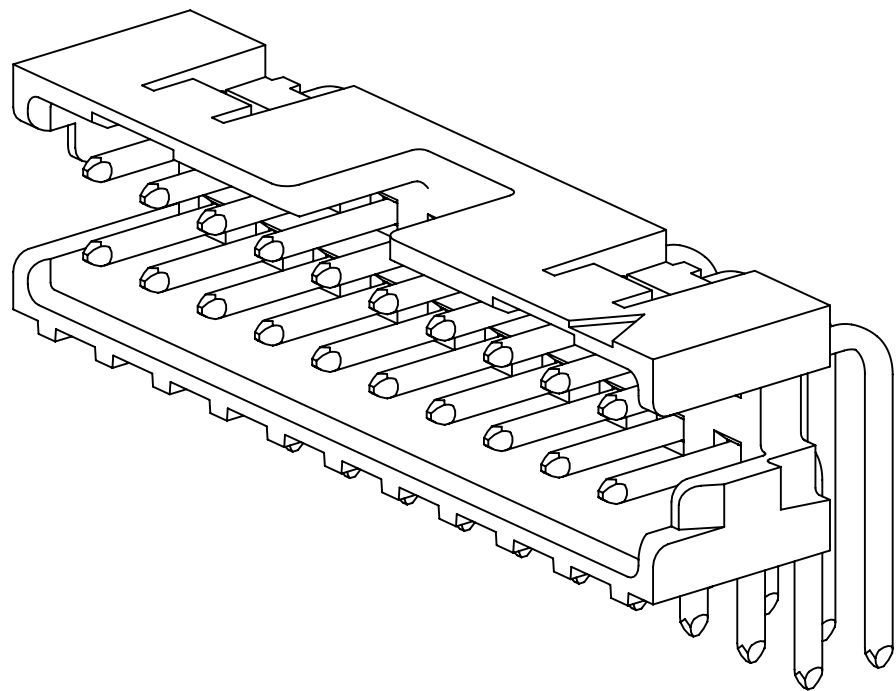

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
RIGHT ANGLE HEADER
14-50 POSITIONS

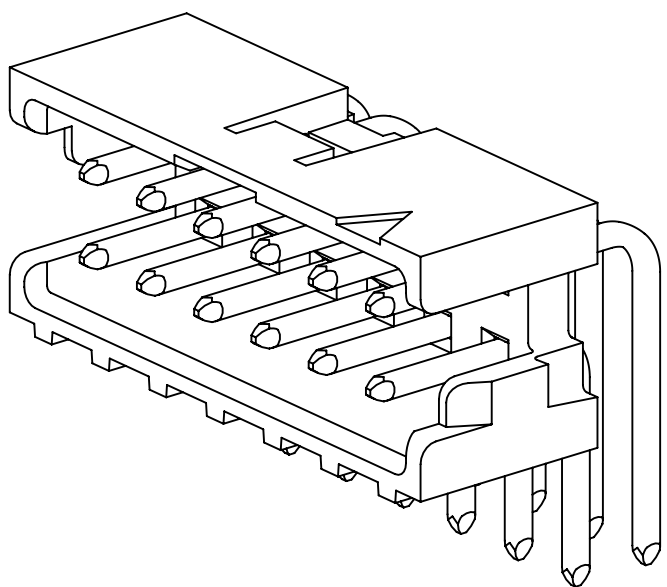




SINGLE FRICTION LATCH
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS



METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		DISTANCE		DRFT	ECO	DATE		DATE	DATE
L. SCHMIDT		JUL 29, 2010		DRFT	ECO	JUL 29, 2010		DATE	DATE
DIVISION		DIVISION CODE		CHKD	ECO	APPROVAL		DATE	DATE
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MAX SURFACE ROUGHNESS		125/		ALL SURFACES	
MARKED ONLY		ANGLES ±1°		CAGE NUMBER		DRAWING NO.		REV.	
125/		D		78-5100-2359-7		A		SHT 2 OF 4	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

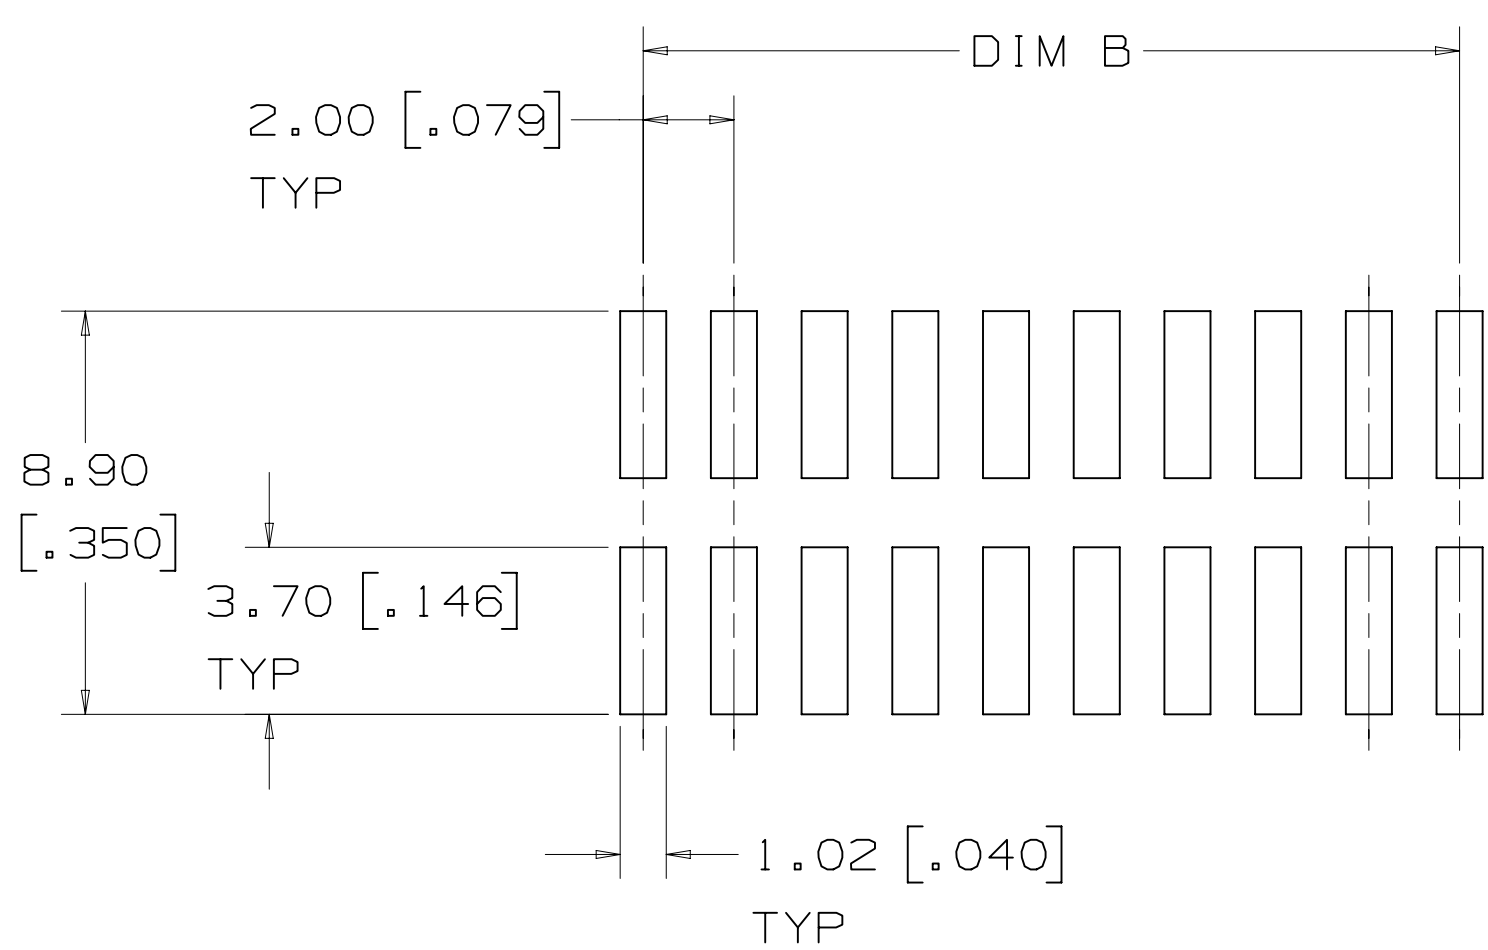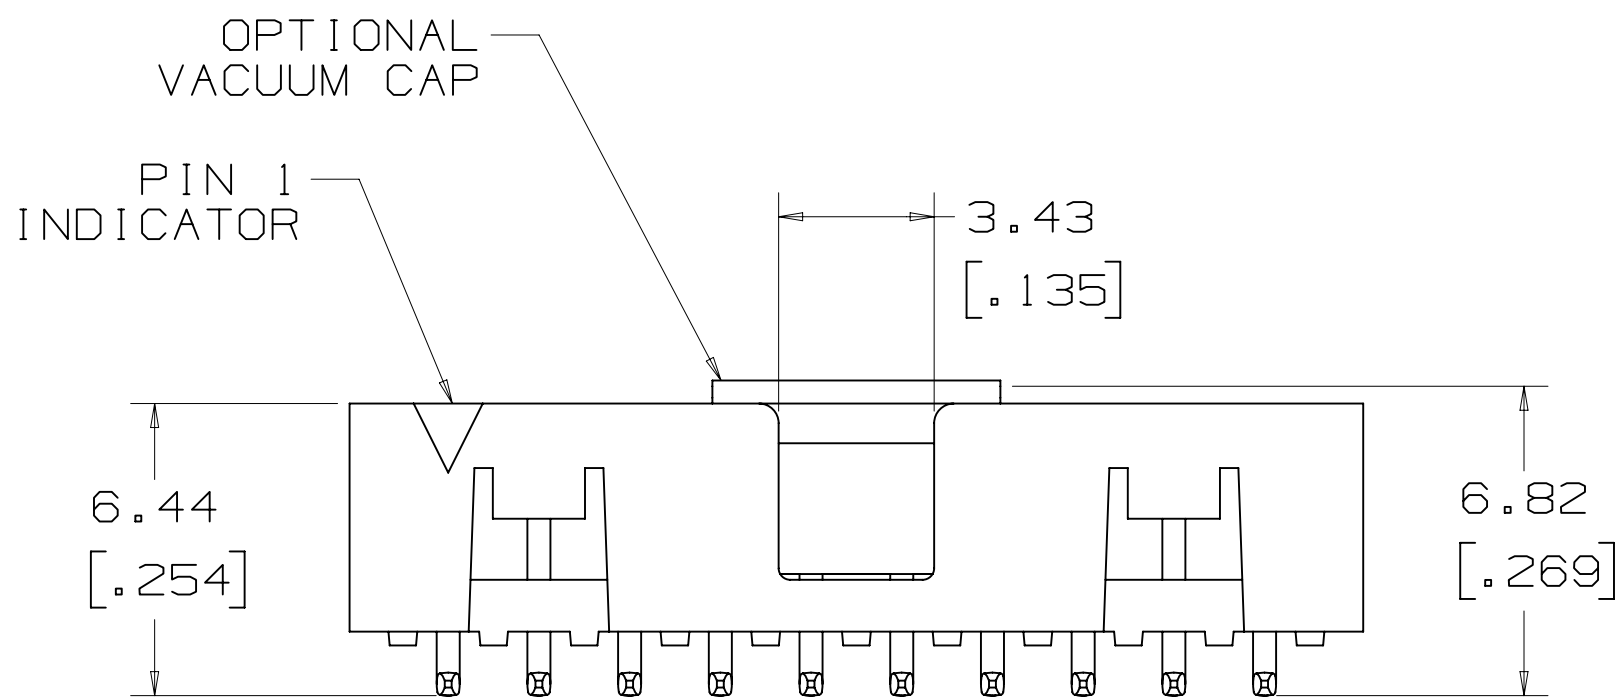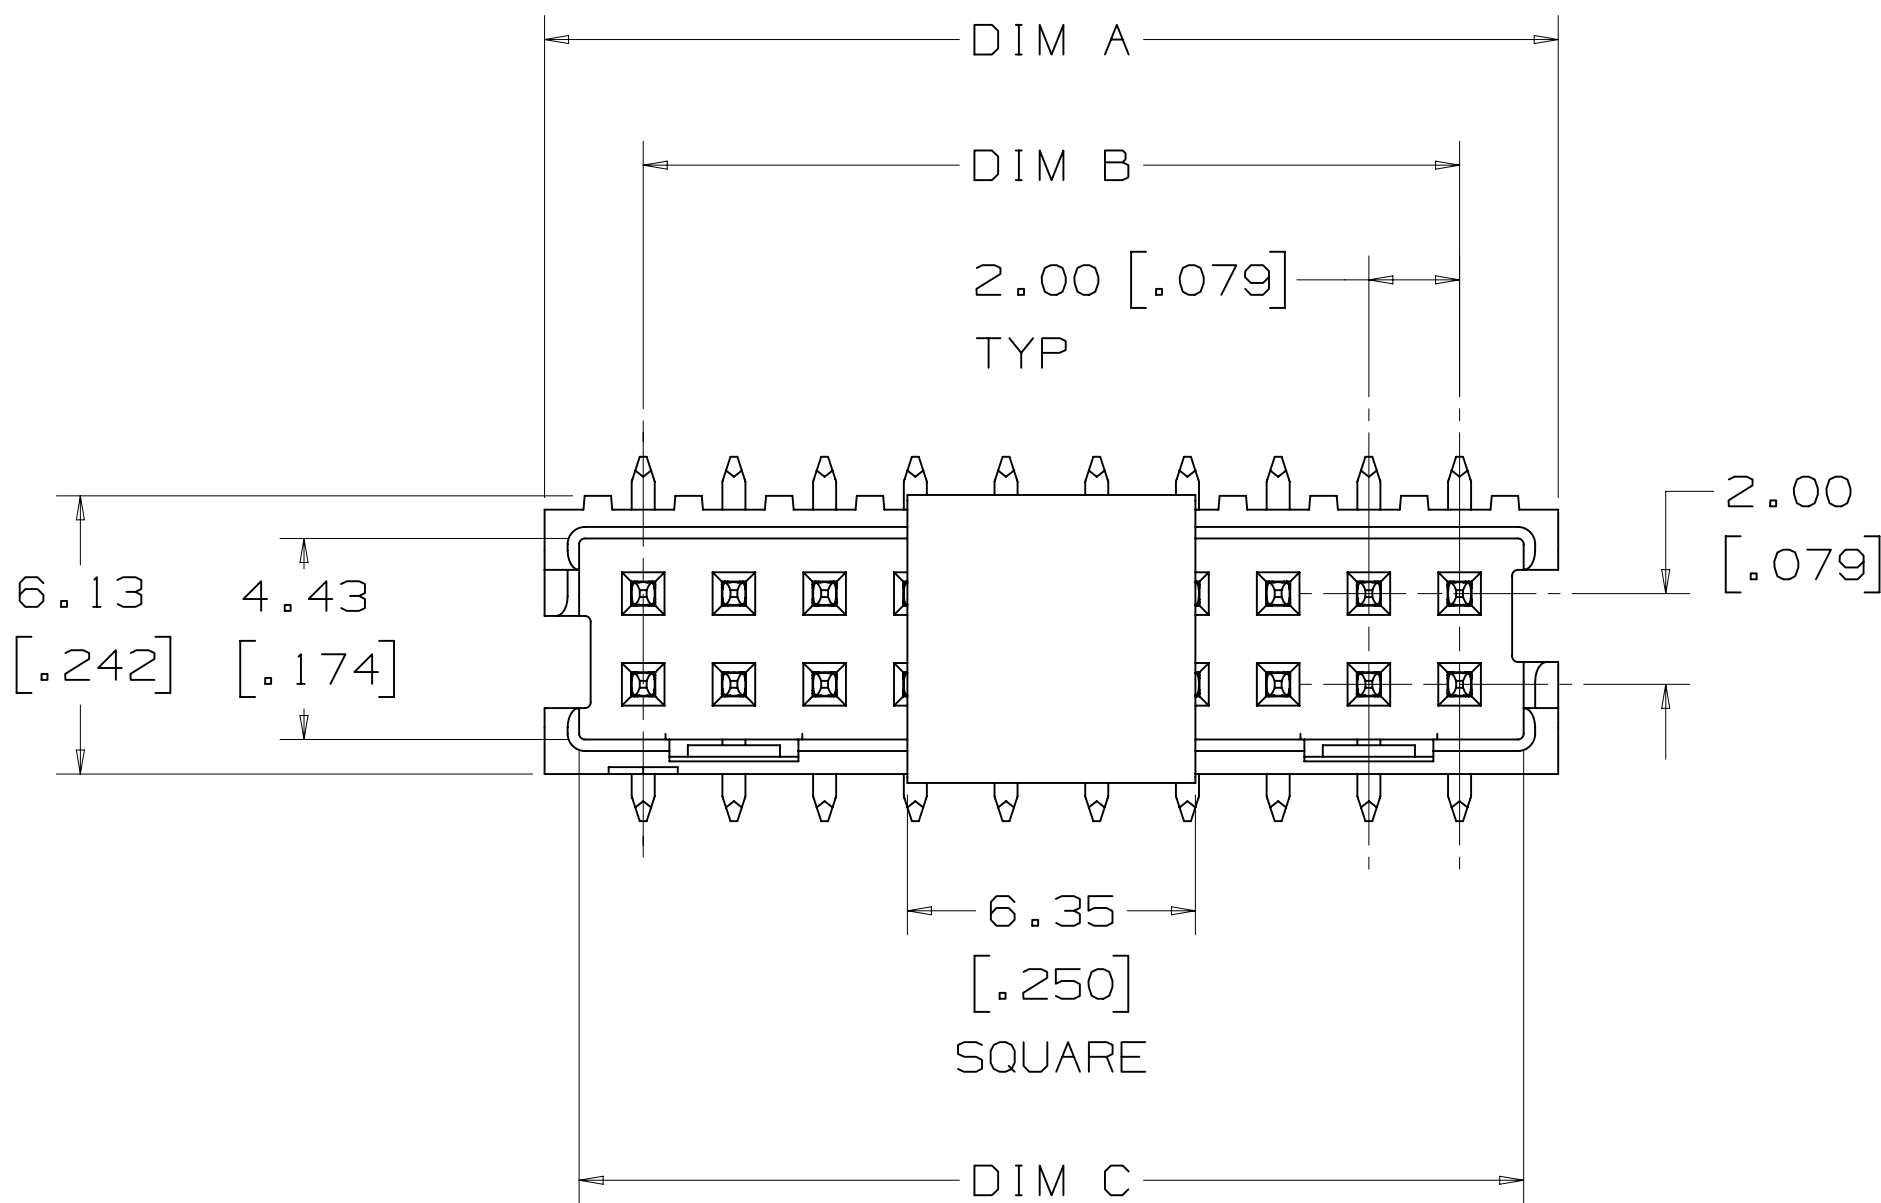


RECOMMENDED PCB PAD PATTERN
TOLERANCE = ±0.08 [.003]

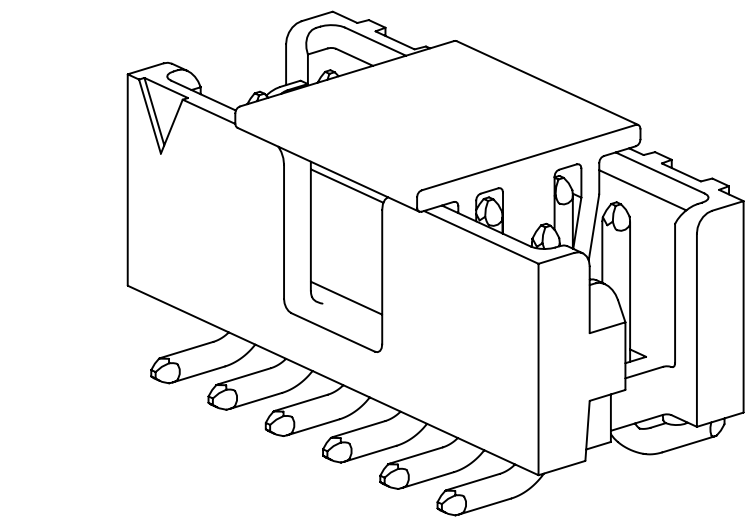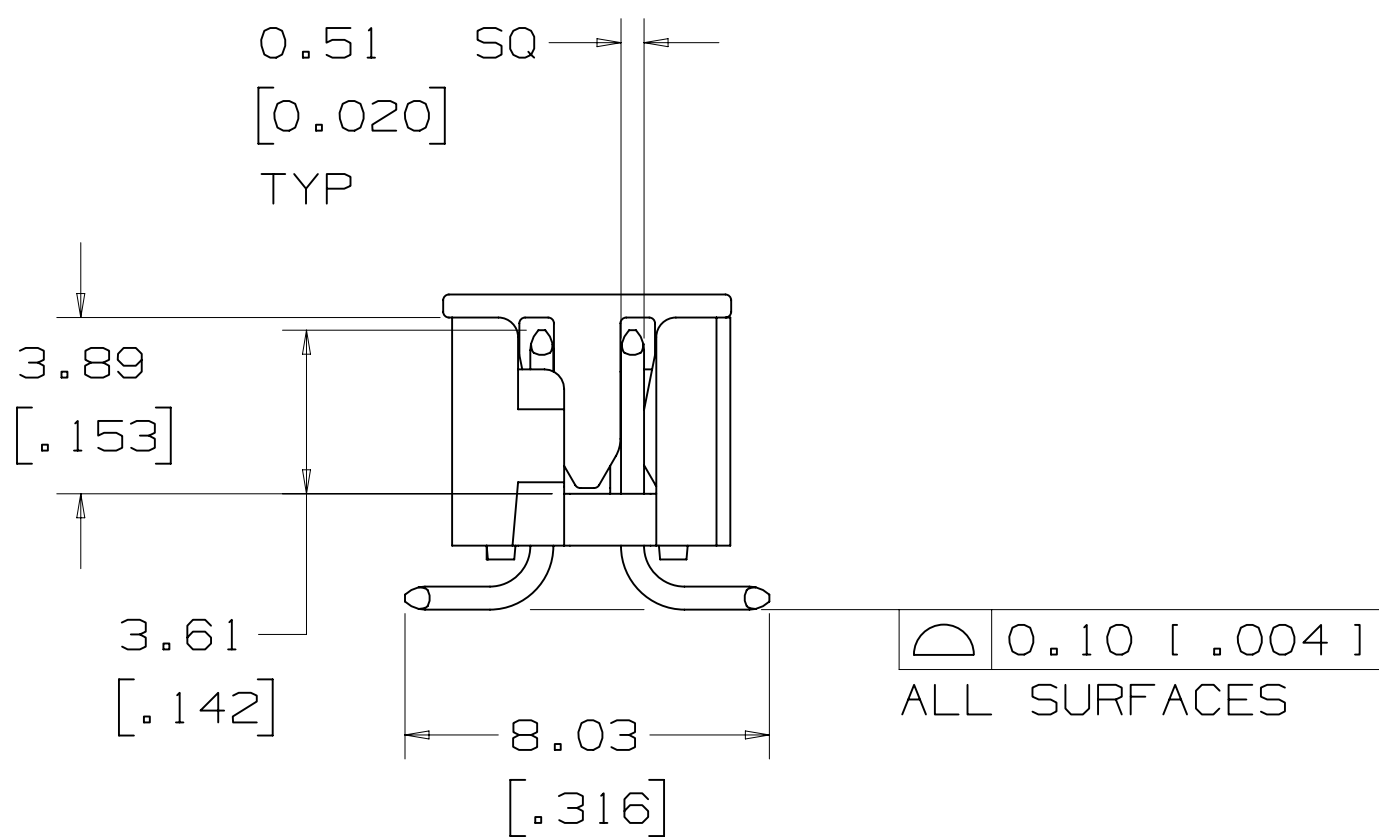

POLARIZATION SLOT
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY

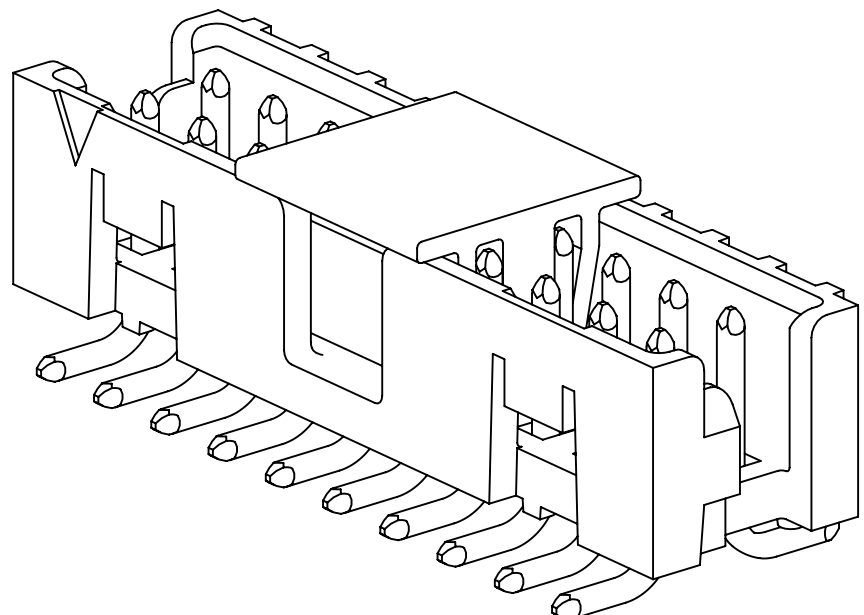

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
SURFACE MOUNT HEADER
14-50 POSITIONS

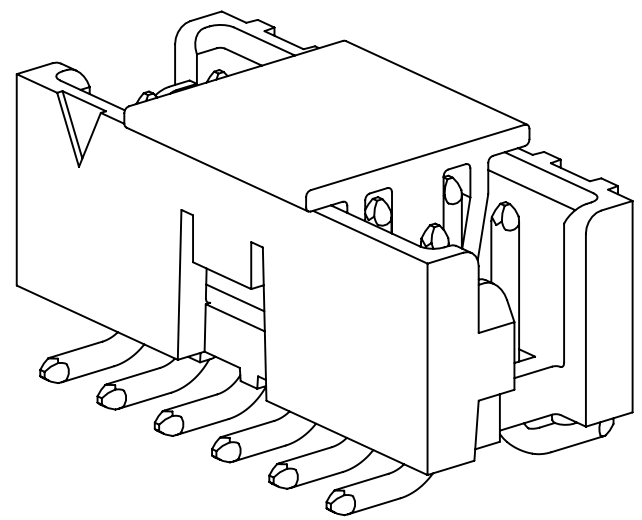

SINGLE FRICTION LATCH
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY


REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		SCALE		DATE		DATE		DATE	
L. SCHMIDT		JUL 29, 2010		MFG		JUL 29, 2010		DATE	
DIVISION		DIVISION CODE		APPROVAL		DATE		DATE	
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		NOTED		NOTED	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS		INCHES		MILLIMETERS	
MAX SURFACE ROUGHNESS		ALL SURFACES		0 ± .00		0 ± .00		0 ± .00	
125/		MARKED ONLY		0 ± .00		0 ± .00		0 ± .00	
ANGLES ±1°		CAGE NUMBER		DRAWING NO.		REV.		REV.	
125/		D		78-5100-2359-7		A		A	
MODEL		DET		LISTS		YES		NO	
SHT 3 OF 4		SHT 3 OF 4		SHT 3 OF 4		SHT 3 OF 4		SHT 3 OF 4	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length 3

STANDARD LENGTH HEADERS
ARE AVAILABLE

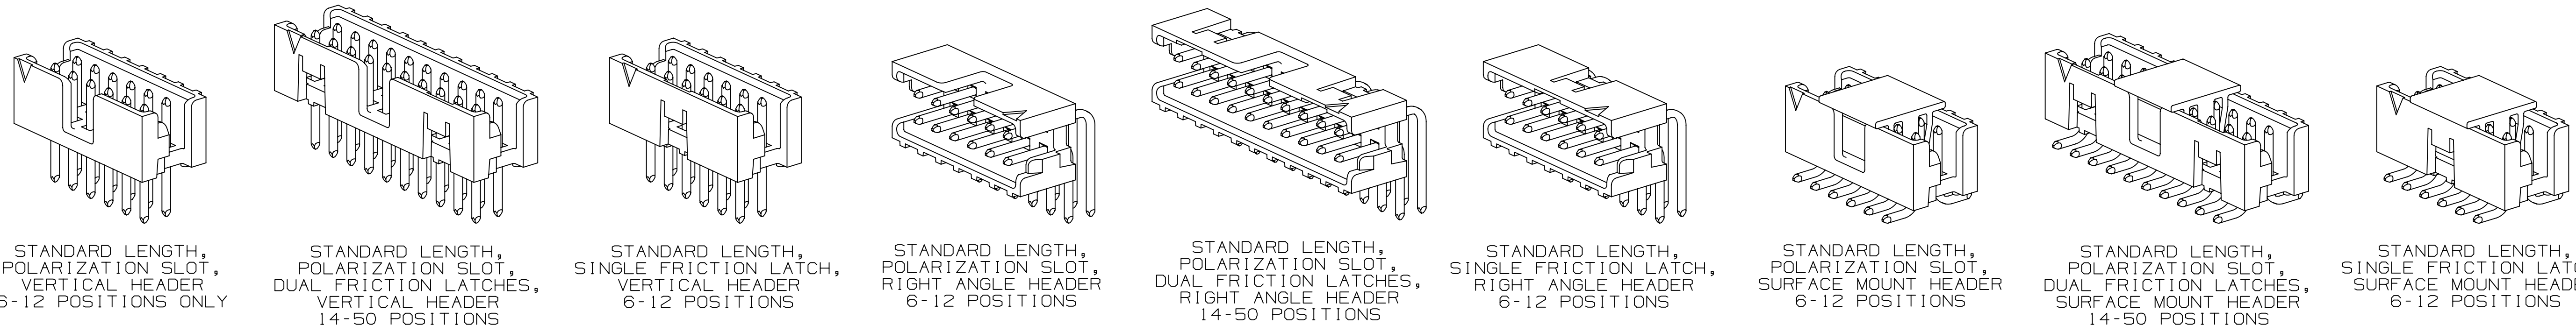

3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Extended Length 4

CALL 3M INTERCONNECT SOLUTIONS
AT 800-225-5373 FOR AVAILABILITY
OF EXTENDED LENGTH HEADERS

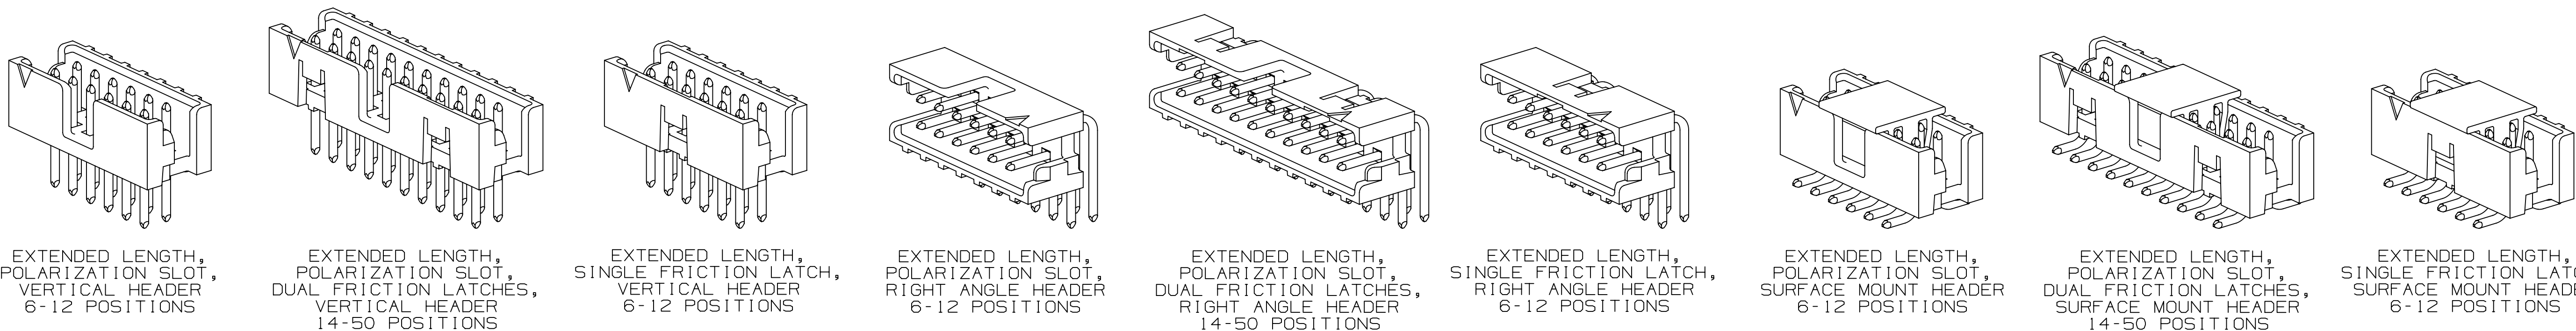

ORDERING INFORMATION

TIER 1 - BEST
1591XX-XXXX

TIER 1 = BEST 0.76 μ m
[30 μ in] GOLD

POSITION COUNT (SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

TIER 2 - BETTER
1592XX-XXXX

TIER 2 = BETTER 0.38 μ m
[15 μ in] GOLD

POSITION COUNT (SEE TABLE)

PART CONFIGURATION
2 = VERTICAL SMT
5 = RIGHT ANGLE THRU HOLE
6 = VERTICAL THRU HOLE

BODY LENGTH
0 = STANDARD LENGTH
(MATES TO 158 SERIES)
1 = EXTENDED LENGTH
(MATES TO 870 SERIES)

CONTACT TAIL LENGTH
2 = 2.84 mm [.112]
3 = 3.94 mm [.155]

POLARIZATION/LATCHING
0 = POLARIZATION SLOT AND
DUAL FRICTION LATCHES
(14-50 POSITIONS ONLY)
1 = POLARIZATION SLOT
(6-12 POSITIONS ONLY)
2 = SINGLE FRICTION LATCH
(6-12 POSITIONS ONLY)

NUMBER OF POSITIONS	SHROUDED BOX HEADER						
	DIM A		DIM B	DIM C		DIM D	
	STANDARD	EXTENDED		STANDARD	EXTENDED		
6	8.35 [.329]	9.52 [.375]	4.00 [.157]	6.83 [.269]	7.99 [.315]	2.84 [.112]	3.94 [.155]
8	10.35 [.407]	11.52 [.453]	6.00 [.236]	8.83 [.347]	9.99 [.393]	2.84 [.112]	3.94 [.155]
10	12.35 [.486]	13.52 [.532]	8.00 [.315]	10.83 [.426]	11.99 [.472]	2.84 [.112]	3.94 [.155]
12	14.35 [.565]	15.52 [.611]	10.00 [.394]	12.83 [.505]	13.99 [.551]	2.84 [.112]	3.94 [.155]
14	16.36 [.644]	17.52 [.690]	12.00 [.472]	14.83 [.584]	15.99 [.630]	2.84 [.112]	3.94 [.155]
16	18.35 [.722]	19.52 [.768]	14.00 [.551]	16.83 [.662]	17.99 [.708]	2.84 [.112]	3.94 [.155]
20	22.35 [.880]	23.52 [.926]	18.00 [.709]	20.83 [.820]	21.99 [.866]	2.84 [.112]	3.94 [.155]
22	24.35 [.959]	25.52 [1.005]	20.00 [.787]	22.83 [.899]	23.99 [.945]	2.84 [.112]	3.94 [.155]
24	26.35 [1.037]	27.52 [1.083]	22.00 [.866]	24.83 [.977]	25.99 [1.023]	2.84 [.112]	3.94 [.155]
26	28.35 [1.116]	29.52 [1.162]	24.00 [.945]	26.83 [1.056]	27.99 [1.102]	2.84 [.112]	3.94 [.155]
30	32.35 [1.274]	33.52 [1.320]	28.00 [1.102]	30.83 [1.214]	31.99 [1.260]	2.84 [.112]	3.94 [.155]
34	36.35 [1.431]	37.52 [1.477]	32.00 [1.260]	34.83 [1.371]	35.99 [1.417]	2.84 [.112]	3.94 [.155]
40	42.35 [1.667]	43.52 [1.713]	38.00 [1.496]	40.83 [1.607]	41.99 [1.653]	2.84 [.112]	3.94 [.155]
44	46.35 [1.825]	47.52 [1.871]	42.00 [1.654]	44.83 [1.765]	45.99 [1.811]	2.84 [.112]	3.94 [.155]
50	52.35 [2.061]	53.52 [2.107]	48.00 [1.890]	50.83 [2.001]	51.99 [2.047]	2.84 [.112]	3.94 [.155]

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
101		102		L. SCHMIDT		DATE JUL 29, 2010			
DIVISION		DIVISION CODE		CHKD		DATE		APPR	DATE
				S. FELDMAN		AUG 09, 2010			
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES			
THIRD ANGLE PROJECTION						MILLIMETERS			
INTERPRET PER ASME Y14.5 - 1994						0 ±			
MAX SURFACE ROUGHNESS						0.00 ±			
125/						0.00 ±			
ALL SURFACES						0.000 ±			
MARKED ONLY						ANGLES ±1°			
A 30741		OCT 28, 2010		LDS		SF			
INITIAL RELEASE									
3M		3M Center St. Paul, MN 55144		© 3M COPYRIGHT 2010		This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.			
TITLE		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES		CAGE NUMBER		DRAWING NO.		REV.	
125/		D 78-5100-2359-7		A					
MODEL		LISTS		YES		NO		SHT 4 OF 4	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.