

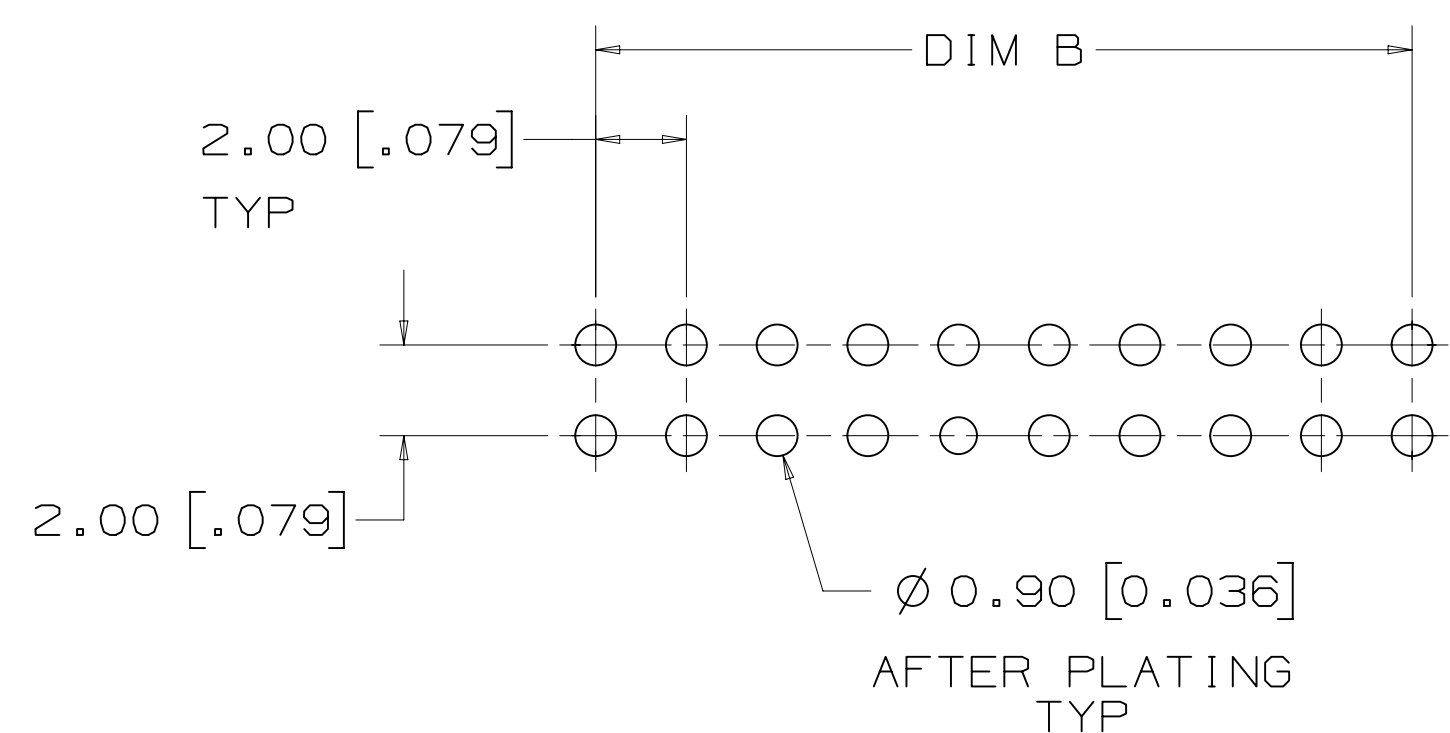
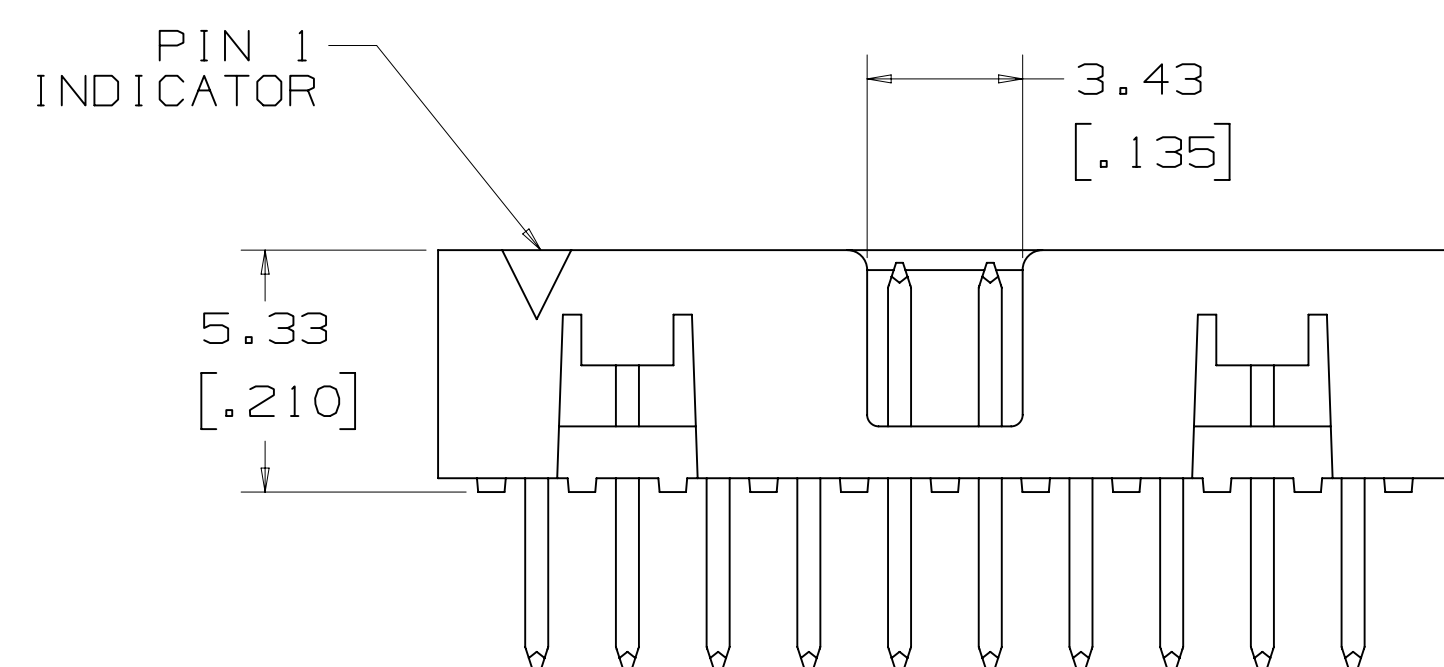



3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length and Extended Length

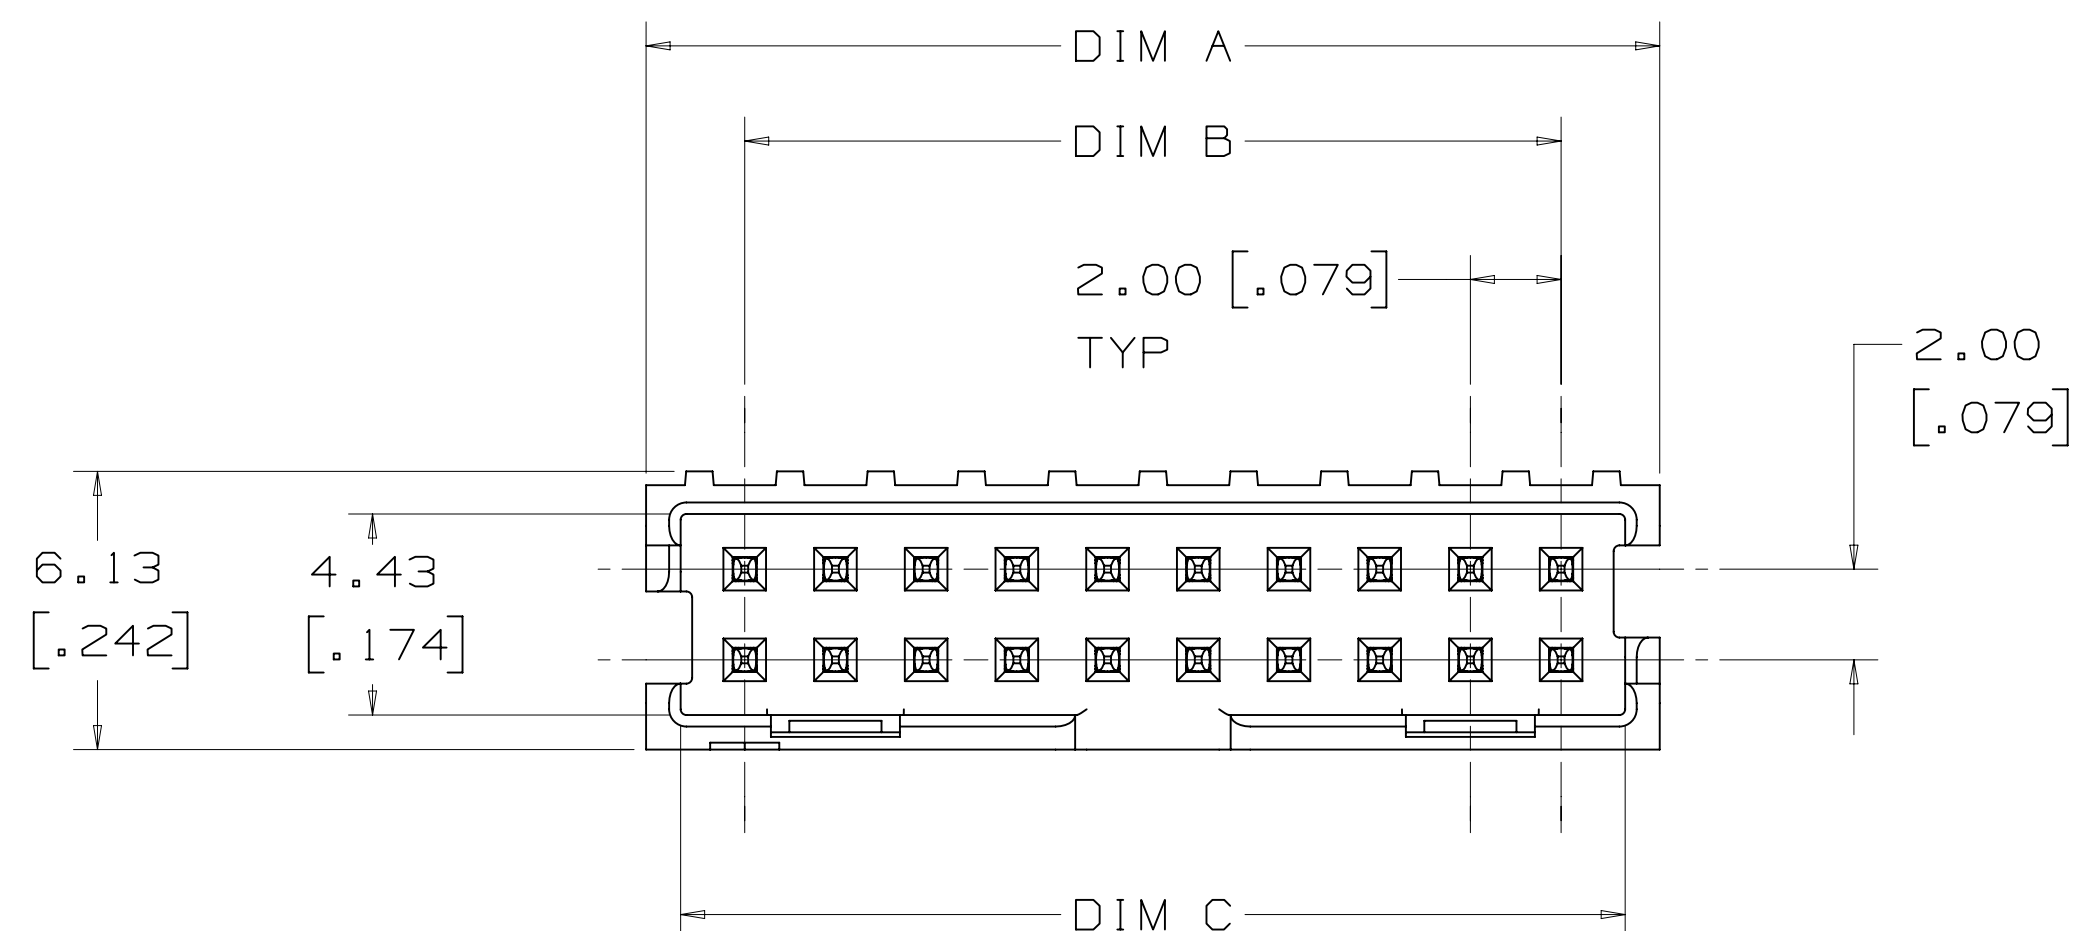


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = 0.05 [.002]

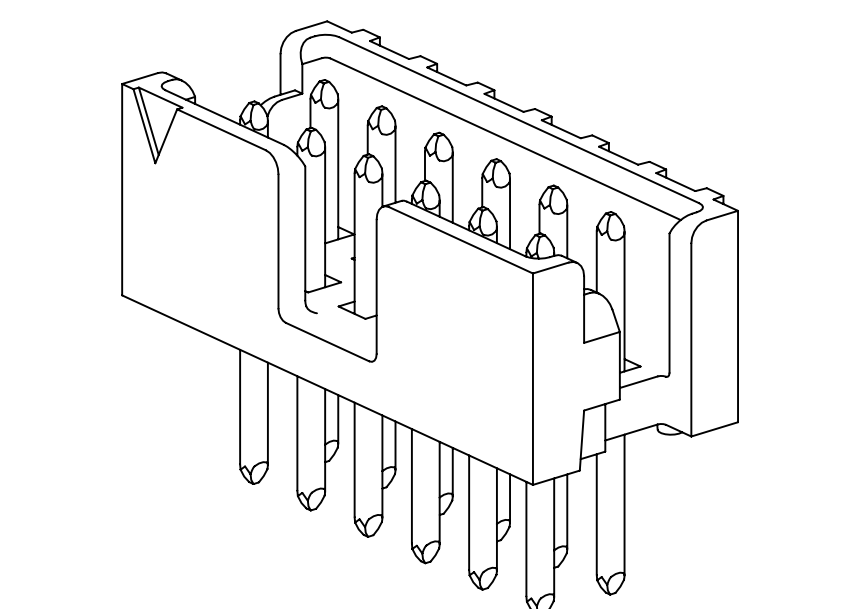

POLARIZATION SLOT
THRU-HOLE VERTICAL HEADER
6-12 POSITIONS ONLY

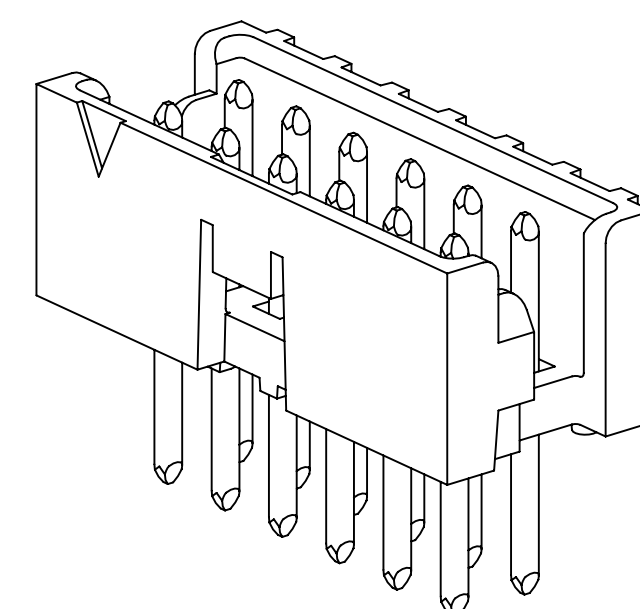

SINGLE FRICTION LATCH
THRU-HOLE VERTICAL HEADER
6-12 POSITIONS ONLY

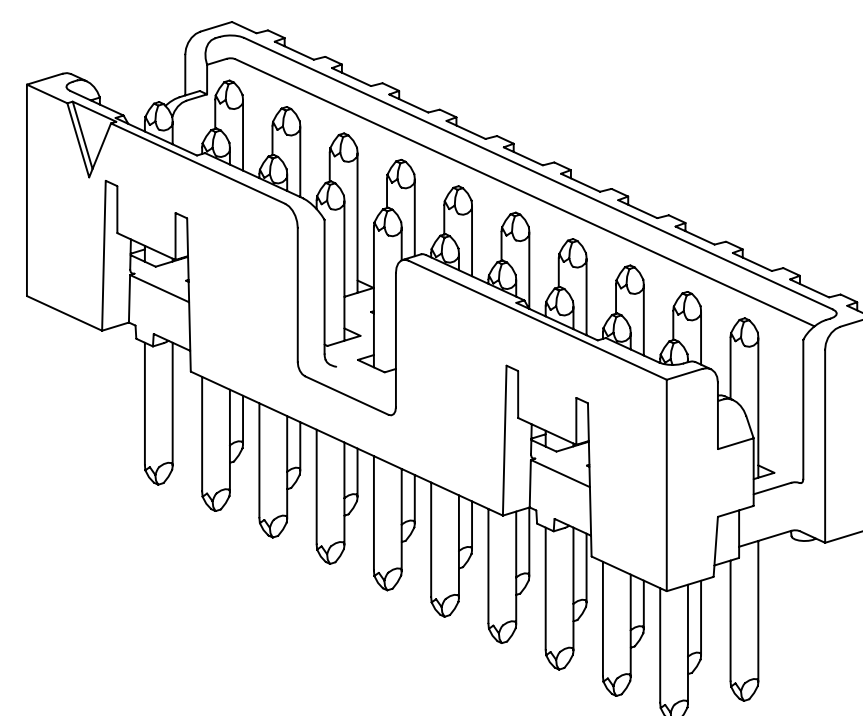

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
THRU-HOLE VERTICAL HEADER
14-50 POSITIONS





PERFORMANCE [5][7]	
CURRENT:	1A, 6 LINES ENERGIZED
INSULATION RESISTANCE:	>1 X 10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	500 VACrms AT SEA LEVEL
TEMPERATURE RATING:	-55°C TO +105°C
SOLDER PROCESS TEMPERATURE:	260°C MAX PER IPC/JEDEC J-STD-020D

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS


METRIC [ENGLISH]

A		30741		OCT 28, 2010		LDS		SF	
INITIAL RELEASE									
DESIGN REFERENCE		NEXT ASSEMBLY		ISSUE DATE AND DESCRIPTION		DRFT		CHKD	
DISTINGUISHING CODES		REV		ECO		DATE		DATE	
		L		SCHMIDT		JUL 29, 2010		MFG	
		CHD				DATE		APPROV	
DIVISION		DIVISION CODE				S		FELDMAN	
						AUG 09, 2010			
DO NOT SCALE DRAWING		SCALE		TOLERANCES EXCEPT AS NOTED		© 3M COPYRIGHT 2010 This document and the information it contains are 3M property and may not be reproduced or further distributed without the express permission, or used disclosed other than for 3M authorized purposes. All rights reserved.			
		6 1							
THIRD ANGLE PROJECTION		INCHES		TITLE		3M SHROUDED BOARD MOUNT HEADER 2 MM X 2 MM PITCH 159 SERIES			
		.0 .00 .000 ± .0000 ±		.0 .00 .000 ± .0000 ±					
INTERPRET PER ASME Y14.5 - 1994		MILLIMETERS		CASE NUMBER		SIZE			
MAX SURFACE ROUGHNESS		.0 .00 .000 ± .000 ±		DRAWING NO.		REV.			
125		.00 ± 0.13 .000 ±		D		78-5100-2359-7			
☒ ALL SURFACES ☐ MARKED ONLY		ANGLES ± 1°		MODEL		DET.			
						☐ YES ☒ NO			
						SHT 1 OF 4			


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

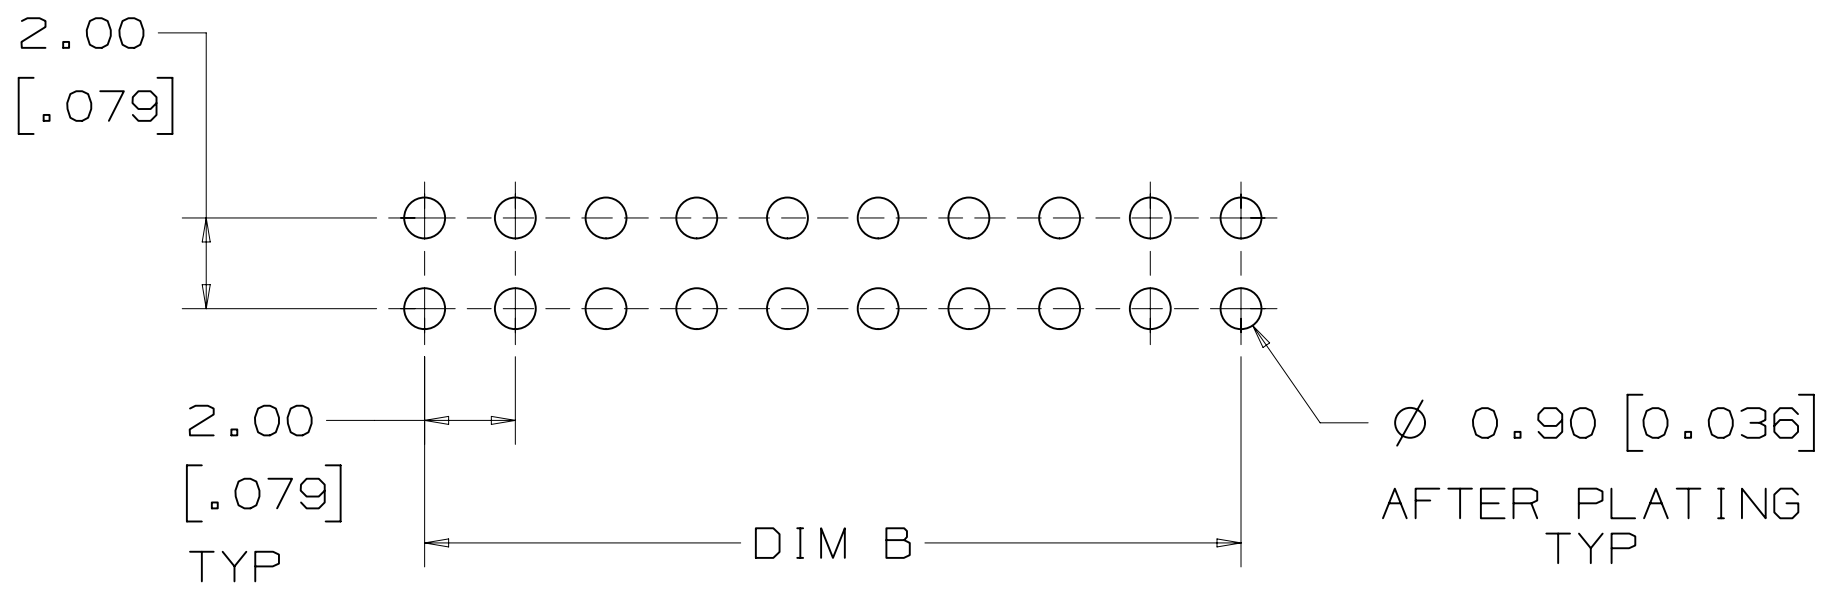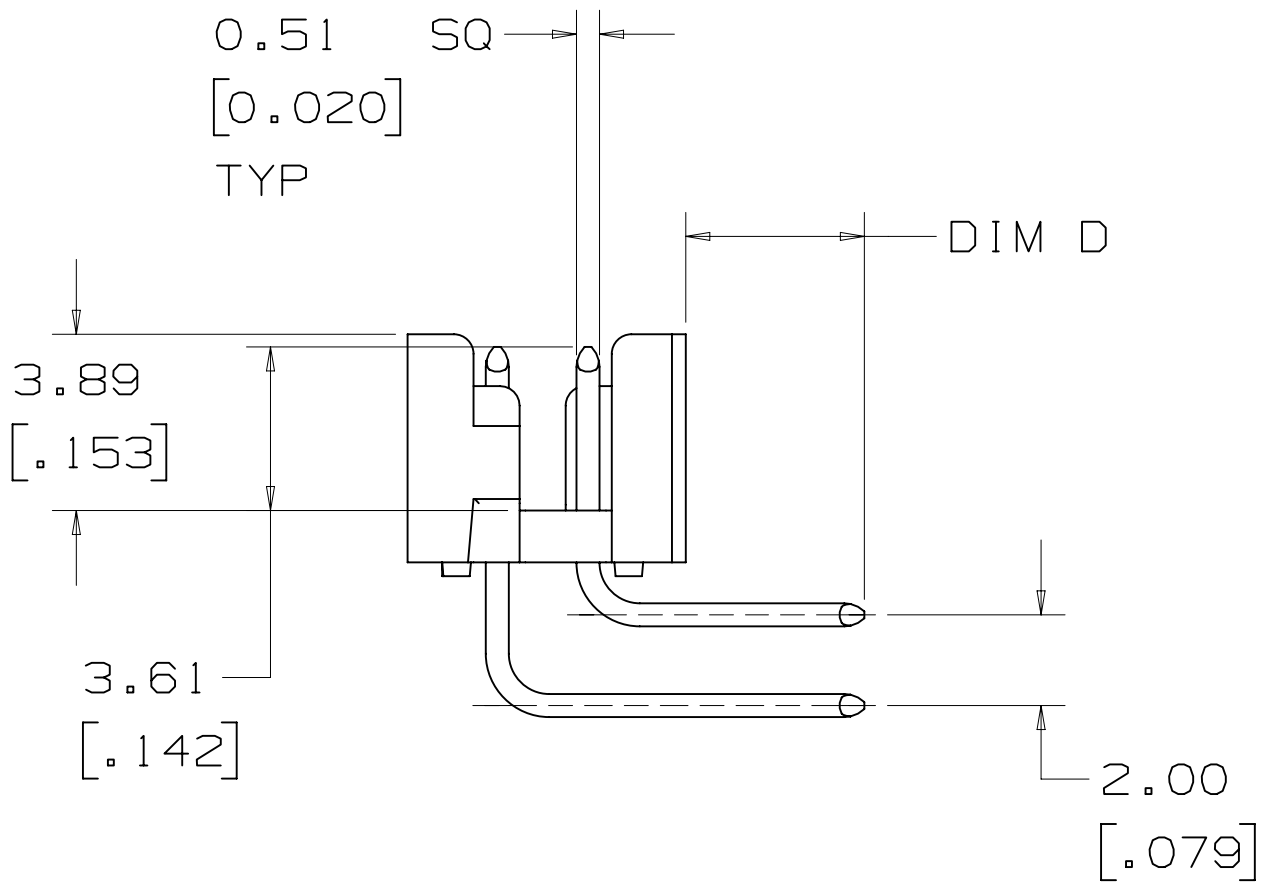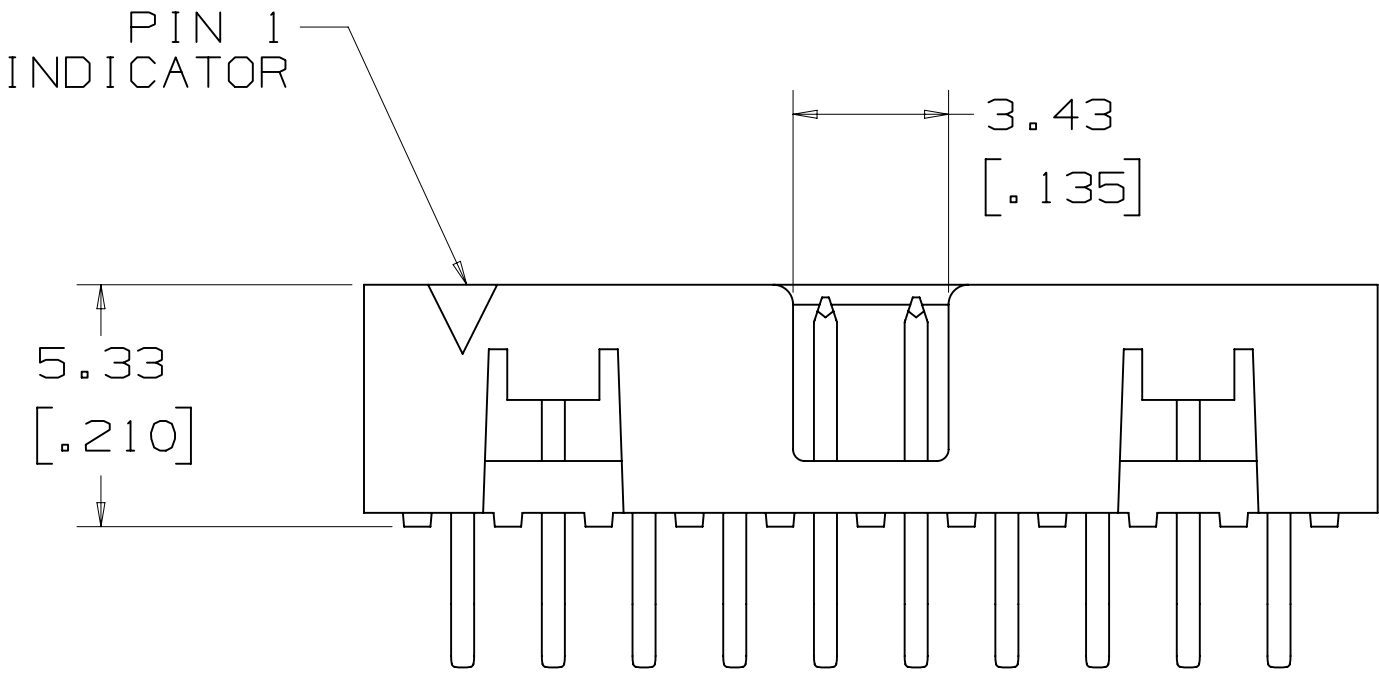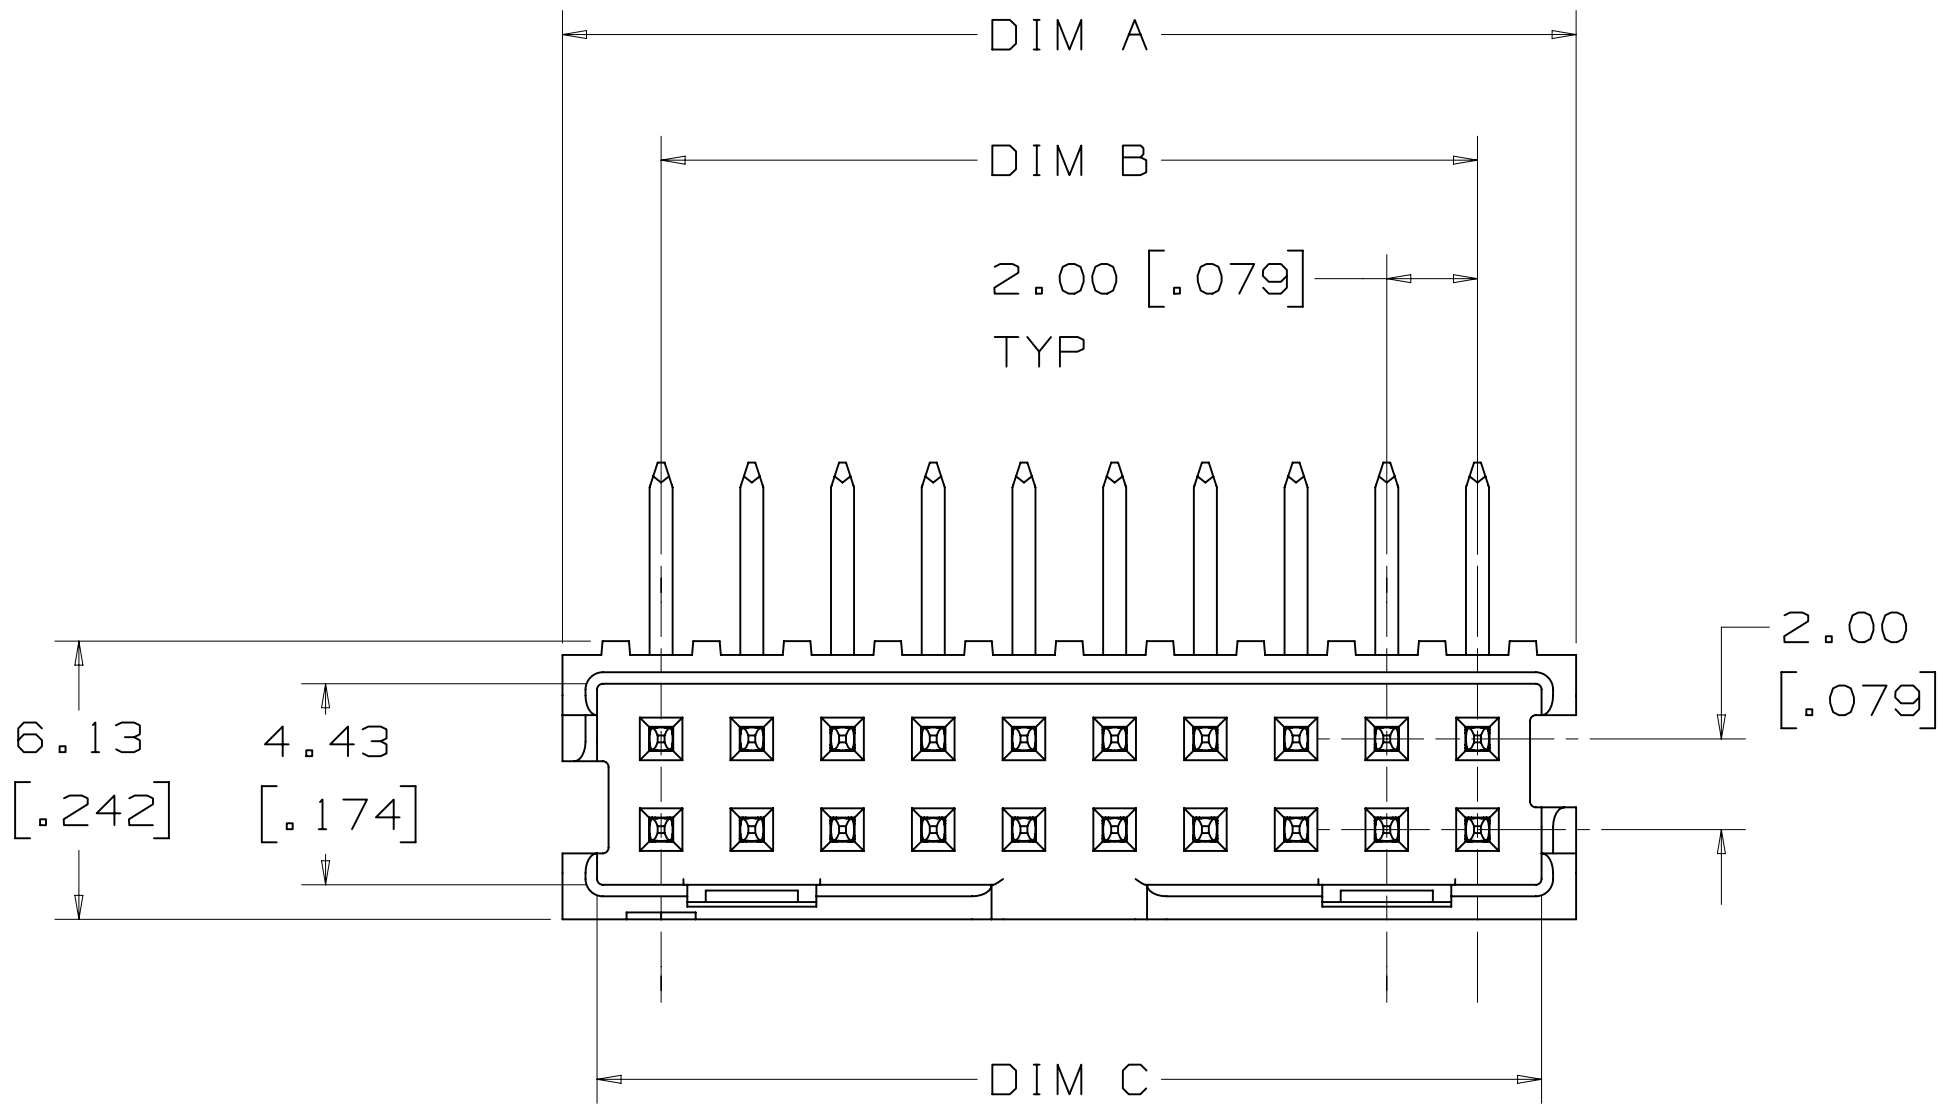


RECOMMENDED PCB HOLE PATTERN
TOLERANCE = ±0.05 [0.002]

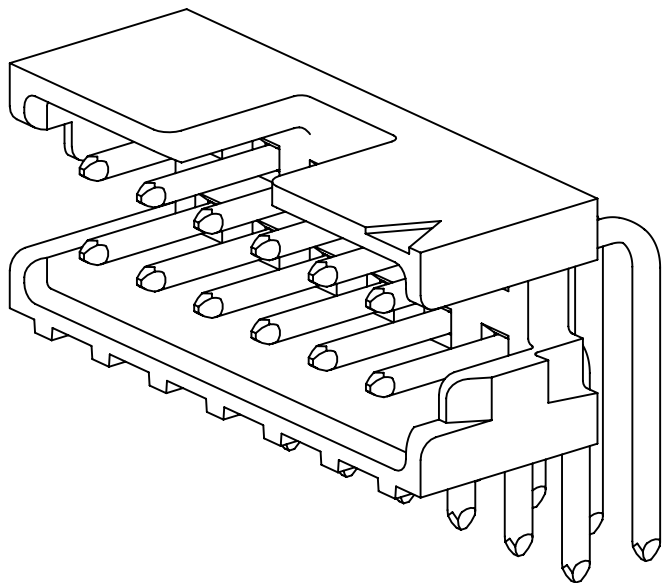

POLARIZATION SLOT
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

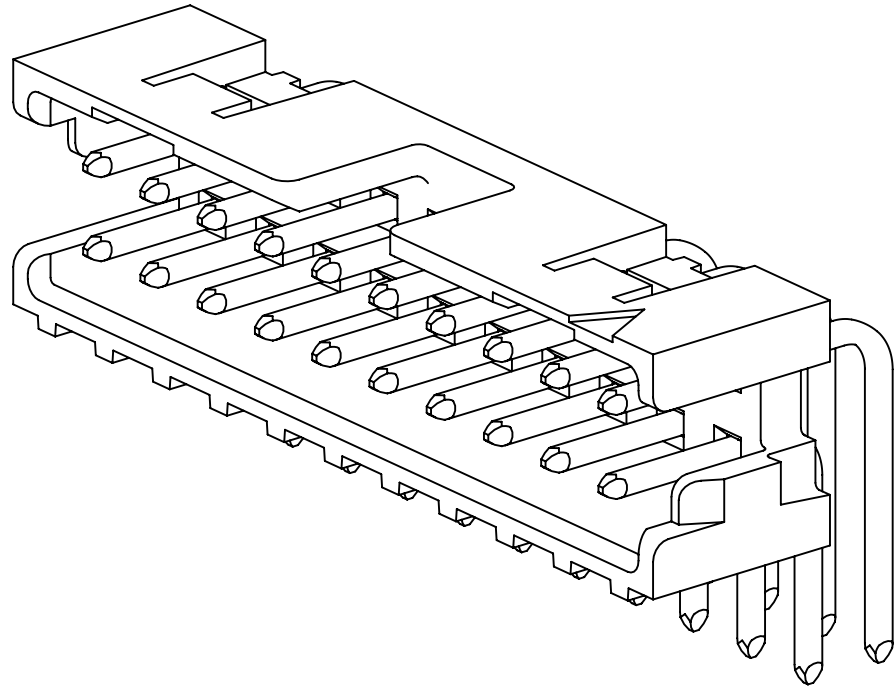

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
RIGHT ANGLE HEADER
14-50 POSITIONS

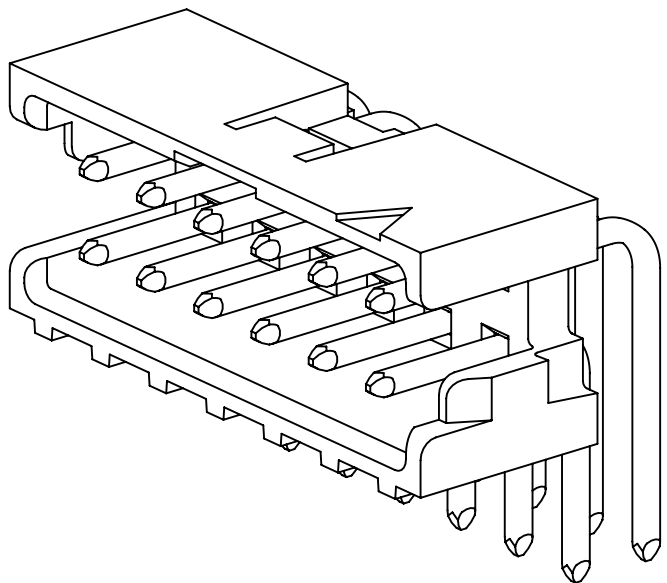





SINGLE FRICTION LATCH
RIGHT ANGLE HEADER
6-12 POSITIONS ONLY

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS AND
SOLDER TAIL LENGTHS


METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		DISTANCE		DRFT	ECO	DATE		DATE	DATE
L. SCHMIDT		JUL 29, 2010		DRFT	ECO	JUL 29, 2010		DATE	DATE
DIVISION		DIVISION CODE		CHKD	ECO	APPROVAL		DATE	DATE
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MAX SURFACE ROUGHNESS		125 / ALL SURFACES		MARKED ONLY	
ANGLES ±1°		ANGLES ±1°		CAGE NUMBER		DRAWING NO.		REV.	
125 / ALL SURFACES		MARKED ONLY		D		78-5100-2359-7		A	
MODEL		DET		YES		NO		SHT 2 OF 4	


3M™ Shrouded Board Mount Header 2 mm X 2 mm Pitch 159 Series, Standard Length [3] and Extended Length [4]

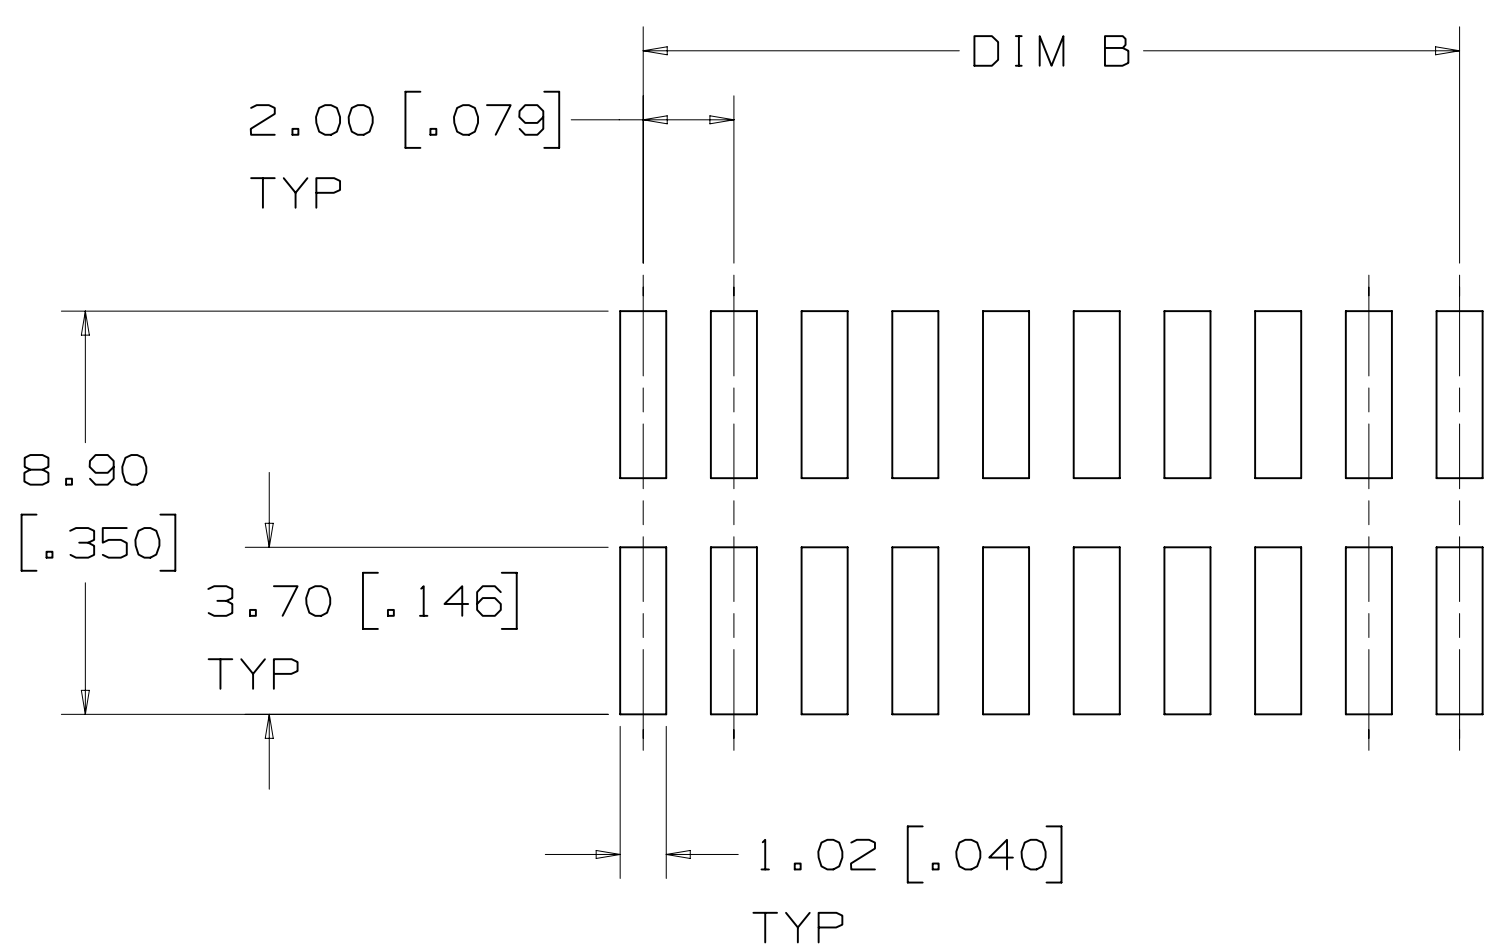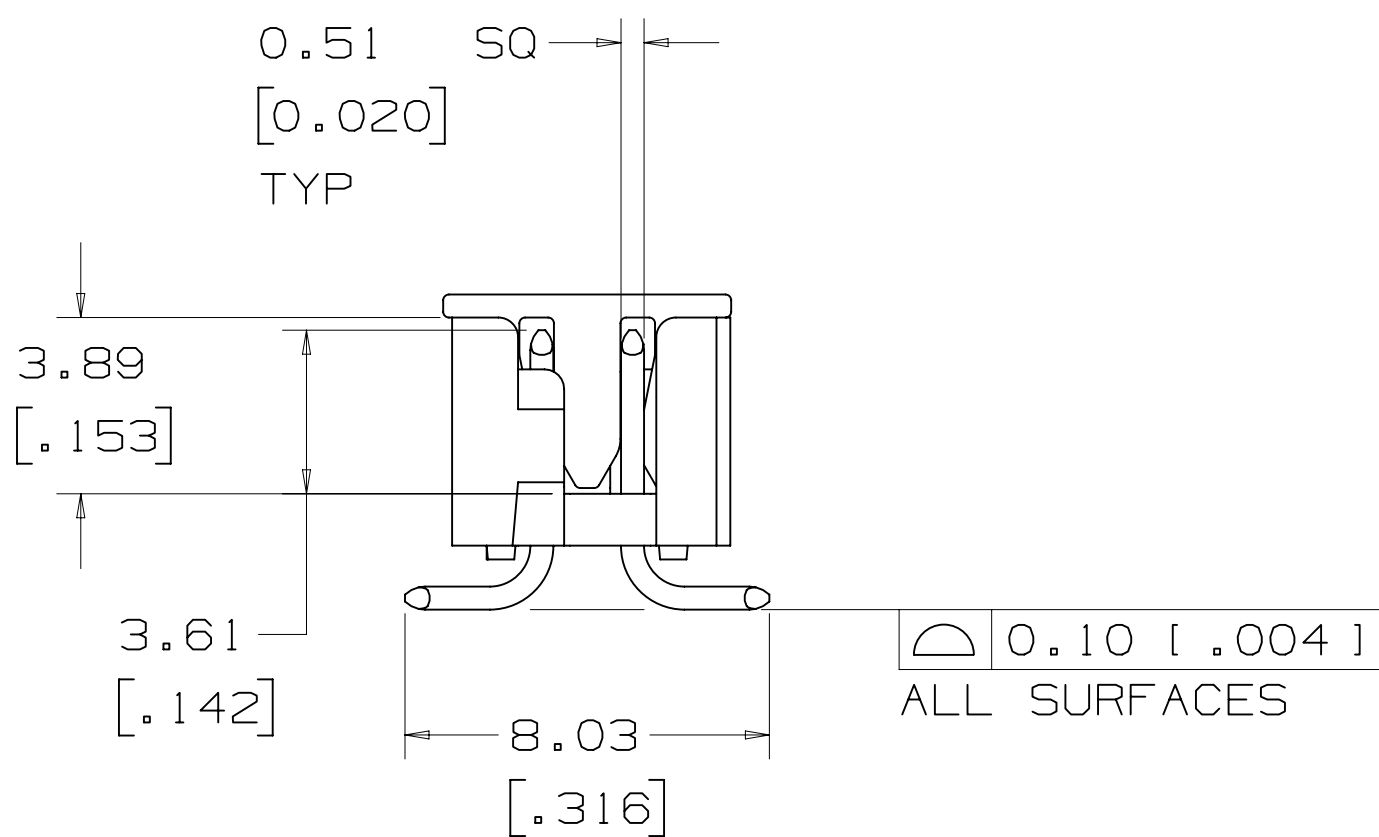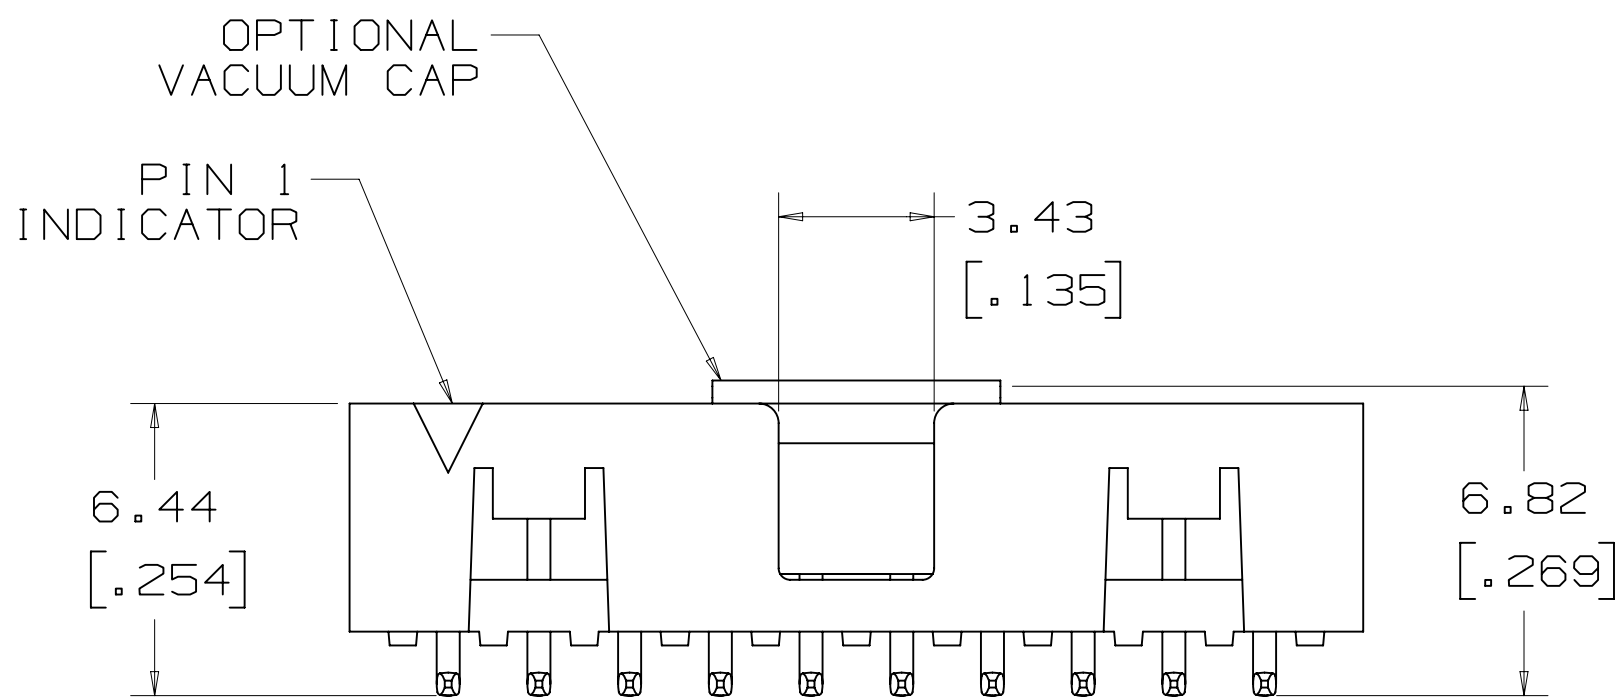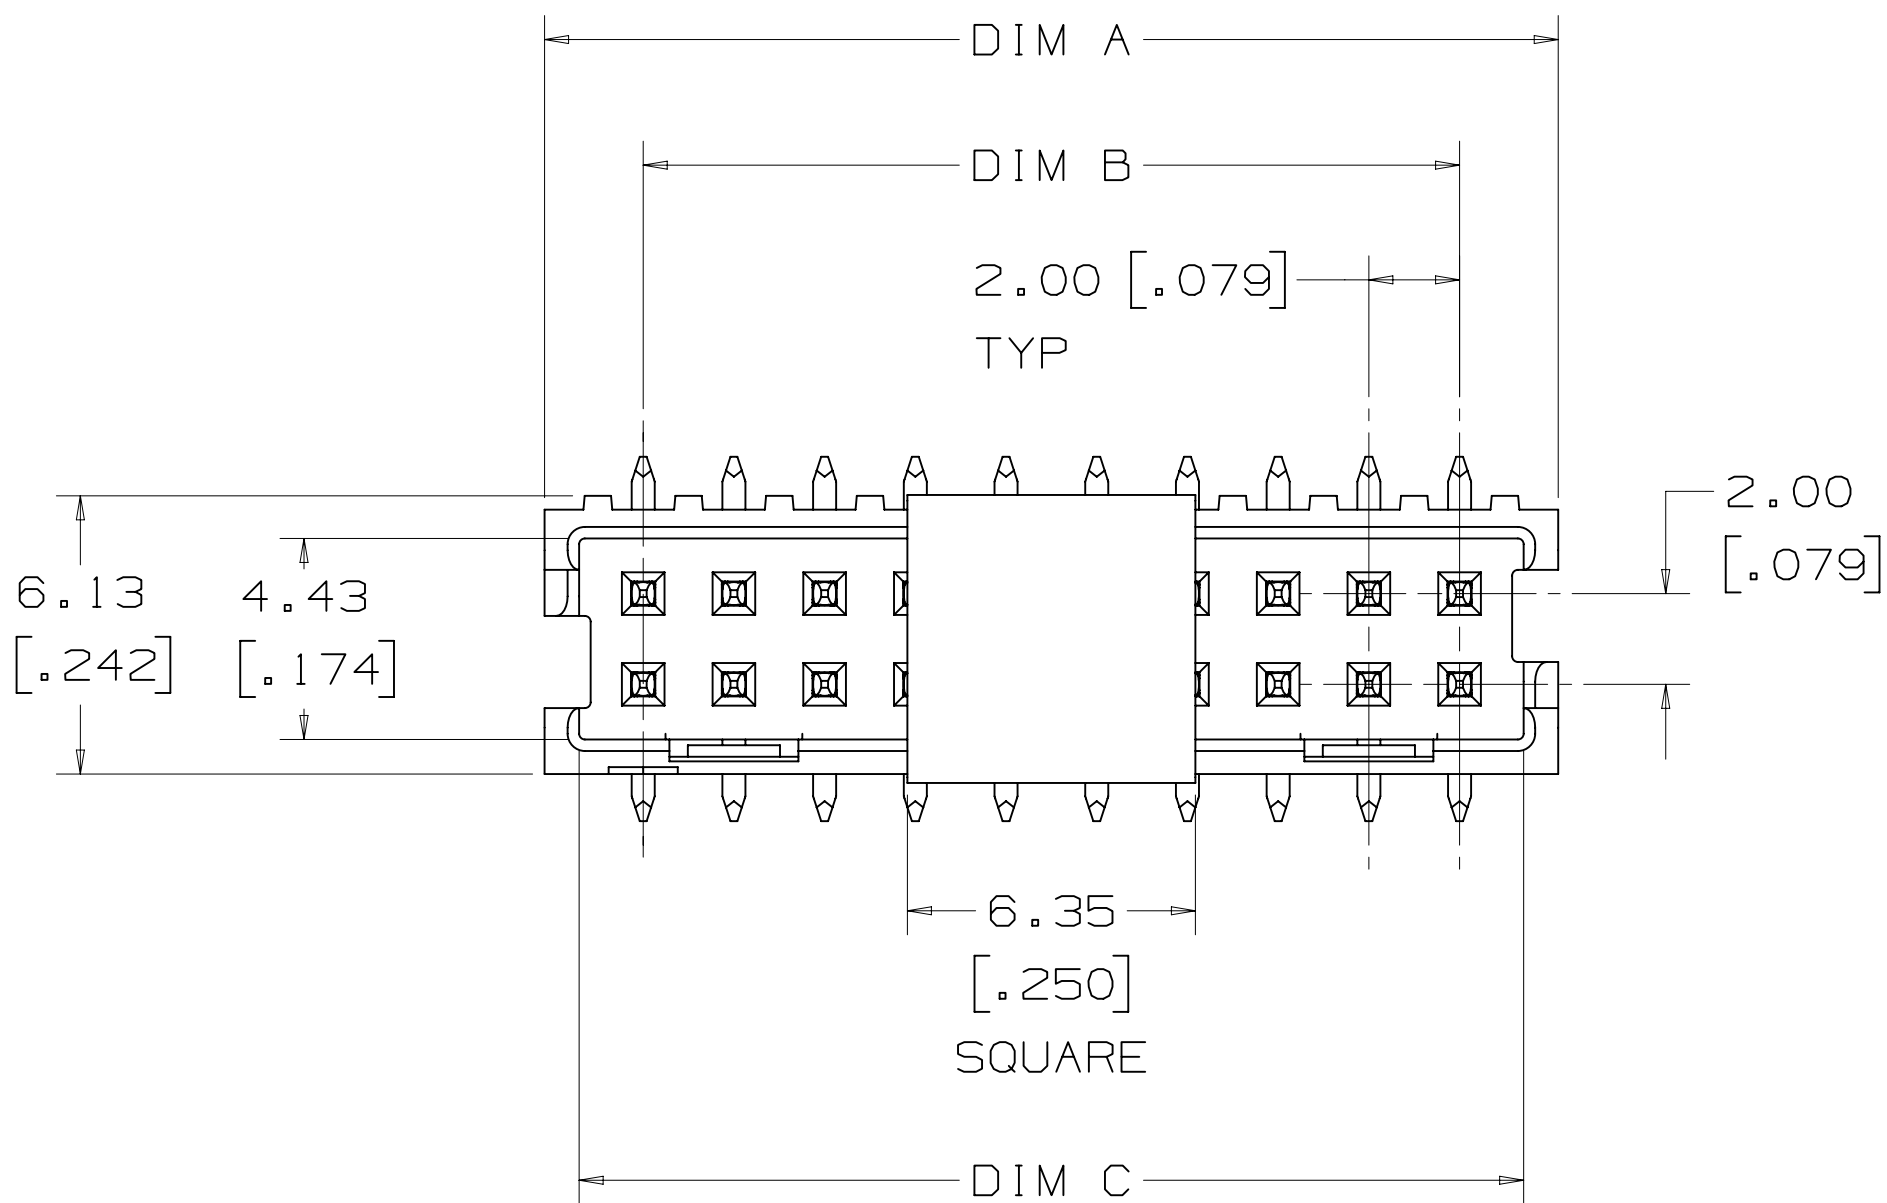


RECOMMENDED PCB PAD PATTERN
TOLERANCE = ±0.08 [0.003]

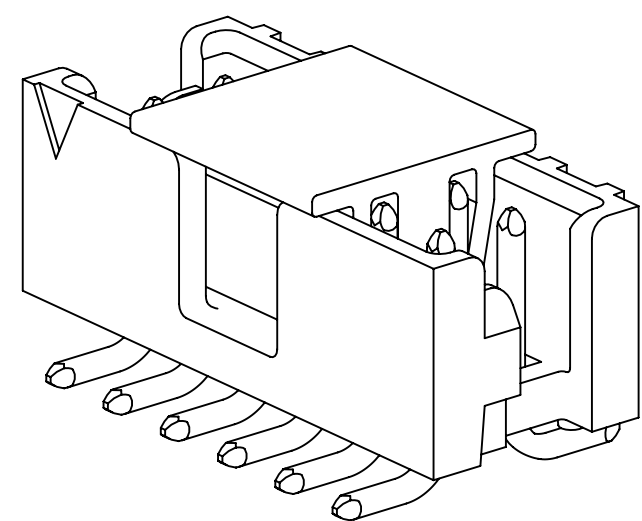

POLARIZATION SLOT
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY

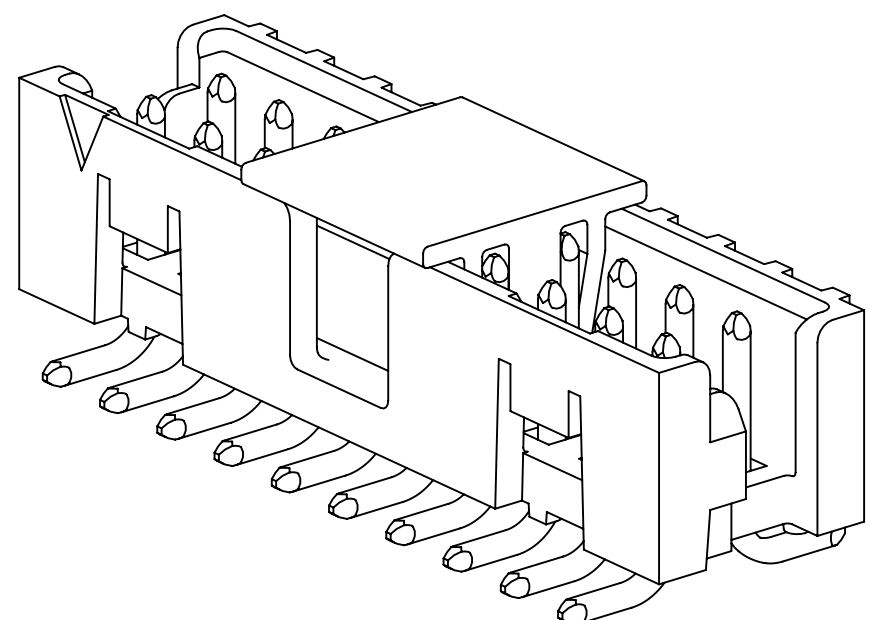

POLARIZATION SLOT AND
DUAL FRICTION LATCHES
SURFACE MOUNT HEADER
14-50 POSITIONS

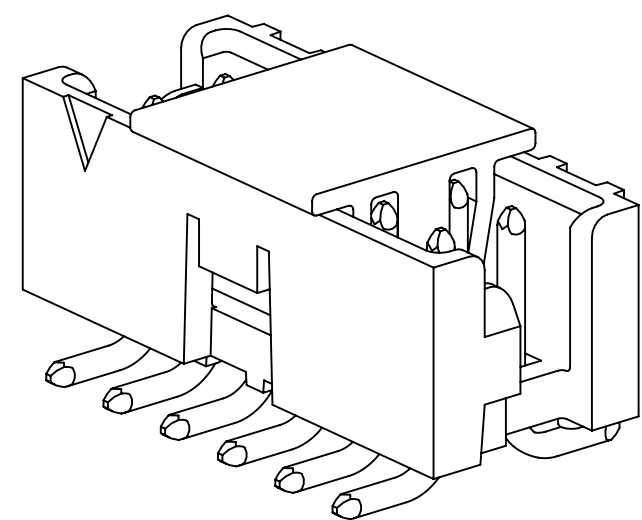

SINGLE FRICTION LATCH
SURFACE MOUNT HEADER
6-12 POSITIONS ONLY

REFERENCE TABLE ON SHEET 4
FOR AVAILABLE POSITIONS

METRIC [ENGLISH]

DESIGN REFERENCE		NEXT ASSEMBLY		REV	ECO	ISSUE DATE AND DESCRIPTION		DRFT	CHKD
DISTANCE		DISTANCE		DATE	DATE	DATE		DATE	DATE
L. SCHMIDT		L. SCHMIDT		JUL 29, 2010	JUL 29, 2010	JUL 29, 2010		JUL 29, 2010	JUL 29, 2010
DIVISION		DIVISION		APPROV	DATE	APPROV		DATE	DATE
3M		3M		S. FELDMAN	AUG 09, 2010	S. FELDMAN		AUG 09, 2010	AUG 09, 2010
DO NOT SCALE DRAWING		SCALE 4/1		TOLERANCES EXCEPT AS NOTED		INCHES		MILLIMETERS	
THIRD ANGLE PROJECTION		INTERPRET PER ASME Y14.5 - 1994		MAX SURFACE ROUGHNESS		CAGE NUMBER		DRAWING NO.	
125		ALL SURFACES		0.00 ± 0.13		D78-5100-2359-7		A	
MARKED ONLY		ANGLES ±1°		MODEL		DET		SHT 3 OF 4	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.