

Product Description

Qorvo's TGP2105 is a 6-bit, digital phase shifter fabricated on Qorvo's high performance 0.15 μ m GaAs pHEMT process. It operates over 6 to 18 GHz and provides 360° of phase coverage with a LSB of 5.625°. It also achieves a low RMS phase error of 4° with 8 dB of insertion loss over all states.


The TGP2105 uses positive switch logic, eliminating the need for a negative voltage rail. That, along with low insertion and a high degree of resolution makes the TGP2105 ideally suited for a variety of wideband phased array applications, including commercial and military radars, satellite-based communication systems and electronic warfare.



Product Features

- Frequency Range: 6 to 18 GHz
- 6-Bit Digital Phase Shifter
- 360° Coverage, LSB = 5.625°
- RMS Phase Error: 4°
- RMS Amplitude Error: 0.45 dB
- Insertion Loss: <10 dB
- Return Loss: >12 dB
- Input P1dB: >25 dBm
- Input IP3: >41 dBm
- Control Voltage: 0/+5 V
- Chip Dimensions: 3.15 x 3.15 x 0.10 mm

Block Diagram

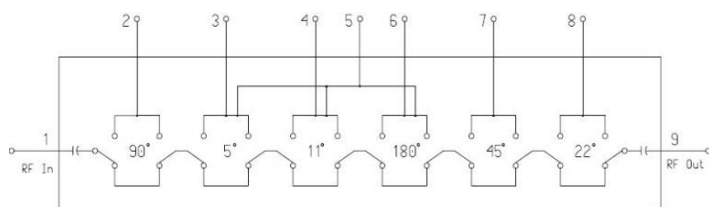

Applications

- Phased Array Antenna Systems
- Satellite Communication Systems
- Electronic Warfare

Ordering Information

Part No.	Description
1096002	Waffle Pack, Qty 20
1101242	TGP2105 Evaluation Board

Absolute Maximum Ratings

Parameter	Value
Control and Reference Voltage	6 V
Control Current	-15 to +5 mA
Power Dissipation	0.9 W
Input Power, CW, 50 Ω , 85°C	30 dBm
Channel Temperature	200 °C
Mounting Temperature (30 Seconds)	320 °C
Storage Temperature	-55 to 150 °C

Operation of this device outside the parameter ranges given above may cause permanent damage. These are stress ratings only, and functional operation of the device at these conditions is not implied. Extended application of Absolute Maximum Rating conditions may reduce device reliability.

Recommended Operating Conditions

Parameter	Value
Control Voltage (5°, 11°, 22°, 45°, 90°, 180°, REF)	0/+5 V
Operating Temperature Range	-40 °C to +85 °C

Electrical specifications are measured at specified test conditions. Specifications are not guaranteed overall operating conditions.

Bias and Truth Table

Control voltage Logic "0" = VL, value between 0 to 0.2 V; Logic "1" = VH, value between +3V to +5V

Phase Shift	5°	11°	22°	45°	90°	180°	REF
0° (Reference)	0	0	0	0	0	0	1
5°	1	0	0	0	0	0	1
11°	0	1	0	0	0	0	1
22°	0	0	1	0	0	0	1
45°	0	0	0	1	0	0	1
90°	0	0	0	0	1	0	1
180°	0	0	0	0	0	1	1
355°	1	1	1	1	1	1	1

Electrical Specifications

Test conditions unless otherwise noted: 25 °C







Data de-embedded to device reference planes at end of feeds, data include bond wire effects

Control Voltage (REF, 5°, 11°, 22°, 45°, 90°, 180°) VL = 0 V, VH = +5 V; See Bias Truth Table

Parameter	Min	Typical	Max	Units
Operational Frequency Range	6		18	GHz
Insertion Loss		6 - 10		dB
Input Return Loss		>12		dB
Output Return Loss		>12		dB
RMS Phase Error		4		deg
RMS Amplitude Error		0.45		dB
Input P1dB		>25		dBm
Input IP3, Tone spacing = 10 MHz, Pin/Tone = 15 dBm		>41		dBm
Insertion Loss Temperature Coefficient		0.008		dB/°C







Performance Plots – Small Signal

Test conditions unless otherwise noted: 25 °C

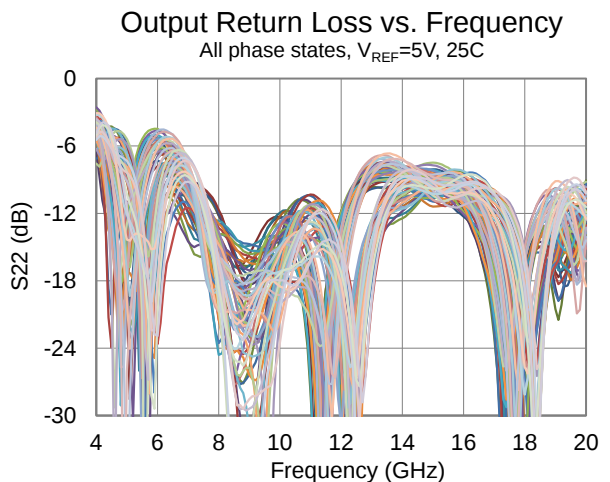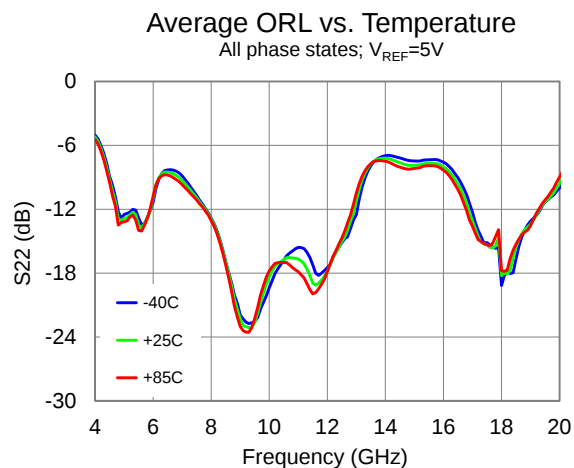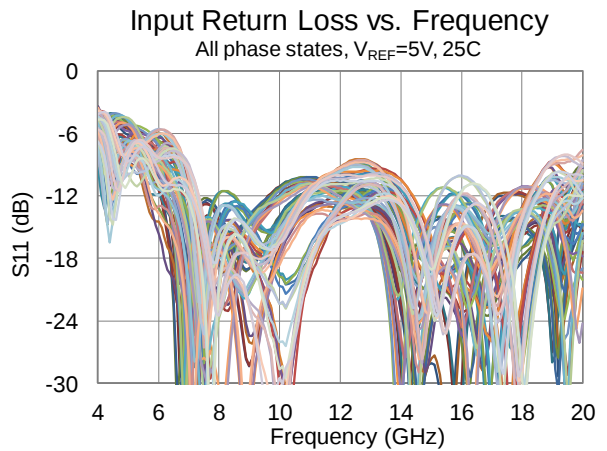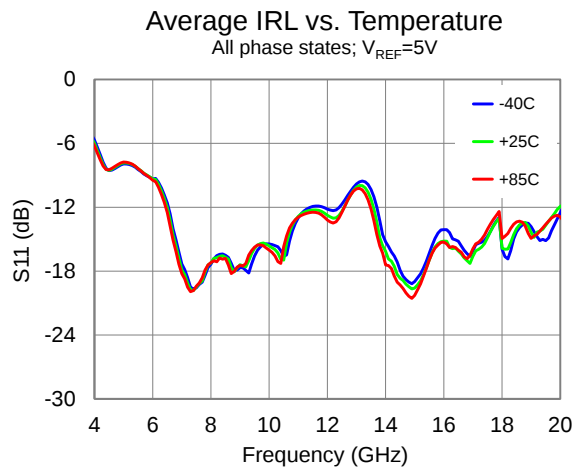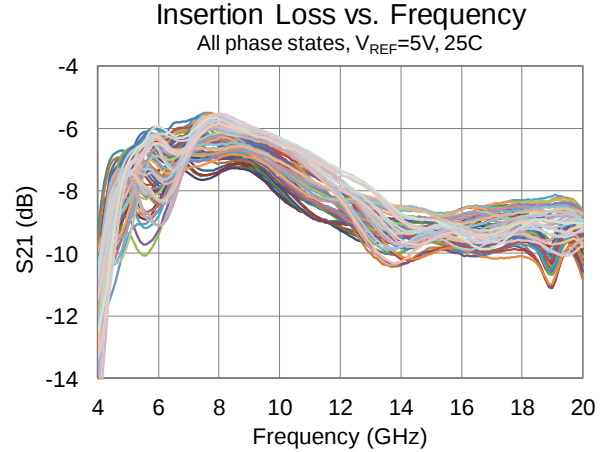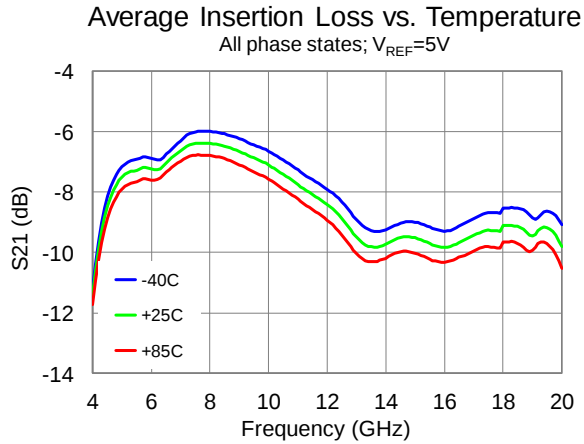




Performance Plots – Small Signal

Test conditions unless otherwise noted: 25 °C

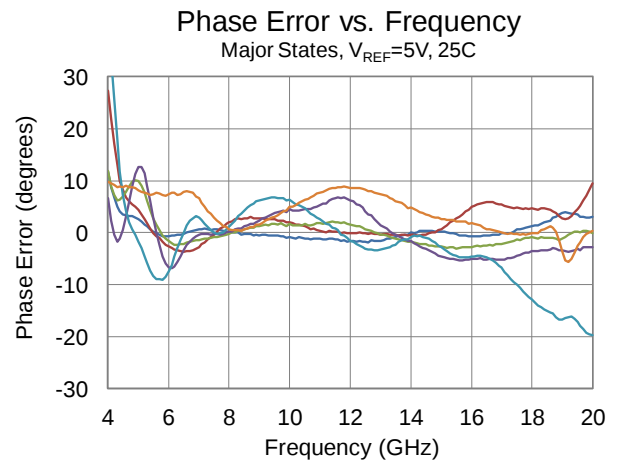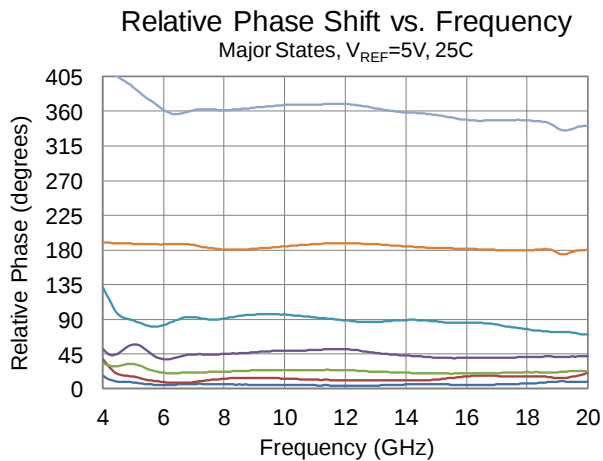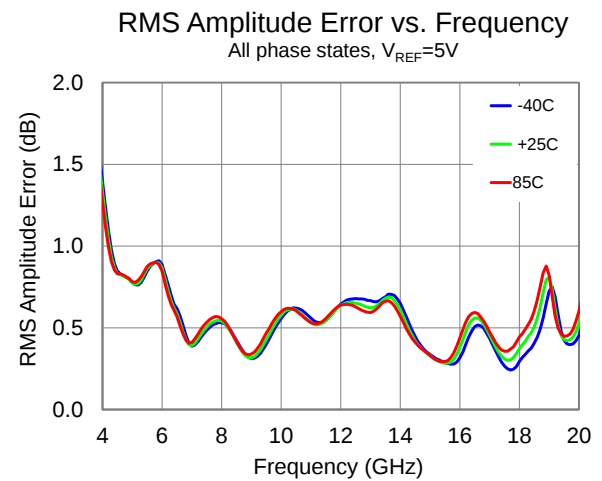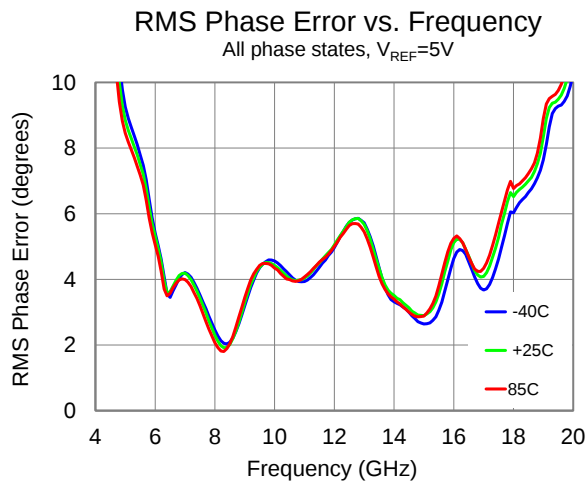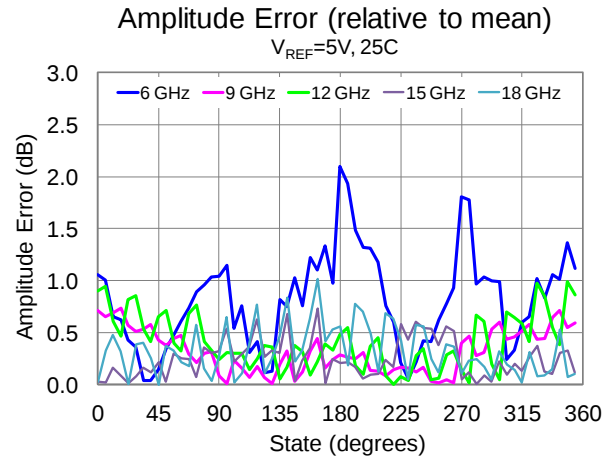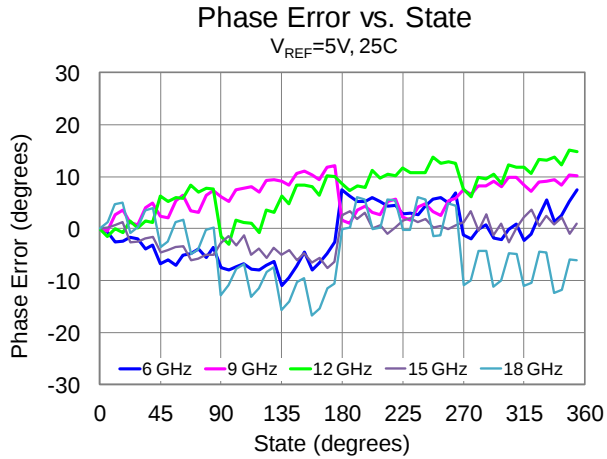


Performance Plots – Large Signal and Linearity

Test conditions unless otherwise noted: 25 °C

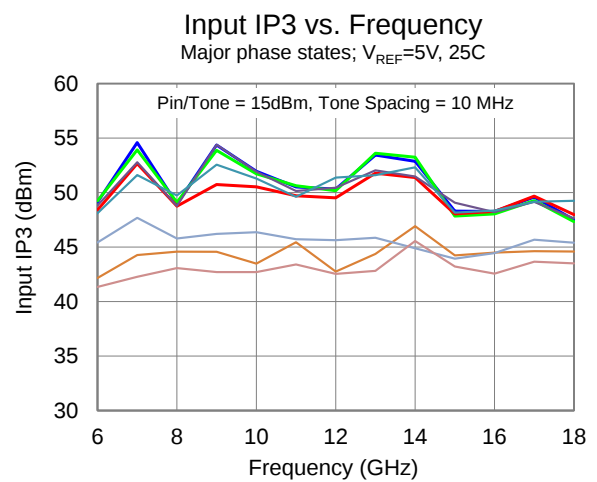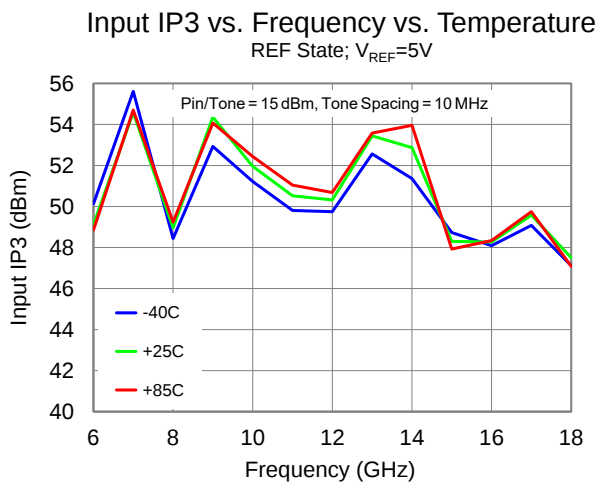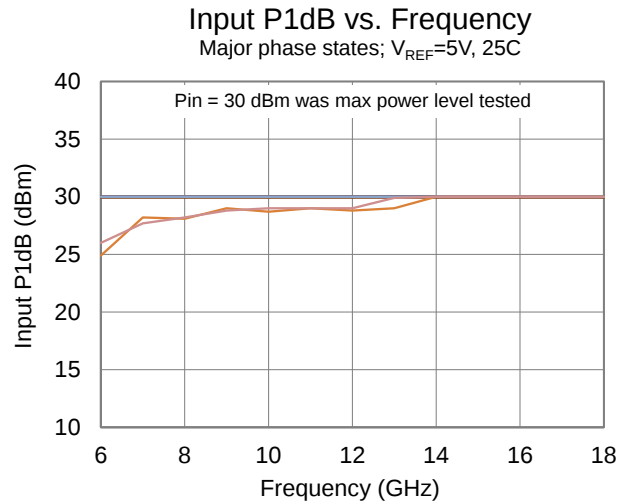

Mechanical Information and Bond Pad Description

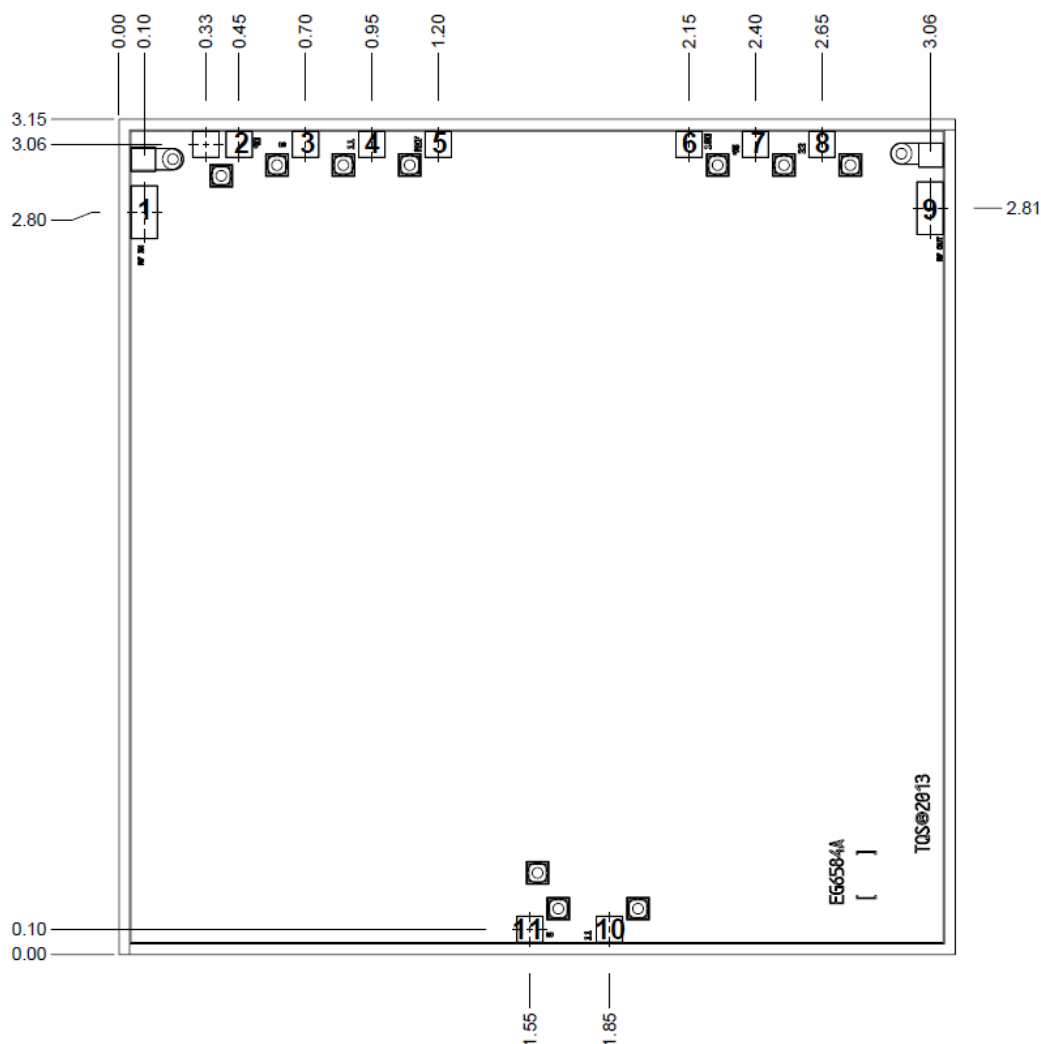


Unit: millimeters, Die thickness: 0.10, Die x, y size tolerance: ± 0.050
Chip edge to bond pad dimensions are shown to center of pad, Ground is backside of die

Bond Pad	Symbol	Description	Pad Size
1	RF In	Input; matched to 50 Ω ; DC blocked	0.200 x 0.100
2	90	90° Bit	0.100 x 0.100
3, 11	5	5° Bit	0.100 x 0.100
4, 10	11	11° Bit	0.100 x 0.100
5	REF	Reference	0.100 x 0.100
6	180	180° Bit	0.100 x 0.100
7	45	45° Bit	0.100 x 0.100
8	22	22° Bit	0.100 x 0.100
9	RF Out	Output; matched to 50 Ω ; DC blocked	0.200 x 0.100

Applications Information

1. The spacing between MMIC and TFN at RF In and RF Out is <5 mils typical.
2. RF connections: Bond two 1-mil diameter, <20 mils length gold bond wires at RF In and RF Out for optimum RF performance.

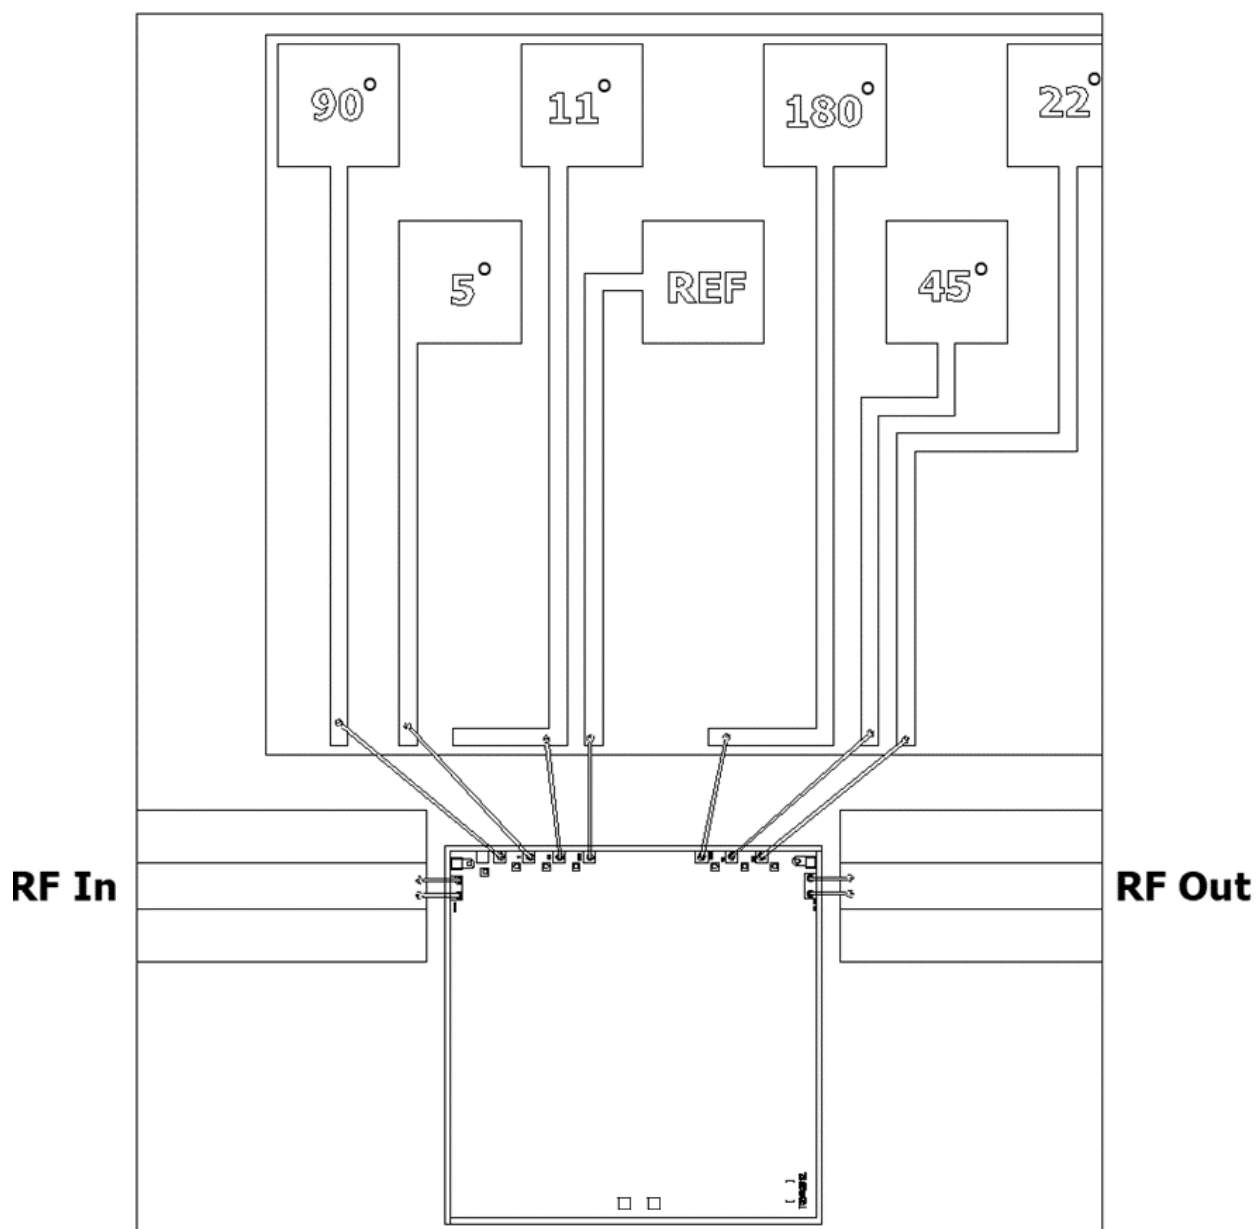

Assembly Notes

Component placement and adhesive attachment assembly notes:

- Vacuum pencils and/or vacuum collets are the preferred method of pick up.
- Air bridges must be avoided during placement.
- The force impact is critical during auto placement.
- Organic attachment (i.e., conductive epoxy) can be used in low-power applications.
- Curing should be done in a convection oven; proper exhaust is a safety concern.

Reflow process assembly notes:

- Use AuSn (80/20) solder and limit exposure to temperatures above 300°C to 3-4 minutes, maximum.
- Conductive epoxy die attach is recommended for PCB mounting.
- Bonding pads plating: Au.
- An alloy station or conveyor furnace with reducing atmosphere should be used.
- Do not use any kind of flux.
- Coefficient of thermal expansion matching is critical for long-term reliability.
- Devices must be stored in a dry nitrogen atmosphere.

Interconnect process assembly notes:

- Thermosonic ball bonding is the preferred interconnect technique.
- Force, time, and ultrasonics are critical parameters.
- Aluminum wire should not be used.
- Devices with small pad sizes should be bonded with 0.0007-inch wire.


Thermal and Reliability Information

Parameter	Test Conditions	Value	Units
Thermal Resistance (θ_{JC}) ⁽¹⁾	$P_{DISS} = 0.09\text{ W}$, $T_{BASEPLATE} = 85^{\circ}\text{C}$	22	$^{\circ}\text{C/W}$
Channel Temperature, T_{CH} (Under RF)		87	$^{\circ}\text{C}$
Median Lifetime (T_M)		3.8E09	Hrs

Notes:

1. Thermal resistance measured to back of carrier plate. MMIC mounted on 40 mils thick CuMo carrier using 1.5 mil 80/20 AuSn.

Median Lifetime

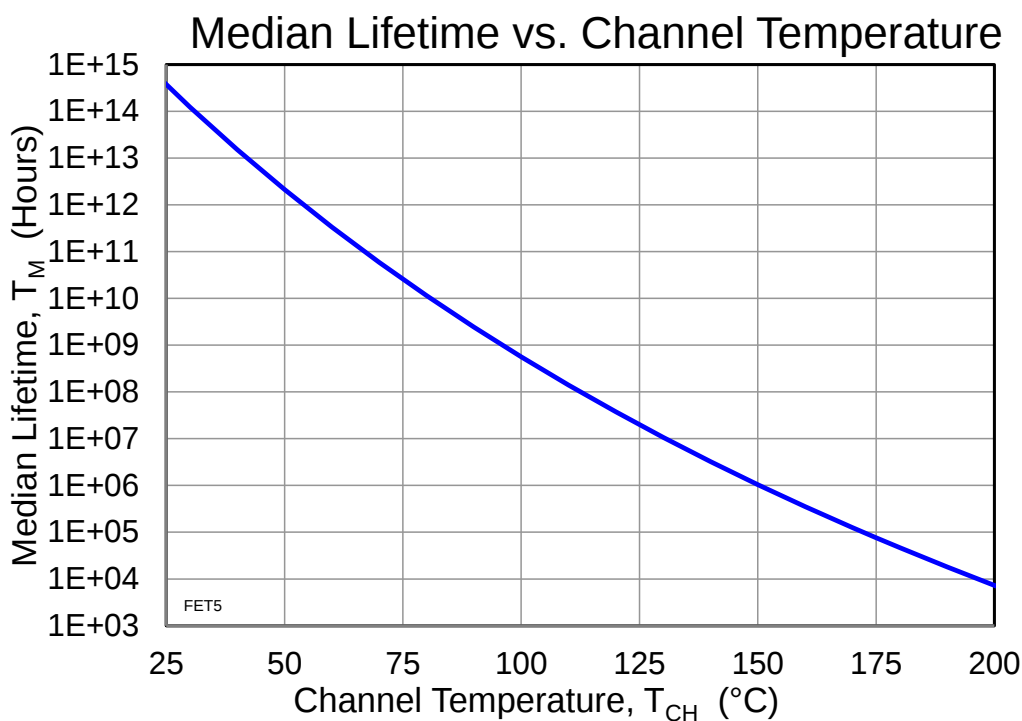

Handling Precautions

Parameter	Rating	Standard		Caution! ESD-Sensitive Device
ESD – Human Body Model (HBM)	Class 1A	ESDA / JEDEC JS-001-2012		

RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU. This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Tel: 1-844-890-8163

Web: www.qorvo.com

Email: customer.support@qorvo.com

Important Notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. **THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

Copyright 2019 © Qorvo, Inc. | Qorvo is a registered trademark of Qorvo, Inc.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.