
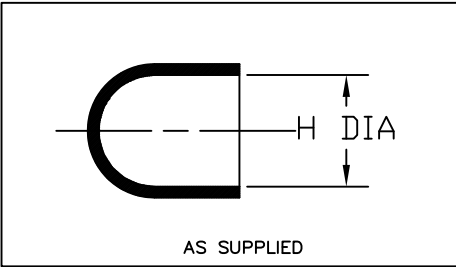


4		3		2		1																																																												
NOTES 1. All dimensions are in $\frac{\text{inches}}{\text{millimeters}}$ 2. Dimensions appearing in table are as follows: a - As Supplied b - After Unrestricted Recovery 3. Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max. 4. Recovered parts may have angularity of 30° - 45°.						DIMENSIONING AND TOLERANCING PER ASME Y14.5M (ISO STANDARDS)																																																												
						REVISIONS																																																												
LTR		DESCRIPTION		DATE																																																														
U2		RELEASE PER ECO-12-002474		02/07/2012																																																														
				<table><tr><th colspan="5">TABLE OF DIMENSIONS</th></tr><tr><th rowspan="2">PART NUMBER</th><th colspan="2">H</th><th rowspan="2">P</th><th rowspan="2">W</th></tr><tr><th>Min a</th><th>Max b</th><th>Min b</th><th>±20% b</th></tr><tr><td>101A011</td><td>.20 [5,1]</td><td>.08 [2,0]</td><td>.90 [22,9]</td><td>.04 [1,02]</td></tr><tr><td>101A021</td><td>.29 [7,4]</td><td>.13 [3,3]</td><td>1.00 [25,4]</td><td>.05 [1,27]</td></tr><tr><td>101A031</td><td>.40 [10,2]</td><td>.18 [4,6]</td><td>1.20 [30,5]</td><td>.06 [1,52]</td></tr><tr><td>101A041</td><td>.60 [15,2]</td><td>.25 [6,4]</td><td>1.60 [40,6]</td><td>.07 [1,78]</td></tr><tr><td>101A052</td><td>.81 [20,6]</td><td>.37 [9,4]</td><td>2.40 [61,0]</td><td>.08 [2,03]</td></tr><tr><td>101A062</td><td>1.00 [25,4]</td><td>.45 [11,4]</td><td>2.70 [68,6]</td><td>.09 [2,29]</td></tr><tr><td>101A073</td><td>1.55 [39,4]</td><td>.71 [18,0]</td><td>3.60 [91,4]</td><td>.10 [2,54]</td></tr><tr><td>101A083</td><td>2.00 [50,8]</td><td>.90 [22,9]</td><td>4.00 [101,6]</td><td>.11 [2,79]</td></tr><tr><td>101A094</td><td>3.30 [83,8]</td><td>1.50 [38,1]</td><td>4.50 [114,3]</td><td>.12 [3,05]</td></tr></table>				TABLE OF DIMENSIONS					PART NUMBER	H		P	W	Min a	Max b	Min b	±20% b	101A011	.20 [5,1]	.08 [2,0]	.90 [22,9]	.04 [1,02]	101A021	.29 [7,4]	.13 [3,3]	1.00 [25,4]	.05 [1,27]	101A031	.40 [10,2]	.18 [4,6]	1.20 [30,5]	.06 [1,52]	101A041	.60 [15,2]	.25 [6,4]	1.60 [40,6]	.07 [1,78]	101A052	.81 [20,6]	.37 [9,4]	2.40 [61,0]	.08 [2,03]	101A062	1.00 [25,4]	.45 [11,4]	2.70 [68,6]	.09 [2,29]	101A073	1.55 [39,4]	.71 [18,0]	3.60 [91,4]	.10 [2,54]	101A083	2.00 [50,8]	.90 [22,9]	4.00 [101,6]	.11 [2,79]	101A094	3.30 [83,8]	1.50 [38,1]	4.50 [114,3]	.12 [3,05]
								TABLE OF DIMENSIONS																																																										
PART NUMBER	H		P	W																																																														
	Min a	Max b			Min b	±20% b																																																												
101A011	.20 [5,1]	.08 [2,0]	.90 [22,9]	.04 [1,02]																																																														
101A021	.29 [7,4]	.13 [3,3]	1.00 [25,4]	.05 [1,27]																																																														
101A031	.40 [10,2]	.18 [4,6]	1.20 [30,5]	.06 [1,52]																																																														
101A041	.60 [15,2]	.25 [6,4]	1.60 [40,6]	.07 [1,78]																																																														
101A052	.81 [20,6]	.37 [9,4]	2.40 [61,0]	.08 [2,03]																																																														
101A062	1.00 [25,4]	.45 [11,4]	2.70 [68,6]	.09 [2,29]																																																														
101A073	1.55 [39,4]	.71 [18,0]	3.60 [91,4]	.10 [2,54]																																																														
101A083	2.00 [50,8]	.90 [22,9]	4.00 [101,6]	.11 [2,79]																																																														
101A094	3.30 [83,8]	1.50 [38,1]	4.50 [114,3]	.12 [3,05]																																																														
ORDERING INFORMATION																																																																		
Base part number 101A021 -X -XX /XXX -X																																																																		
Material dash number (See Compatibility Chart)																																																																		
Modification number																																																																		
Adhesive slash number (If necessary, see Compatibility Chart)																																																																		
Color designator																																																																		
* Color code based on SAE-AMS-DTL-23053																																																																		
* not all colors available for this molded part.																																																																		
COMPATIBILITY CHART																																																																		
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	ADHESIVE SLASH NO.	ADHESIVE S NUMBER																																																														
-3	Polyolefin, Semi-rigid	RT-301	/42; /86	S-1017; S-1048																																																														
-4	Polyolefin, Flexible	RT-1304	/42; /86	S-1017; S-1048																																																														
-12	*VITON, Flexible	RT-1312	N/A	N/A																																																														
-25	Elastomer, Fluid Resistant	RT-1325	/86; /225	S-1048; S-1206																																																														
-100	Polyolefin, Semi-flexible	RT-1323																																																																
THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF TYCO ELECTRONICS CORPORATION, AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY TYCO ELECTRONICS CORPORATION IS PROHIBITED.																																																																		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC AND INCHES ARE IN BRACKETS. DECIMAL TOLERANCES XXX ± 0.13 (.005) XX ± 0.25 (.01) X ± 0.50 (.10) ANGLE TOLERANCE .X ± 1 DEG.																																																																		
DRAWN M. Mazariegos 01/31/12 APPROVED D. Hurrell 02/01/12 RPN CAD FILE: 101A011thru094_CD THIRD ANGLE PROJECTION																																																																		
TE Connectivity Cap, Round End SIZE B CODE IDENT. NO. 06090 DWG. NO. 101A011thru094 DO NOT SCALE THIS DRAWING SHEET 1 OF 1																																																																		

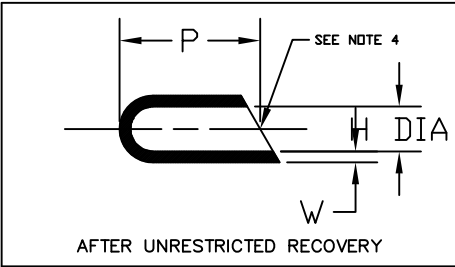

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.