

Part Number: WP710A10SGD14V

Super Bright Green

### Features

- Low power consumption.
- Popular T-1 diameter package.
- General purpose leads.
- Reliable and rugged.
- Long life - solid state reliability.
- Available on tape and reel.
- 14V internal resistor.
- RoHS compliant.

### Description

The Super Bright Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

### Package Dimensions



#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



## Selection Guide

| Part No.       | Dice                     | Lens Type      | Iv (mcd) [2]<br>V= 14V |      | Viewing Angle [1] |
|----------------|--------------------------|----------------|------------------------|------|-------------------|
|                |                          |                | Min.                   | Typ. | 2θ1/2             |
| WP710A10SGD14V | Super Bright Green (GaP) | Green Diffused | 8                      | 20   | 40°               |

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

| Symbol             | Parameter                | Device             | Typ. | Max. | Units | Test Conditions     |
|--------------------|--------------------------|--------------------|------|------|-------|---------------------|
| λ <sub>peak</sub>  | Peak Wavelength          | Super Bright Green | 565  |      | nm    | V <sub>F</sub> =14V |
| λ <sub>D</sub> [1] | Dominant Wavelength      | Super Bright Green | 568  |      | nm    | V <sub>F</sub> =14V |
| Δλ <sub>1/2</sub>  | Spectral Line Half-width | Super Bright Green | 30   |      | nm    | V <sub>F</sub> =14V |
| I <sub>F</sub>     | Forward Current          | Super Bright Green | 10.5 | 13.5 | mA    | V <sub>F</sub> =14V |
| I <sub>R</sub>     | Reverse Current          | Super Bright Green |      | 10   | μA    | V <sub>R</sub> = 5V |

Note:

- 1.Wavelength: +/-1nm.

## Absolute Maximum Ratings at TA=25°C





| Parameter                   | Super Bright Green  | Units |
|-----------------------------|---------------------|-------|
| Power dissipation           | 160                 | mW    |
| Forward Voltage             | 16                  | V     |
| Reverse Voltage             | 5                   | V     |
| Operating Temperature       | -40°C To +70°C      |       |
| Storage Temperature         | -40°C To +85°C      |       |
| Lead Solder Temperature [1] | 260°C For 3 Seconds |       |
| Lead Solder Temperature [2] | 260°C For 5 Seconds |       |

Notes:

1. 2mm below package base.
2. 5mm below package base.




## Super Bright Green WP710A10SGD14V

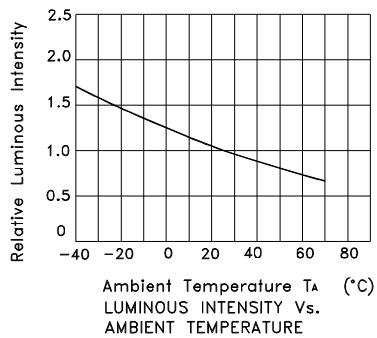

# Kingbright

## PACKING & LABEL SPECIFICATIONS

WP710A10SGD14V

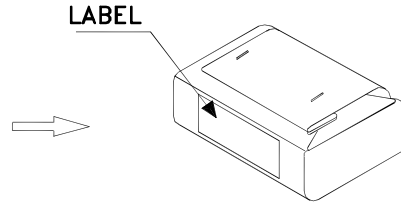


1000PCS / BAG




56K / 9# BOX

OUTSIDE LABEL

OUTSIDE LABEL



28K / 5# BOX

|   |  |
|---|--|
| <h1>Kingbright</h1>   |  |
| P/NO: WP710A10xxx   |  |
| QTY: 1000 pcs   | Q.C. <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">Q C<br/>XX XX XXXX<br/>PASSED</span> |
| S/N: XXXX   |  |
| CODE: XXX   |  |
| LOT NO:   |  |
| <br><small>XXXXXXXXXXXXXXXXXXXXXXXXXXXX</small> |  |
| RoHS Compliant  |  |

## PRECAUTIONS

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

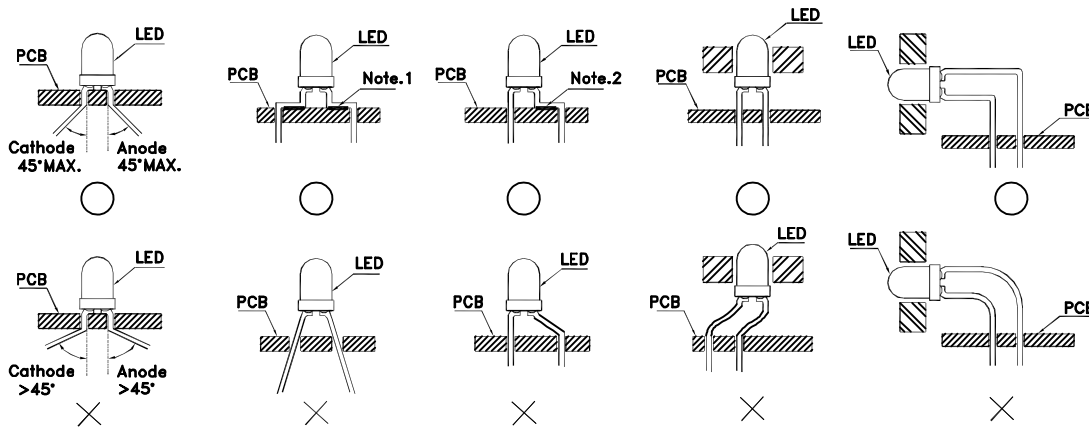


Fig.1

”○” Correct mounting method ”×” Incorrect mounting method

2. When soldering wire to the LED, use individual heat-shrink tubing to insulate the exposed leads to prevent accidental contact short-circuit. (Fig.2)

3. Use stand-offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.

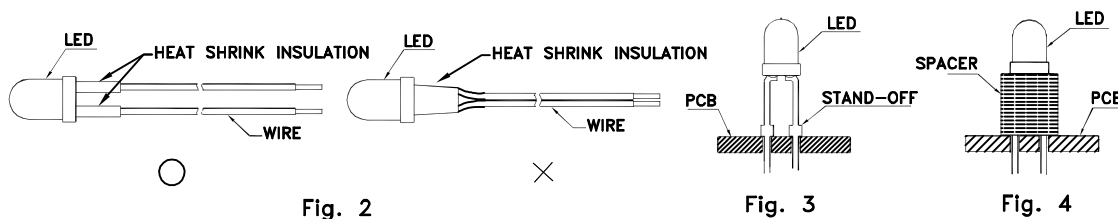


Fig. 2

Fig. 3

Fig. 4

4. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
5. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)

6. Do not bend the leads more than twice. (Fig. 8)



7. During soldering, component covers and holders should leave clearance to avoid placing damaging stress on the LED during soldering.



8. The tip of the soldering iron should never touch the lens epoxy.

9. Through-hole LEDs are incompatible with reflow soldering.

10. If the LED will undergo multiple soldering passes or face other processes where the part may be subjected to intense heat, please check with Kingbright for compatibility.

11. Recommended Wave Soldering Profile for Kingbright Thru-Hole Products



**NOTES:**

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. During wave soldering, the PCB top-surface temperature should be kept below 105°C.
5. No more than once.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.