HPCIE-C236

Half-size PICMG 1.3 CPU Card supports LGA 1151 Intel® Xeon® E3, Core™ i3/Pentium®/ Celeron® CPU with Intel® C236, ECC & non-ECC DDR4 SO-DIMM, VGA, iDP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, mSATA, HD Audio, Intel® AMT and RoHS

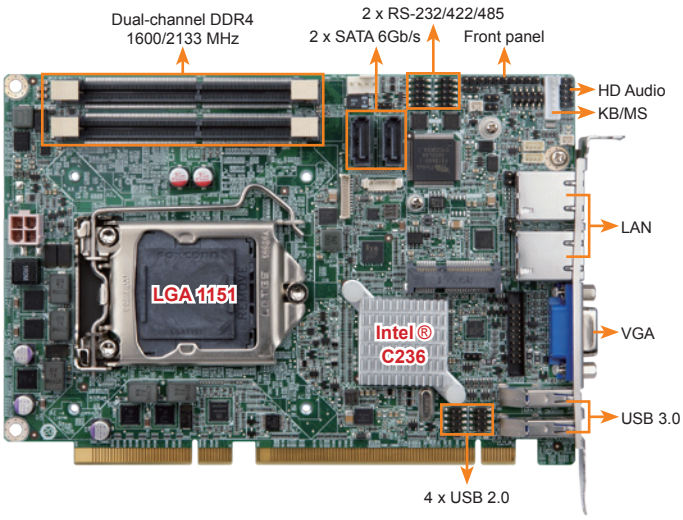

PCIe Mini slot provides mSATA and USB signal for full-size or half-size mSATA SSD and wireless LAN card.

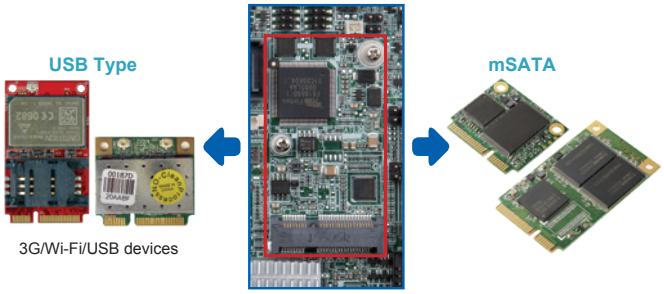

Specifications

- CPU
  LGA 1151 socket supports Intel® Xeon® E3 v5/v6, 6th/7th generation Core™ i3, Pentium® or Celeron® processor
- Chipset
  Intel® C236
- Memory
  Two 260-pin 1866/2133 MHz dual-channel DDR4 ECC and non-ECC unbuffered SO-DIMMs support up to 32 GB
- BIOS
  UEFI BIOS
- Graphics Engine
  Intel® HD Graphics Gen 9 supports DX11/12, OpenCL 2.x and OpenGL 4.3/4.4
  Decode/Encode for HEVC, VP8, VP9, VDENC
- Display Output
  1 x VGA (up to 1920x1200@60 Hz)
  1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160@60 Hz)
- Ethernet
  LAN1: Intel® I219LM Clarkville-V with Intel® AMT 11.0 support
  LAN2: Intel® I210 PCIe controller
- External I/O Interface
  2 x USB 3.0
- Internal I/O Interface
  1 x KB/MS (1x6 pin)
  1 x mSATA (SATA & USB signal)
  2 x RS-232/422/485 (2x5 pin, P=2.0)
  2 x SATA 6Gb/s (RAID 0, 1 supported)
  4 x USB 2.0 (2x4 pin, P=2.0)
- Front Panel
  1 x Front panel (1x10 pin, power LED, HDD LED, speaker, power button, reset button)
- LAN LED
  2 x LAN LED (1x2 pin)
- Audio
  Support 7.1-channel HD Audio by IEI AC-KIT-892HD kit
- SMBus
  1 x SMBus (1x4 pin)
- I²C
  1 x I²C (1x4 pin)
- Expansion
  16-lane PCIe signal from CPU via golden finger
  (supports x16, or x8 + x8, or x4 + x4 + x8)
  4-lane PCIe signal from Q170 via golden finger
  1 x Full/Half-size PCIe Mini card slot (supports mSATA)
- Watchdog Timer
  Software programmable supports 1~255 sec. system reset
- Digital I/O
  8-bit digital I/O (2x5 pin)
- Fan Connector
  1 x CPU smart fan (1x4 pin)
- Power Supply
  5V/12V, AT/ATX support
- Power Consumption
  5V@0.13A, 12V@7.89A, 3.3V@0.10A, 5VSB@0.20A
  (Intel® Xeon® E3-1275 v5 3.60 GHz with two 16 GB 2133 MHz DDR4 memory)
- Operating Temperature
  -20°C ~ 60°C
- Operating Humidity
  5% ~ 95%, non-condensing
- Dimensions
  169 mm x 126 mm
- Weight
  GW: 1000g / NW: 420g
- CE/FCC compliant

Features

- PICMG 1.3 half-size CPU Card
- LGA 1151 Intel® Xeon® E3 v5/v6, 6th/7th generation Core™ i3, Pentium® or Celeron® processor supported
- Two 260-pin 1866/2133 MHz dual-channel DDR4 ECC and non-ECC SO-DIMMs support up to 32 GB memory
- Supports dual independent display by VGA & internal DP pin header
- PCIe Mini card slot support mSATA & USB 2.0
- Intel® PCIe GbE with Intel® AMT 11.0 supported
- Supports RAID 0, 1 function via SATA 6Gb/s
- IEI jumper-less function

Packing List

1 x HPCIE-C236 single board computer
1 x SATA cable
1 x QIG

Ordering Information

Part No.	Description
HPCIE-C236-R10	Half-size PICMG 1.3 CPU card supports LGA 1151 Intel® Xeon® E3, Core™ i3/Pentium®/Celeron® CPU with Intel® C236, ECC & non-ECC DDR4 SO-DIMM, VGA, iDP, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, mSATA, HD Audio, Intel® AMT and RoHS
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-002700-200-RS	RS-232/422/485 cable, 200mm, P=2.0
AC-KIT-892HD-R10	7.1-channel HD Audio kit with Realtek ALC892 supports dual audio streams
CF-115XA-R10	High-performance LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 73W
CF-1156C-R20	LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-R20	LGA 1155/LGA 1156 cooler kit, 1U chassis compatible, 65W
DP-DP-R10	DisplayPort to DisplayPort converter board (for IEI iDP connector)
DP-DVI-R10	DisplayPort to DVI-D converter board (for IEI iDP connector)
DP-HDMI-R10	DisplayPort to HDMI converter board (for IEI iDP connector)
DP-LVDS-R10	DisplayPort to LVDS converter board (for IEI iDP connector)
DP-VGA-R10	DisplayPort to VGA converter board (for IEI iDP connector)
SAIDE-KIT01-R10	SATA to IDE/CF converter board

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.