

PIS-5500

High Performance Graphics Processing Fanless PC with Intel® Core™ i7 Processor and NVIDIA GPU

Features

- 6th/7th Gen Intel® Core™ i7 Processor
- 8x M12 GbE (4x support PoE), 4x RS-422, 4x USB 3.0, 1x DVI-I, 4x DisplayPort with lockable connectors
- Supports MXM 3.1 Type A/B module on PCI Express x16
- Rich Storage Options: 2x 2.5" SATA 6.0 Gb/s drive bays, 1x M.2 2280 slot, 1x CFAST socket
- GNSS/3G/4G/WLAN support via 2x mPCIe slots and 2x USIM slots
- MVB/CAN bus support by Mini PCI Express add-on module
- Nominal Voltage: 24VDC, 36VDC, 72VDC and 110VDC (EN50155 compliant)



Specifications

System

Processor

6th/7th Gen Intel® Core™ i7 processors (formerly Skylake and Kaby Lake)
 Intel® Core™ i7-6820EQ CPU, 2.80GHz
 Intel® Core™ i7-7820EQ CPU, 3.0GHz

Memory

Dual channel DDR4-2133 SDRAM with dual SODIMM sockets, up to 32GB

BIOS

AMI UEFI

Storage

Up to 4x 2.5" SATA drive bays
 (two for PIS-5500 series, four for PIS-5510 series)
 1x CFAST slot, externally accessible
 1x M.2 2280 (SATA)

Graphics

2x DisplayPort from Intel processor
 4x DisplayPort with lockable design from GPU MXM (SKU dependent)
 1x DVI-I from Intel processor

Connectivity

Ethernet

2x RJ-45 1000BASE-T Ethernet ports
 4x M12 X-code 1000BASE-T Ethernet ports with PoE Class 2 (7W), 1.5kV isolation
 4x M12 A-coded 1000BASE-T Ethernet ports, 1.5kV isolation

USB

4x USB 3.0 Type A ports
 Additional 2x M12 USB ports in PIS-5510 series

Serial Port

4x DB-9 RS-232/422/485 ports (RS-422 by default)
 2kVrms isolation

Audio

Mic-in/ Line-out ports

CAN/MVB

Supported by Mini PCIe card with two DB-9 outputs

Wireless

2x Mini PCIe card slots are available for cellular modem or WLAN modules
 Compliant to Mini PCIe card spec v1.2 (PCIe and USB 2.0)
 Each Mini PCIe slot supports one micro-SIM
 4x RP-SMA antenna connector cutouts

In-system Expansion I/O

2x full size Mini PCI Express slots
 2x USIM slots
 1x Type A/B MXM slot on PCI Express x16 (P1000, P3000)
 1x USB 2.0 wafer connector

External I/O

4x M12 GbE with PoE ports
 4x M12 GbE ports
 2x RJ-45 GbE ports
 6x DisplayPorts
 1x DVI-I port
 4x USB 3.0 Type A ports
 2x M12 USB 2.0 ports (in PIS-5510)
 2x DB-9 connectors reserved for MVB or CAN Mini PCIe module
 1x Mic-in port
 1x Line-out port
 Four antenna cutouts reserved
 Reset button
 Power button

Specifications

• Miscellaneous

LEDs

1x diagnostics, 1x storage, 1x WDT, 3x user defined

Battery

Coin cell CR2032 (change to rechargeable golden cap by request)

Board Management

ADLINK SEMA 3.0:

- Watch Dog
- Hardware monitor
- Runtime statistics
- Failsafe dual BIOS

Power Supply

One 4-pin A-coded M12 connector

+24V/+36V/+72V/+110VDC nominal power input (16.8V to 137.5V, EN50155 compliant)

Power Consumption

149W on PIS-5500/6820/8G/P1000; 158W on PIS-5500/6820/8G/P3000 at

1. +24VDC in
2. CPU 100% loading
3. P1000 or P3000 100% loading

• Mechanical

Dimension (WxDxH)

360mm x 225.1mm x 88.8mm (for PIS-5500)

360mm x 225.1mm x 105.4mm (for PIS-5510)

Weight

6.3 kg

Mounting

Wall mount

• Environmental

Operating Temperature

Convection cooled

Class OT1: -25°C to 55°C with P3000 MXM module (supported by condition)

Class OT3: -25°C to 70°C with P1000 MXM module

Storage Temperature

-40°C to +85°C

Humidity

EN 50125-1, compliance EN 60068-2-78: 2012 Edition 2.0, Clause 4.2 at 40°C

Vibration

EN50155 standard, method EN61373: 2010, Category 1 Class B

Shock

EN50155 standard, method EN61373: 2010, Category 1 Class A & Class B

Safety

EN 50153

EN50124-1

Fire Protection

EN 45545-2:2013+A1:2015

EMC

EN 50121-3-2, EN50155

• Operating System

Windows 8, Windows 10

Ubuntu 16.04

Ordering Information

- PIS-5500/6820/16G**
 Fanless railway computer with Intel® Core™ i7-6820EQ and 16GB DDR4 and two SATA bays (conformal coating by request; external cables and power adapter are excluded)
- PIS-5500/7820/32G/P3000**
 Fanless railway computer with Intel® Core™ i7-7820EQ and 32GB DDR4 with P3000 MXM module and two SATA bays (conformal coating by request; external cables and power adapter are excluded)
*Please contact your sales representative for P3000 support condition.
- PIS-5510/6820/16G/P1000**
 Fanless railway computer with Intel® Core™ i7-6820EQ and 16GB DDR4 with P1000 MXM module and four SATA bays (conformal coating by request; external cables and power adapter are excluded)


Optional Accessories

- Factory-installed industrial grade SSD
- Mini PCIe card 3G/Wi-Fi/BT/GPS wireless kit
- Mini PCIe card CAN bus Kit
- Starter cable kit for PIS-5500**
 4x PoE M12(X) to RJ-45 cable, 4x Ethernet M12 A(M) to RJ-45(F) cable, 1x PS/2 KB/MS Y cable and 1x M12(S) to DC power cable
- Starter cable kit for PIS-5510**
 4x PoE M12(X) to RJ-45 cable, 4x Ethernet M12 A(M) to RJ-45(F) cable, 2x M12(A) to USB 2.0 type A cable, 1x PS/2 KB/MS Y cable and 1x M12(S) to DC power cable


Dimensions

(Units: mm)

PIS-5500

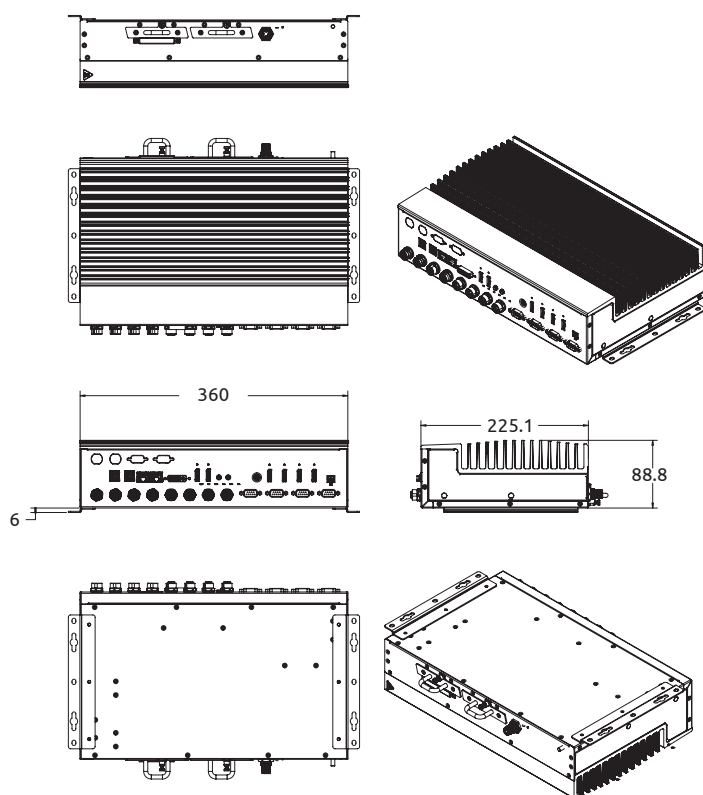

PIS-5510

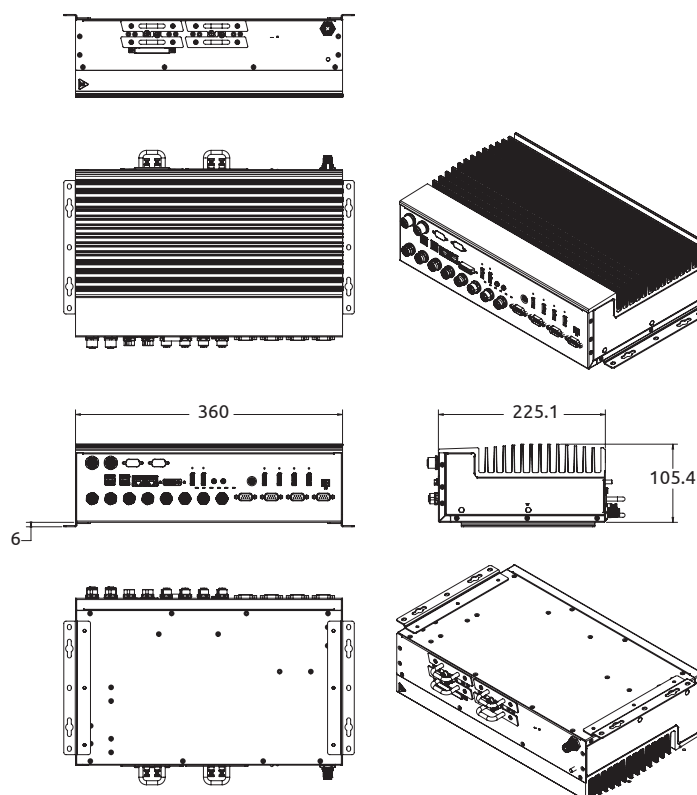



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.