


| OPERATING CHARACTERISTICS | LSA | | LSR | | LSN | LSP | | LSH | |
|---------------------------|---------------|-------------|------------------------------------|-------------|---------------------------------|--|----------------|--|-------------|
| | MOMENTARY | | MOMENTARY LOW TORQUE | | MAINTAINED | MOMENTARY LOW PRETRAVEL AND DIFF. TRAVEL | | MOMENTARY LOW PRETRAVEL AND LOW TORQUE | |
| PRETRAVEL(MAX) | 15° | | 15° | | 65° | 9° | | 9° | |
| OVERTRAVEL(MIN) | 60° | | 60° | | 20° | 66° | | 66° | |
| DIFFERENTIAL TRAVEL(MAX) | SINGLE POLE | DOUBLE POLE | SINGLE POLE | DOUBLE POLE | 40° | SINGLE POLE | DOUBLE POLE | SINGLE POLE | DOUBLE POLE |
| | 5° | 7° | 5° | 7° | | 3° | 4° | 3° | 4° |
| TOTAL TRAVEL (REF) | 75° | | 75° | | 90° | 75° | | 75° | |
| OPERATING TORQUE(MAX) | 4 IN. LBS | | 1.7 IN. LBS | | 4 IN. LBS | 4 IN. LBS | | 1.7 IN. LBS | |
| FULL TRAVEL TORQUE(MAX) | 4 IN. LBS | | 1.7 IN. LBS | | | 4 IN. LBS | | 1.7 IN. LBS | |
| OPERATING CHARACTERISTICS | LSU | | LSL | | LSM | LSI | LSS | | |
| | LOW PRETRAVEL | | SEQUENCE DOUBLE POLE ONLY | | CENTER NEUTRAL DOUBLE POLE ONLY | MOMENTARY | GRAVITY RETURN | | |
| PRETRAVEL(MAX) | 5° | | 1ST STEP 15° 2ND STEP 10° ADD'L | | 18° | 15° | NOT APPLICABLE | | |
| OVERTRAVEL(MIN) | 70° | | 48° | | 57° | 60° | NOT APPLICABLE | | |
| DIFFERENTIAL TRAVEL(MAX) | SINGLE POLE | DOUBLE POLE | | | 10° | 5° | 12° | | |
| | 5° | 4° | | | | | | | |
| TOTAL TRAVEL (REF) | 75° | | 75° | | 75° | 75° | 360° | | |
| OPERATING TORQUE(MAX) | 4 IN. LBS | | 4 IN. LBS | | 4 IN. LBS | 12 IN-OZ | 5 IN-OZ | | |
| FULL TRAVEL TORQUE(MAX) | 4 IN. LBS | | 4 IN. LBS | | 4 IN. LBS | 12 IN-OZ | 5 IN-OZ | | |


SIDE ROTARY

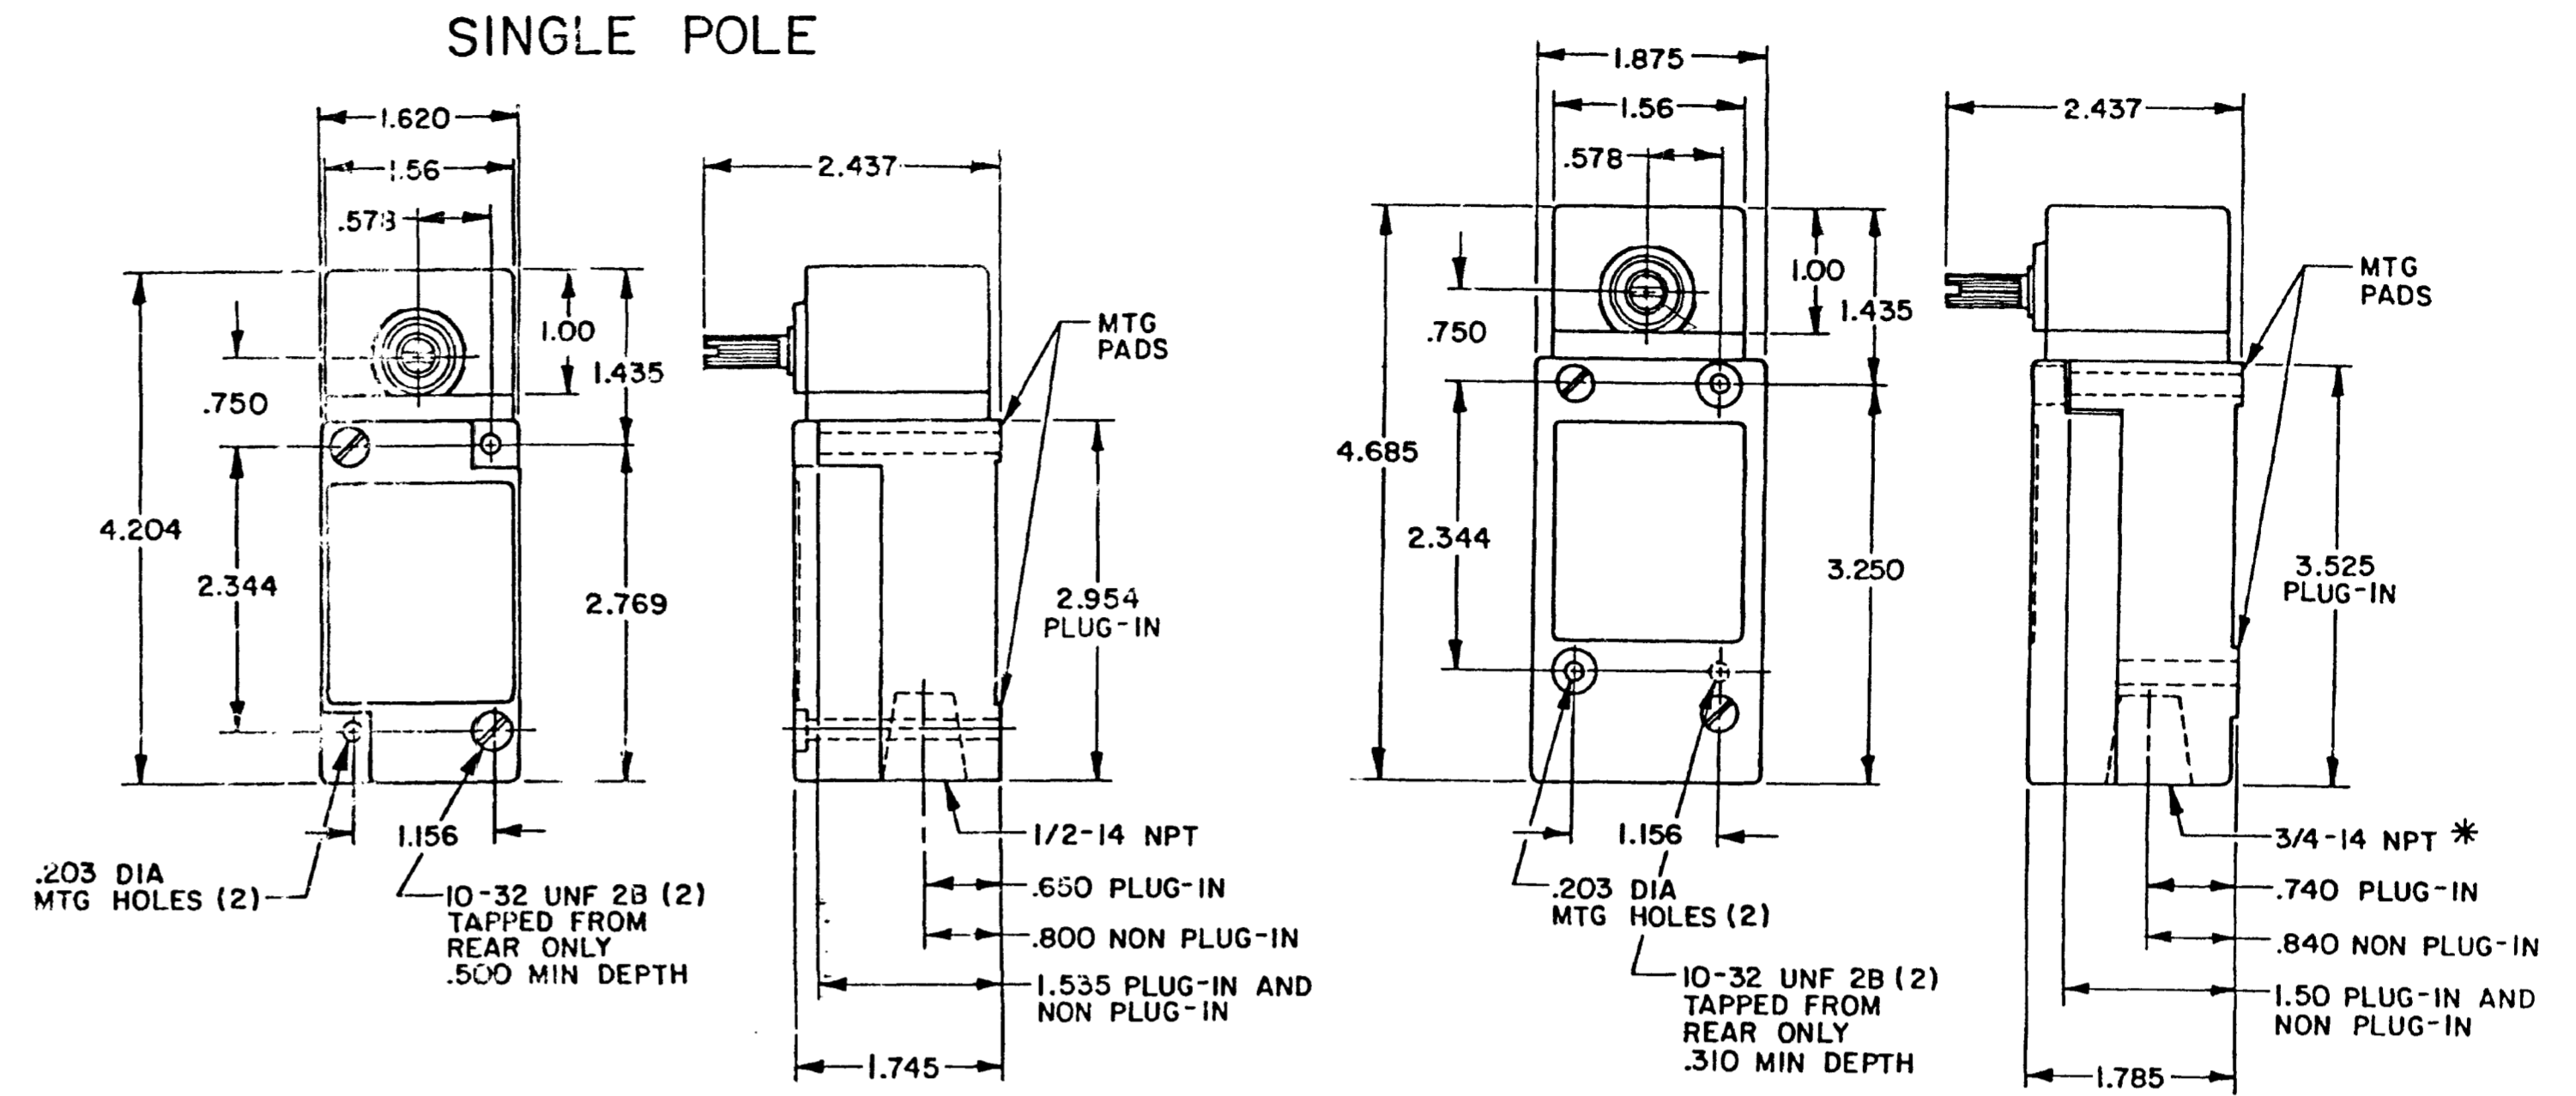



TYPE: LSA1, LSH1, LSN1, LSP1, LSR1
LSA3, LSH3, LSN3, LSP3, LSR3
LSS1, LST1

TYPE: LSA2, LSH2, LSM2, LSN2, LSP2, LSR2
LSA4, LSH4, LSM4, LSN4, LSP4, LSR4

*LSA6, LSH6, LSM6, LSN6, LSP6, LSR6
LSA7, LSH7, LSM7, LSN7, LSP7, LSR7 HAVE
1/2-14 NPT CONDUIT HOLE

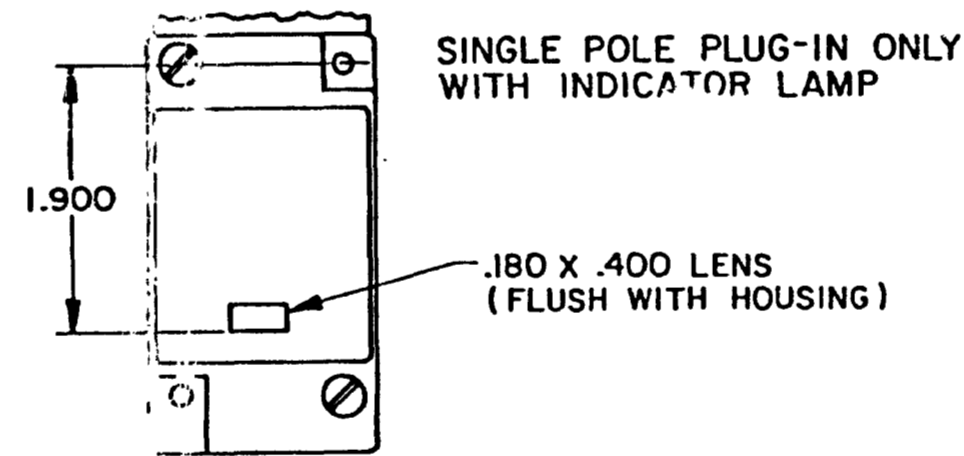


120 LAMP VOLTAGE -
TYPE LSA5, LSH5, LSN5, LSP5, LSR5
240 LAMP VOLTAGE -
TYPE LSA8, LSH8, LSN8, LSP8, LSR8

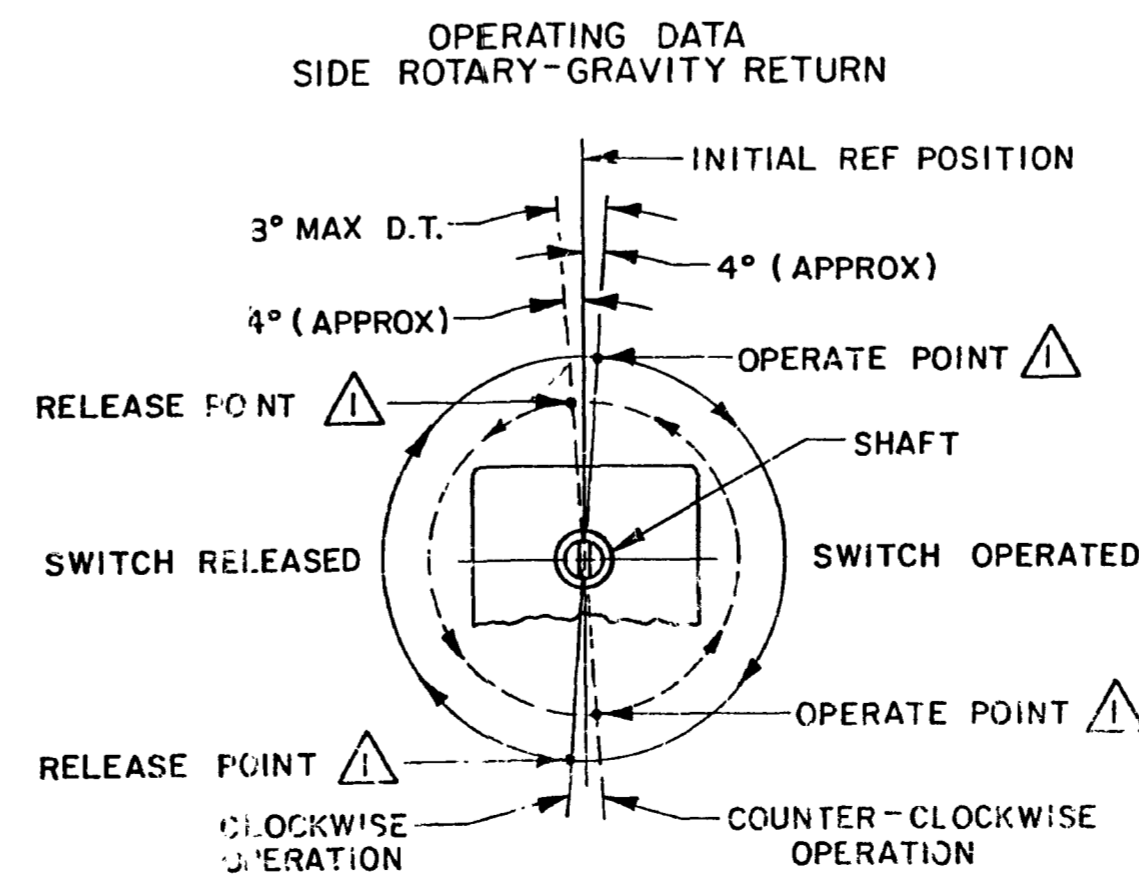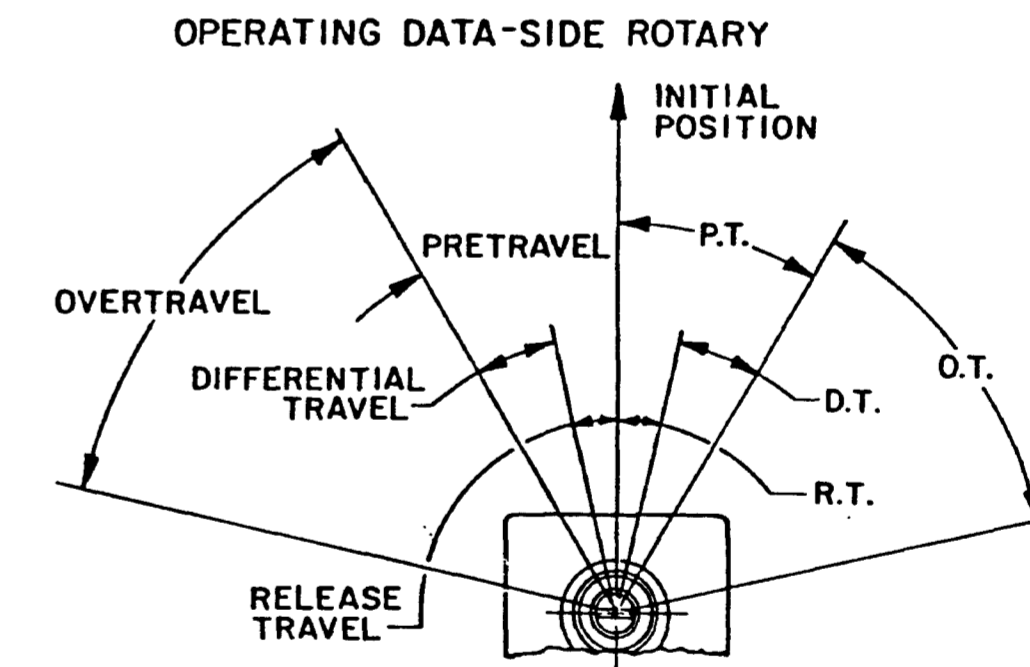

NOTE
OPERATE AND RELEASE POINTS WILL EXCHANGE
LOCATIONS IF SHAFT IS ROTATED 180°

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

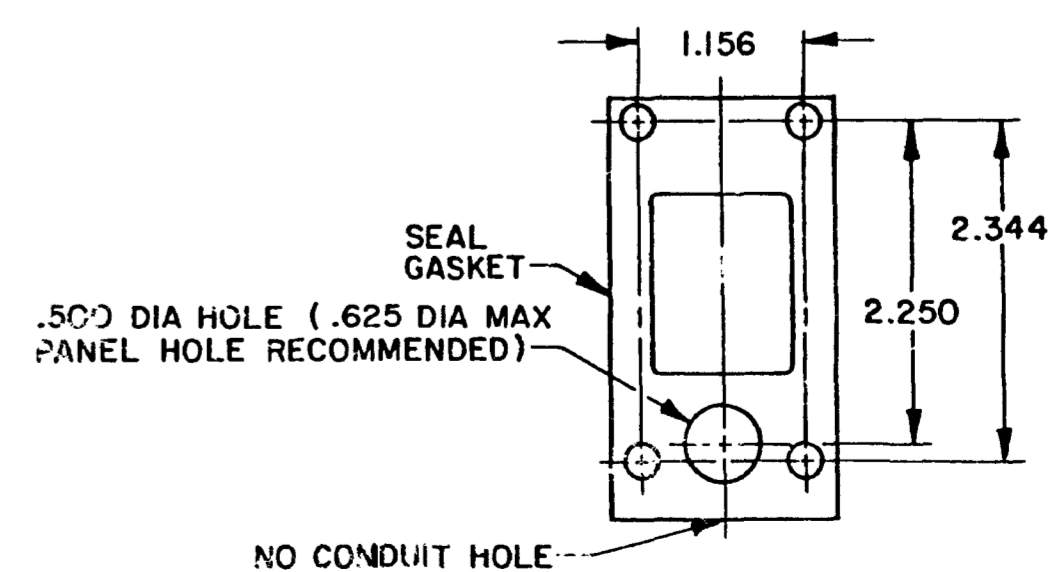


THIRD ANGLE PROJECTION


| | |
|---|-------|
| SCALE | NONE |
| DO NOT SCALE PRINT | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | |
| ONE PLACE (.0) | ±.030 |
| TWO PLACES (.00) | ±.015 |
| THREE PLACES (.000) | ±.005 |
| ANGLES | ± |
| WEIGHT | |

ISSUE 12
CATALOG LISTING LSA-LSW SERIES CHART 1
PAGE 1 OF 10
PSR 1000007
RELEASE NO CO-78498
REPLACES LSA-LSW SERIES
MAM 15 JUN 94
RASTER
11AUG06
11 JUL 94


SIDE ROTARY CAM TRACKING

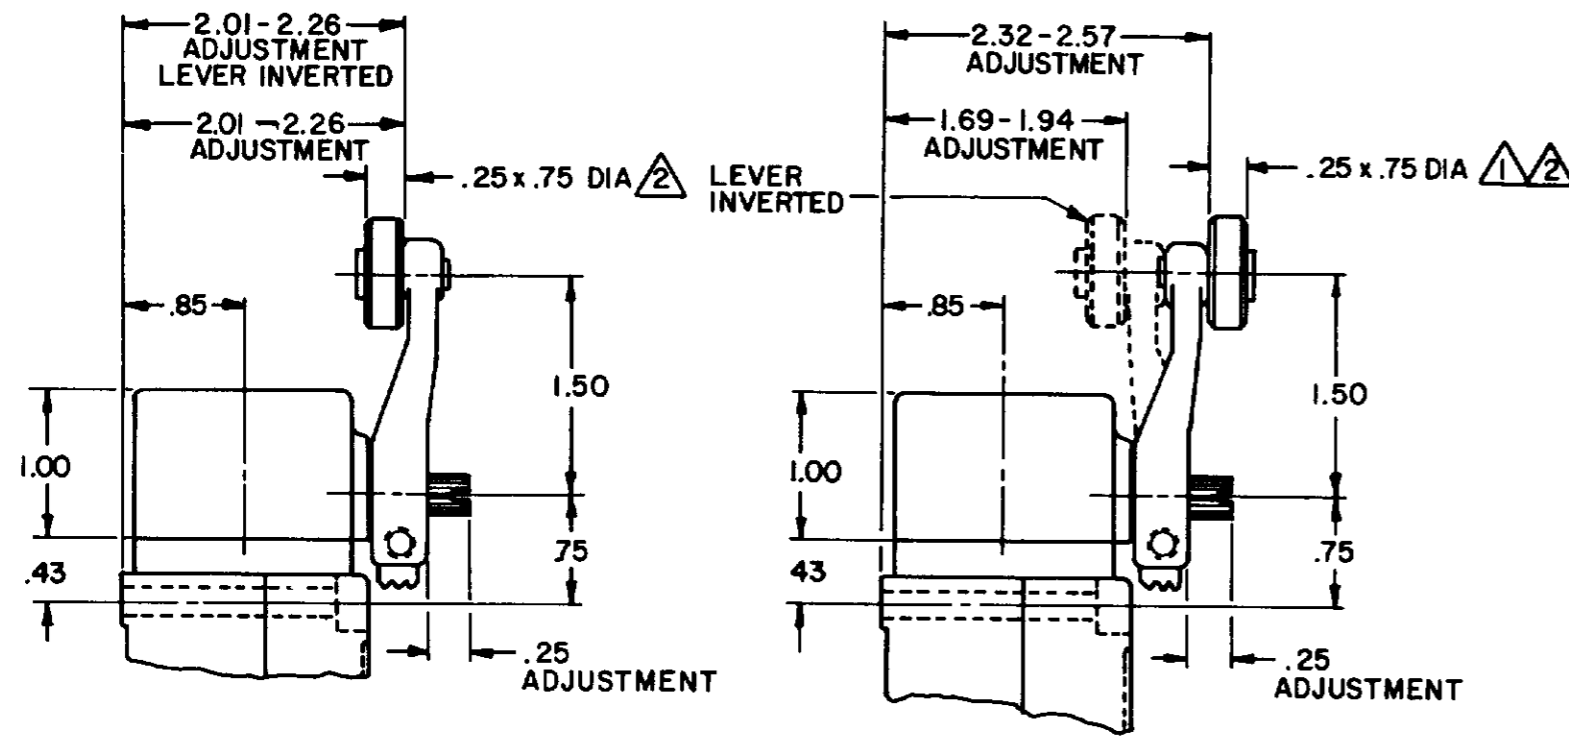


LSZ51 TYPE LEVERS

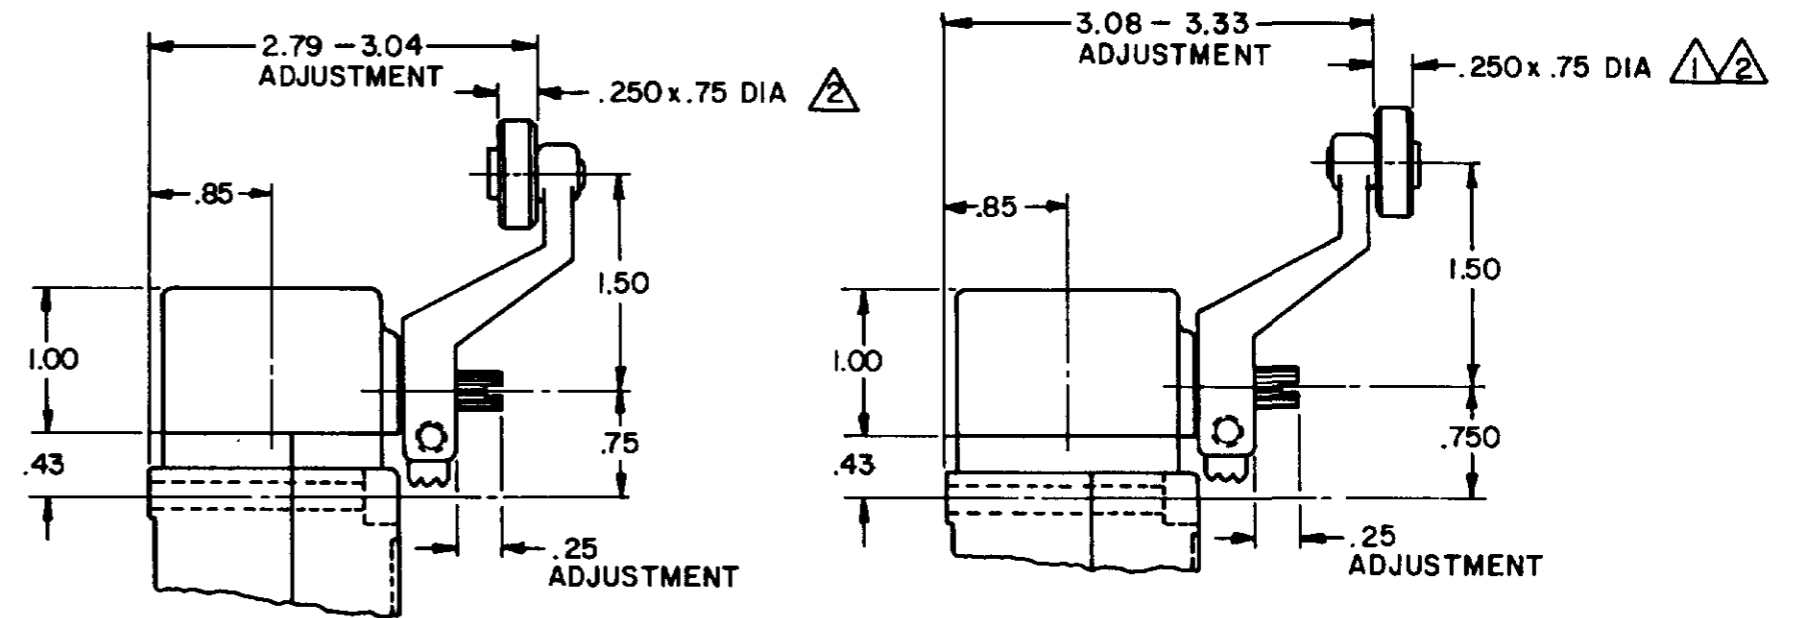


LSZ55 TYPE LEVERS

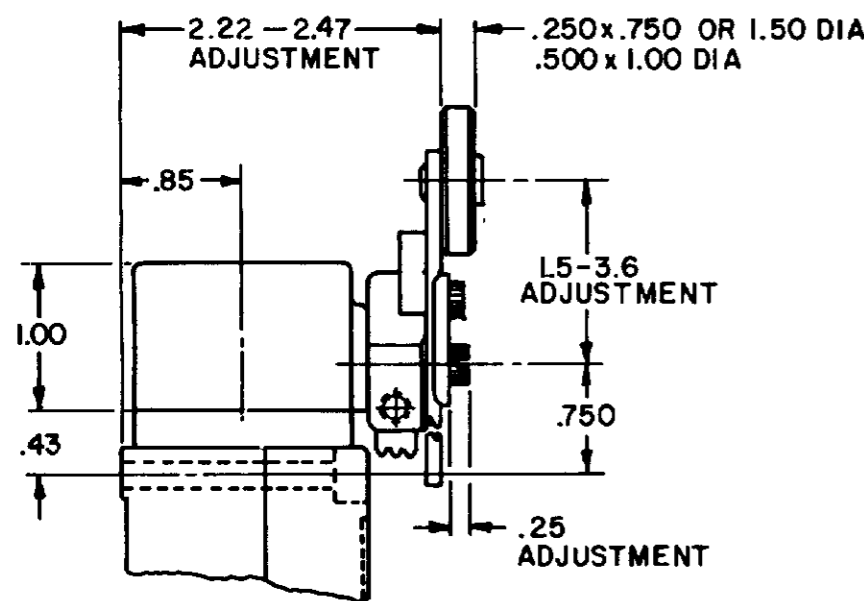


LSZ52 TYPE LEVER

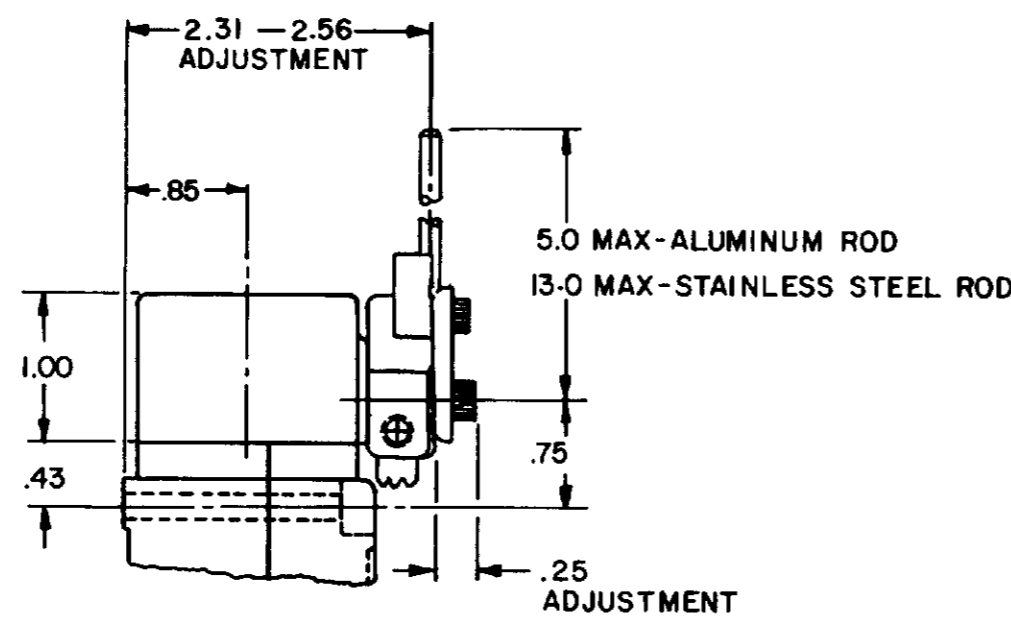

LSZ54 TYPE LEVER

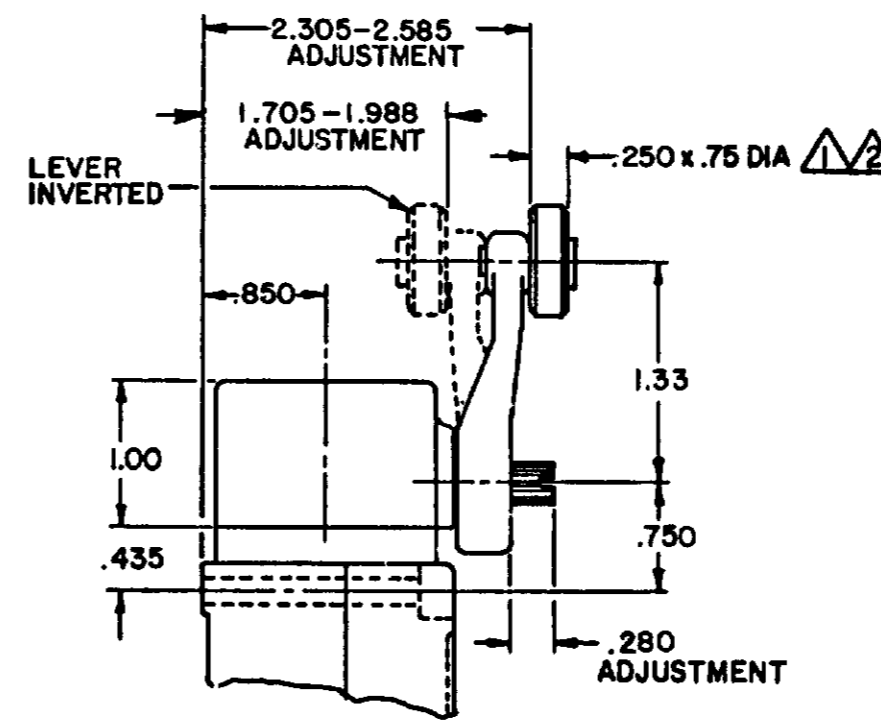

OPEN MOUNTED ROLLER

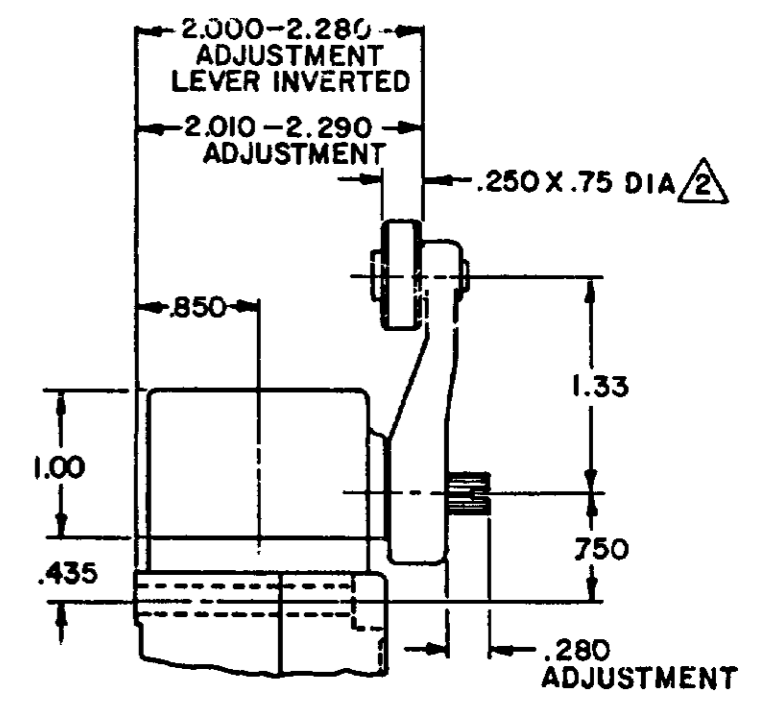

CLOSED MOUNTED ROLLER

LSZ59 TYPE LEVERS

NOTES

- ① ALSO AVAILABLE IN Ø.250 X 1.500 NYLON, BUT LEVER CANNOT BE INVERTED
- ② FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO "M" DRAWING
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 "M" DRAWING

CATALOG LISTING LSA-LSW SERIES CHART 1
 ISSUE 12
 PSR 10JUL07 RELEASE NO. CO-78498 REPLACES LSA-LSW SERIES
 CHECK 11AUG04
 REVISIONS
 L 0031956
 BS 10JUL07
 B 201004
 C SL 10AUG00
 C 201748
 C SL 17NOV00
 D 202198
 C SL 23JAN01
 E 204871
 C SL FEB 02
 F 206581
 GLH 14OCT02
 G 206763
 C SL 31OCT02
 H 207179
 GLH 14JAN03
 J 207474
 SLH 18FEB03
 K 0006871
 RR 11AUG04
 DRAWN MAM 15 JUN 94
 CHECK JAF 11 JUL 94

PAGE 2 OF 10

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

| | |
|---|-------|
| THIRD ANGLE PROJECTION | |
| SCALE NONE | |
| DO NOT SCALE PRINT | |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | |
| ONE PLACE () | ±.030 |
| TWO PLACES (00) | ±.015 |
| THREE PLACES (0.000) | ±.005 |
| ANGLES | ± |
| WEIGHT | |

ISSUE 12 PSR 10JUL07 RELEASE NO CO-78498 REPLACES LSA-LSW SERIES


REV. S I O N S
 L 0031958
 1 JUL 07
 B 201004
 10 AUG 00
 C 201748
 17 NOV 00
 D 202198
 23 JAN 01
 E 204871
 6 FEB 02
 F 206581
 14 OCT 02
 G 206763
 31 OCT 02
 H 207179
 14 JAN 03
 J 207474
 18 FEB 03
 K 0006871

MAM 15 JUN 94 CHECK JAF
 1 JUL 94 CHECK AK
 11AUG04 CHECK


TOP ROTARY

SINGLE POLE

DOUBLE POLE

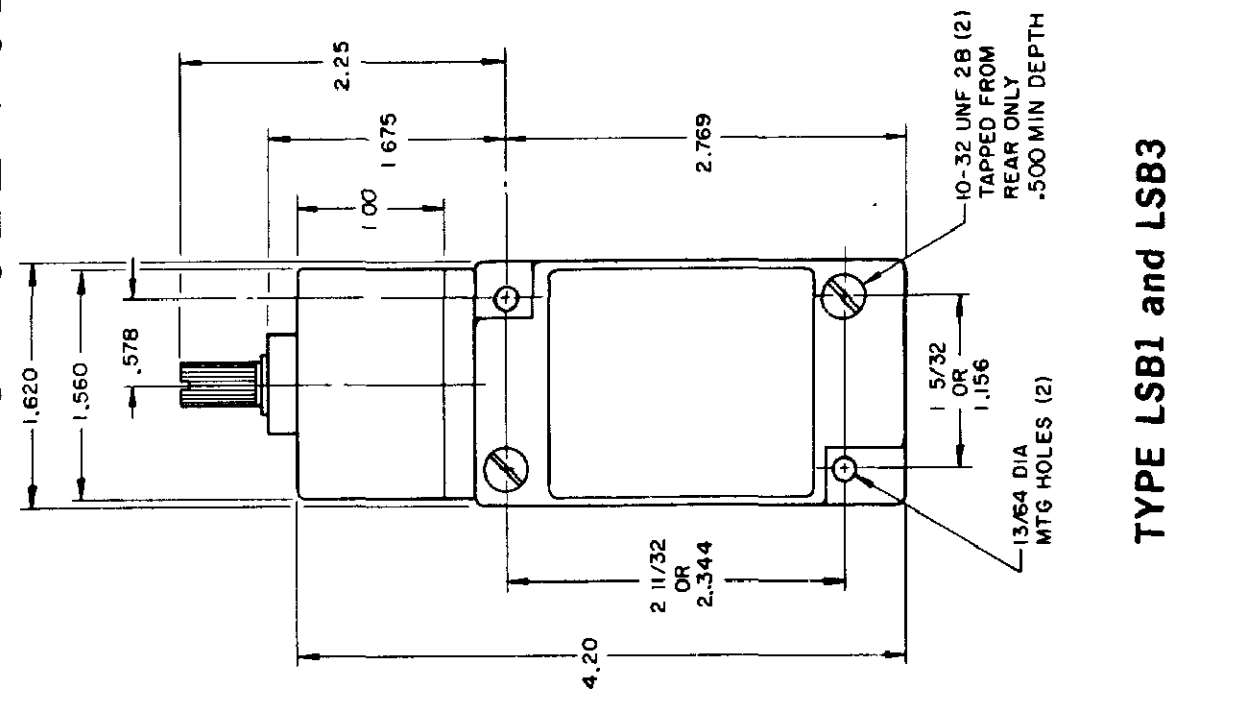

TYPE LSB1 and LSB3

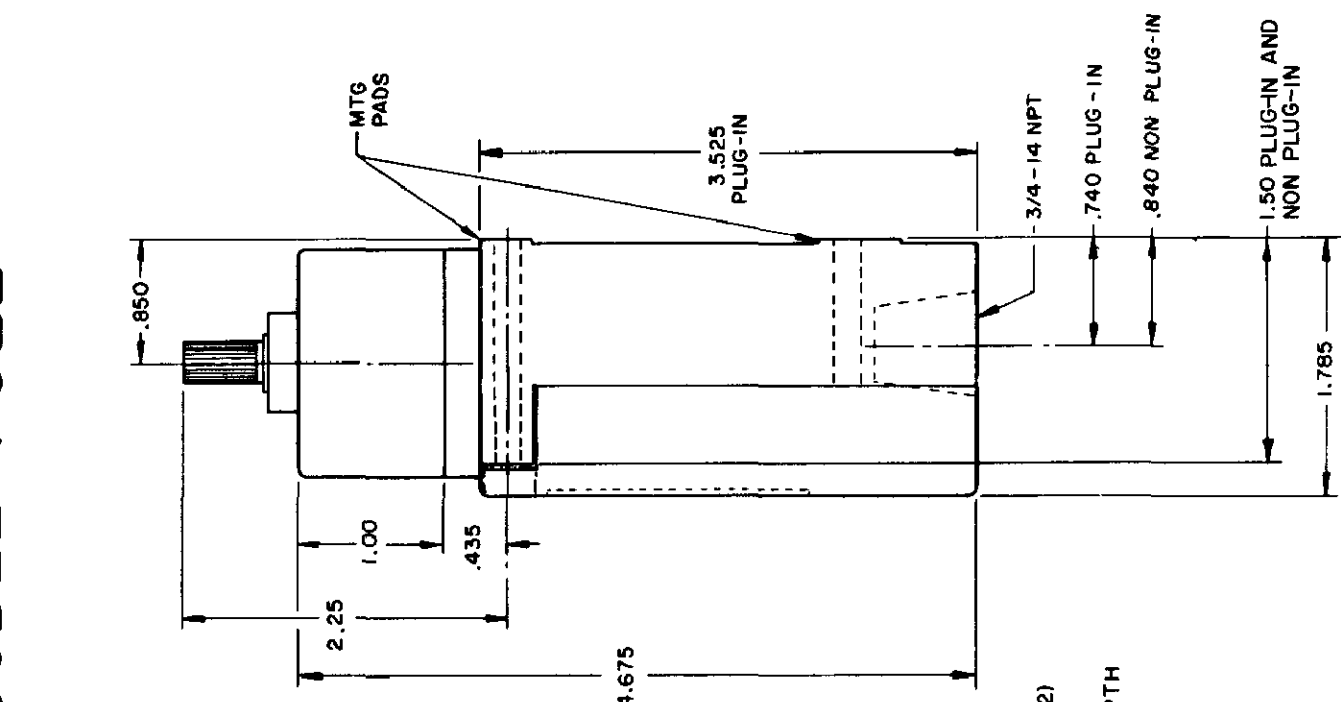

TYPE LSB2 and LSB4
 LSB6 and LSB7 have 1/2 - 14 NPT CONDUIT HOLE

| | SINGLE POLE | DOUBLE POLE |
|-------------------------|-------------|-------------|
| PRETRAVEL MAX | 25° | 25° |
| OVERTRAVEL MIN | 110° | 110° |
| DIFFERENTIAL TRAVEL MAX | 10° | 12° |
| OPERATING TORQUE MAX | 2.5 IN. LBS | 2.5 IN. LBS |
| TOTAL TRAVEL (REF) | 135° | 135° |

ELECTRICAL RATINGS


| A.C. VOLTAGE | AMPS AT 35 POWER FACTOR | | | |
|--------------|-------------------------|-------|-------------|-------|
| | SINGL POLE | | DOUBLE POLE | |
| | MAKE | BREAK | MAKE | BREAK |
| 120 | 60 | 6 | 30 | 3 |
| 240 | 30 | 3 | 15 | 1.5 |
| 480 | 15 | 1.5 | 7.5 | 7.5 |
| 600 | 12 | 1.2 | 6 | 6 |

| D.C. VOLTAGE | MAKE & BREAK | |
|--------------|--------------|-----------|
| | INDUCTIVE | RESISTIVE |
| 120 | 0.25 | 0.80 |
| 240 | 0.15 | 0.40 |

ELECTRONIC DUTY BASIC SWITCH
 10 AMP CONT.

| VOLTAGE | MAKE AND BREAK AMPS |
|----------------|---------------------|
| 5 AC OR DC MIN | 01 AMP MIN |
| 600 AC | 720 VA |
| 240 DC | 30 WATT |

WIRING BASIC SWITCH
 (SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

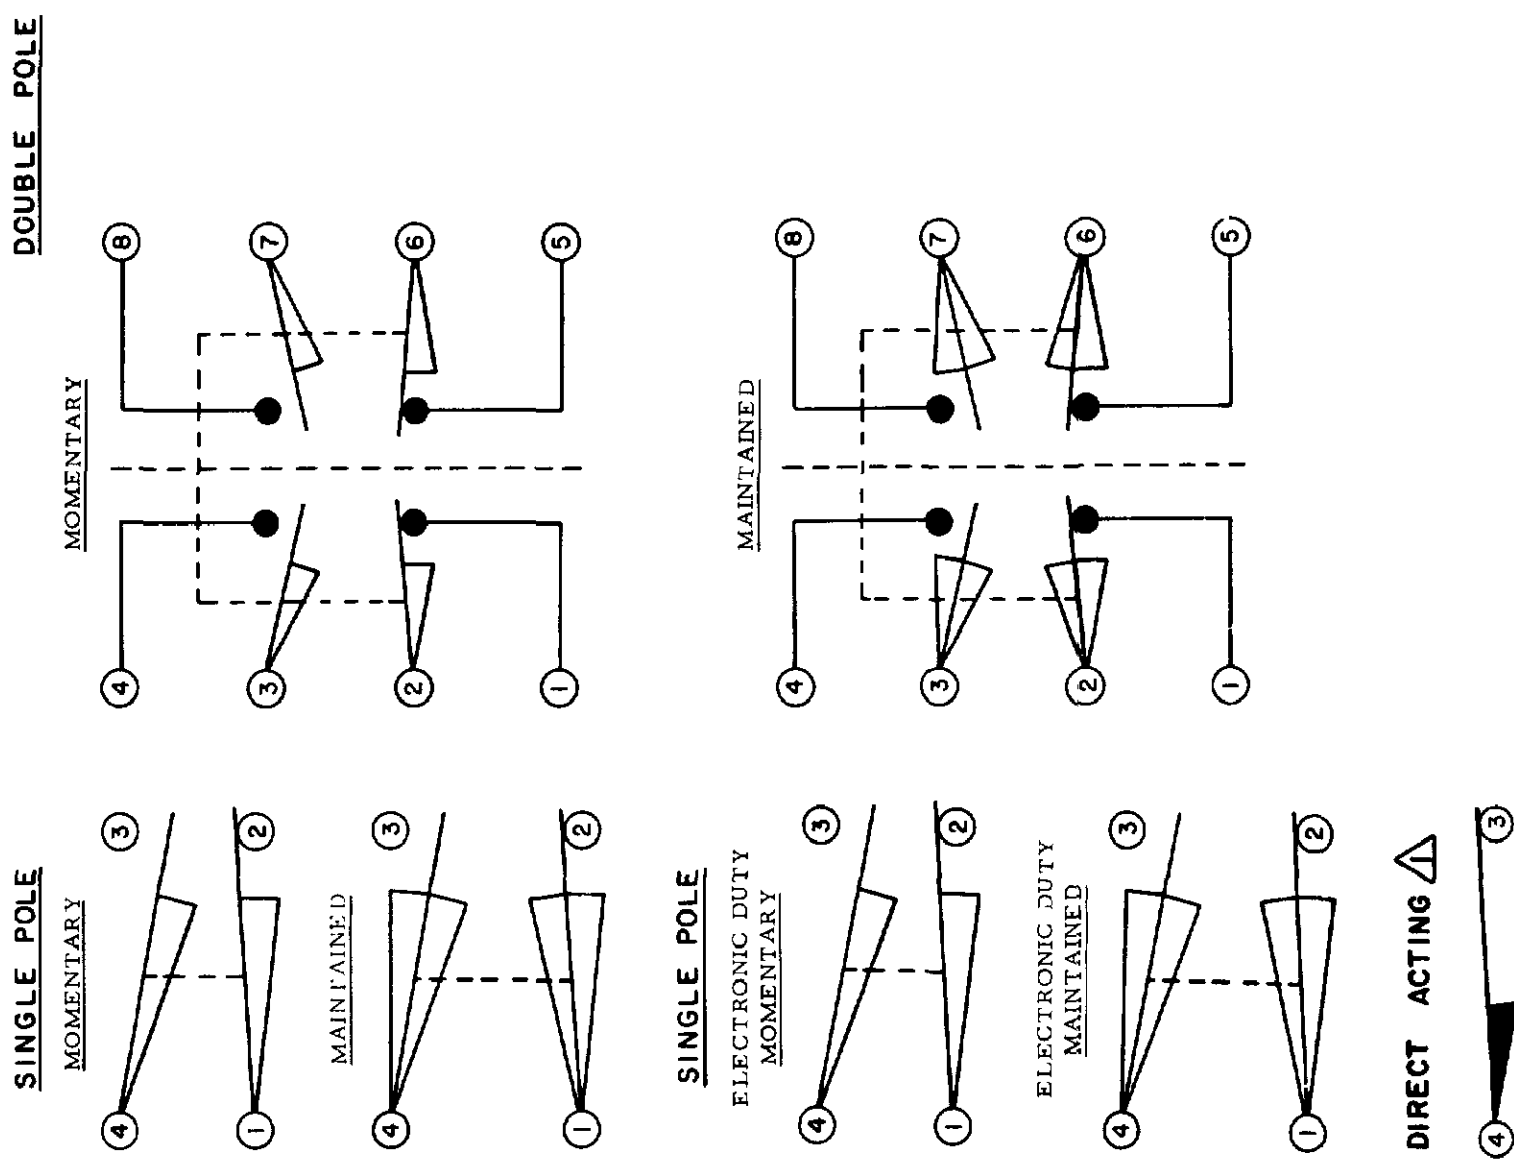


NOTES
 Δ DIFFERENTIAL TRAVEL ON ALL OPERATING CHARACTERISTICS NOT APPLICABLE

| REV | DATE | BY | CHKD | DESCRIPTION |
|-----|-----------|--------|------|-------------|
| L | 0031956 | | | |
| B | 10 JUL 07 | BS | | |
| B | 201004 | | | |
| C | 10 AUG 00 | C.S.L. | | |
| C | 201748 | | | |
| D | 202198 | | | |
| E | 204871 | | | |
| F | 206581 | | | |
| G | 206763 | | | |
| H | 207178 | | | |
| I | 207474 | | | |
| J | 207474 | | | |
| K | 0006871 | | | |


PLUNGER TYPE TOP

SINGLE POLE

DOUBLE POLE

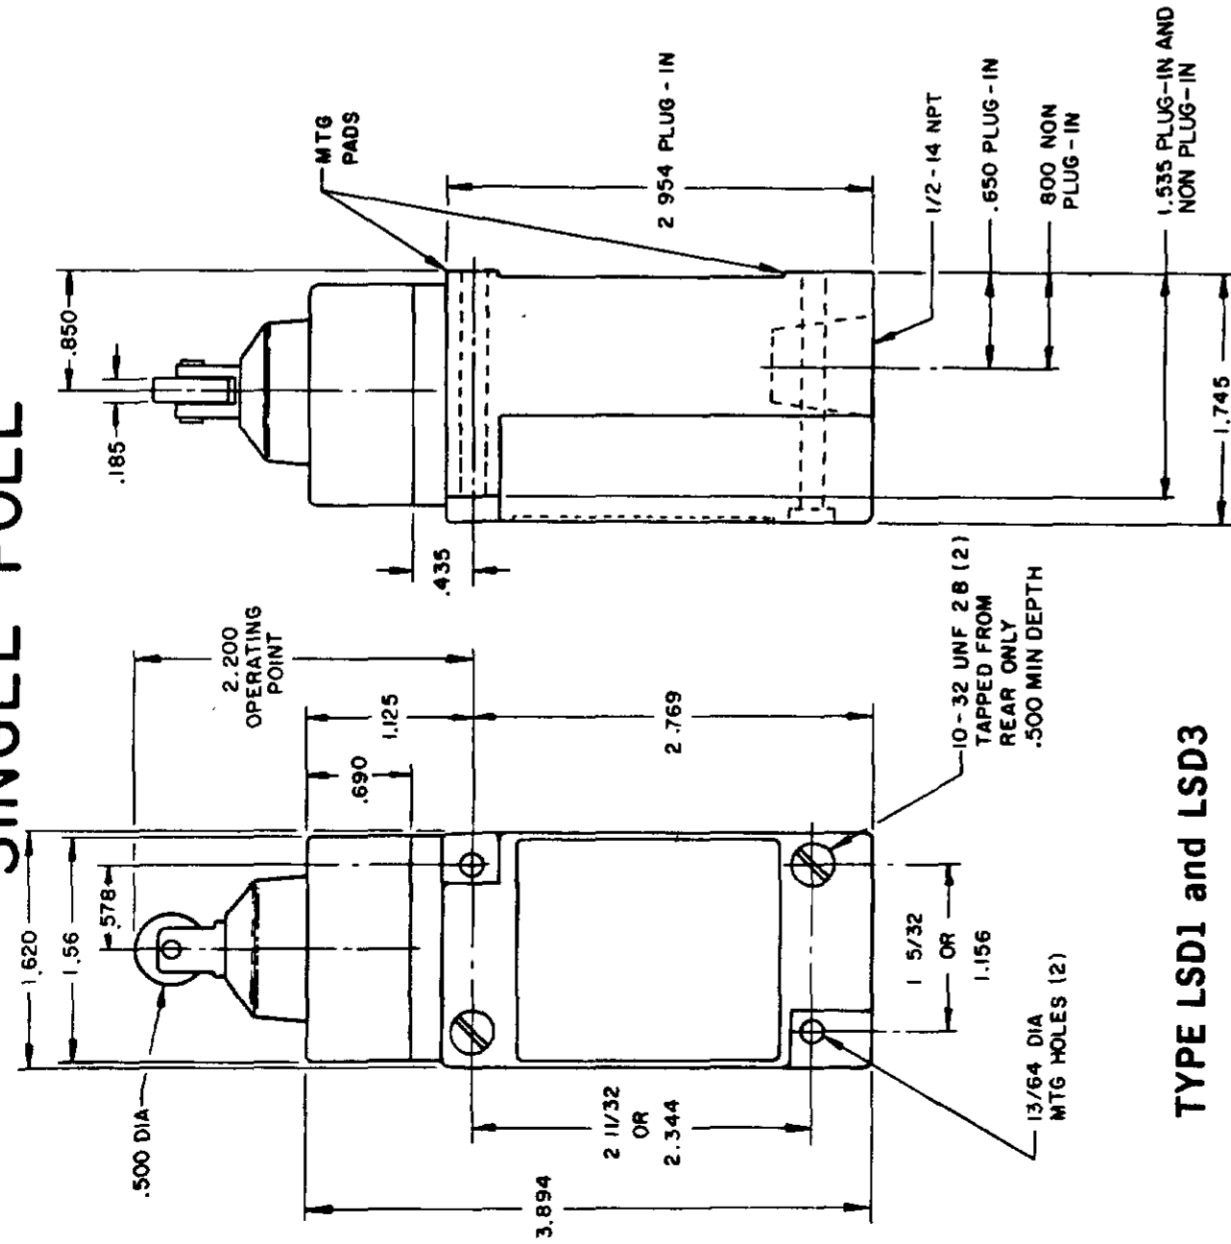


TYPE LSD1 and LSD3

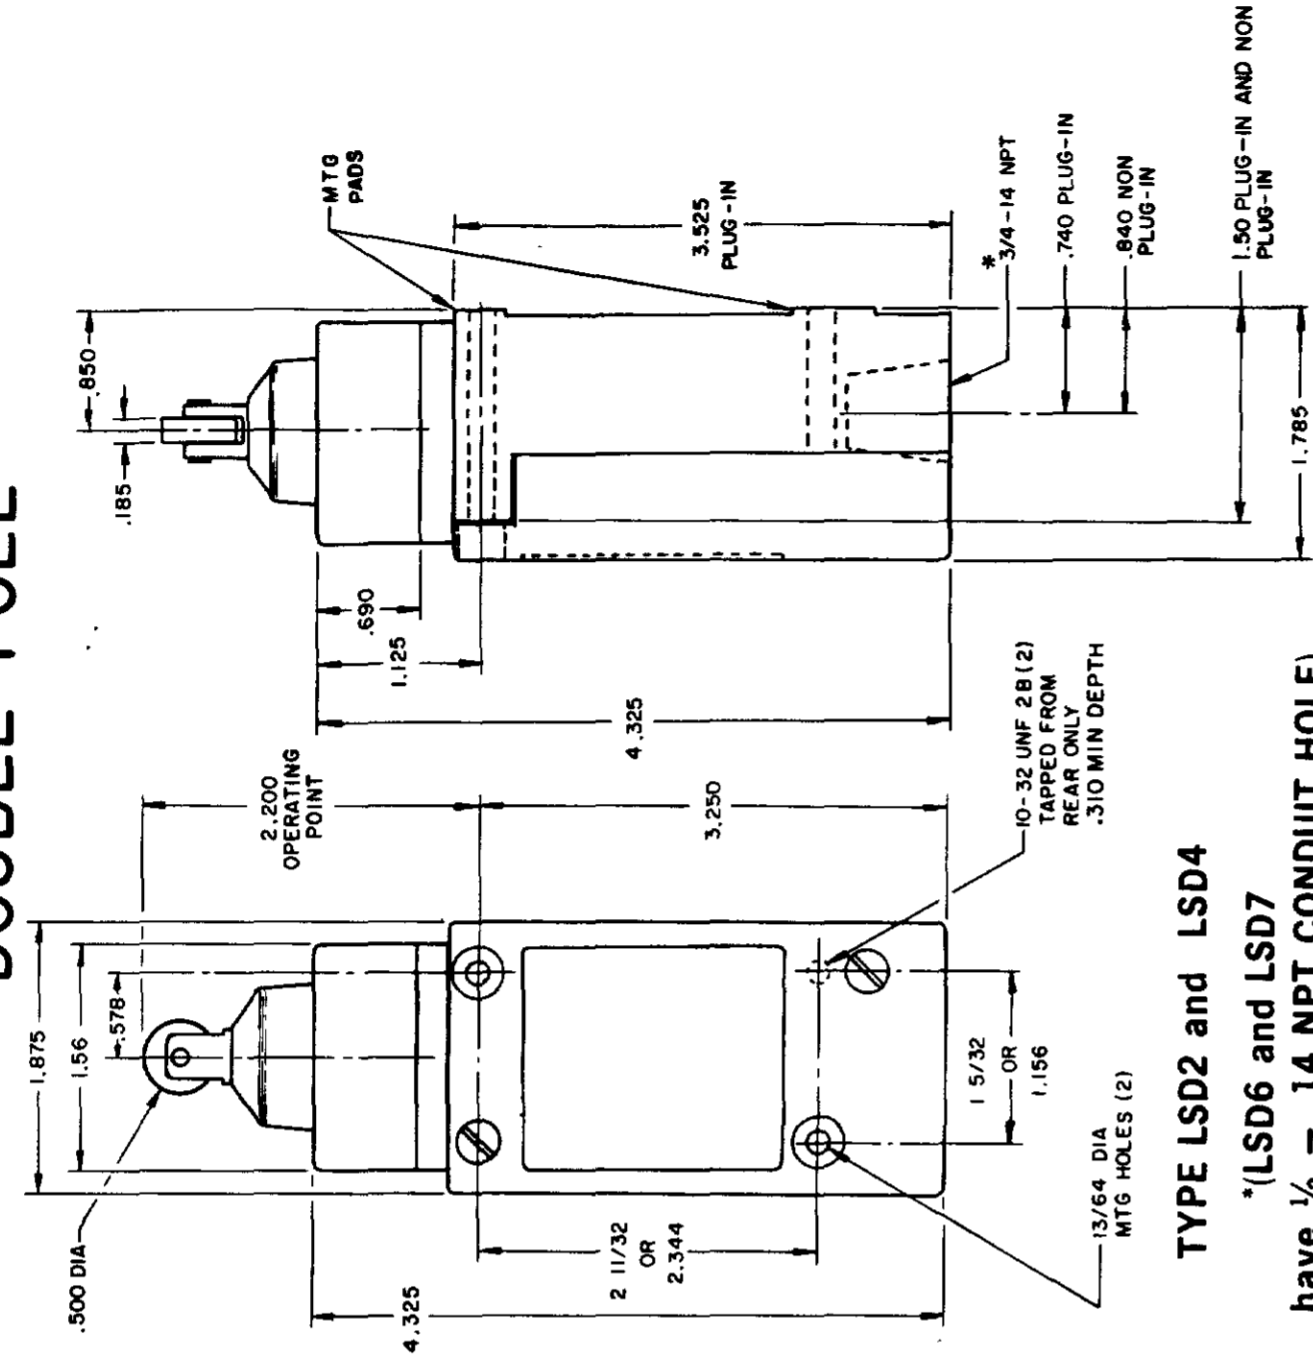


TYPE LSD2 and LSD4

*(LSD6 and LSD7 have 1/2 - 14 NPT CONDUIT HOLE)

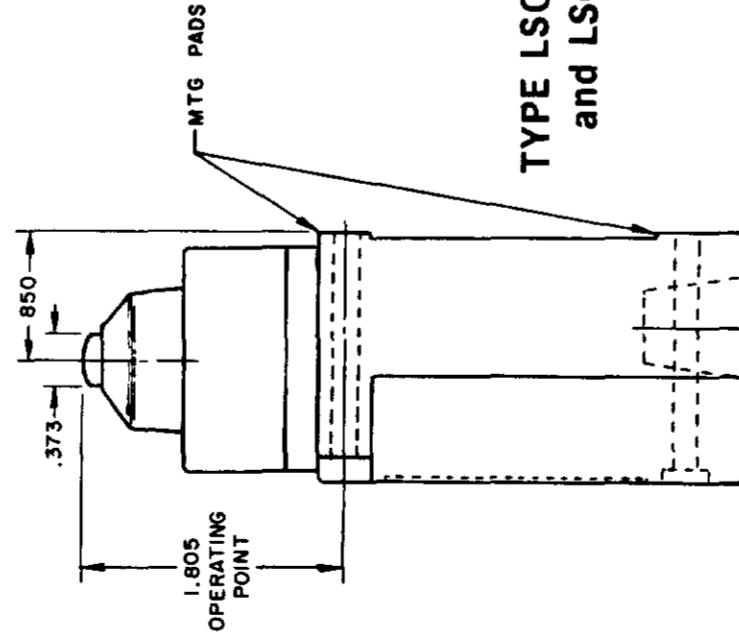


TYPE LSC1 and LSC3

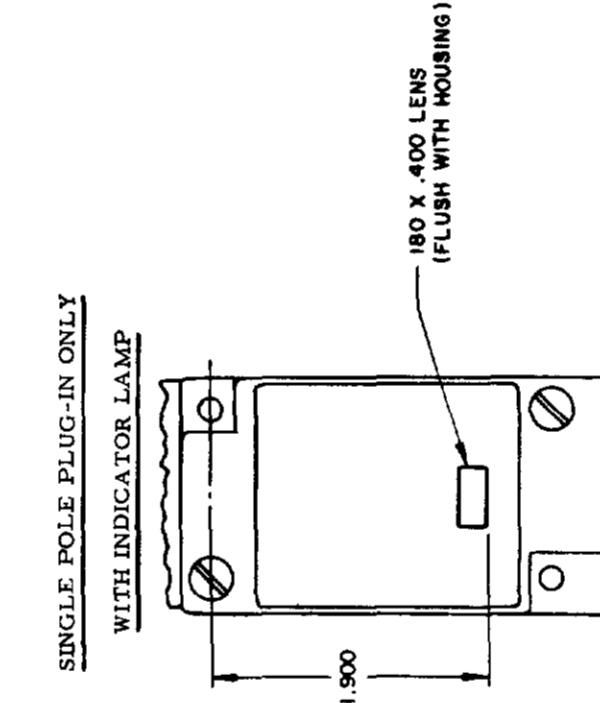


TYPE LSC2 and LSC4


120 LAMP VOLTAGE - TYPE LSC5, LSD5 or LSV5
 240 LAMP VOLTAGE - TYPE LSC8, LSD8 or LSV8

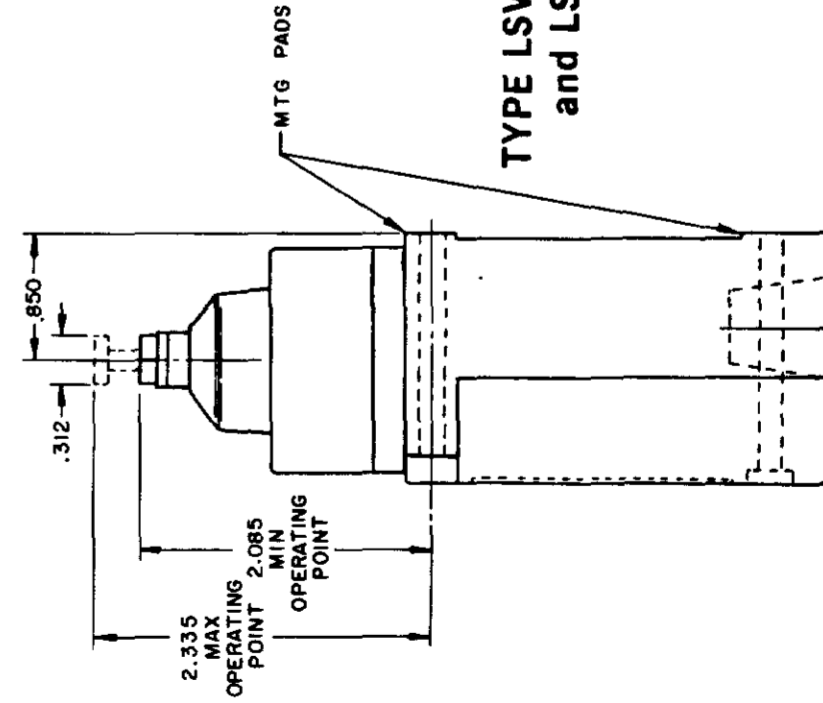

TYPE LSV1 and LSV3

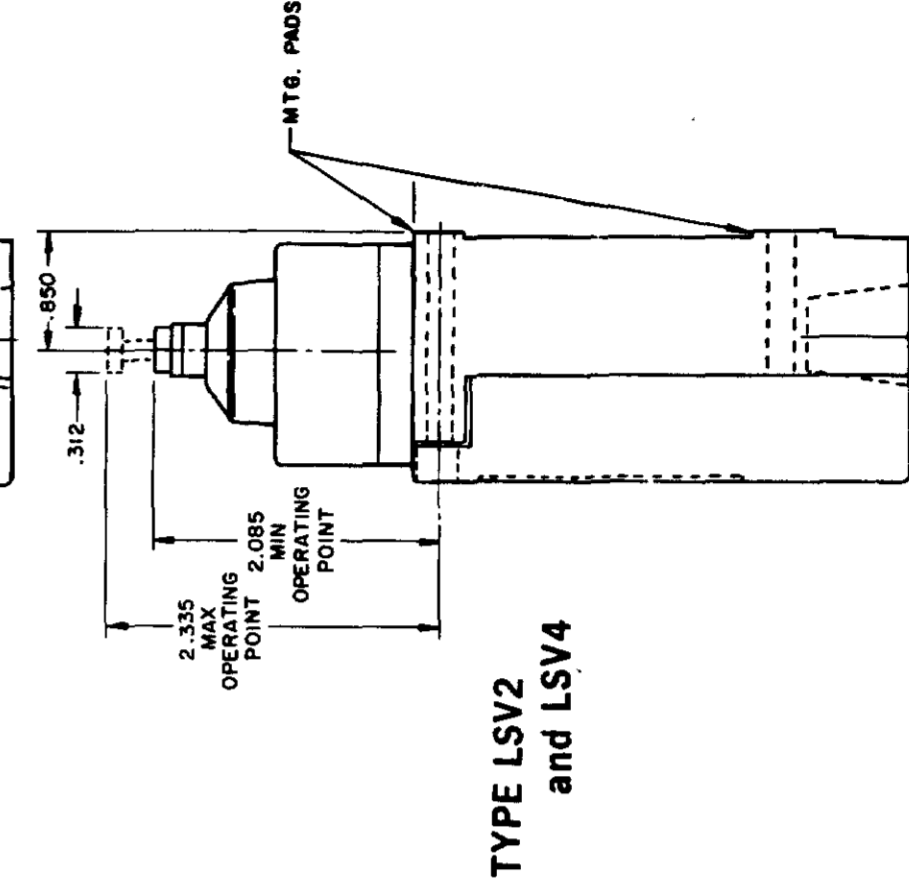

TYPE LSV2 and LSV4

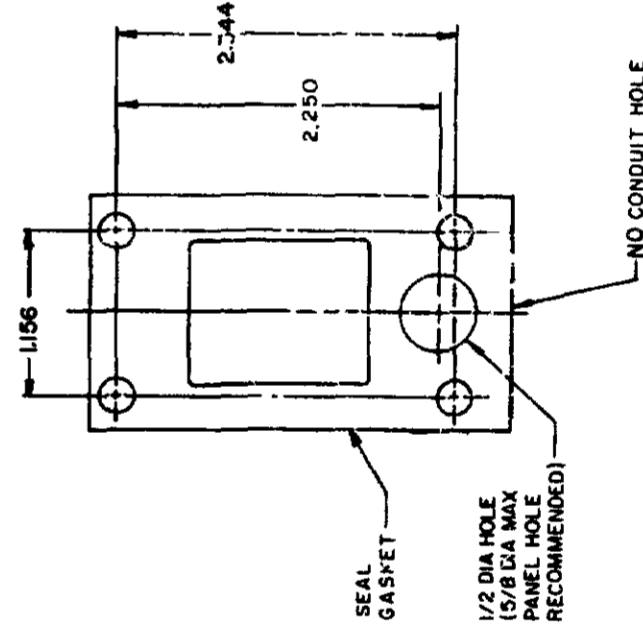


MANIFOLD MOUNT (PLUG-IN ONLY)
 SINGLE POLE AND DOUBLE POLE
 TYPE LSA THROUGH LSW SERIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
 a Honeywell Division


SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

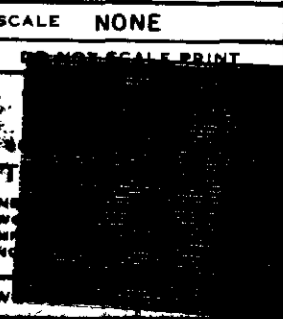


| | | | |
|--------|-----------|-------|-----|
| RASTER | 15 JUN 94 | CHECK | JAF |
| DRAWN | 11 JUL 94 | CHECK | AK |
| MAM | 11 AUG 04 | CHECK | AK |
| REV | 11 AUG 04 | CHECK | AK |
| 1 | 11 AUG 04 | CHECK | AK |
| 2 | 11 AUG 04 | CHECK | AK |
| 3 | 11 AUG 04 | CHECK | AK |
| 4 | 11 AUG 04 | CHECK | AK |
| 5 | 11 AUG 04 | CHECK | AK |
| 6 | 11 AUG 04 | CHECK | AK |
| 7 | 11 AUG 04 | CHECK | AK |
| 8 | 11 AUG 04 | CHECK | AK |
| 9 | 11 AUG 04 | CHECK | AK |
| 10 | 11 AUG 04 | CHECK | AK |
| 11 | 11 AUG 04 | CHECK | AK |
| 12 | 11 AUG 04 | CHECK | AK |
| 13 | 11 AUG 04 | CHECK | AK |
| 14 | 11 AUG 04 | CHECK | AK |
| 15 | 11 AUG 04 | CHECK | AK |
| 16 | 11 AUG 04 | CHECK | AK |
| 17 | 11 AUG 04 | CHECK | AK |
| 18 | 11 AUG 04 | CHECK | AK |
| 19 | 11 AUG 04 | CHECK | AK |
| 20 | 11 AUG 04 | CHECK | AK |
| 21 | 11 AUG 04 | CHECK | AK |
| 22 | 11 AUG 04 | CHECK | AK |
| 23 | 11 AUG 04 | CHECK | AK |
| 24 | 11 AUG 04 | CHECK | AK |
| 25 | 11 AUG 04 | CHECK | AK |
| 26 | 11 AUG 04 | CHECK | AK |
| 27 | 11 AUG 04 | CHECK | AK |
| 28 | 11 AUG 04 | CHECK | AK |
| 29 | 11 AUG 04 | CHECK | AK |
| 30 | 11 AUG 04 | CHECK | AK |
| 31 | 11 AUG 04 | CHECK | AK |
| 32 | 11 AUG 04 | CHECK | AK |
| 33 | 11 AUG 04 | CHECK | AK |
| 34 | 11 AUG 04 | CHECK | AK |
| 35 | 11 AUG 04 | CHECK | AK |
| 36 | 11 AUG 04 | CHECK | AK |
| 37 | 11 AUG 04 | CHECK | AK |
| 38 | 11 AUG 04 | CHECK | AK |
| 39 | 11 AUG 04 | CHECK | AK |
| 40 | 11 AUG 04 | CHECK | AK |
| 41 | 11 AUG 04 | CHECK | AK |
| 42 | 11 AUG 04 | CHECK | AK |
| 43 | 11 AUG 04 | CHECK | AK |
| 44 | 11 AUG 04 | CHECK | AK |
| 45 | 11 AUG 04 | CHECK | AK |
| 46 | 11 AUG 04 | CHECK | AK |
| 47 | 11 AUG 04 | CHECK | AK |
| 48 | 11 AUG 04 | CHECK | AK |
| 49 | 11 AUG 04 | CHECK | AK |
| 50 | 11 AUG 04 | CHECK | AK |
| 51 | 11 AUG 04 | CHECK | AK |
| 52 | 11 AUG 04 | CHECK | AK |
| 53 | 11 AUG 04 | CHECK | AK |
| 54 | 11 AUG 04 | CHECK | AK |
| 55 | 11 AUG 04 | CHECK | AK |
| 56 | 11 AUG 04 | CHECK | AK |
| 57 | 11 AUG 04 | CHECK | AK |
| 58 | 11 AUG 04 | CHECK | AK |
| 59 | 11 AUG 04 | CHECK | AK |
| 60 | 11 AUG 04 | CHECK | AK |
| 61 | 11 AUG 04 | CHECK | AK |
| 62 | 11 AUG 04 | CHECK | AK |
| 63 | 11 AUG 04 | CHECK | AK |
| 64 | 11 AUG 04 | CHECK | AK |
| 65 | 11 AUG 04 | CHECK | AK |
| 66 | 11 AUG 04 | CHECK | AK |
| 67 | 11 AUG 04 | CHECK | AK |
| 68 | 11 AUG 04 | CHECK | AK |
| 69 | 11 AUG 04 | CHECK | AK |
| 70 | 11 AUG 04 | CHECK | AK |
| 71 | 11 AUG 04 | CHECK | AK |
| 72 | 11 AUG 04 | CHECK | AK |
| 73 | 11 AUG 04 | CHECK | AK |
| 74 | 11 AUG 04 | CHECK | AK |
| 75 | 11 AUG 04 | CHECK | AK |
| 76 | 11 AUG 04 | CHECK | AK |
| 77 | 11 AUG 04 | CHECK | AK |
| 78 | 11 AUG 04 | CHECK | AK |
| 79 | 11 AUG 04 | CHECK | AK |
| 80 | 11 AUG 04 | CHECK | AK |
| 81 | 11 AUG 04 | CHECK | AK |
| 82 | 11 AUG 04 | CHECK | AK |
| 83 | 11 AUG 04 | CHECK | AK |
| 84 | 11 AUG 04 | CHECK | AK |
| 85 | 11 AUG 04 | CHECK | AK |
| 86 | 11 AUG 04 | CHECK | AK |
| 87 | 11 AUG 04 | CHECK | AK |
| 88 | 11 AUG 04 | CHECK | AK |
| 89 | 11 AUG 04 | CHECK | AK |
| 90 | 11 AUG 04 | CHECK | AK |
| 91 | 11 AUG 04 | CHECK | AK |
| 92 | 11 AUG 04 | CHECK | AK |
| 93 | 11 AUG 04 | CHECK | AK |
| 94 | 11 AUG 04 | CHECK | AK |
| 95 | 11 AUG 04 | CHECK | AK |
| 96 | 11 AUG 04 | CHECK | AK |
| 97 | 11 AUG 04 | CHECK | AK |
| 98 | 11 AUG 04 | CHECK | AK |
| 99 | 11 AUG 04 | CHECK | AK |
| 100 | 11 AUG 04 | CHECK | AK |

SIDE PLUNGER TYPE
SINGLE POLE **DOUBLE POLE**

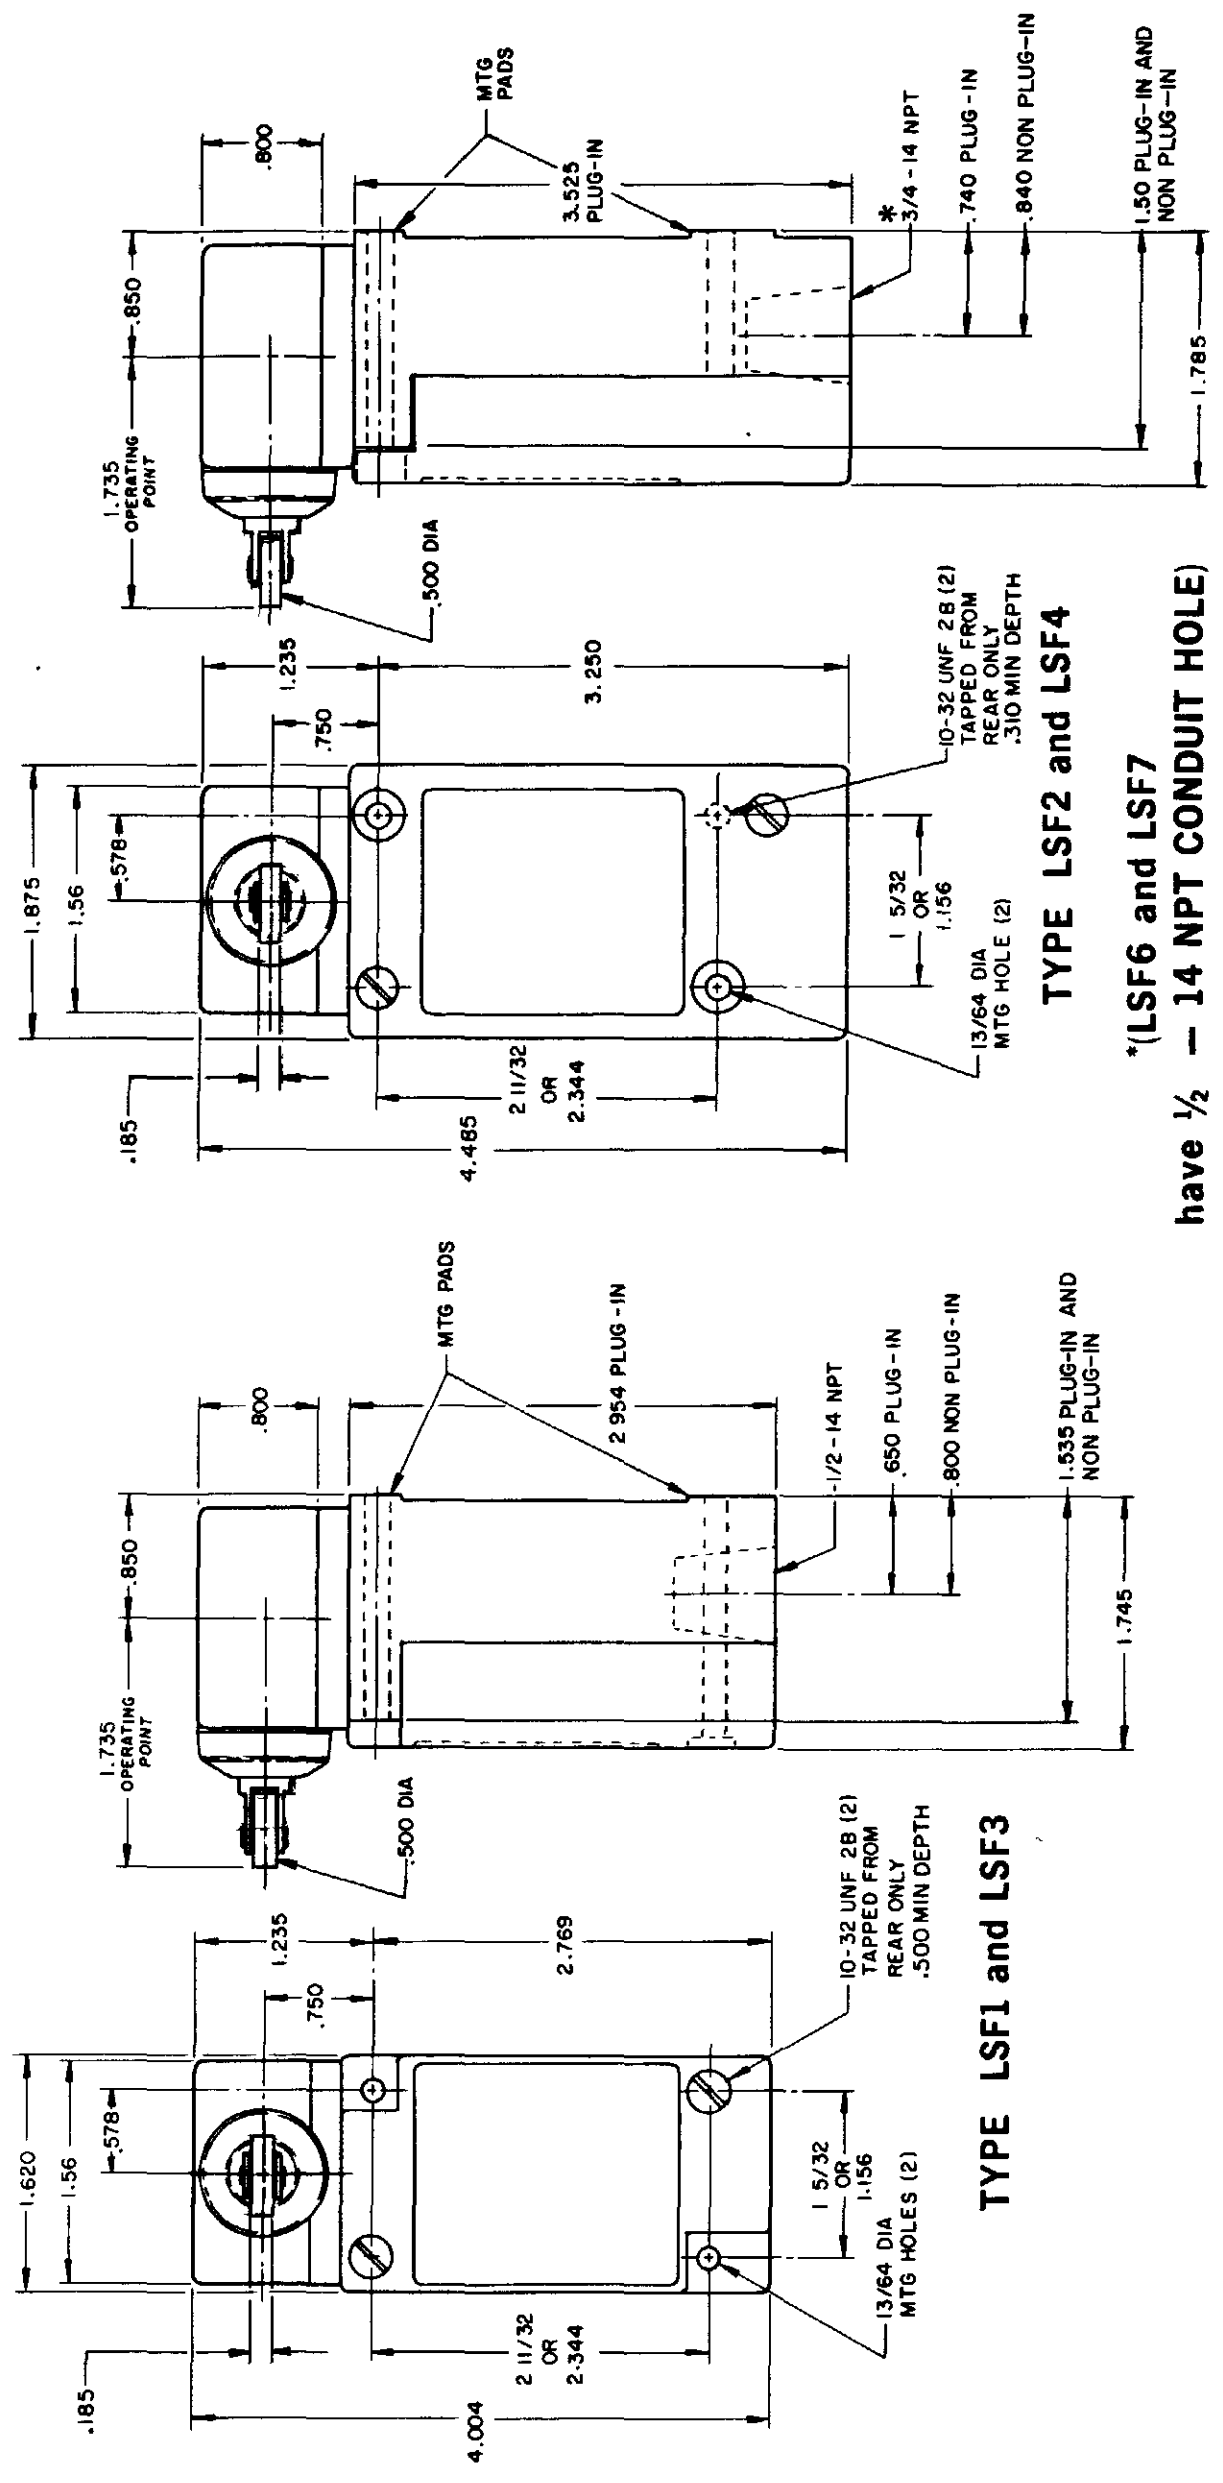


TYPE LSF1 and LSF3
TYPE LSF2 and LSF4
 *(LSF6 and LSF7 have 1/2 - 14 NPT CONDUIT HOLE)

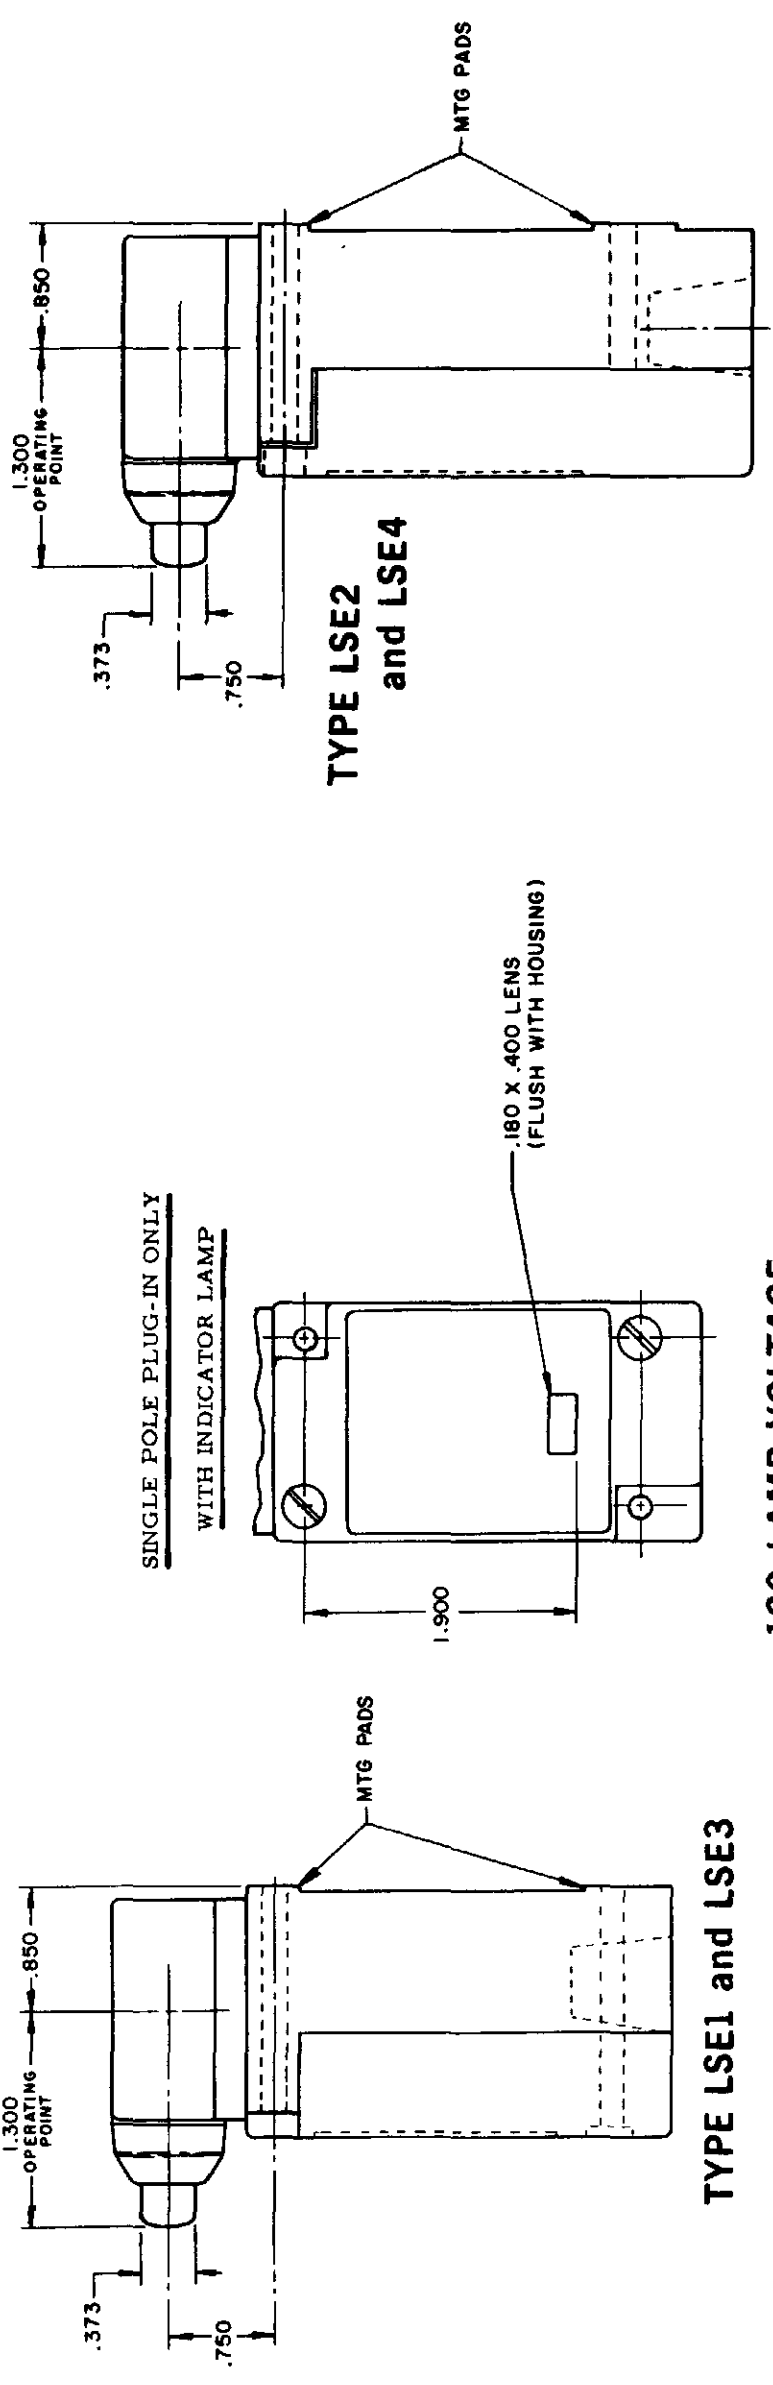

TYPE LSE1 and LSE3
TYPE LSE2 and LSE4
TYPE LSW1 and LSW3

120 LAMP VOLTAGE -
 TYPE LSF5, LSE5 and LSW5
 240 LAMP VOLTAGE -
 TYPE LSF8, LSE8 and LSW8

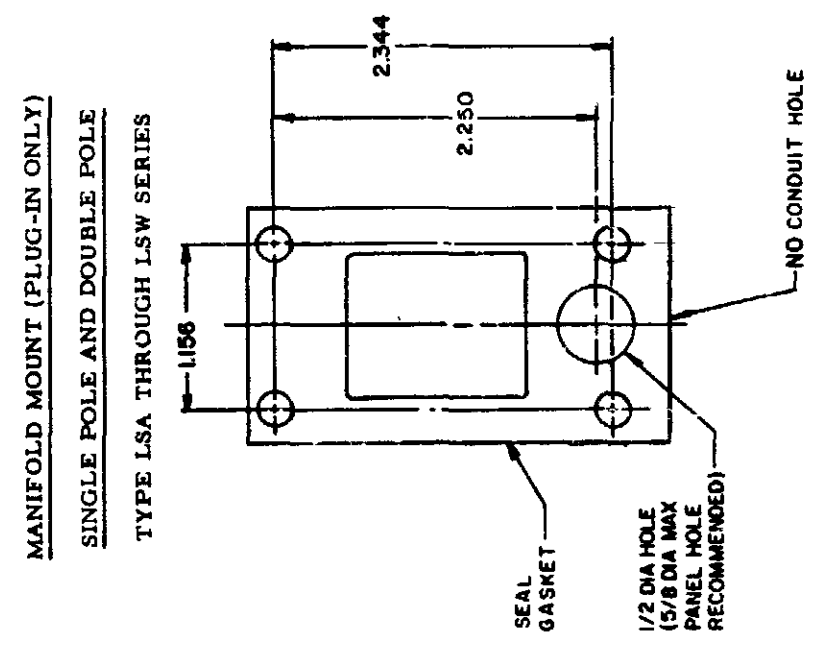

MANIFOLD MOUNT (PLUG-IN ONLY)
 SINGLE POLE AND DOUBLE POLE
 TYPE LSA THROUGH LSW SERIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
 a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

FED MFG CODE 91929


ISSUE 12 PSR 10JUL07 RELEASE NO CO-78498 REPLACES LSA-LSW SERIES

CATALOG LISTING
M LSA-LSW SERIES CHART 1
PAGE 6 OF 10

REVISIONS
L 0031956
M 10 JUL 07
B 201004
C 201748
D 202198
E 204871
F 206581
G 206763
H 207179
J 207474
K 0006871
11AUG04
11AUG04

REVISIONS
L 0031956
M 10 JUL 07
B 201004
C 201748
D 202198
E 204871
F 206581
G 206763
H 207179
J 207474
K 0006871
11AUG04
11AUG04

REVISIONS
L 0031956
M 10 JUL 07
B 201004
C 201748
D 202198
E 204871
F 206581
G 206763
H 207179
J 207474
K 0006871
11AUG04
11AUG04

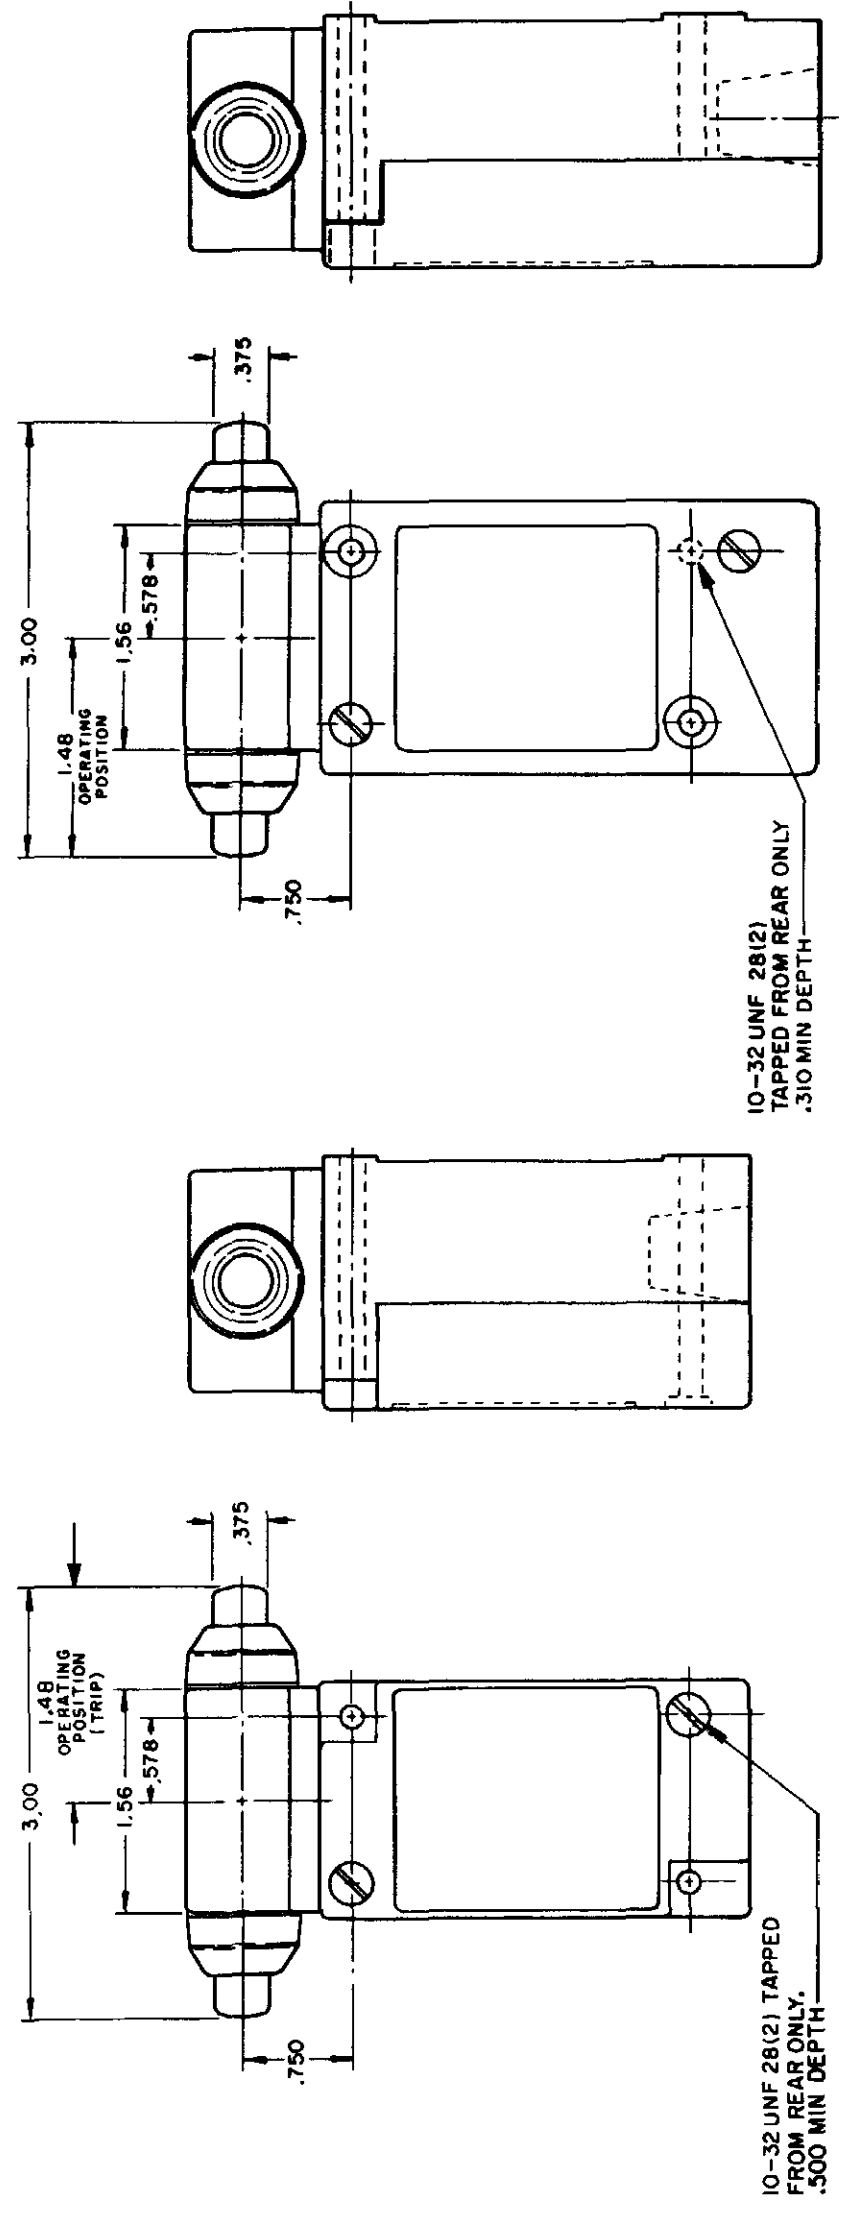

TYPE LSG2 and LSG4

TYPE LSG1 and LSG3

INITIAL POSITION (FREE POSITION) } PRETRAVEL
OPERATING POINT } DIFFERENTIAL TRAVEL
FULL TRAVEL } OVERTRAVEL

TOP PLUNGER TYPES

| CHARACTERISTICS | LSC PLUNGER | LSD ROLLER PLUNGER | LSV ADJ PLUNGER | SEQUENCE BASIC | |
|-----------------------------|--------------------------------------|--------------------------------------|--------------------------------------|---|-----|
| | | | | LSC | LSV |
| PRETRAVEL (MAX) | .070 | .070 | .070 | 1ST STEP .070 | |
| DIFFERENTIAL TRAVEL (MAX) | SINGLE POLE .015 DOUBLE POLE .020 | SINGLE POLE .015 DOUBLE POLE .020 | SINGLE POLE .015 DOUBLE POLE .020 | 2ND STEP .016 MIN ADD'L | |
| OVERTRAVEL (MIN) | .190 | .190 | .190 | .015 EACH STEP | |
| OPERATING FORCE (MAX) | 4 LBS | 4 LBS | 4 LBS | .170 | |
| OPERATING POINT | 1.805 ± .030 | 2.200 ± .040 | 2.085 MIN | 1ST STEP | |
| FULL OVERTRAVEL FORCE (MAX) | 7 LBS | 7 LBS | 7 LBS | 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX | |

SIDE PLUNGER TYPES

| CHARACTERISTICS | LSE PLUNGER | LSF ROLLER PLUNGER | LSW ADJ PLUNGER | SEQUENCE BASIC | |
|-----------------------------|--------------|--------------------|-----------------|-------------------------|-----|
| | | | | LSE | LSW |
| PRETRAVEL (MAX) | .100 | .100 | .170 | 1ST STEP .100 | |
| DIFFERENTIAL TRAVEL (MAX) | .045 | .045 | .090 | 2ND STEP .020 MIN ADD'L | |
| OVERTRAVEL (MIN) | .190 | .190 | .080 | .025 EACH STEP | |
| OPERATING FORCE (MAX) | 6 LBS | 6 LBS | 10 LBS | .170 | |
| OPERATING POINT | 1.300 ± .030 | 1.735 ± .040 | 1.480 ± .030 | 6 LBS | |
| FULL OVERTRAVEL FORCE (MAX) | 6 LBS | 6 LBS | 10 LBS | 1ST STEP | |

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH a Honeywell Division
FED MFG CODE 91929

SWITCH - ENCLOSED


CATALOG LISTING
LSA-LSW SERIES CHART 1

SCALE NONE
DO NOT SCALE PRINT
DIMENSIONS ARE IN INCHES
TOLERANCES
ONE PLACE (Ø)
TWO PLACE (.001)
THREE PLACE (.000)
ANGLES
WEIGHT


WOBBLE STICK

SINGLE POLE



DOUBLE POLE

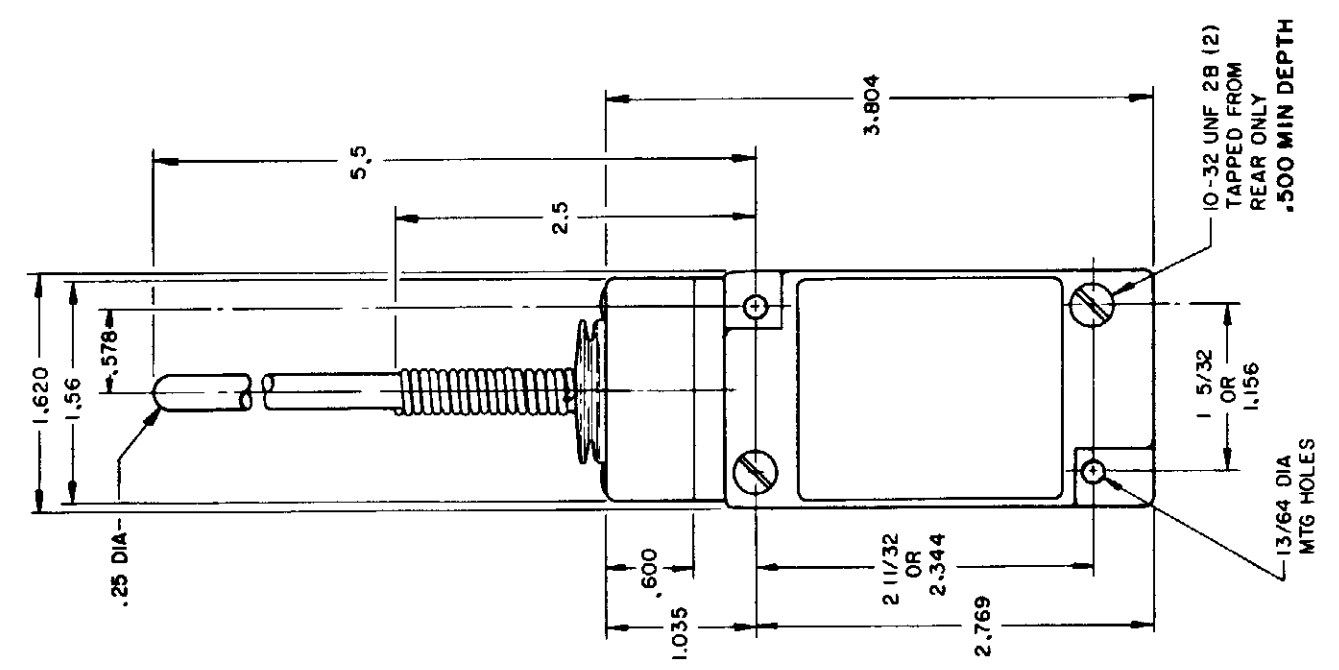



**PLASTIC EXTENSION
TYPE 7A ACTUATOR**
TYPE LSJ1 AND LSJ3

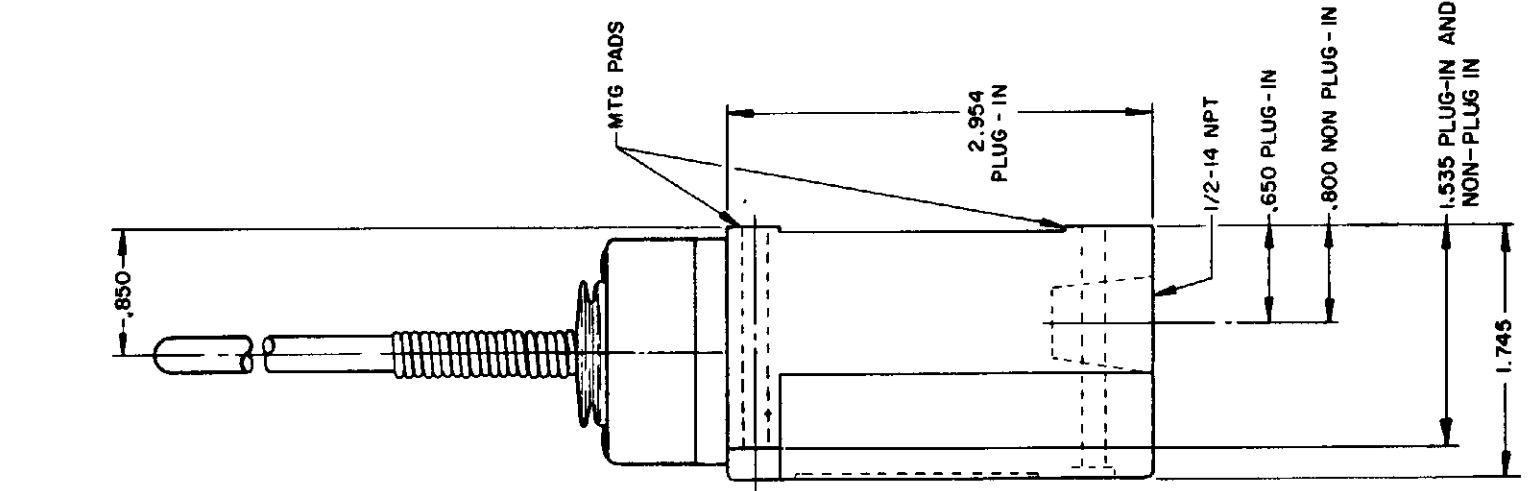

**PLASTIC EXTENSION
TYPE 7A ACTUATOR**
TYPE LSJ2 AND LSJ4
LSJ6 AND LSJ7 HAVE
1/2 - 14 NPT CONDUIT HOLE

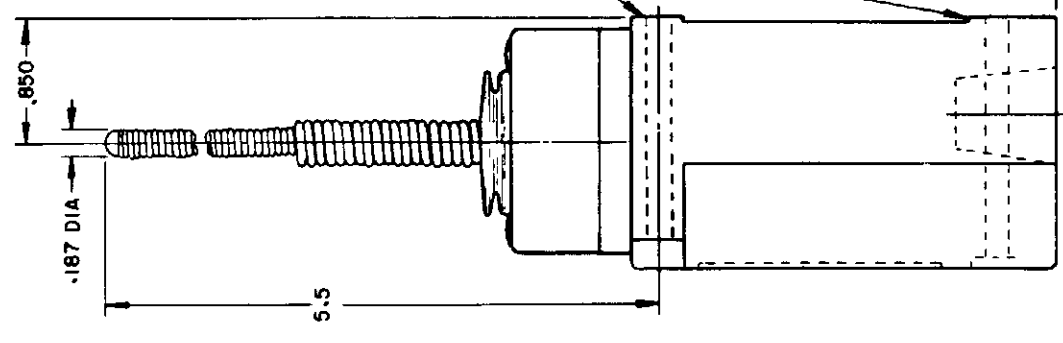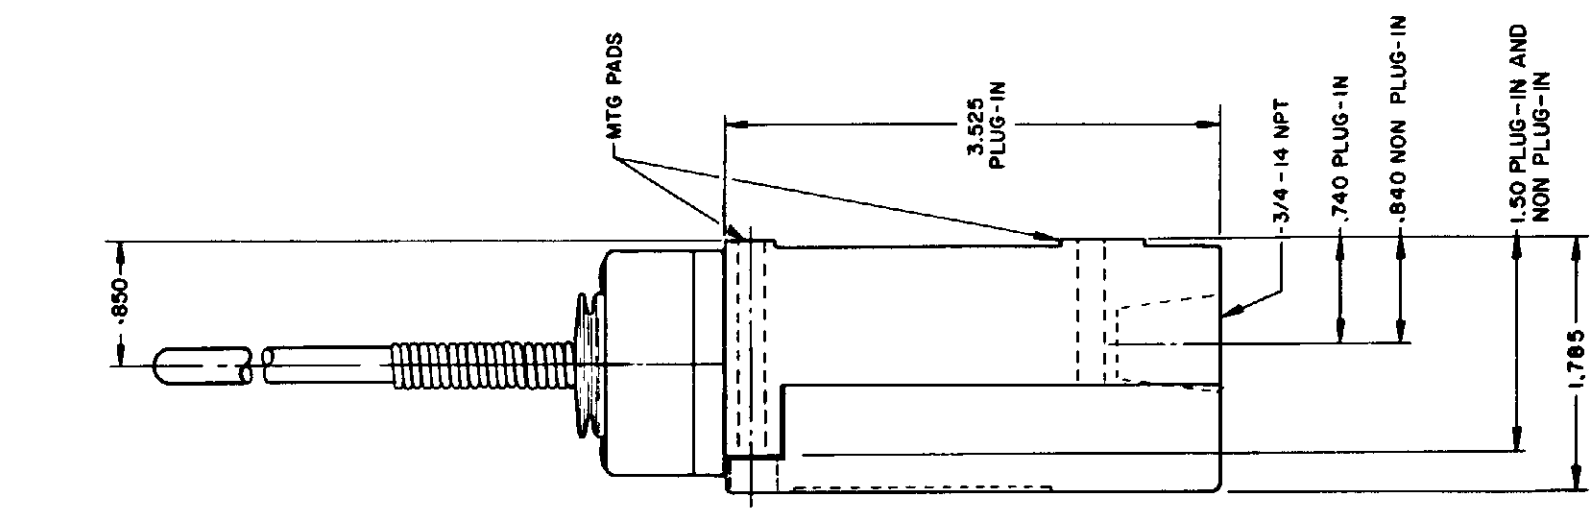


**REPLACEMENT ACTUATOR
LSZ-4009**

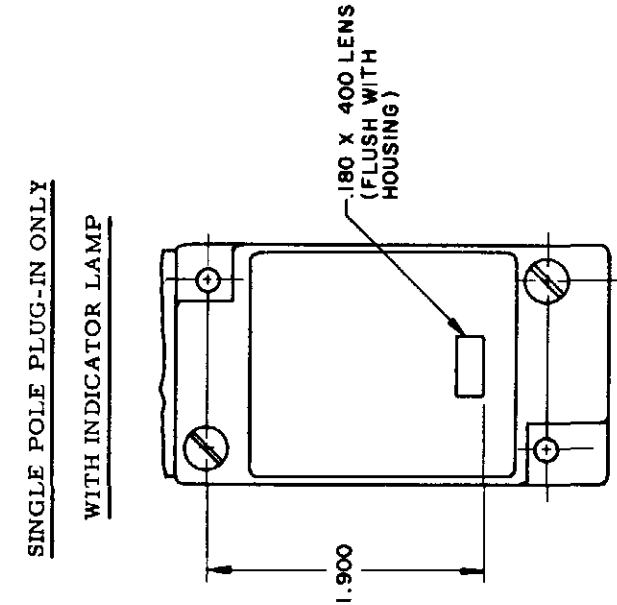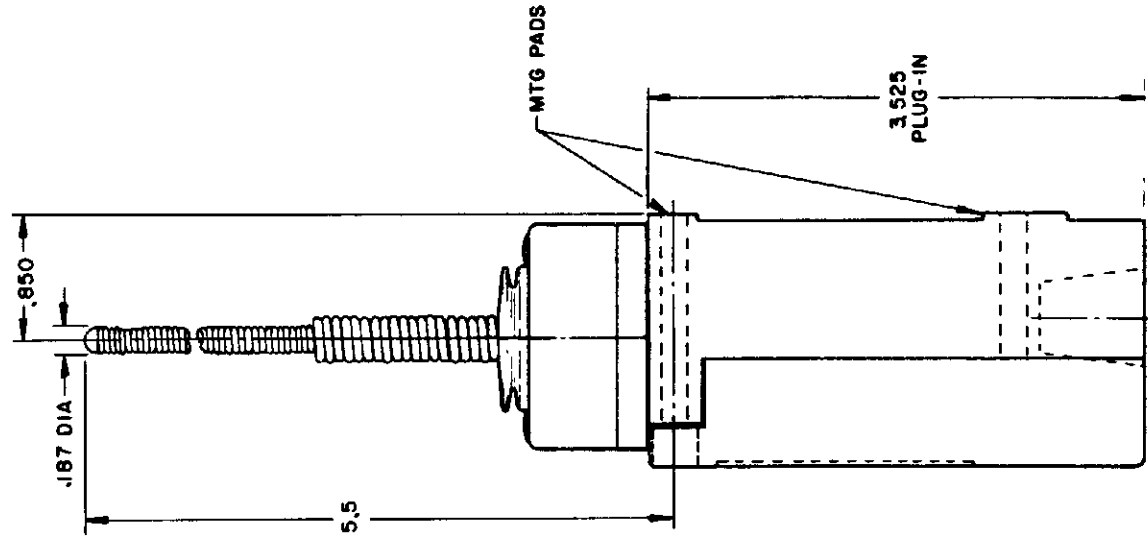

**REPLACEMENT ACTUATOR
LSZ-4011**


MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSA THROUGH LSW SERIES

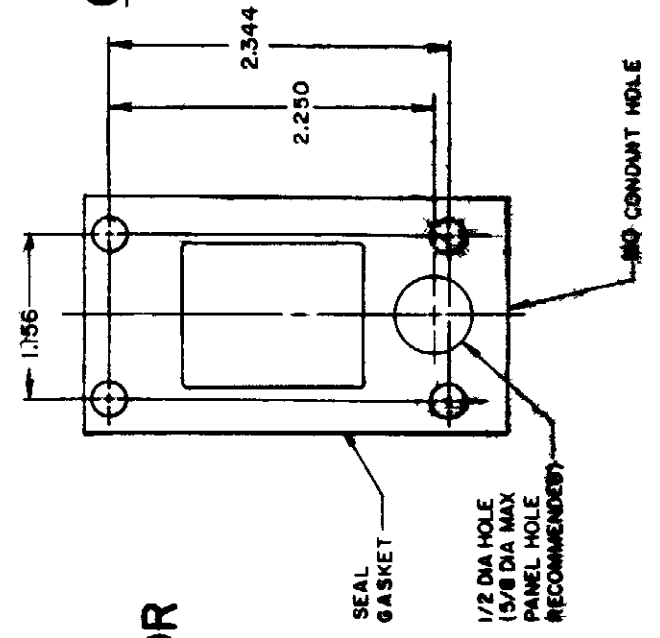

**CABLE EXTENSION
TYPE 7N ACTUATOR**

**CABLE EXTENSION
TYPE 7N ACTUATOR**

**REPLACEMENT ACTUATOR
LSZ-4011**

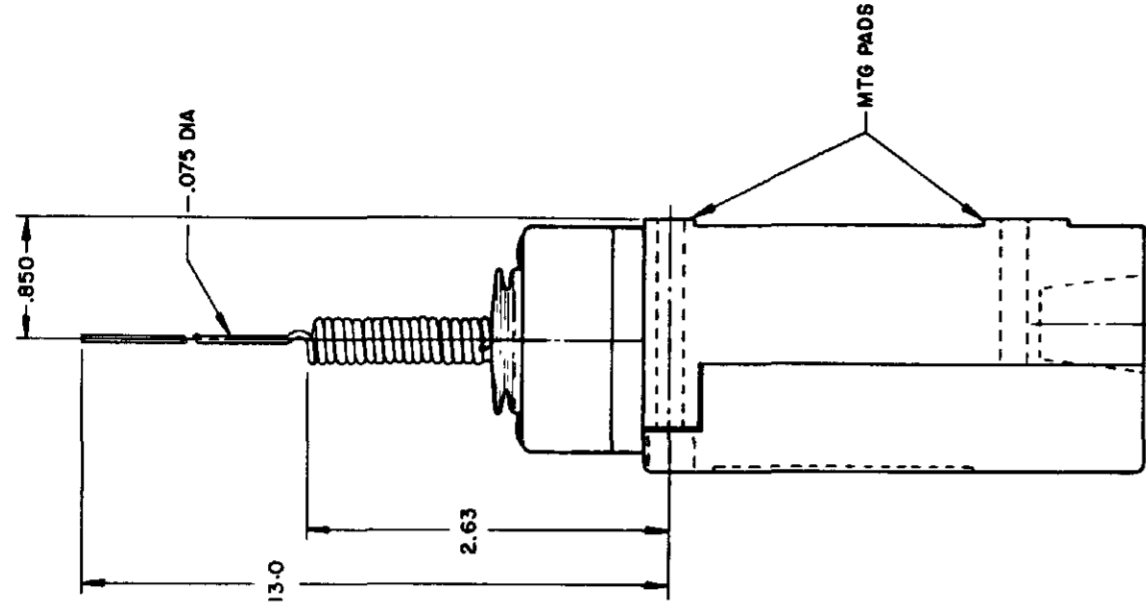


WIRE EXTENSION TYPE 7M ACTUATOR


TYPE LSJ2 and LSJ4

LSJ6 and LSJ7 have 1/2 - 14 NPT CONDUIT HOLE

SINGLE POLE PLUG-IN ONLY
 WITH INDICATOR LAMP

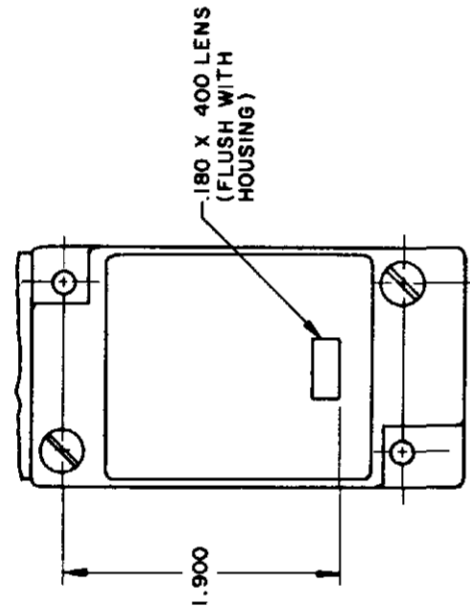

120 LAMP VOLTAGE TYPE LSJ5
 240 LAMP VOLTAGE TYPE LSJ8

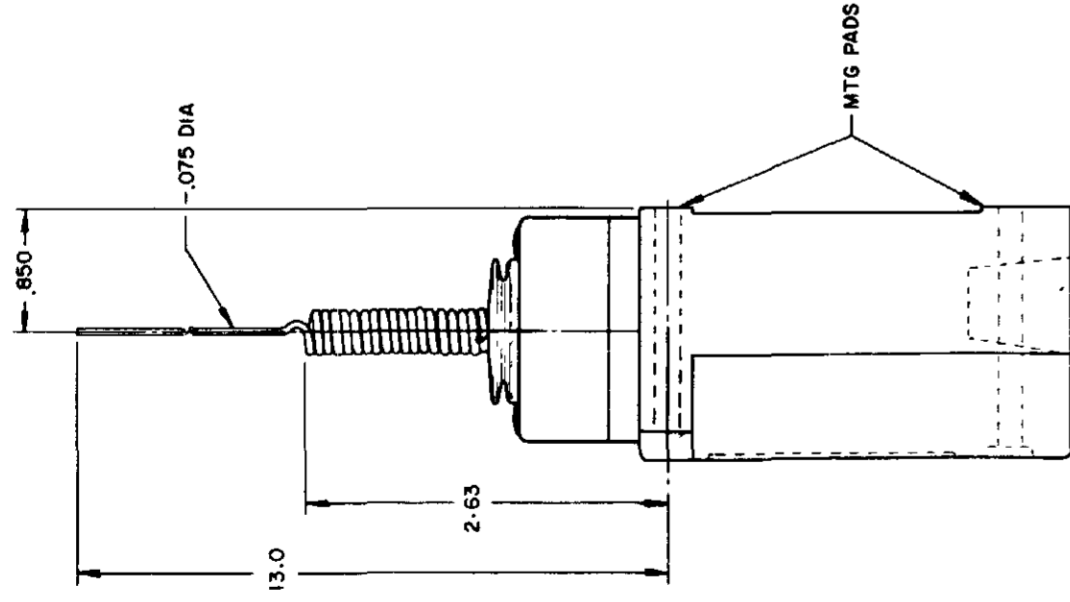


WIRE EXTENSION TYPE 7M ACTUATOR

TYPE LSJ1 and LSJ3

REPLACEMENT ACTUATOR - LSZ 4010


CAT WHISKER

SINGLE POLE

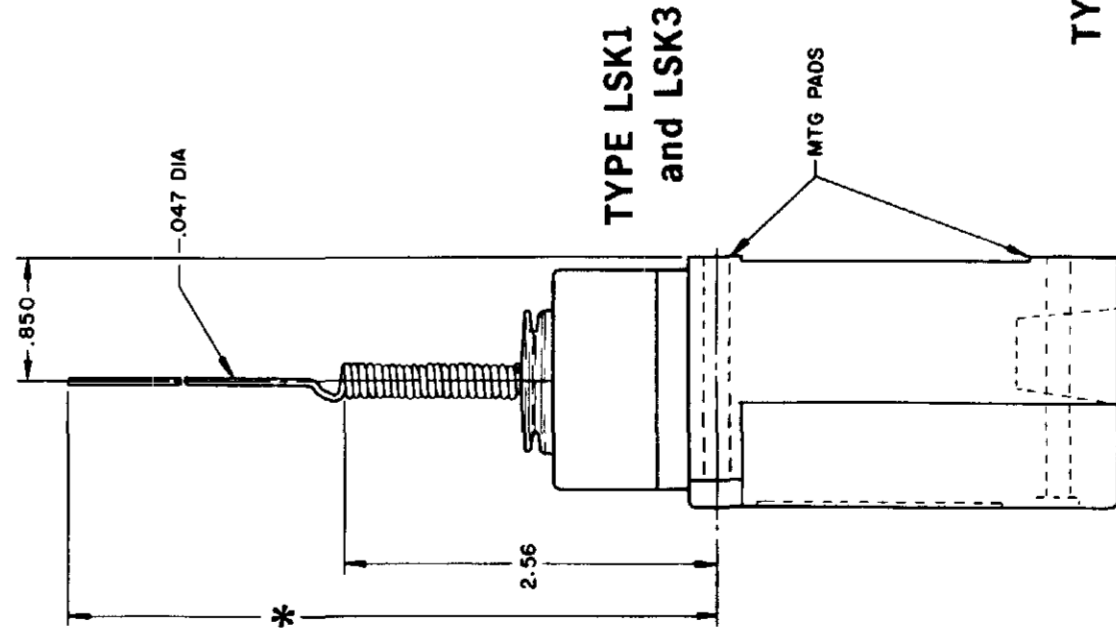

TYPE LSK1
 and LSK3


DOUBLE POLE

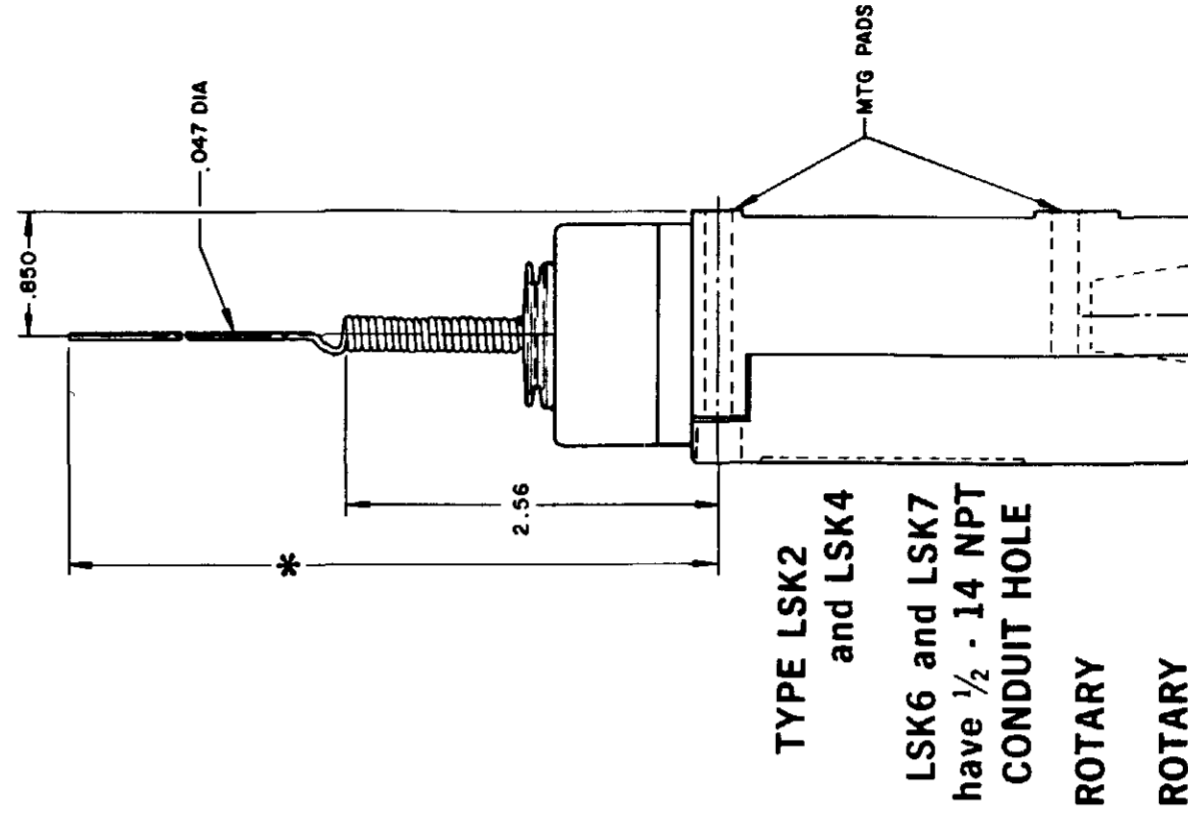

TYPE LSK2
 and LSK4

LSK6 and LSK7
 have 1/2 - 14 NPT
 CONDUIT HOLE

SINGLE POLE PLUG-IN ONLY
 WITH INDICATOR LAMP

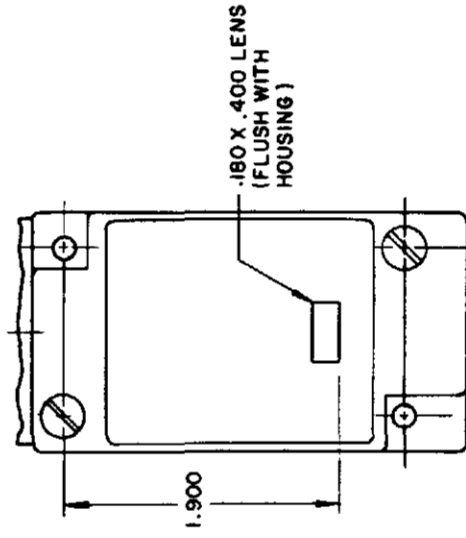

120 LAMP VOLTAGE
 TYPE LSK5 - CAT WHISKER TYPE LSB5 - TOP ROTARY
 240 LAMP VOLTAGE
 TYPE LSK8 - CAT WHISKER TYPE LSB8 - TOP ROTARY

* WIRE EXTENSION REPLACEMENT ACTUATOR

TYPE 8A ACTUATOR 5.5 IN.-LSZ 4012

TYPE 8B ACTUATOR 7.5 IN.-LSZ 4013

TYPE 8C COIL ACTUATOR 5.5 IN.-LSZ 4014
 ACTUATOR 9.5 IN. - LSZ 4036

WIRE EXTENSION

* TYPE 8A ACTUATOR 5.5 IN.

TYPE 8B ACTUATOR 7.5 IN.

TYPE 8C ACTUATOR 5.5 IN.

TYPE 8D ROD ACTUATOR 5.5 IN.


| PRETRAVEL (APPROX) IN. RADIUS | CAT. WHISKER | | WOBBLE STICK | |
|-------------------------------|-----------------|------------|--------------|-------|
| | 5/16" COIL WIRE | 7/16" WIRE | ROD | CABLE |
| 2 | 2 | 4.5 | 1.0 | 1.5 |
| OPERATING FORCE-OZ (MAX) | 7.0 | 5.0 | 3.0 | 10.0 |
| | | | 7.0 | 5.0 |

| ISSUE | 12 | PSR | 10JUL07 | RELEASE NO | CO-78498 | REPLACES | LSA-LSW SERIES | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|---|------|---------|-------------|-----------|----------|----------------|-----|------|----|------|-------------|---|---------|----|---------|--|---|--------|----|---------|--|---|--------|----|---------|--|---|--------|----|---------|--|---|--------|----|---------|--|---|--------|----|--------|--|---|--------|----|---------|--|---|--------|----|---------|--|---|--------|----|---------|--|---|---------|----|---------|--|
| CATALOG LISTING | LSA-LSW SERIES CHART 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PAGE | 9 OF 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| REVISIONS | <table border="1"> <tr> <th>REV</th> <th>DATE</th> <th>BY</th> <th>CHKD</th> <th>DESCRIPTION</th> </tr> <tr> <td>L</td> <td>0031956</td> <td>BS</td> <td>10JUL07</td> <td></td> </tr> <tr> <td>B</td> <td>201004</td> <td>BS</td> <td>10AUG00</td> <td></td> </tr> <tr> <td>C</td> <td>201748</td> <td>BS</td> <td>17NOV00</td> <td></td> </tr> <tr> <td>D</td> <td>202198</td> <td>BS</td> <td>23JAN01</td> <td></td> </tr> <tr> <td>E</td> <td>204871</td> <td>BS</td> <td>14OCT02</td> <td></td> </tr> <tr> <td>F</td> <td>206581</td> <td>BS</td> <td>206763</td> <td></td> </tr> <tr> <td>G</td> <td>206763</td> <td>BS</td> <td>31OCT02</td> <td></td> </tr> <tr> <td>H</td> <td>207179</td> <td>BS</td> <td>14JAN03</td> <td></td> </tr> <tr> <td>J</td> <td>207474</td> <td>BS</td> <td>18FEB03</td> <td></td> </tr> <tr> <td>K</td> <td>0006871</td> <td>BS</td> <td>11AUG04</td> <td></td> </tr> </table> | | | | | | | REV | DATE | BY | CHKD | DESCRIPTION | L | 0031956 | BS | 10JUL07 | | B | 201004 | BS | 10AUG00 | | C | 201748 | BS | 17NOV00 | | D | 202198 | BS | 23JAN01 | | E | 204871 | BS | 14OCT02 | | F | 206581 | BS | 206763 | | G | 206763 | BS | 31OCT02 | | H | 207179 | BS | 14JAN03 | | J | 207474 | BS | 18FEB03 | | K | 0006871 | BS | 11AUG04 | |
| REV | DATE | BY | CHKD | DESCRIPTION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| L | 0031956 | BS | 10JUL07 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | 201004 | BS | 10AUG00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| C | 201748 | BS | 17NOV00 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| D | 202198 | BS | 23JAN01 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| E | 204871 | BS | 14OCT02 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| F | 206581 | BS | 206763 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G | 206763 | BS | 31OCT02 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| H | 207179 | BS | 14JAN03 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| J | 207474 | BS | 18FEB03 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| K | 0006871 | BS | 11AUG04 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DATE | 15 JUN 94 | CHKD | JAF | DATE | 15 JUL 94 | CHKD | AK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DRAWN | MAM | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

CONVERSION BASES

SINGLE POLE (SIDE ROTARY) LSZ 4003

DOUBLE POLE (SIDE ROTARY) LSZ 4004

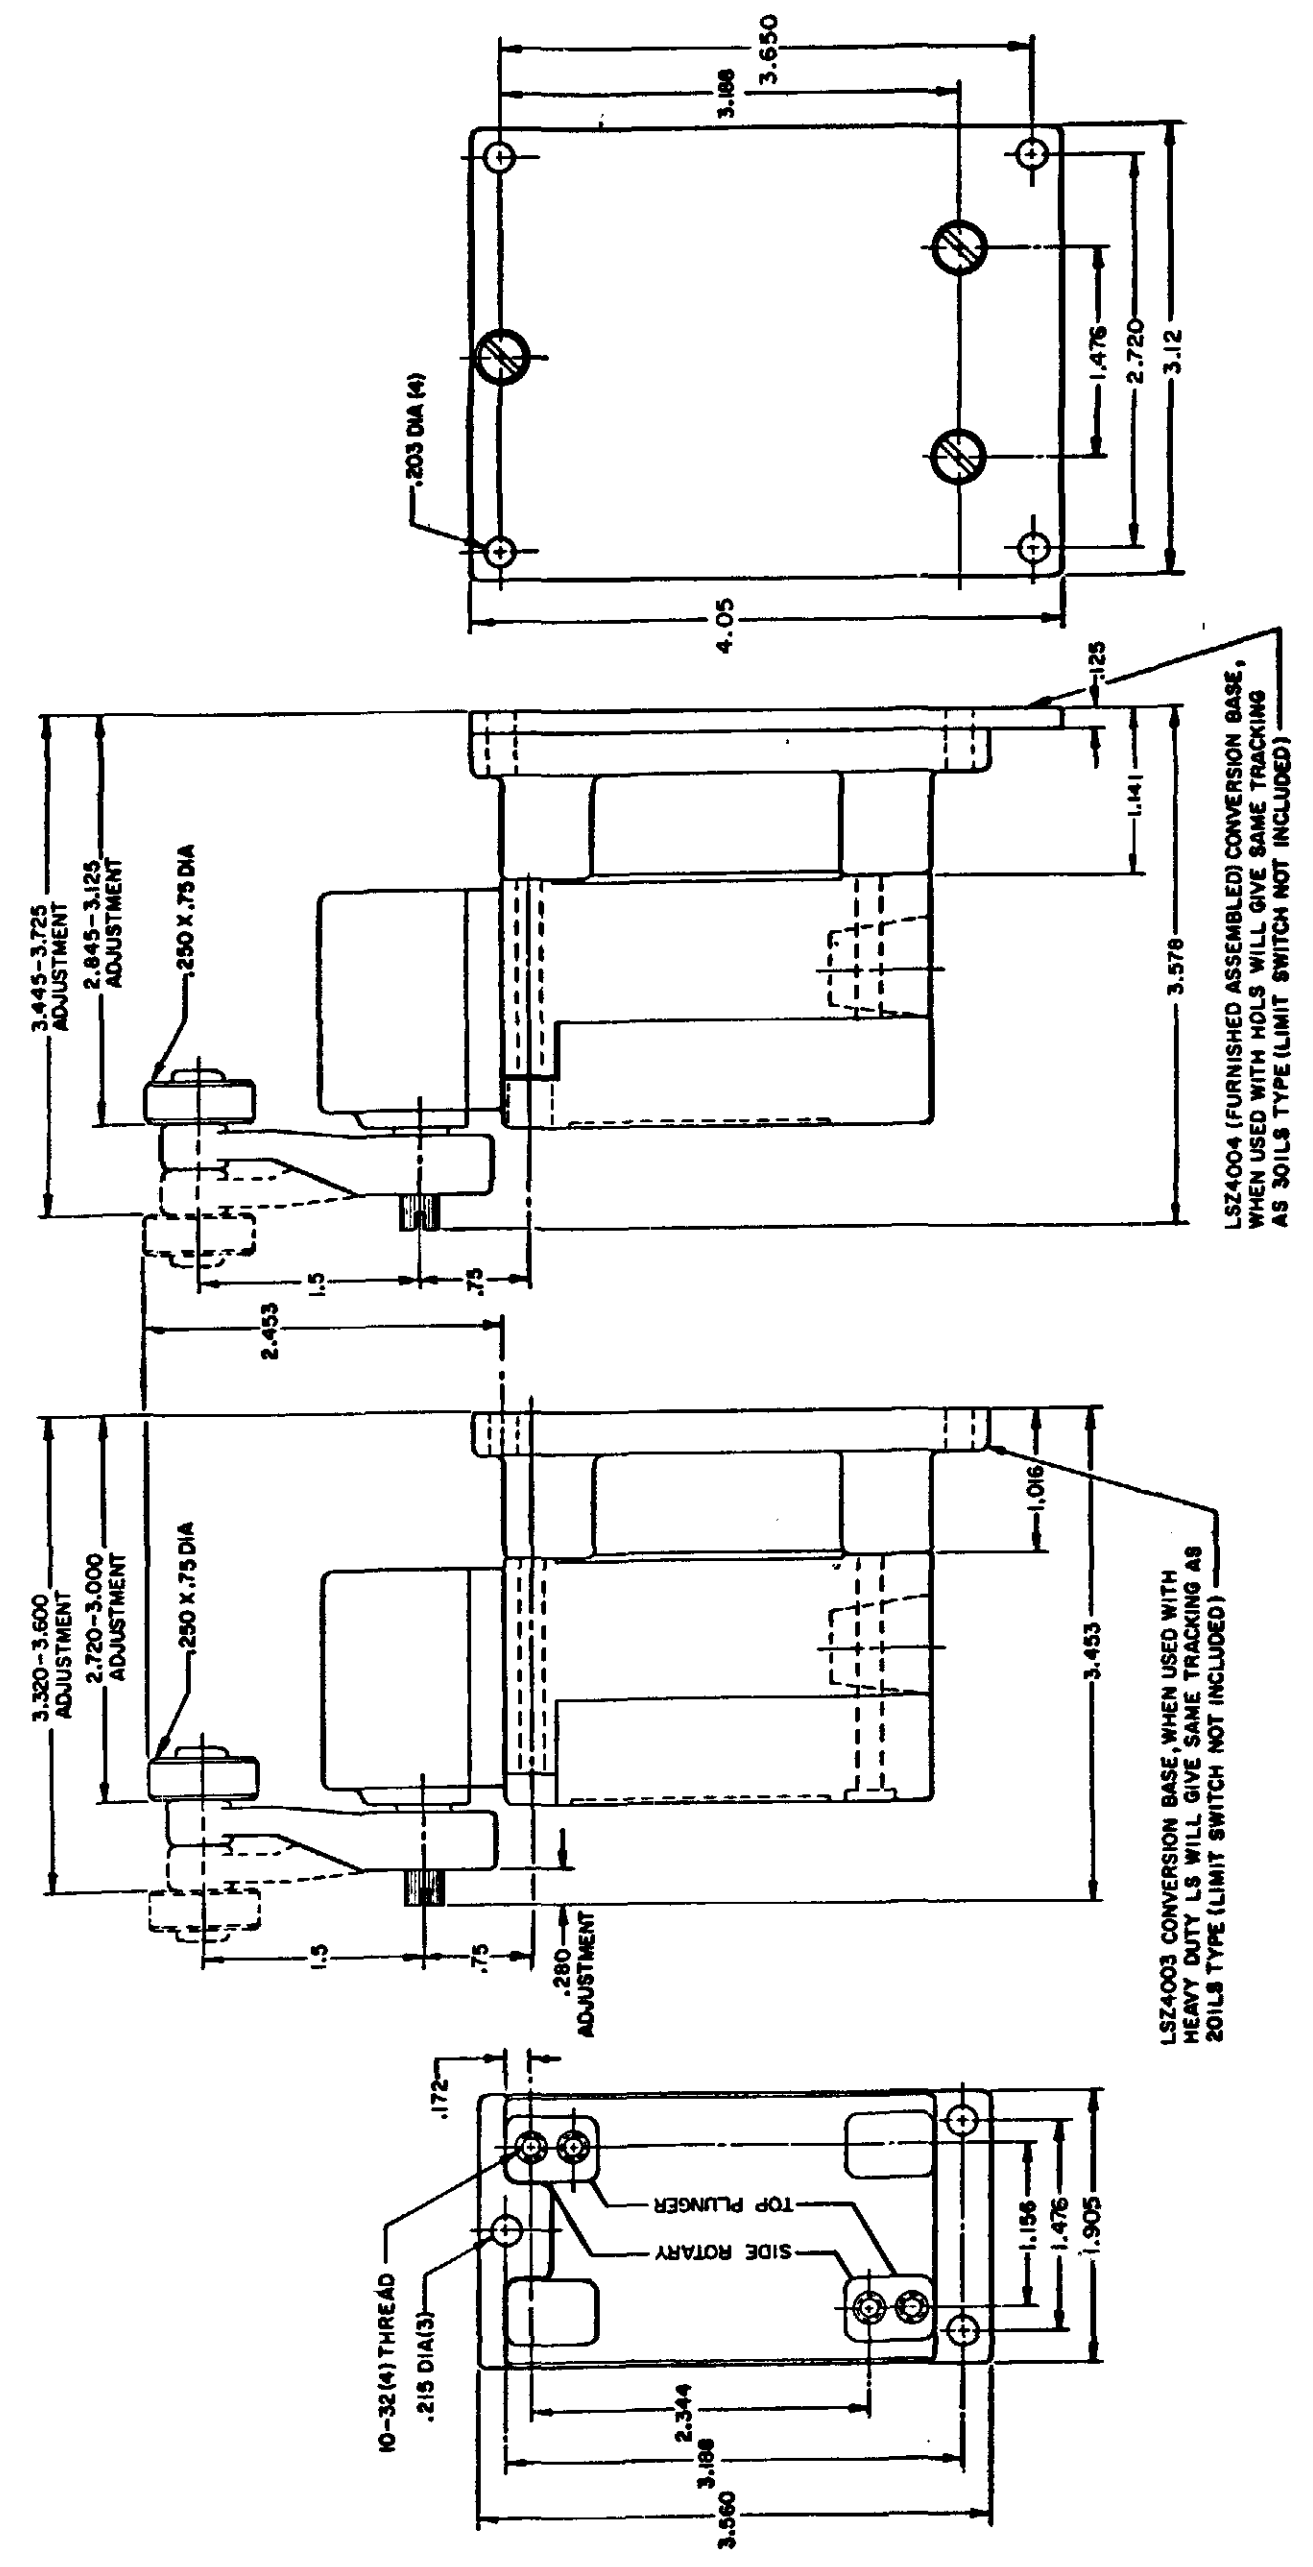


LSZ4003 CONVERSION BASE WHEN USED WITH HEAVY DUTY LS WILL GIVE SAME TRACKING AS 201LS TYPE (LIMIT SWITCH NOT INCLUDED)

LSZ4004 (FURNISHED ASSEMBLED) CONVERSION BASE, WHEN USED WITH HOLDS WILL GIVE SAME TRACKING AS 301LS TYPE (LIMIT SWITCH NOT INCLUDED)

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMITS

SINGLE POLE TOP PLUNGER LSZ 4003

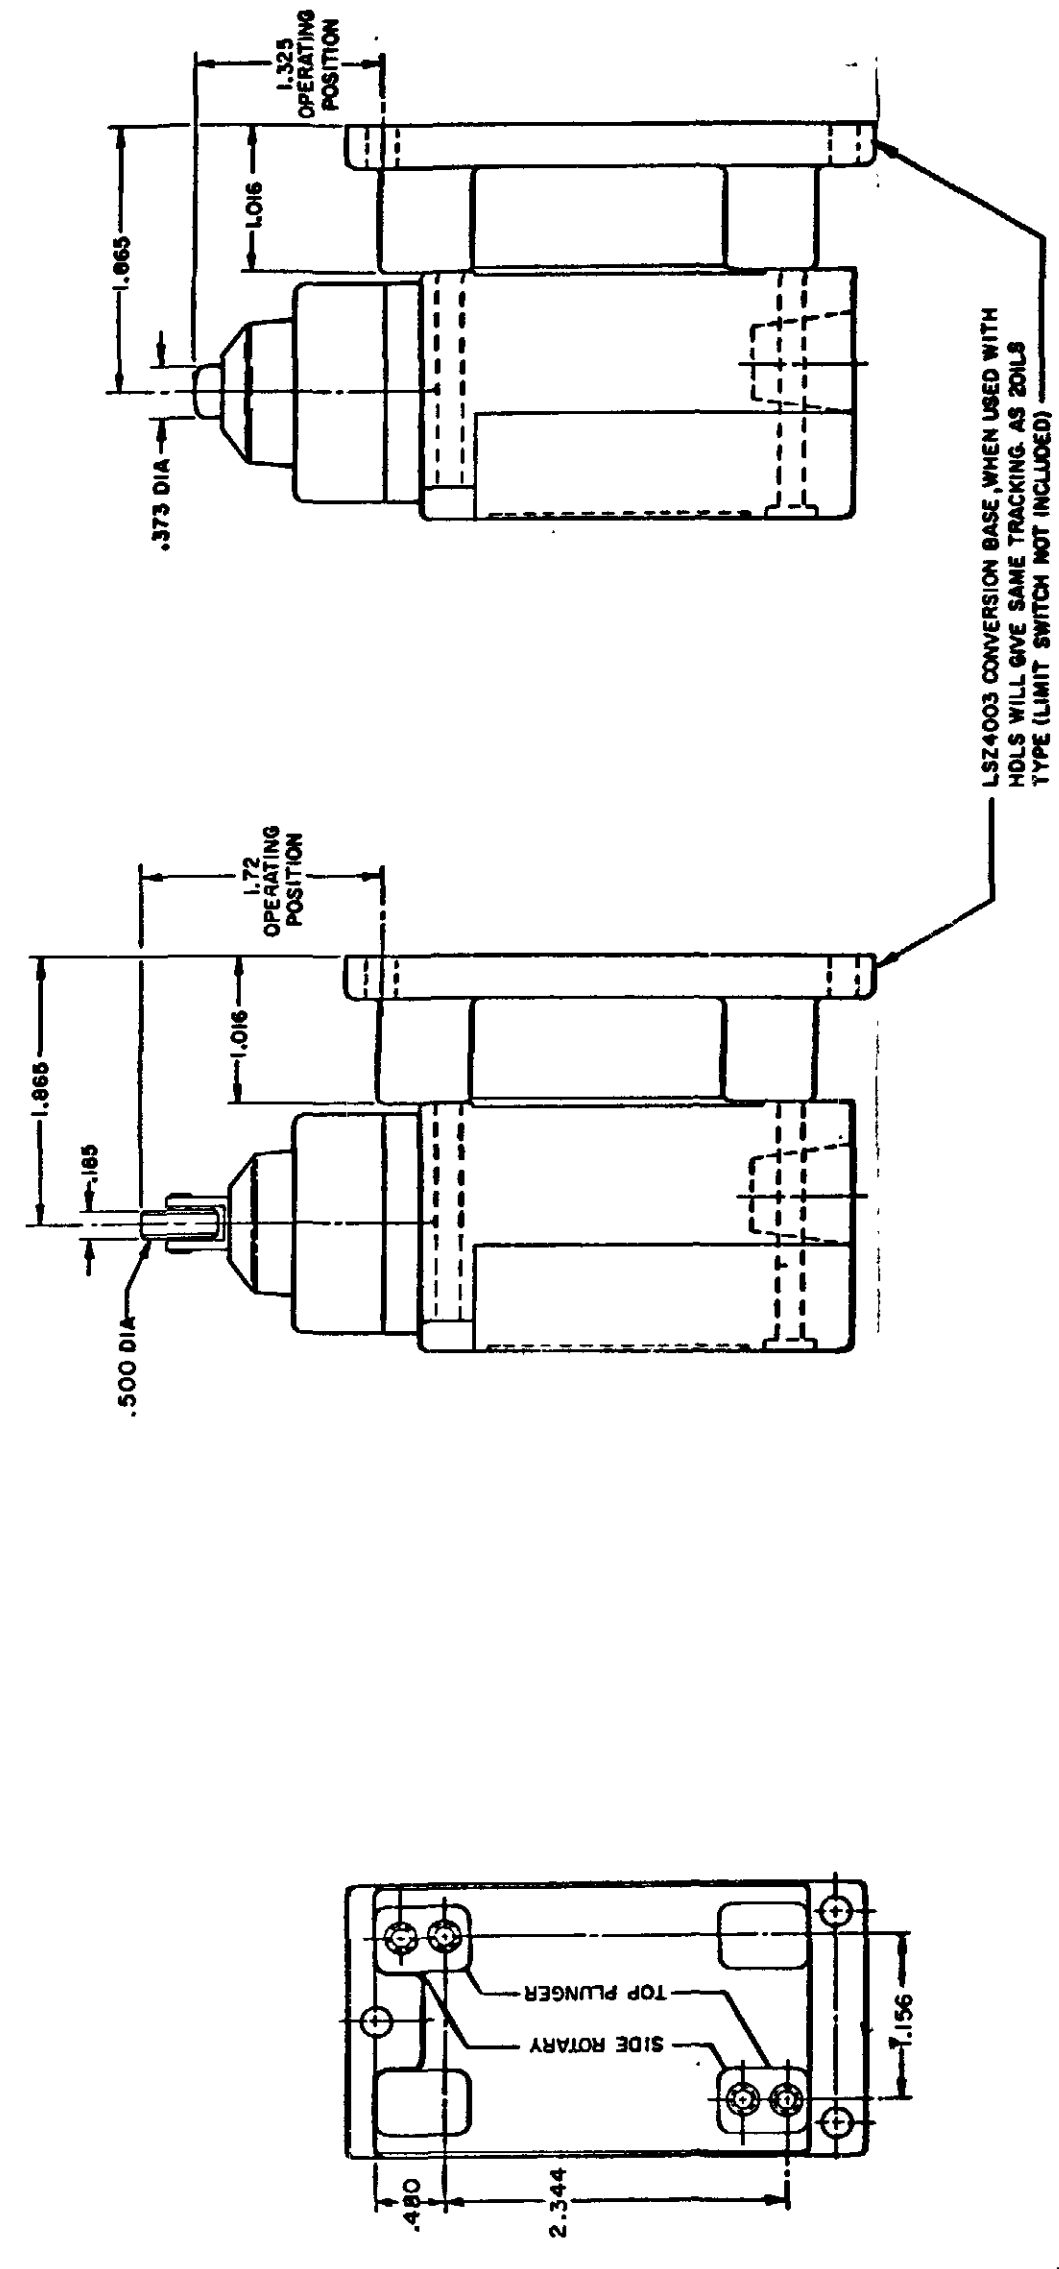

NOTE
SEE OTHER PAGES OF LSA-LSW
(M) DRAWING FOR DIMENSION OF LIMIT SWITCH

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING
LSA-LSW SERIES
CHART 1

SCALE FULL
DO NOT SCALE PRINT

PAGE 9 OF 10

| HEAD TYPE | CELLULUBE | DETERGENT | 5 STAR | ASTM #1 | ASTM #2 | ASTM #3 | ASTM #4 | HOUGHTON SAFE 271 | HOUGHTON SAFE 820 | HOUGHTON SAFE 1010, 1055 | MINERAL OIL | PETR. OIL CRUDE | SILICON GR & OIL | SUNSAFE | BEER | STODDARD SOLV. | CHLORINATED SOLVENTS | CITRIC ACID | D-ESTER SYN. LUBRICANTS | OZONE | HYDRAUL | PROGUARD | PETRO. BASE HYDRAULIC OIL | LARD OIL | SILICATE ESTERS |
|-----------|---|-----------|--------|---------|---------|---------|---------|-------------------|-------------------|--------------------------|-------------|-----------------|------------------|---------|------|----------------|----------------------|-------------|-------------------------|-------|---------|----------|---------------------------|----------|-----------------|
| LSA | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSB | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSC | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 3 | 4 | 4 | 2 | 2 | 2 | |
| LSD | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 3 | 4 | 4 | 2 | 2 | 2 | |
| LSE | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 3 | 4 | 4 | 2 | 2 | 2 | |
| LSF | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 2 | 4 | 4 | 2 | 2 | 2 | |
| LSG | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 3 | 4 | 4 | 2 | 2 | 2 | |
| LSH | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSJ | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 3 | 4 | 4 | 2 | 2 | 2 | |
| LSK | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 3 | 4 | 4 | 2 | 2 | 2 | |
| LSL | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSM | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSN | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSP | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSR | 4 | 1 | 1 | 1 | 1 | 2 | 1 | 4 | 1 | 1 | 1 | 1 | 1 | 1 | 4 | 1 | 2 | 4 | 4 | 4 | 4 | 1 | 1 | 2 | |
| LSV | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 3 | 4 | 4 | 2 | 2 | 2 | |
| LSW | 4 | 2 | 2 | 1 | 2 | 4 | 4 | 2 | 4 | 2 | 2 | 1 | 2 | 1 | 2 | 4 | 1 | 4 | 2 | 4 | 4 | 2 | 2 | 2 | |
| LST | UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY | | | | | | | | | | | | | | | | | | | | | | | | |
| LSS | UNSEALED DEVICE, INTENDED TO MEET NEMA 1 ONLY | | | | | | | | | | | | | | | | | | | | | | | | |

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

| TEMPERATURE LIMITATIONS FOR STANDARD DEVICES | | |
|--|-----------|------------|
| TYPES | LOW LIMIT | HIGH LIMIT |
| LSA | +10°F | +250°F |
| LSB | +30°F | +250°F |
| LSC | +10°F | +200°F |
| LSD | +10°F | +200°F |
| LSE | +10°F | +200°F |
| LSF | +10°F | +200°F |
| LSG | +30°F | +200°F |
| LSH | +30°F | +250°F |
| LSJ | +10°F | +200°F |
| LSK | +10°F | +200°F |
| LSL | +10°F | +250°F |
| LSM | +30°F | +250°F |
| LSN | +30°F | +250°F |
| LSP | +10°F | +250°F |
| LSR | +30°F | +250°F |
| LSV | +10°F | +200°F |
| LSW | +10°F | +200°F |
| LST | +30 F | +170°F |
| LSS | +30°F | +170°F |

CATALOG LISTING
M LSA-LSW SERIES CHART 1
 PAGE 10 OF 10
 ISSUE 12
 PSR 10JUL07
 RELEASE NO. CO-78498
 REPLACES LSA-LSW SERIES

| REVISIONS | DATE | CHECK |
|-----------|---------|-------|
| L | 0031956 | |
| BS | 10JUL07 | |
| B | 201004 | |
| C | 201748 | |
| D | 202198 | |
| E | 204871 | |
| F | 206581 | |
| G | 206783 | |
| H | 207179 | |
| J | 207474 | |
| K | 0006871 | |

RASTER
 DRAWN
 MAM 15 JUN 94
 CHECK 11AUG04

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

| | | |
|---|---------------------------|-----------------|
| MICRO SWITCH a Honeywell Division FED. MFG. CODE 91929 | SWITCH - ENCLOSED | CATALOG LISTING |
| | LSA-LSW SERIES CHART 1 | |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.