

62mA-400mA EOL – Last Buy Date is Jun 30, 2020
 No replacements for these ratings

Type GSA / GSAP

Slow Blow Fuse Series

HF **Pb** GSA/GSAP Series, 6x32mm Ceramic Tube Slow Blow Fuse

RoHS 2 Compliant

Description

6x32mm Slow Blow, ceramic tube body cartridge fuse designed, approved and complied with UL and CSA standard 248-14.

Features


- Meet UL and CSA standard 248-14
- Wide operating temperature range
- Bulk packing available
- RoHS 2 compliant
- Halogen Free
- Lead Free

Applications

Provide individual protection for components or internal circuits.

- Power supplies
- Battery charger
- Monitor
- Adapter

LEAD FREE = **Pb**
 HALOGEN FREE = **HF**

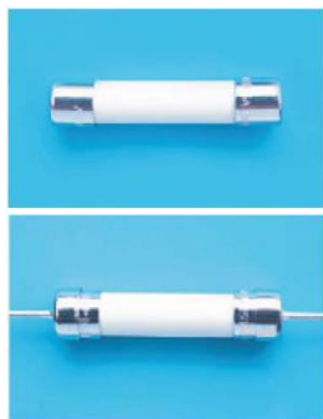

Physical Specifications

| | |
|-----------|---|
| Materials | Body : Ceramic |
| | Cap : Nickel Plated Brass Caps |
| | Leads : Matte Tin Plated Copper |
| Marking | On Fuse : |
| | "bel", "GSA", "Current Rating", "Voltage Rating", "Appropriate Safety Logos", "✓" (RoHS 2 compliant) |
| | On Label : |
| | "bel", "GSA" or "GSAP", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "✓", "RoHS", "e" (China RoHS compliant). |

Electrical Characteristics (UL/CSA STD.248-14)

| Testing Current | Blow Time | |
|-----------------|-----------|---------|
| | Minimum | Maximum |
| 100% | 4 hrs. | N/A |
| 135% | N/A | 1 Hr. |
| 200% | 5 sec | 30 sec |

Safety Agency Approvals

| Safety Agency | Safety Agency Certificate | Voltage Rating (V) | Ampere Range / Volt @ I.R. ability* |
|----------------------------------|--|----------------------|--|
| UL US SP | E20624 LR39772 | 63mA-15A/ 250V AC | 63mA-8A/125V AC @10,000A 63mA-1A/250V AC @35A >1A-3.5A/250V AC @100A >3.5A-8A/250V AC @200A |
| RA US SR | | | 10A-15A/125V AC @10,000A 10A-15A/250V AC @750A |
| PS E | JET1037-31003-1010 JET1037-31003-1011 JET1037-31003-1007 | | 1A-5A/125V AC @500A >5A-15A/125V AC @300A |

*I.R.= Interrupting Rating = Short Circuit Rating(Amps)

Type GSA / GSAP

Environmental Specifications

| | |
|---------------------------|--|
| Shock Resistance | MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform) |
| Vibration Resistance | MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion). |
| Salt Spray Resistance | MIL-STD-202G, Method 101E, Test Condition B (48 hrs.). |
| Insulation Resistance | MIL-STD-202G, Method 302, Test Condition A (After Opening) 10,000 ohms minimum. |
| Solderability | MIL-STD-202G, Method 208H |
| Resistance to solder Heat | MIL-STD-202G, Method 210F, Test Condition B. (260+/-5°C, 10+/-1 sec) |
| Thermal Shock | MIL-STD-202G, Method 107G, Test Condition B (-65°C to +125°C). |
| Operating Temperature | -55°C to +125°C |
| Terminal Strength | IEC-68-2-21 |

Electrical Specifications

| Catalog Number | Ampere Rating | Typical Cold Resistance (ohms) | Volt-drop @100%In (Volt) max. | Voltage and Interrupting Ratings | Melting I ² T <10 mSec (A ² Sec) | Melting I ² T @10 In (A ² Sec) | Maximum Power Dissipation (W) | Agency Approvals | | | | | |
|----------------|---------------|--------------------------------|-------------------------------|---|--|--|-------------------------------|------------------|----|-------|----|----|---|
| | | | | | | | | UL US | SP | UL US | SP | CS | |
| GSA(P) 63-R | 63mA | 75.5 | 7.33 | See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings | 0.087 | 0.098 | 0.71 | Y | Y | | | | |
| GSA(P) 80-R | 80mA | 48.4 | 6.27 | | 0.135 | 0.152 | 0.74 | Y | Y | | | | |
| GSA(P) 100-R | 100mA | 29.4 | 4.41 | | 0.209 | 0.238 | 0.55 | Y | Y | | | | |
| GSA(P) 125-R | 125mA | 17.5 | 3.45 | | 0.323 | 0.372 | 0.58 | Y | Y | | | | |
| GSA(P) 160-R | 160mA | 12.3 | 3.13 | | 0.499 | 0.581 | 0.60 | Y | Y | | | | |
| GSA(P) 200-R | 200mA | 7.1 | 2.13 | | 0.773 | 0.908 | 0.63 | Y | Y | | | | |
| GSA(P) 250-R | 250mA | 5.0 | 1.97 | | 1.2 | 1.4 | 0.66 | Y | Y | | | | |
| GSA(P) 300-R | 300mA | 3.17 | 1.52 | | 1.9 | 2.2 | 0.70 | Y | Y | | | | |
| GSA(P) 375-R | 375mA | 2.14 | 1.26 | | 2.6 | 3.2 | 0.73 | Y | Y | | | | |
| GSA(P) 500-R | 500mA | 1.38 | 1.07 | See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings | 4.4 | 5.4 | 0.78 | Y | Y | | | | |
| GSA(P) 600-R | 600mA | 1.05 | 0.98 | | 6.9 | 8.5 | 0.82 | Y | Y | | | | |
| GSA(P) 700-R | 700mA | 0.648 | 0.69 | | 8.5 | 11 | 0.84 | Y | Y | | | | |
| GSA(P) 750-R | 750mA | 0.642 | 0.68 | | 10 | 12 | 0.85 | Y | Y | | | | |
| GSA(P) 1-R | 1A | 0.374 | 0.59 | | 16 | 21 | 0.91 | Y | Y | | | | Y |
| GSA(P) 1.25-R | 1.25A | 0.248 | 0.43 | | 25 | 32 | 0.96 | Y | Y | | | | Y |
| GSA(P) 1.6-R | 1.6A | 0.155 | 0.38 | | 39 | 50 | 1.01 | Y | Y | | | | Y |
| GSA(P) 2-R | 2A | 0.115 | 0.36 | | 61 | 79 | 1.06 | Y | Y | | | | Y |
| GSA(P) 2.5-R | 2.5A | 0.079 | 0.29 | | 94 | 123 | 1.12 | Y | Y | | | | Y |
| GSA(P) 3-R | 3A | 0.058 | 0.27 | | 146 | 192 | 1.18 | Y | Y | | | | Y |
| GSA(P) 4-R | 4A | 0.039 | 0.23 | | 226 | 300 | 1.24 | Y | Y | | | | Y |
| GSA(P) 5-R | 5A | 0.029 | 0.22 | | 349 | 469 | 1.31 | Y | Y | | | | Y |
| GSA(P) 6-R | 6A | 0.018 | 0.19 | | 286 | 455 | 1.61 | Y | Y | | | | Y |
| GSA(P) 7-R | 7A | 0.016 | 0.18 | | 372 | 592 | 1.81 | Y | Y | | | | Y |
| GSA(P) 8-R | 8A | 0.013 | 0.17 | | 483 | 769 | 1.95 | Y | Y | | | | Y |
| GSA(P) 10-R | 10A | 0.010 | 0.17 | 817 | 1300 | 2.26 | | | Y | Y | Y | | |
| GSA(P) 12-R | 12A | 0.008 | 0.15 | 1277 | 2031 | 2.56 | | | Y | Y | Y | | |
| GSA(P) 15-R | 15A | 0.006 | 0.15 | 2123 | 3377 | 2.96 | | | Y | Y | Y | | |

Consult manufacturer for other ratings

EOL—
 Last Buy Date is
 Jun 30, 2020



Specifications subject to change without notice

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302 USA


+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection

Type GSA / GSAP

Temperature Derating Curve




Average Time Current Curve

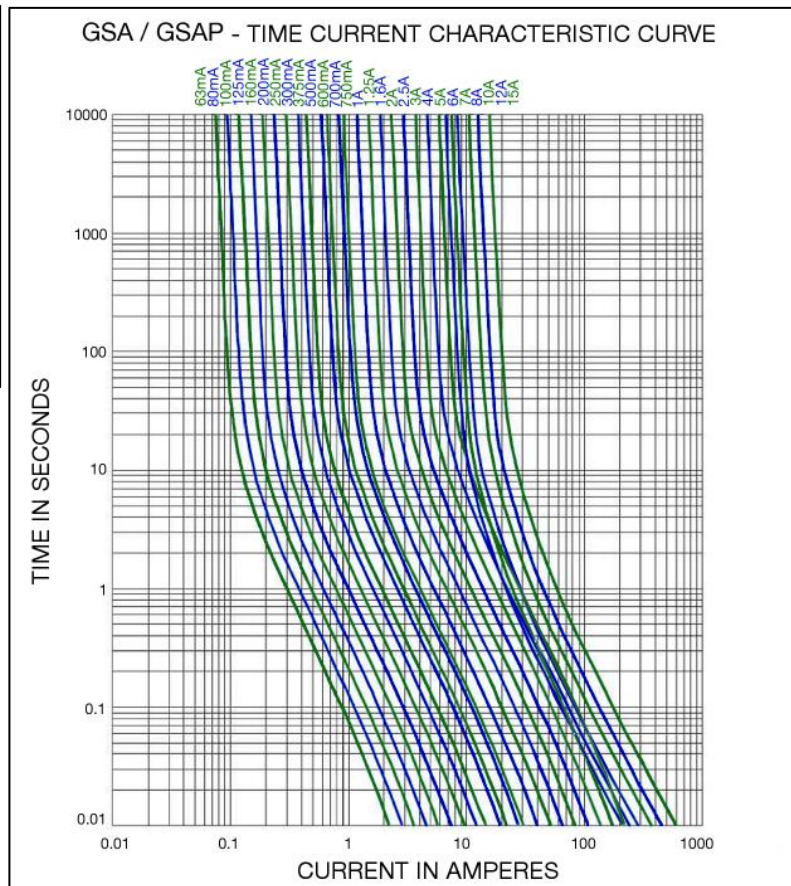

Soldering parameters

| Lead-free Wave Soldering Profile | |
|--|--|
| Wave Soldering Parameter | |
| Average ramp-up rate | 200°C / second |
| Heating rate during preheat | typical 1 - 2°C / second Max 4°C / second |
| Final preheat temperature | within 125°C of soldering temperature |
| Peak temperature Tp | 260°C |
| Time within +0°C / -5°C of actual peak temperature | 10 seconds |
| Ramp-down rate | 5°C / second max. |

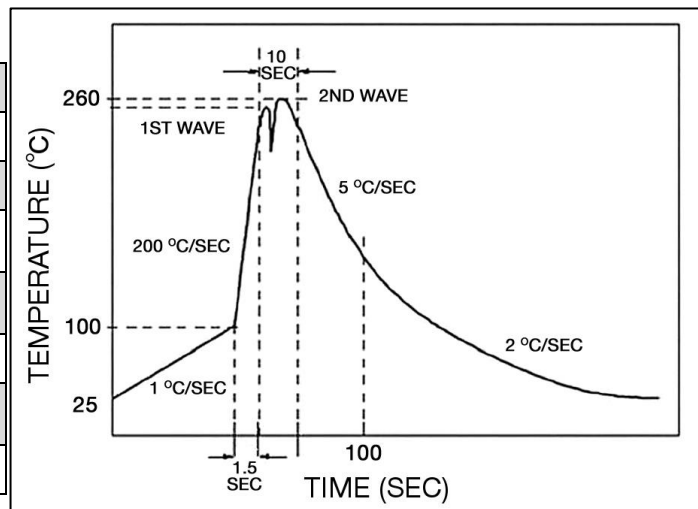

Specifications subject to change without notice

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302 USA

+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection

Type GSA / GSAP

Fuse FGNO Explanation


06X6 R [XXXX] -XX

0606R=GSA/0616R=GSAP; [XXXX]=Ampere Rating; XX=See Ordering Information as below

| Fraction | Decimal | Milliamps | Bel FGNO[XXXX] |
|----------|---------|-----------|----------------|
| 1/16 | 0.063 | 63 | 0063 |
| 8/100 | .080 | 80 | 0080 |
| 1/10 | .100 | 100 | 0100 |
| 1/8 | .125 | 125 | 0125 |
| | .160 | 160 | 0160 |
| 2/10 | .200 | 200 | 0200 |
| 1/4 | .250 | 250 | 0250 |
| 3/10 | .300 | 300 | 0300 |
| 3/8 | .375 | 375 | 0375 |
| 1/2 | .500 | 500 | 0500 |
| 6/10 | .600 | 600 | 0600 |
| 7/10 | .700 | 700 | 0700 |
| 3/4 | .750 | 750 | 0750 |


| Fraction | Decimal | Amps | Bel FGNO[XXXX] |
|----------|---------|------|----------------|
| | 1.0 | 1 | 1000 |
| 1-1/4 | 1.25 | 1.25 | 1250 |
| | 1.60 | 1.6 | 1600 |
| | 2.0 | 2 | 2000 |
| 2-1/2 | 2.5 | 2.5 | 2500 |
| | 3.0 | 3 | 3000 |
| | 4.0 | 4 | 4000 |
| | 5.0 | 5 | 5000 |
| | 6.0 | 6 | 6000 |
| | 7.0 | 7 | 7000 |
| | 8.0 | 8 | 8000 |
| | | 10 | 9100 |
| | | 12 | 9120 |
| | | 15 | 9150 |

Mechanical Dimensions

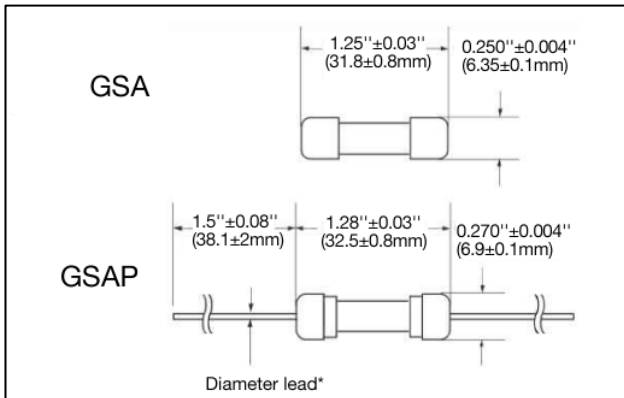

*Diameter lead 0.032"±0.002" for 5A and less
 *Diameter lead 0.039"±0.002" for 6A and above

Ordering Information

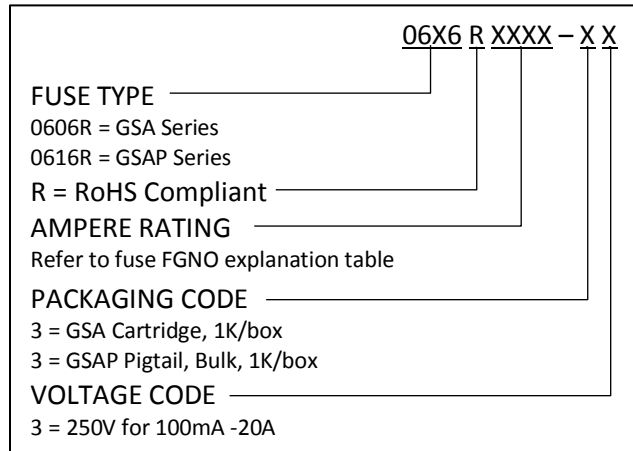

Packaging

| Packaging Option | Packaging Specification | Quantity | Packaging Code | Inside Tape Spacing |
|---------------------|-------------------------|----------|----------------|---------------------|
| Bulk | N/A | 1000 | 33 | N/A |
| Bulk (Pigtail Type) | N/A | 1000 | 33 | N/A |



Specifications subject to change without notice

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302 USA

+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.