

InGaP HBT 2.4 – 2.5 GHz Power Amplifier
PRELIMINARY DATA SHEET
DESCRIPTION

The LX5510 is a power amplifier optimized for WLAN applications in the 2.4-2.5GHz frequency range. The PA is implemented as a two-stage monolithic microwave integrated circuit (MMIC) with active bias and input/output pre-matching.

The device is manufactured with an InGaP/GaAs Heterojunction Bipolar Transistor (HBT) IC process (MOCVD). With single low voltage supply of 3.3V 20dB power gain between 2.4-2.5GHz, at a low quiescent current of 65mA.

For +19dBm OFDM output power (64QAM, 54Mbps), the PA provides a low EVM (Error-Vector Magnitude) of 3.0%, and consumes 120mA total DC current with the nominal 3.3V bias. With increased bias of 4.5V EVM is ~ 5% at 23dBm.

The LX5510 is available in a 16-pin 3mmx3mm micro-lead package (MLP). The compact footprint, low profile, and excellent thermal capability of the MLP package makes the LX5510 an ideal solution for medium-gain power amplifier requirements for IEEE 802.11b/g applications


IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

KEY FEATURES

- Advanced InGaP HBT
- 2.4 – 2.5GHz Operation
- Single-Polarity 3.3V Supply
- Low Quiescent Current Icq ~65mA
- Power Gain ~20dB @ 2.45GHz and Pout = 19dBm
- Total Current 120mA for Pout = 19dBm @ 2.45GHz OFDM
- EVM ~ 3.0% for 64QAM / 54Mbps and Pout = 19dBm
- Small Footprint (3x3mm²)
- Low Profile (0.9mm)

APPLICATIONS

- IEEE 802.11b/g

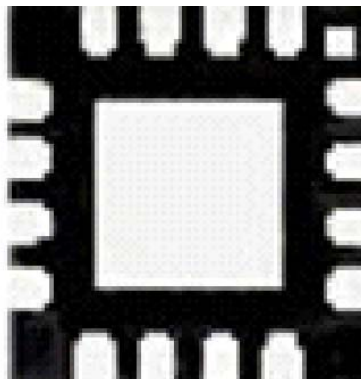PRODUCT HIGHLIGHT

PACKAGE ORDER INFO
LQ


Plastic MLPQ
16 pin
LX5510-LQ

Note: Available in Tape & Reel.
Append the letter "T" to the part number.
(i.e. LX5510-LQT)

InGaP HBT 2.4 – 2.5 GHz Power Amplifier
PRELIMINARY DATA SHEET
ABSOLUTE MAXIMUM RATINGS

DC Supply Voltage, RF off	6V
Collector Current	400mA
Total Power Dissipation	2W
RF Input Power	15dBm
Maximum Junction Temperature (T _J max)	150°C
Operation Ambient Temperature	-40°C to +85°C
Storage Temperature	-60°C to +150°C

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.
 x denotes respective pin designator 1, 2, or 3

PACKAGE PIN OUT


* Pad is Ground

LQ PACKAGE
(Bottom View)

FUNCTIONAL PIN DESCRIPTION

Name	Description
RF IN	RF input for the power amplifier. This pin is DC-shorted to GND but AC-coupled to the transistor base of the first stage.
VB1	Bias current control voltage for the first stage.
VB2	Bias current control voltage for the second stage. The VB2 pin can be connected with the first stage control voltage (VB1) into a single reference voltage (referred to as Vref) through an external resistor bridge.
VCC	Supply voltage for the bias reference and control circuits. This pin can be combined with both VC1 and VC2 pins, resulting in a single supply voltage (referred to as Vc).
RF OUT	RF output for the power amplifier.
VC1	Power supply for first stage amplifier. The VC1 feedline should be terminated with a 4pF bypass capacitor 50mil apart from the device, followed by a 8.2nH blocking inductor at the supply side. This pin can be combined with VC2 and VCC pins, resulting in a single supply voltage (referred to as Vc).
VC2	Power supply for second stage amplifier. The VC2 feedline should be driven with a 8.2nH AC blocking inductor and 1uF bypass capacitor. This pin can be combined with VC1 and VCC pins, resulting in a single supply voltage (referred to as Vc).
GND	The center metal base of the MLP package provides both DC and RF ground as well as heat sink for the power amplifier.

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, the following specifications apply over the operating ambient temperature $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$ except where otherwise noted and the following test conditions: $V_c = 3.3\text{V}$, $V_{\text{ref}} = 2.85\text{V}$, $I_{\text{cq}} = 65\text{mA}$, $T_A = 25^{\circ}\text{C}$

Parameter	Symbol	Test Conditions	LX5510			Units
			Min	Typ	Max	
Frequency Range	f		2.4		2.5	GHz
Power Gain at Pout = 19dBm	Gp			20		dB
EVM at Pout = 19dBm		64QAM / 54Mbps		3.0		%
Total Current at Pout = 19dBm	Ictotal			120		mA
Quiescent Current	Icq			65		mA
Bias Control Reference Current	Iref	For Icq = 65mA		1.2		mA
Small-Signal Gain	S21			20		dB
Gain Flatness	ΔS_{21}	Over 100MHz		± 0.5		dB
Gain Variation Over Temperature	ΔS_{21}	-40°C to +85°C		TBD		dB
Input Return Loss	S11			10		dB
Output Return Loss	S22			10		dB
Reverse Isolation	S12			-40		dB
Second Harmonic		Pout = 19dBm		-60		dBc
Third Harmonic		Pout = 19dbm		-50		dBc
Noise Figure	NF			TBD		dB
Ramp-On Time	tON	10 ~ 90%			100	ns

Note: All measured data was obtained on a 10mil GETEK evaluation board without heat sink.

InGaP HBT 2.4 – 2.5 GHz Power Amplifier

PRELIMINARY DATA SHEET

S PARAMETER (3.3V)

m1 freq=2.400GHz dB(S(2,1))=19.788	m2 freq=2.450GHz dB(S(2,1))=19.421	m7 freq=2.500GHz dB(S(2,1))=18.846
--	--	--


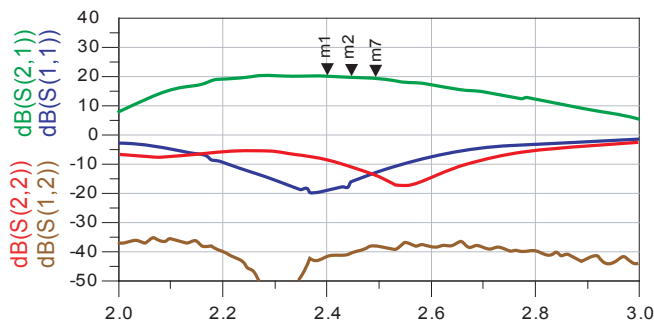


Figure 1 – S-Parameter Data
(Vc = 3.3V, Vref = 2.85V, Icq = 65mA)

POWER SWEEP

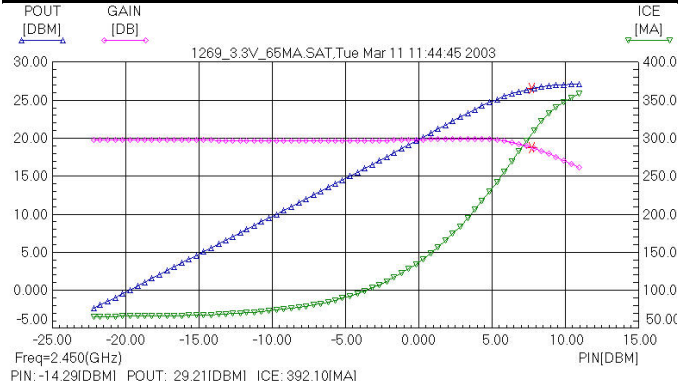

Gain: 18.77 [dB] Pin: 7.75 [dBm]
1.0 dB COMPRESSION POINTS: Pout: 26.52 [dBm] Pin: 7.75 [dBm]
Figure 2 – Power Sweep
(Vc = 3.3V, Vref = 2.85V, Icq = 65mA)

EVM DATA

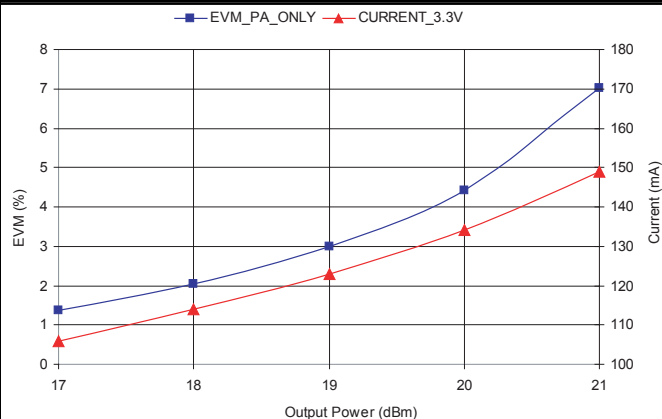


Figure 3 – EVM Data with 54Mbps 64QAM OFDM
(Vc = 3.3V, Vref = 2.85V, Icq = 65mA, Frequency = 2.45GHz)

ACP DATA

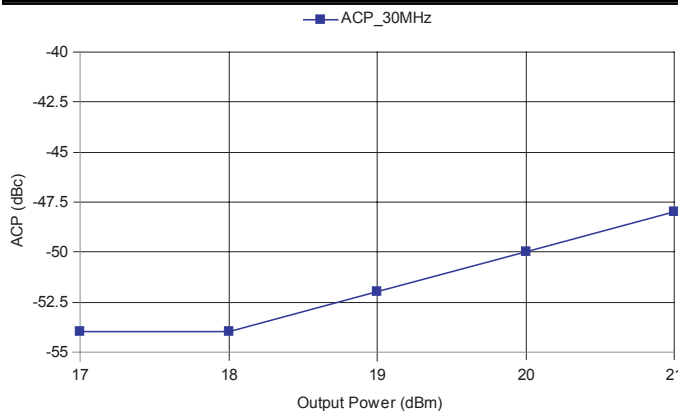


Figure 4 – ACP Data with 54Mbps 64QAM OFDM
(Vc = 3.3V, Vref = 2.85V, Icq = 65mA, Frequency = 2.45GHz)

CCK SPECTRUM

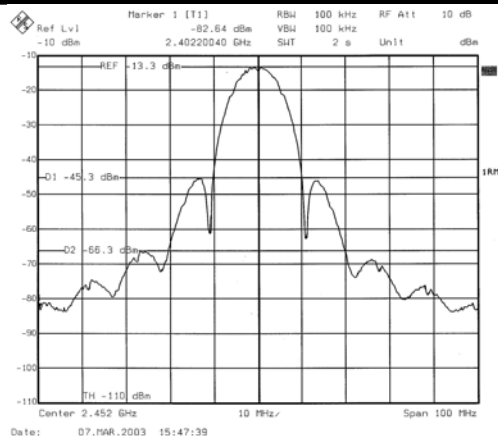


Figure 5 – Spectrum with 23dBm 11Mb/s CCK
(Vc = 3.3V, Vref = 2.85V, Icq = 65mA, Ic = 180mA, Freq = 2.45GHz)

S PARAMETER (4.5V)

m1 freq=2.400GHz S21 (dB)=20.041	m2 freq=2.450GHz S21 (dB)=19.710	m7 freq=2.500GHz S21 (dB)=19.143
--	--	--

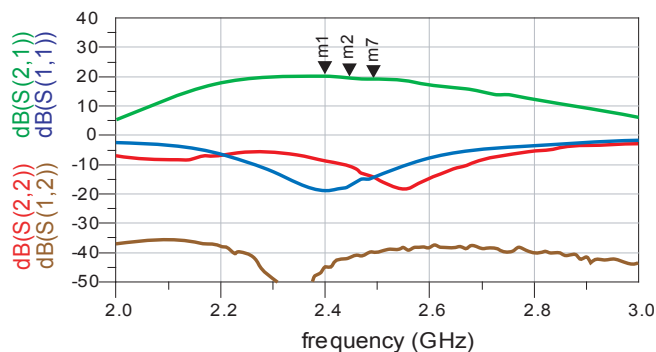


Figure 6 – S-Parameter Data
(Vc = 4.5V, Vref = 2.85V, Icq = 65mA)

InGaP HBT 2.4 – 2.5 GHz Power Amplifier

PRELIMINARY DATA SHEET

POWER SWEEP

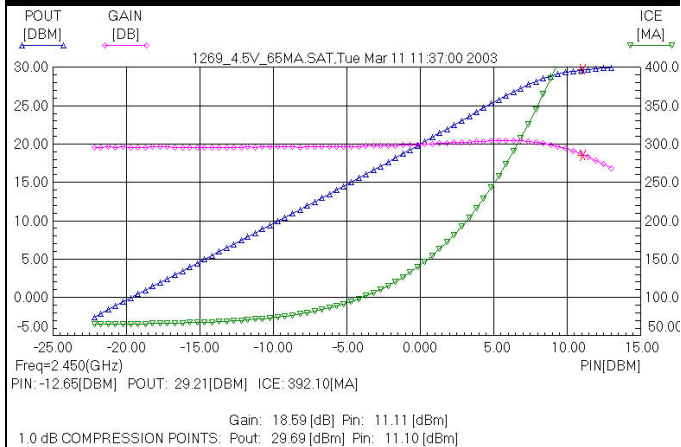


Figure 7 – Power Sweep
(Vc = 4.5V, Vref = 2.85V, Icq = 65mA)

EVM DATA

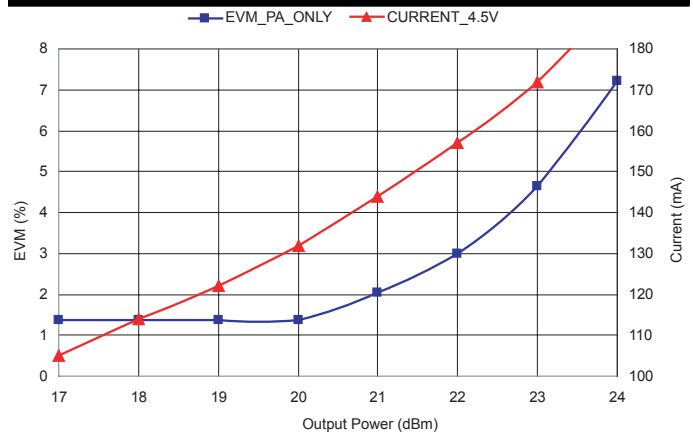


Figure 8 – EVM Data with 54Mbps 64QAM OFDM
(Vc = 4.5V, Vref = 2.85V, Icq = 65mA, Frequency = 2.45GHz)

ACP DATA

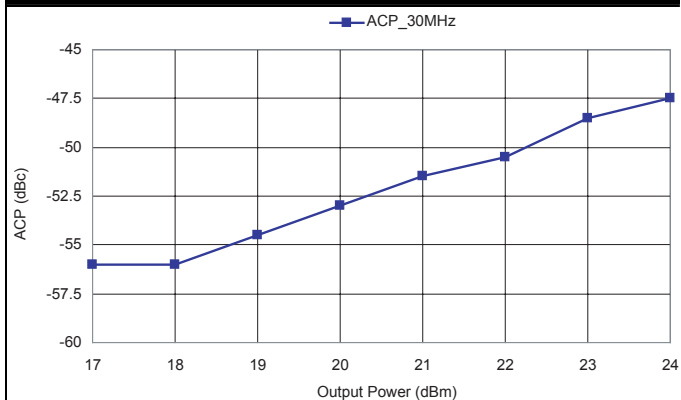


Figure 9 – ACP Data with 54Mbps 64QAM OFDM
(Vc = 4.5V, Vref = 2.85V, Icq = 65mA, Frequency = 2.45GHz)

CCK SPECTRUM

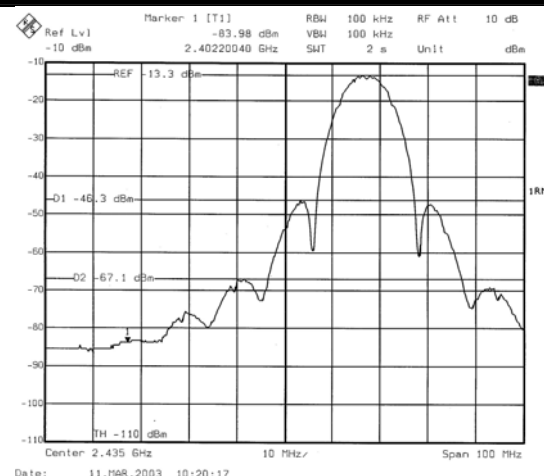
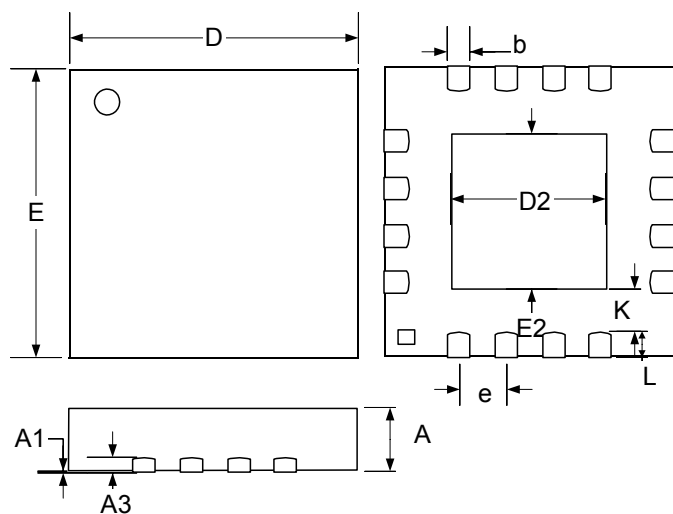


Figure 10 – Spectrum with 23dBm 11Mb/s CCK
(Vc = 4.5V, Vref = 2.85V, Icq = 65mA, Ic = 180mA, Freq = 2.45GHz)

PACKAGE DIMENSIONS
LQ 16-Pin MLPQ Plastic (3x3mm EP)


Dim	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.00	0.031	0.039
A1	0	0.05	0	0.002
A3	0.18	0.30	0.007	0.012
b	0.18	0.30	0.007	0.012
D	3.00 BSC		0.118 BSC	
E	3.00 BSC		0.118 BSC	
e	0.5 BSC		0.020 BSC	
D2	1.50	1.80	0.051	0.061
E2	1.50	1.80	0.051	0.061
K	0.2	-	0.008	-
L	0.35	0.45	0.012	0.020

Note:

1. Dimensions do not include mold flash or protrusions; these shall not exceed 0.155mm(.006") on any side. Lead dimension shall not include solder coverage.

NOTES

PRODUCT PRELIMINARY DATA – Information contained in this document is pre-production data, and is proprietary to Microsemi. It may not be modified in any way without the express written consent of Microsemi. Product referred to herein is not guaranteed to achieve preliminary or production status and product specifications, configurations, and availability may change at any time.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.