


POWER COMBICON feed-through plugs

10.16 mm pitch

DFK-PC 16/...-ST(F)-10,16

If a 16 mm² conductor is used, the new feed-through plug connector offers the possibility to transfer a current of 76 A from inside the device to outside and vice-versa. Just insert DFK-PC 16 into the opening in the housing and fix it in place using the easy-to-use snap-lock mechanism, without the need for additional tools. This version is designed in such a way that there is a screw connection on the device inside to guide cables from outside the device to the inside (or vice-versa). In combination with the standard PC 16 plugs, a cable-cable feed-through fit in the device housing can be realized for 2 to 9 positions. In the STF versions, the shielding function can be guided onto or through the housing wall. The fastening flanges offer vibration-proof connection. The feed-through plug connector is designed for 1.0 to 3.0 mm panel thickness.

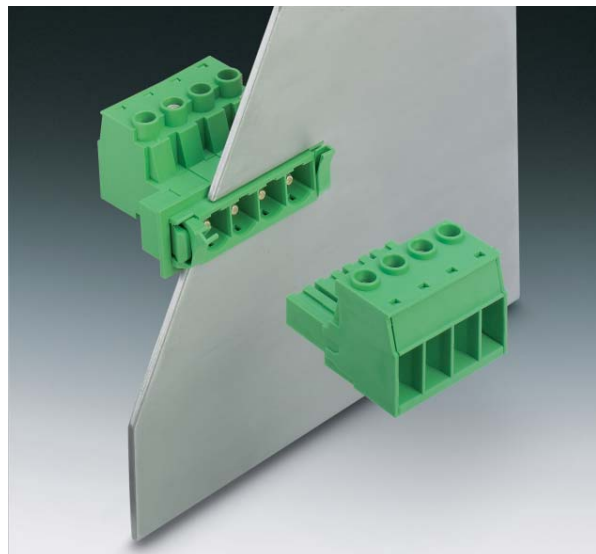

COMBICON Select

The COMBICON search engine with CAD downloading



COMBICON Select – the printed circuit board connection software supports your workflow from the PCB and housing layout to the ordering process with:

- Systematic and fast selection of products
- Universal Internet aided engineering with extensive CAD downloading
- Easy-to-use e-shopping functions.

select.phoenixcontact.com/combicon

Note:

In compliance with DIN EN 61984, COMBICON plug connectors come without switching capacity. During designated use, they must not be plugged in or disconnected when carrying voltage or under load.



Fast snap-lock mechanism




Screw fastening

POWER COMBICON

Feed-through plugs

DFK-PC 16/...-ST-10,16

10.16 mm Pitch

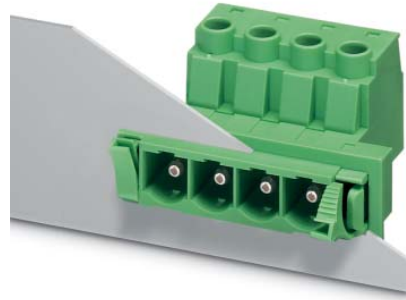


Description	No. of pos.	Dim. a [mm]
POWER COMBICON plugs, 10.16 mm pitch, color: green	2	10.16
	3	20.32
	4	30.48
	5	40.64
	6	50.80
	7	60.96
	8	71.12
	9	81.28
Keying profile , is inserted into the slot on the plug and header, red insulating material		
Screws , (DIN ISO 7049 screw ST 2,9 x 9,5), for fixing feed-through terminal blocks on the housing wall		
Screwdriver , to actuate the terminal screws		
Marker card , with 10 pcs., 10-section marker strips, white, self-adhesive, for 100 terminal blocks		
Crimp pliers , for ferrules of up to 16 mm ²		
Technical data		
Dimensions		
Pitch		[mm]
Technical data in accordance with IEC/ DIN VDE		
Insulating material group		–
Surge voltage category / contamination class		– / –
Rated voltage		[V]
Rated surge voltage		[kV]
Nominal current / cross section		[A] / [mm ²]
Maximum load current / cross section		[A] / [mm ²]
Connection capacity		
Solid / stranded / conductor sizes		[mm ²] / [mm ²] / AWG
Stranded with ferrule without / with plastic sleeve		[mm ²]
Multiple connection (2 conductors with same cross section)		
Solid / stranded		[mm ²]
Stranded with ferrules without plastic sleeve		[mm ²]
Stranded with TWIN ferrule with plastic sleeve		[mm ²]
Stripping length		[mm]
Internal cylindrical gage (IEC 60947-1)		–
Screw thread		–
Tightening torque		[Nm]
Insulation material		
Inflammability class acc. to UL 94		
Approval data (UL/CUL and CSA)		
Usegroup B		[V] / [A] / AWG
Usegroup C		[V] / [A] / AWG
Usegroup D		[V] / [A] / AWG

Type	Order No.	Pcs./Pkt.															
DFK-PC 16/ 2-ST-10,16	1703373	50															
DFK-PC 16/ 3-ST-10,16	1703386	50															
DFK-PC 16/ 4-ST-10,16	1703399	50															
DFK-PC 16/ 5-ST-10,16	1703409	50															
DFK-PC 16/ 6-ST-10,16	1703412	50															
DFK-PC 16/ 7-ST-10,16	1703425	50															
DFK-PC 16/ 8-ST-10,16	1703438	50															
DFK-PC 16/ 9-ST-10,16	1703441	50															
CP-HCC 4	1600027	50															
DFK-PC 16-SS	1705449	20															
SZS 1,0 x 4,0	1205066	10															
SK 10/5 (see COMBICON catalog)																	
CRIMPFOX 16 S	1207983	1															
see description																	
10.16																	
<table> <tr> <td>III / 3</td><td>III / 2</td><td>II / 2</td></tr> <tr> <td>1000</td><td>1000</td><td>1000</td></tr> <tr> <td>8</td><td>8</td><td>6</td></tr> <tr> <td></td><td>57 ¹⁾ / 10</td><td></td></tr> <tr> <td></td><td>76 ¹⁾ / 16</td><td></td></tr> </table>			III / 3	III / 2	II / 2	1000	1000	1000	8	8	6		57 ¹⁾ / 10			76 ¹⁾ / 16	
III / 3	III / 2	II / 2															
1000	1000	1000															
8	8	6															
	57 ¹⁾ / 10																
	76 ¹⁾ / 16																
0.75 - 16 / 0.75 - 16 / 18 - 6																	
0,5 - 16 ²⁾ / 0,5 - 16 ²⁾																	
0.75 - 6 / 0.75 - 6																	
0.5 - 4																	
0.5 - 6																	
14																	
A6																	
M4																	
1.5 - 1.7																	
PA																	
V0																	
600 / 55 / 20 - 6																	
600 / 55 / 20 - 6																	
on request																	

¹⁾ Observe derating curve

²⁾ Only in connection with CRIMPFOX 16 S

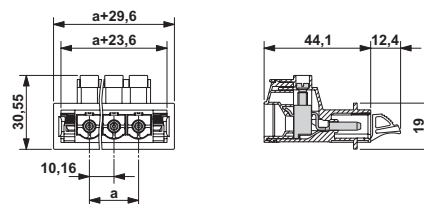


POWER COMBICON

Feed-through plugs

DFK-PC 16/...-STF-10,16

10.16 mm Pitch

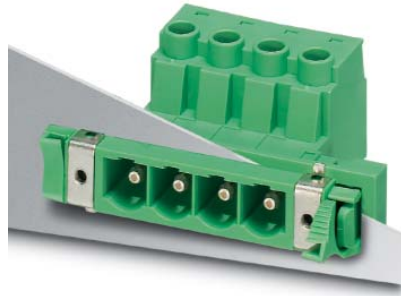


Description	No. of pos.	Dim. a [mm]	Type	Order No.	Pcs./Pkt.
POWER COMBICON feed-through plugs, 10.16 mm pitch , color: green, with screw flange	2	10.16	DFK-PC 16/ 2-STF-10,16	1703454	50
	3	20.32	DFK-PC 16/ 3-STF-10,16	1703467	50
	4	30.48	DFK-PC 16/ 4-STF-10,16	1703470	50
	5	40.64	DFK-PC 16/ 5-STF-10,16	1703483	50
	6	50.80	DFK-PC 16/ 6-STF-10,16	1703496	50
	7	60.96	DFK-PC 16/ 7-STF-10,16	1703506	50
	8	71.12	DFK-PC 16/ 8-STF-10,16	1703519	50
	9	81.28	DFK-PC 16/ 9-STF-10,16	1703522	50
Keying profile , is inserted into the slot on the plug and header, red insulating material			CP-HCC 4	1600027	50
Screws , (DIN ISO 7049 screw ST 2,9 x 9,5), for fixing feed-through terminal blocks on the housing wall			DFK-PC 16-SS	1705449	20
Screwdriver , to actuate the terminal screws			SZS 1,0 x 4,0	1205066	10
Marker card , with 10 pcs., 10-section marker strips, white, self-adhesive, for 100 terminal blocks			SK 10/5 (see COMBICON catalog)		
Crimp pliers , for ferrules of up to 16 mm ²			CRIMPFOX 16 S	1207983	1
Technical data			see description		
Dimensions			10.16		
Pitch [mm]					
Technical data in accordance with IEC/ DIN VDE					
Insulating material group			I		
Surge voltage category / contamination class			III / 3		
Rated voltage [V]			1000		
Rated surge voltage [kV]			8		
Nominal current / cross section [A] / [mm ²]			57 ') / 10		
Maximum load current / cross section [A] / [mm ²]			76 ') / 16		
Connection capacity					
Solid / stranded / conductor sizes [mm ²] / [mm ²] / AWG			0.75 - 16 / 0.75 - 16 / 18 - 6		
Stranded with ferrule without / with plastic sleeve [mm ²]			0,5 - 16 ') / 0,5 - 16 ')		
Multiple connection (2 conductors with same cross section)					
Solid / stranded [mm ²]			0.75 - 6 / 0.75 - 6		
Stranded with ferrules without plastic sleeve [mm ²]			0.5 - 4		
Stranded with TWIN ferrule with plastic sleeve [mm ²]			0.5 - 6		
Stripping length [mm]			14		
Internal cylindrical gage (IEC 60947-1)			A6		
Screw thread			M4		
Tightening torque [Nm]			1.5 - 1.7		
Insulation material			PA		
Inflammability class acc. to UL 94			V0		
Approval data (UL/CUL and CSA)					
Usegroup B [V] / [A] / AWG			600 / 55 / 20 - 6		
Usegroup C [V] / [A] / AWG			600 / 55 / 20 - 6		
Usegroup D [V] / [A] / AWG			on request		

Type	Order No.	Pcs./Pkt.
DFK-PC 16/ 2-STF-10,16	1703454	50
DFK-PC 16/ 3-STF-10,16	1703467	50
DFK-PC 16/ 4-STF-10,16	1703470	50
DFK-PC 16/ 5-STF-10,16	1703483	50
DFK-PC 16/ 6-STF-10,16	1703496	50
DFK-PC 16/ 7-STF-10,16	1703506	50
DFK-PC 16/ 8-STF-10,16	1703519	50
DFK-PC 16/ 9-STF-10,16	1703522	50
CP-HCC 4	1600027	50
DFK-PC 16-SS	1705449	20
SZS 1,0 x 4,0	1205066	10
SK 10/5 (see COMBICON catalog)		
CRIMPFOX 16 S	1207983	1
see description 10.16		
I		
III / 3	III / 2	II / 2
1000	1000	1000
8	8	6
57 ¹⁾ / 10		
76 ¹⁾ / 16		
0.75 - 16 / 0.75 - 16 / 18 - 6		
0,5 - 16 ²⁾ / 0,5 - 16 ²⁾		
0.75 - 6 / 0.75 - 6		
0.5 - 4		
0.5 - 6		
14		
A6		
M4		
1.5 - 1.7		
PA		
V0		
600 / 55 / 20 - 6		
600 / 55 / 20 - 6		
on request		

¹⁾ Observe derating curve

²⁾ Only in connection with CRIMPFOX 16 S

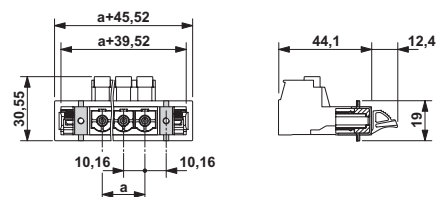


POWER COMBICON

Feed-through plugs

DFK-PC 16/...-STF-SH-10,16

10.16 mm Pitch


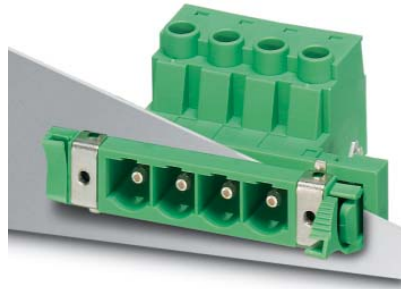



Description	No. of pos.	Dim. a [mm]
POWER COMBICON feed-through plugs, 10.16 mm pitch, color: green, shielded version, with screw flange	2	10.16
	3	20.32
	4	30.48
	5	40.64
	6	50.80
	7	60.96
	8	71.12
	9	81.28
Keying profile, is inserted into the slot on the plug and header, red insulating material		
Screws, (DIN ISO 7049 screw ST 2,9 x 9,5), for fixing feed-through terminal blocks on the housing wall		
Screwdriver, to actuate the terminal screws		
Marker card, with 10 pcs., 10-section marker strips, white, self-adhesive, for 100 terminal blocks		
Crimp pliers, for ferrules of up to 16 mm ²		
Technical data		
Dimensions		
Pitch		[mm]
Technical data in accordance with IEC/ DIN VDE		
Insulating material group		–
Surge voltage category / contamination class		– / –
Rated voltage		[V]
Rated surge voltage		[kV]
Nominal current / cross section		[A] / [mm ²]
Maximum load current / cross section		[A] / [mm ²]
Connection capacity		
Solid / stranded / conductor sizes		[mm ²] / [mm ²] / AWG
Stranded with ferrule without / with plastic sleeve		[mm ²]
Multiple connection (2 conductors with same cross section)		
Solid / stranded		[mm ²]
Stranded with ferrules without plastic sleeve		[mm ²]
Stranded with TWIN ferrule with plastic sleeve		[mm ²]
Stripping length		[mm]
Internal cylindrical gage (IEC 60947-1)		–
Screw thread		–
Tightening torque		[Nm]
Insulation material		
Inflammability class acc. to UL 94		
Approval data (UL/CUL and CSA)		
Usegroup B		[V] / [A] / AWG
Usegroup C		[V] / [A] / AWG
Usegroup D		[V] / [A] / AWG

Type	Order No.	Pcs./Pkt.																		
DFK-PC 16/ 2-STF-SH-10,16	1703616	50																		
DFK-PC 16/ 3-STF-SH-10,16	1703629	50																		
DFK-PC 16/ 4-STF-SH-10,16	1703632	50																		
DFK-PC 16/ 5-STF-SH-10,16	1703645	50																		
DFK-PC 16/ 6-STF-SH-10,16	1703658	50																		
DFK-PC 16/ 7-STF-SH-10,16	1703661	50																		
DFK-PC 16/ 8-STF-SH-10,16	1703674	50																		
DFK-PC 16/ 9-STF-SH-10,16	1703687	50																		
CP-HCC 4	1600027	50																		
DFK-PC 16-SS	1705449	20																		
SZS 1,0 x 4,0	1205066	10																		
SK 10/5 (see COMBICON catalog)																				
CRIMPFOX 16 S	1207983	1																		
see description																				
10.16																				
<table> <tr> <td></td><td>I</td><td></td></tr> <tr> <td>III / 3</td><td>III / 2</td><td>II / 2</td></tr> <tr> <td>1000</td><td>1000</td><td>1000</td></tr> <tr> <td>8</td><td>8</td><td>6</td></tr> <tr> <td></td><td>57 ¹⁾ / 10</td><td></td></tr> <tr> <td></td><td>76 ¹⁾ / 16</td><td></td></tr> </table>				I		III / 3	III / 2	II / 2	1000	1000	1000	8	8	6		57 ¹⁾ / 10			76 ¹⁾ / 16	
	I																			
III / 3	III / 2	II / 2																		
1000	1000	1000																		
8	8	6																		
	57 ¹⁾ / 10																			
	76 ¹⁾ / 16																			
0.75 - 16 / 0.75 - 16 / 18 - 6																				
0,5 - 16 ²⁾ / 0,5 - 16 ²⁾																				
0.75 - 6 / 0.75 - 6																				
0.5 - 4																				
0.5 - 6																				
14																				
A6																				
M4																				
1.5 - 1.7																				
PA																				
V0																				
600 / 55 / 20 - 6																				
600 / 55 / 20 - 6																				
on request																				


¹⁾ Observe derating curve

²⁾ Only in connection with CRIMPFOX 16 S

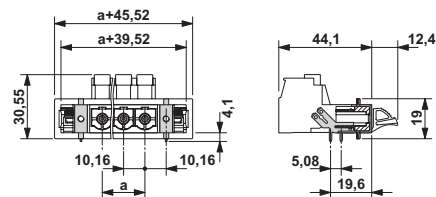





Sheet metal cutout for snap-lock mechanism
for "ST" versions



Sheet metal cutout for screw connection
for "ST" versions



Sheet metal cutout for snap-lock mechanism
for "STF" versions



Sheet metal cutout for screw connection
for "STF" versions


Derating curve

Type: PC 16/...-ST-10,16 with DFK-PC 16/...-ST-10,16

Connected conductor cross section = 16 mm²

Reduction factor = 0.8

Number of positions = see diagram

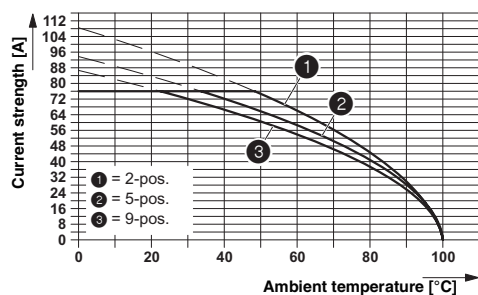



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.