



# STP80NF03L-04

## STB80NF03L-04 STB80NF03L-04-1

N-CHANNEL 30V - 0.0035  $\Omega$  - 80A D<sup>2</sup>PAK/I<sup>2</sup>PAK/TO-220  
STripFET™ II POWER MOSFET

| TYPE             | V <sub>DSS</sub> | R <sub>DS(on)</sub> | I <sub>D</sub> |
|------------------|------------------|---------------------|----------------|
| STB80NF03L-04/-1 | 30 V             | <0.004 $\Omega$     | 80 A           |
| STP80NF03L-04    | 30 V             | <0.004 $\Omega$     | 80 A           |


- TYPICAL R<sub>DS(on)</sub> = 0.0035 $\Omega$
- EXCEPTIONAL dv/dt CAPABILITY
- 100% AVALANCHE TESTED
- LOW THRESHOLD DRIVE

### DESCRIPTION


This Power MOSFET is the latest development of STMicroelectronics unique "Single Feature Size™" strip-based process. The resulting transistor shows extremely high packing density for low on-resistance, rugged avalanche characteristics and less critical alignment steps therefore a remarkable manufacturing reproducibility.

### APPLICATIONS

- HIGH CURRENT, HIGH SPEED SWITCHING
- MOTOR CONTROL, AUDIO AMPLIFIERS
- DC-DC & DC-AC CONVERTERS
- AUTOMOTIVE ENVIRONMENT (INJECTION, ABS, AIR-BAG, LAMPDRIVERS, Etc.)

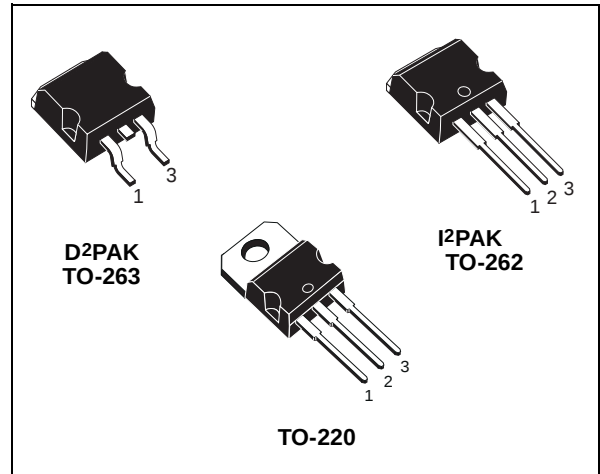

### INTERNAL SCHEMATIC DIAGRAM

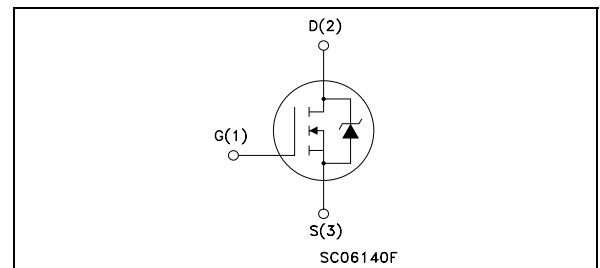

### Ordering Information

| SALES TYPE      | MARKING      | PACKAGE            | PACKAGING   |
|-----------------|--------------|--------------------|-------------|
| STB80NF03L-04   | 80NF03L-04 @ | D <sup>2</sup> PAK | TUBE        |
| STB80NF03L-04T4 | 80NF03L-04 @ | D <sup>2</sup> PAK | TAPE & REEL |
| STP80NF03L-04   | 80NF03L-04 @ | TO-220             | TUBE        |
| STB80NF03L-04-1 | 80NF03L-04 @ | I <sup>2</sup> PAK | TUBE        |

### ABSOLUTE MAXIMUM RATINGS

| Symbol              | Parameter                                             | Value      | Unit |
|---------------------|-------------------------------------------------------|------------|------|
| V <sub>DS</sub>     | Drain-source Voltage (V <sub>GS</sub> = 0)            | 30         | V    |
| V <sub>DGR</sub>    | Drain-gate Voltage (R <sub>GS</sub> = 20 k $\Omega$ ) | 30         | V    |
| V <sub>GS</sub>     | Gate- source Voltage                                  | $\pm 20$   | V    |
| I <sub>D</sub> (**) | Drain Current (continuous) at T <sub>C</sub> = 25°C   | 80         | A    |
| I <sub>D</sub> (**) | Drain Current (continuous) at T <sub>C</sub> = 100°C  | 80         | A    |
| I <sub>DM</sub> (•) | Drain Current (pulsed)                                | 320        | A    |
| P <sub>tot</sub>    | Total Dissipation at T <sub>C</sub> = 25°C            | 300        | W    |
|                     | Derating Factor                                       | 2          | W/°C |
| dv/dt (1)           | Peak Diode Recovery voltage slope                     | 2          | V/ns |
| E <sub>AS</sub> (2) | Single Pulse Avalanche Energy                         | 2.3        | J    |
| T <sub>stg</sub>    | Storage Temperature                                   | -60 to 175 | °C   |
| T <sub>j</sub>      | Max. Operating Junction Temperature                   | 175        | °C   |

(•) Pulse width limited by safe operating area.

(\*\*) Current Limited by Package

(1) I<sub>SD</sub>  $\leq$  80A, di/dt  $\leq$  240A/ $\mu$ s, V<sub>DD</sub>  $\leq$  24V, T<sub>j</sub>  $\leq$  T<sub>JMAX</sub>

(2) Starting T<sub>j</sub> = 25 °C, I<sub>D</sub> = 40A, V<sub>DD</sub> = 20V

**STB80NF03L-04/-1/STP80NF03L-04****THERMAL DATA**

|                       |                                                |     |      |      |
|-----------------------|------------------------------------------------|-----|------|------|
| R <sub>thj-case</sub> | Thermal Resistance Junction-case               | Max | 0.5  | °C/W |
| R <sub>thj-amb</sub>  | Thermal Resistance Junction-ambient            | Max | 62.5 | °C/W |
| T <sub>I</sub>        | Maximum Lead Temperature For Soldering Purpose | Typ | 300  | °C   |

**ELECTRICAL CHARACTERISTICS** (T<sub>case</sub> = 25 °C unless otherwise specified)**OFF**

| Symbol               | Parameter                                             | Test Conditions                                                                     | Min. | Typ. | Max.    | Unit     |
|----------------------|-------------------------------------------------------|-------------------------------------------------------------------------------------|------|------|---------|----------|
| V <sub>(BR)DSS</sub> | Drain-source Breakdown Voltage                        | I <sub>D</sub> = 250 µA V <sub>GS</sub> = 0                                         | 30   |      |         | V        |
| I <sub>DSS</sub>     | Zero Gate Voltage Drain Current (V <sub>GS</sub> = 0) | V <sub>DS</sub> = Max Rating<br>V <sub>DS</sub> = Max Rating T <sub>C</sub> = 125°C |      |      | 1<br>10 | µA<br>µA |
| I <sub>GSS</sub>     | Gate-body Leakage Current (V <sub>DS</sub> = 0)       | V <sub>GS</sub> = ± 20 V                                                            |      |      | ±100    | nA       |

**ON (\*)**

| Symbol              | Parameter                         | Test Conditions                                                                               | Min. | Typ.            | Max.            | Unit   |
|---------------------|-----------------------------------|-----------------------------------------------------------------------------------------------|------|-----------------|-----------------|--------|
| V <sub>GS(th)</sub> | Gate Threshold Voltage            | V <sub>DS</sub> = V <sub>GS</sub> I <sub>D</sub> = 250 µA                                     | 1    |                 |                 | V      |
| R <sub>DS(on)</sub> | Static Drain-source On Resistance | V <sub>GS</sub> = 10 V I <sub>D</sub> = 40 A<br>V <sub>GS</sub> = 4.5 V I <sub>D</sub> = 40 A |      | 0.0035<br>0.004 | 0.004<br>0.0055 | Ω<br>Ω |

**DYNAMIC**

| Symbol                                                   | Parameter                                                               | Test Conditions                                       | Min. | Typ.                | Max. | Unit           |
|----------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------|------|---------------------|------|----------------|
| g <sub>fs</sub> (*)                                      | Forward Transconductance                                                | V <sub>DS</sub> = 15 V I <sub>D</sub> = 15 A          |      | 50                  |      | S              |
| C <sub>iss</sub><br>C <sub>oss</sub><br>C <sub>rss</sub> | Input Capacitance<br>Output Capacitance<br>Reverse Transfer Capacitance | V <sub>DS</sub> = 25V, f = 1 MHz, V <sub>GS</sub> = 0 |      | 5500<br>1670<br>290 |      | pF<br>pF<br>pF |

# ELECTRICAL CHARACTERISTICS (continued)

## SWITCHING ON

| Symbol                        | Parameter                                                    | Test Conditions                                                                                                         | Min. | Typ.           | Max. | Unit           |
|-------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|------|----------------|------|----------------|
| $t_{d(on)}$<br>$t_r$          | Turn-on Delay Time<br>Rise Time                              | $V_{DD} = 15\text{ V}$ $I_D = 40\text{ A}$<br>$R_G = 4.7\ \Omega$ $V_{GS} = 4.5\text{ V}$<br>(Resistive Load, Figure 3) |      | 30<br>270      |      | ns<br>ns       |
| $Q_g$<br>$Q_{gs}$<br>$Q_{gd}$ | Total Gate Charge<br>Gate-Source Charge<br>Gate-Drain Charge | $V_{DD} = 24\text{ V}$ $I_D = 80\text{ A}$ $V_{GS} = 4.5\text{ V}$                                                      |      | 85<br>23<br>40 | 110  | nC<br>nC<br>nC |

## SWITCHING OFF

| Symbol                           | Parameter                                             | Test Conditions                                                                                                            | Min. | Typ.             | Max. | Unit           |
|----------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------|------------------|------|----------------|
| $t_{d(off)}$<br>$t_f$            | Turn-off Delay Time<br>Fall Time                      | $V_{DD} = 15\text{ V}$ $I_D = 40\text{ A}$<br>$R_G = 4.7\ \Omega$ , $V_{GS} = 4.5\text{ V}$<br>(Resistive Load, Figure 3)  |      | 110<br>95        |      | ns<br>ns       |
| $t_r(v_{off})$<br>$t_f$<br>$t_c$ | Off-Voltage Rise Time<br>Fall Time<br>Cross-over Time | $V_{clamp} = 24\text{ V}$ $I_D = 80\text{ A}$<br>$R_G = 4.7\ \Omega$ $V_{GS} = 4.5\text{ V}$<br>(Inductive Load, Figure 5) |      | 125<br>75<br>125 |      | ns<br>ns<br>ns |


## SOURCE DRAIN DIODE

| Symbol                            | Parameter                                                                    | Test Conditions                                                                                                                               | Min. | Typ.            | Max.      | Unit                     |
|-----------------------------------|------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|------|-----------------|-----------|--------------------------|
| $I_{SD}$<br>$I_{SDM} (*)$         | Source-drain Current<br>Source-drain Current (pulsed)                        |                                                                                                                                               |      |                 | 80<br>320 | A<br>A                   |
| $V_{SD} (*)$                      | Forward On Voltage                                                           | $I_{SD} = 80\text{ A}$ $V_{GS} = 0$                                                                                                           |      |                 | 1.5       | V                        |
| $t_{rr}$<br>$Q_{rr}$<br>$I_{RRM}$ | Reverse Recovery Time<br>Reverse Recovery Charge<br>Reverse Recovery Current | $I_{SD} = 80\text{ A}$ $di/dt = 100\text{ A}/\mu\text{s}$<br>$V_{DD} = 20\text{ V}$ $T_j = 150^\circ\text{C}$<br>(see test circuit, Figure 5) |      | 75<br>0.15<br>4 |           | ns<br>$\mu\text{C}$<br>A |


(\*) Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5 %.

(●) Pulse width limited by safe operating area.


## Safe Operating Area

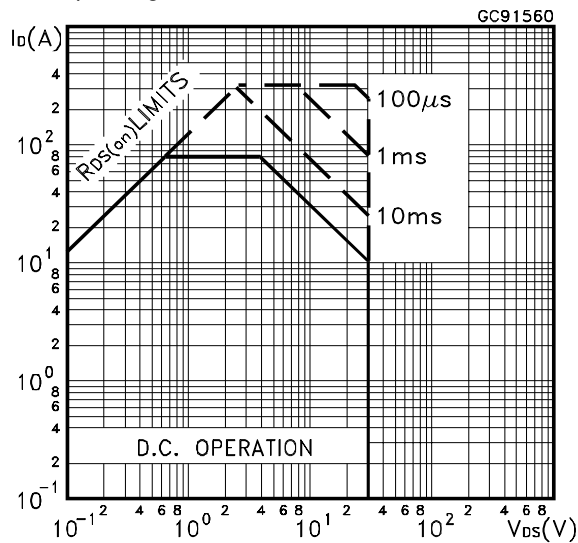


## Thermal Impedance

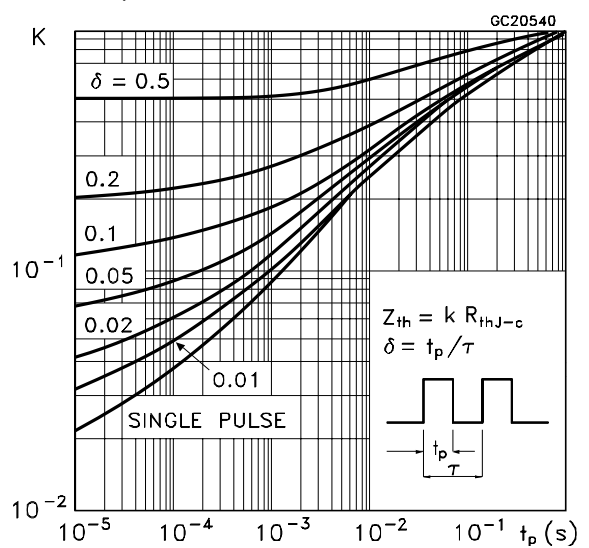


Output Characteristics

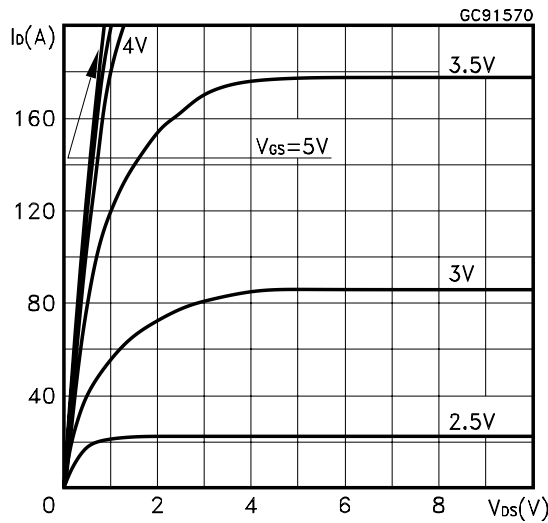


Transfer Characteristics

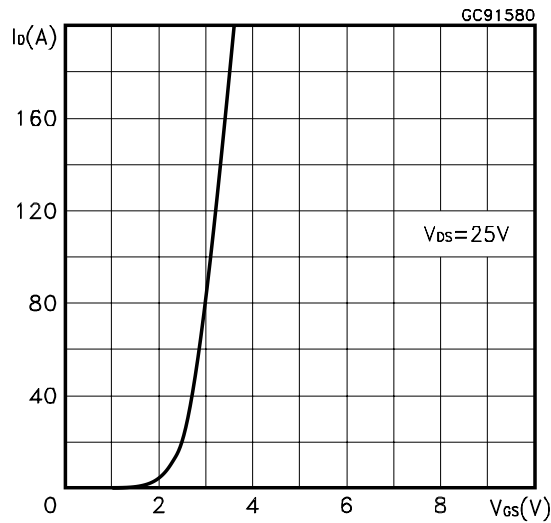


Transconductance

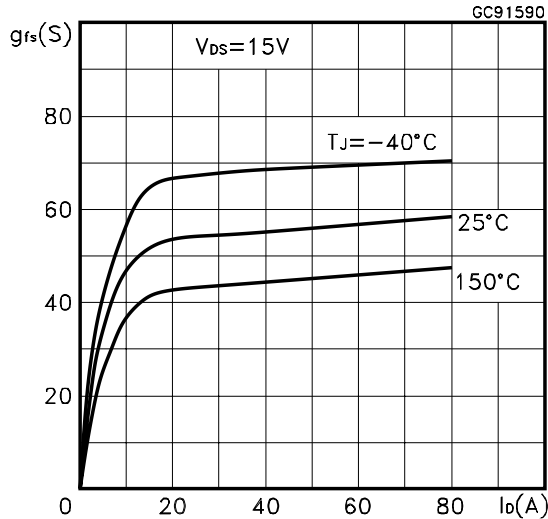


Static Drain-source On Resistance

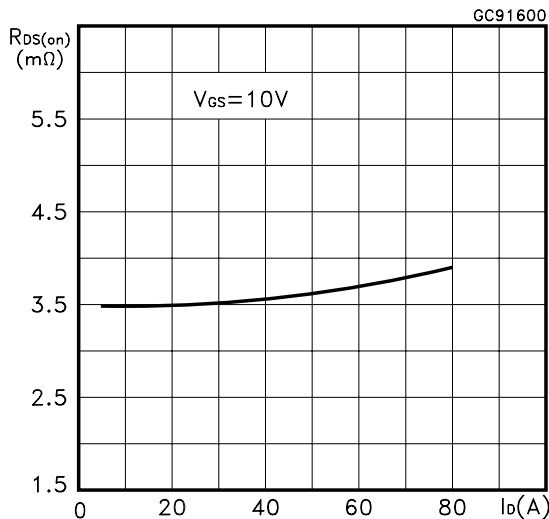


Gate Charge vs Gate-source Voltage

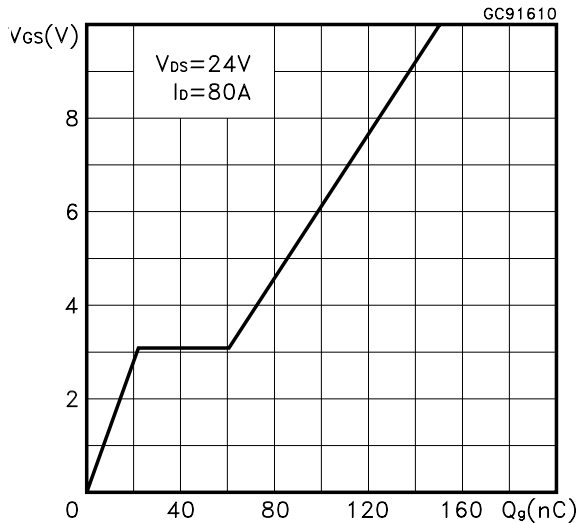


Capacitance Variations

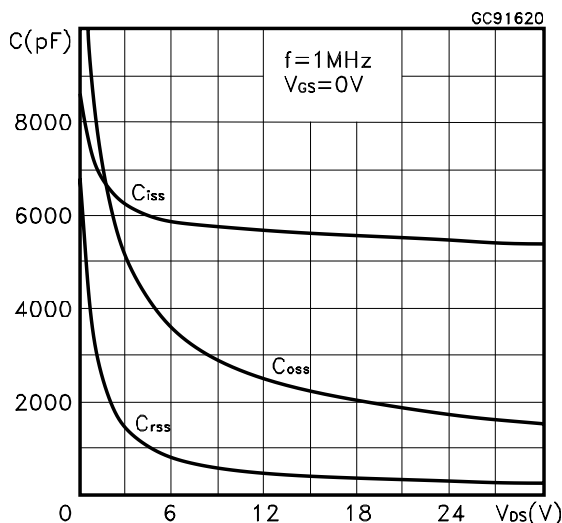


Normalized Gate Threshold Voltage vs Temperature

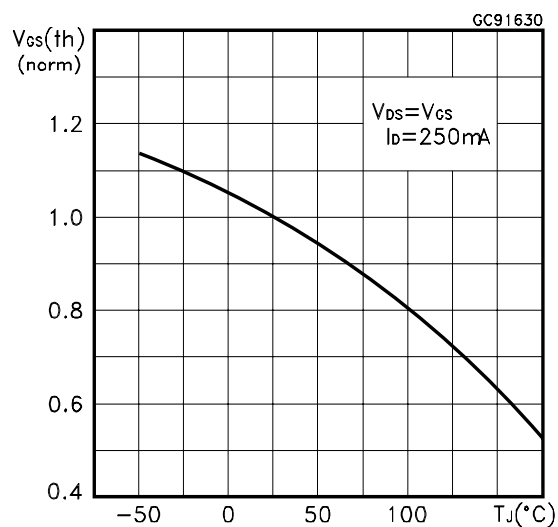


Normalized on Resistance vs Temperature

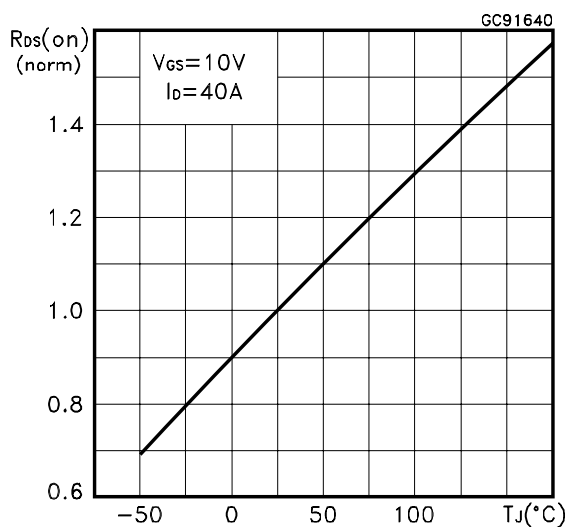


Source-drain Diode Forward Characteristics

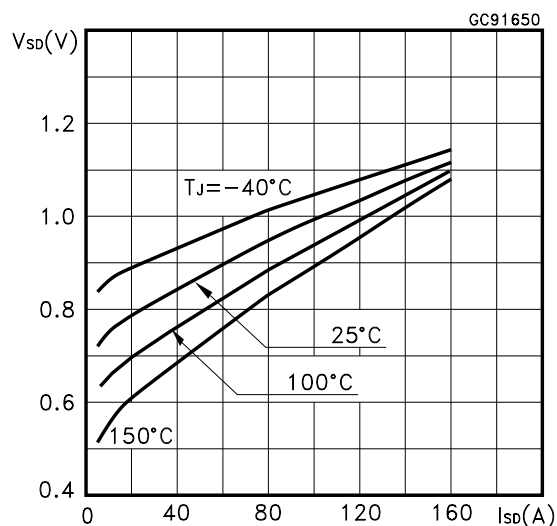


Normalized Breakdown Voltage vs Temperature.

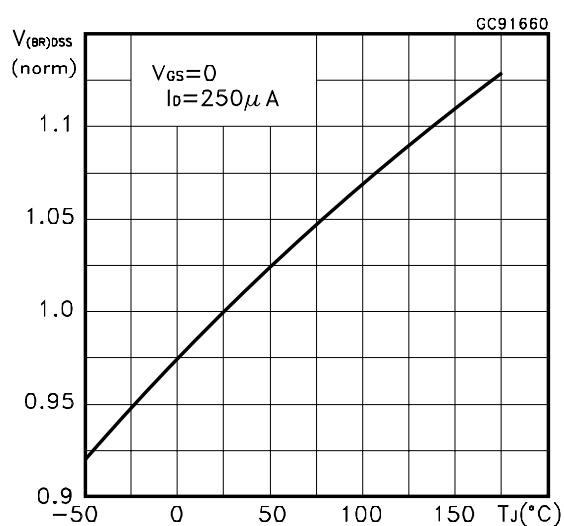


**Fig. 1: Unclamped Inductive Load Test Circuit**

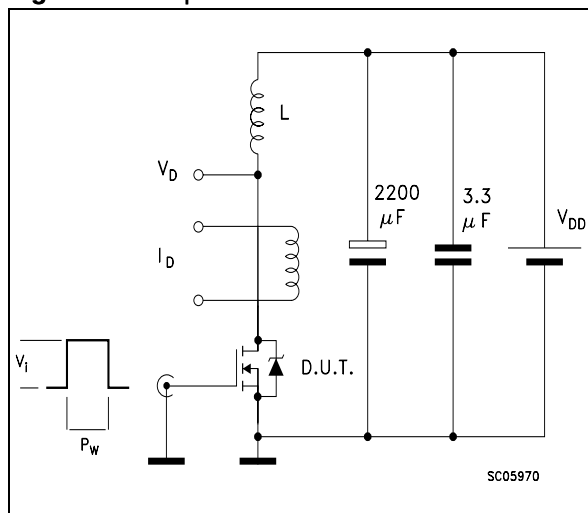


**Fig. 2: Unclamped Inductive Waveform**

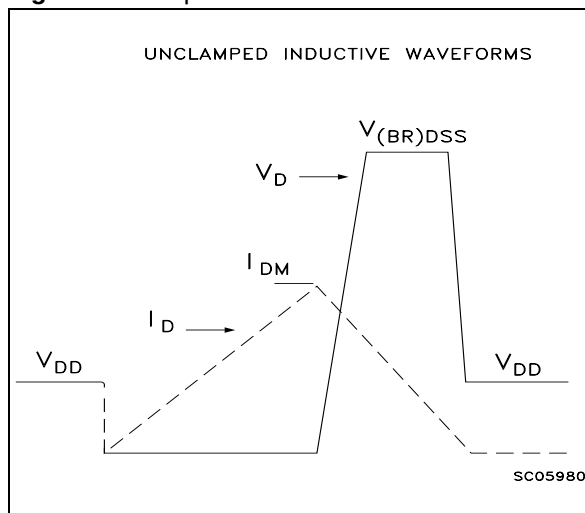


**Fig. 3: Switching Times Test Circuits For Resistive Load**

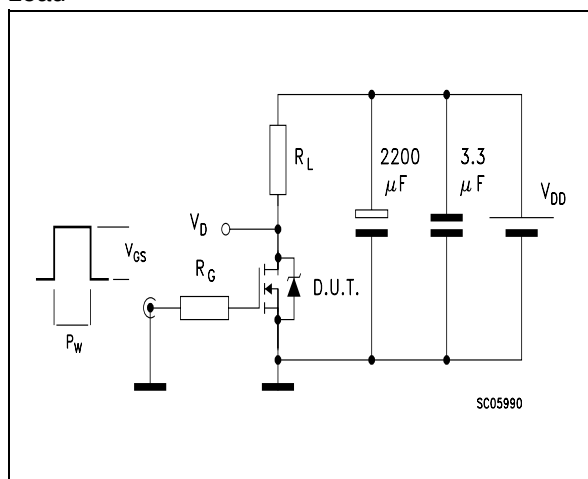

**Fig. 4: Gate Charge test Circuit**

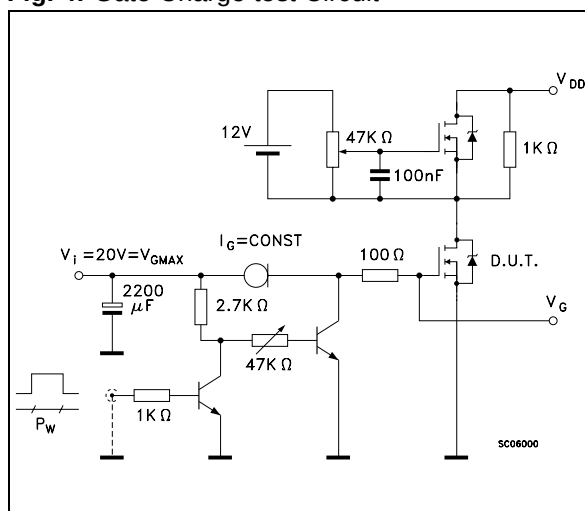


**Fig. 5: Test Circuit For Inductive Load Switching And Diode Recovery Times**

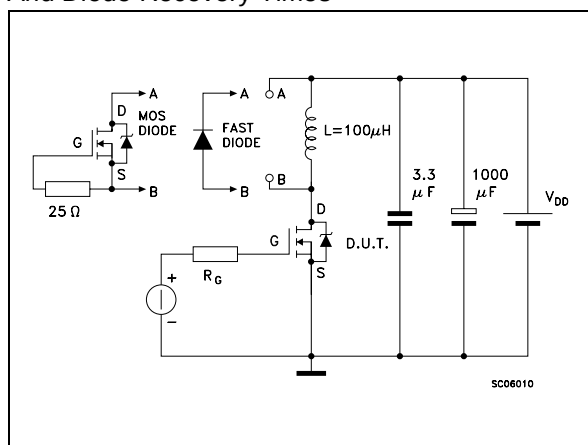


D<sup>2</sup>PAK MECHANICAL DATA

| DIM. | mm.  |      |       | inch. |       |       |
|------|------|------|-------|-------|-------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP.  | TYP.  |
| A    | 4.4  |      | 4.6   | 0.173 |       | 0.181 |
| A1   | 2.49 |      | 2.69  | 0.098 |       | 0.106 |
| A2   | 0.03 |      | 0.23  | 0.001 |       | 0.009 |
| B    | 0.7  |      | 0.93  | 0.028 |       | 0.037 |
| B2   | 1.14 |      | 1.7   | 0.045 |       | 0.067 |
| C    | 0.45 |      | 0.6   | 0.018 |       | 0.024 |
| C2   | 1.21 |      | 1.36  | 0.048 |       | 0.054 |
| D    | 8.95 |      | 9.35  | 0.352 |       | 0.368 |
| D1   |      | 8    |       |       | 0.315 |       |
| E    | 10   |      | 10.4  | 0.394 |       | 0.409 |
| E1   |      | 8.5  |       |       | 0.334 |       |
| G    | 4.88 |      | 5.28  | 0.192 |       | 0.208 |
| L    | 15   |      | 15.85 | 0.591 |       | 0.624 |
| L2   | 1.27 |      | 1.4   | 0.050 |       | 0.055 |
| L3   | 1.4  |      | 1.75  | 0.055 |       | 0.069 |
| M    | 2.4  |      | 3.2   | 0.094 |       | 0.126 |
| R    |      | 0.4  |       |       | 0.015 |       |
| V2   | 0°   |      | 8°    | 0°    |       | 8°    |

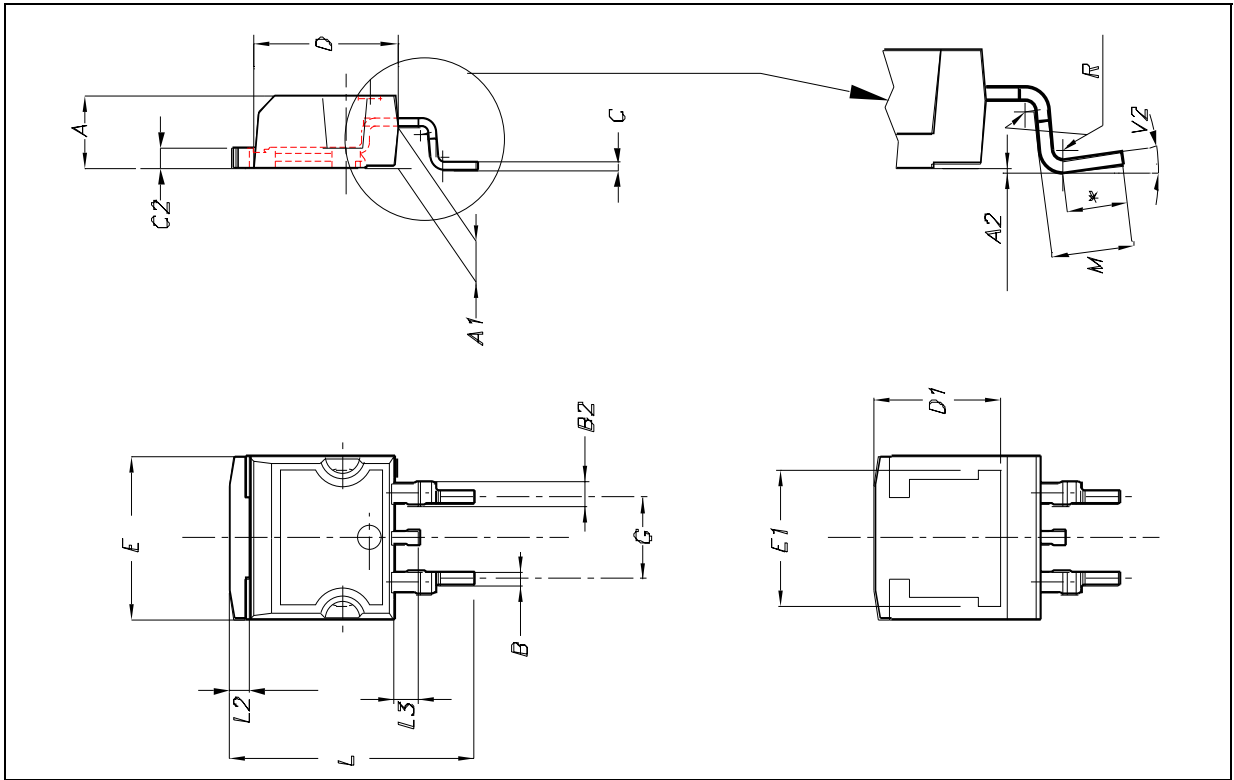

TO-262 (I<sup>2</sup>PAK) MECHANICAL DATA


| DIM. | mm   |      |      | inch  |      |       |
|------|------|------|------|-------|------|-------|
|      | MIN. | TYP. | MAX. | MIN.  | TYP. | MAX.  |
| A    | 4.4  |      | 4.6  | 0.173 |      | 0.181 |
| A1   | 2.49 |      | 2.69 | 0.098 |      | 0.106 |
| B    | 0.7  |      | 0.93 | 0.027 |      | 0.036 |
| B2   | 1.14 |      | 1.7  | 0.044 |      | 0.067 |
| C    | 0.45 |      | 0.6  | 0.017 |      | 0.023 |
| C2   | 1.23 |      | 1.36 | 0.048 |      | 0.053 |
| D    | 8.95 |      | 9.35 | 0.352 |      | 0.368 |
| e    | 2.4  |      | 2.7  | 0.094 |      | 0.106 |
| E    | 10   |      | 10.4 | 0.393 |      | 0.409 |
| L    | 13.1 |      | 13.6 | 0.515 |      | 0.531 |
| L1   | 3.48 |      | 3.78 | 0.137 |      | 0.149 |
| L2   | 1.27 |      | 1.4  | 0.050 |      | 0.055 |

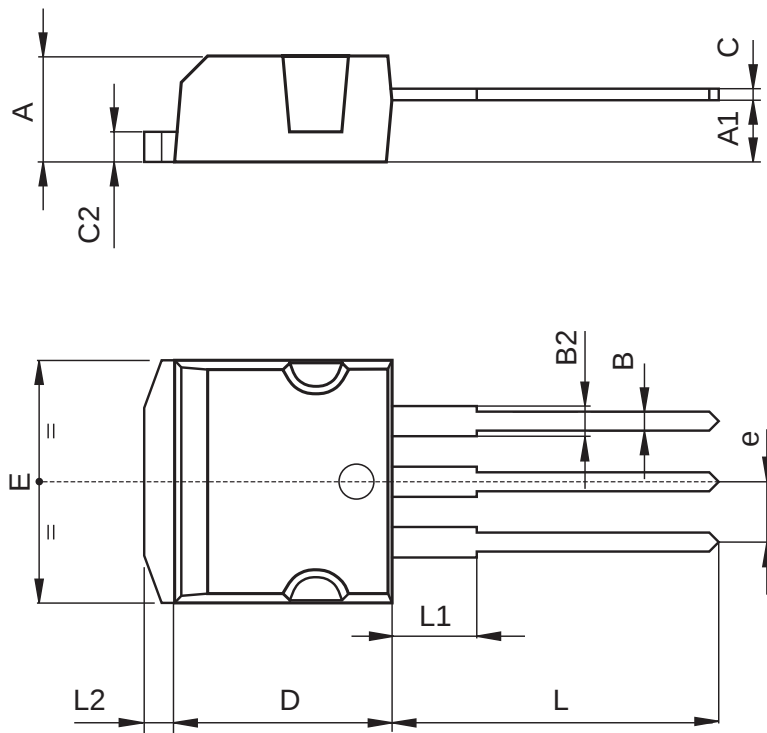


P011P5/E

## TO-220 MECHANICAL DATA


| DIM. | mm    |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

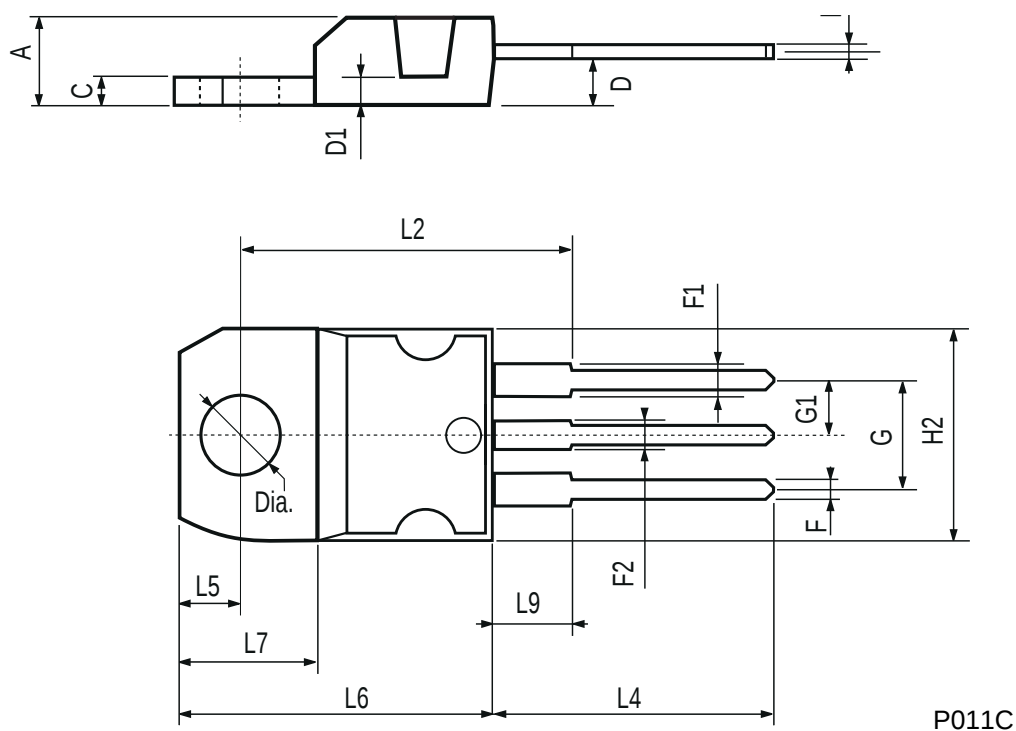


## D2PAK FOOTPRINT

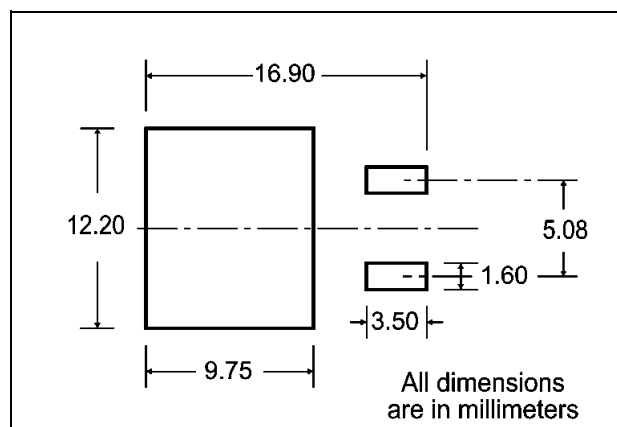

## TUBE SHIPMENT (no suffix)\*

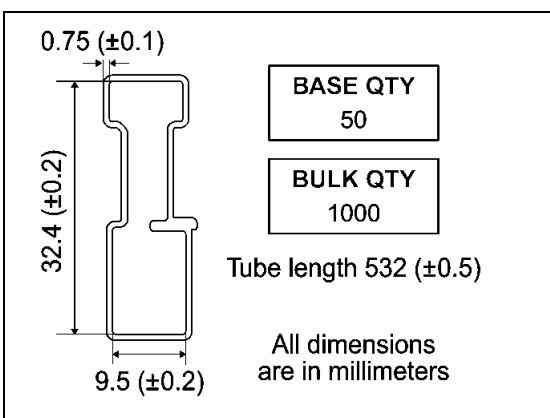

## TAPE AND REEL SHIPMENT (suffix "T4")\*

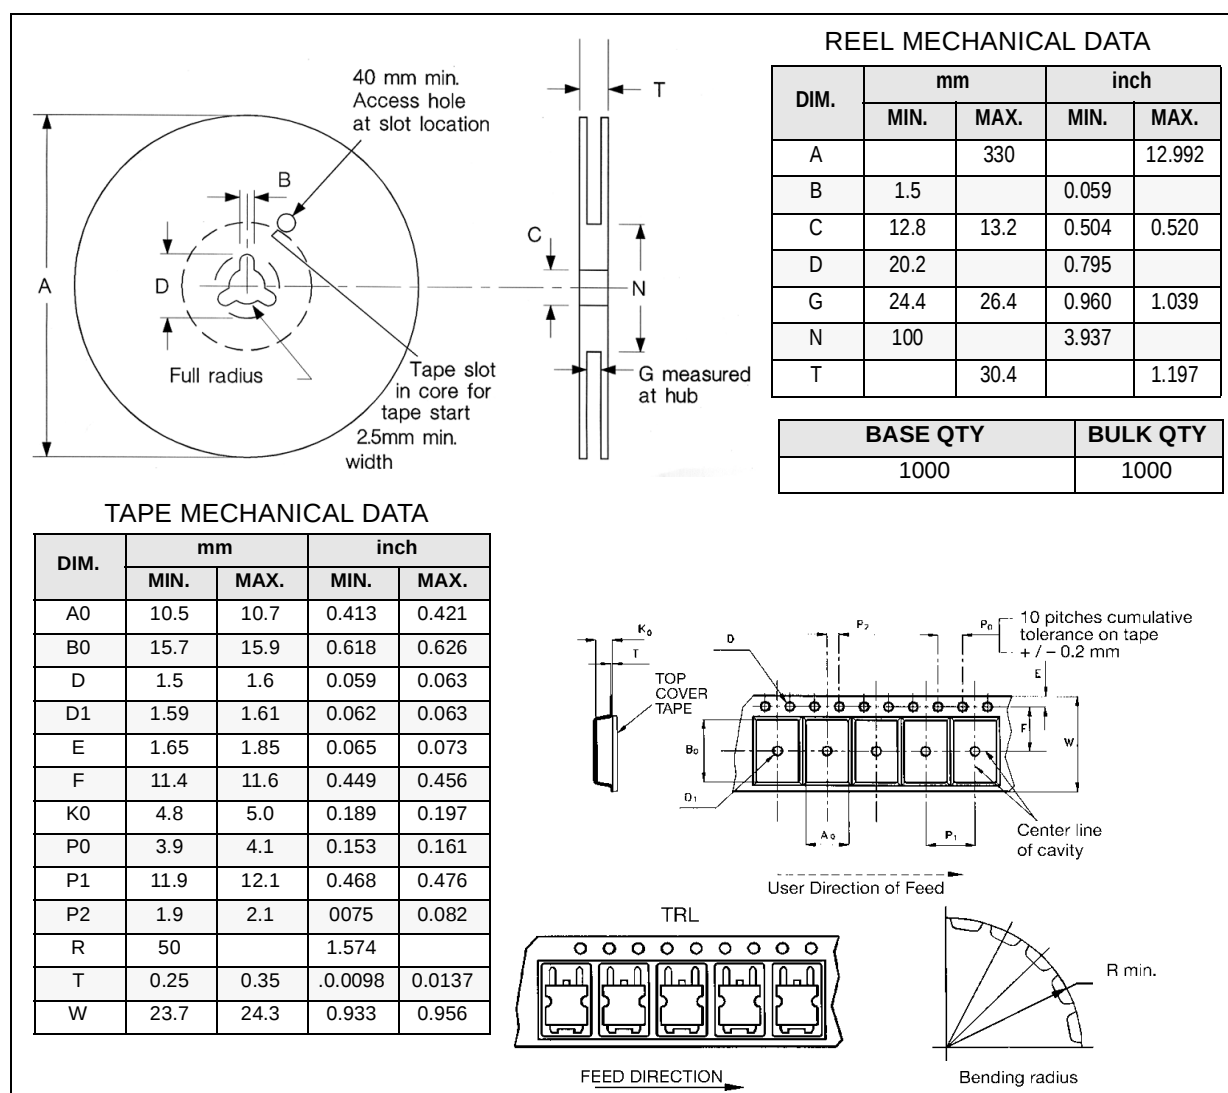

\* on sales type

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is registered trademark of STMicroelectronics  
® 2002 STMicroelectronics - All Rights Reserved

All other names are the property of their respective owners.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco -  
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.