

Typical Applications


The HMC175MS8 / HMC175MS8E is ideal for:

- Mini-Base Stations
- Portable Wireless
- PCMCIA

Features

Ultra Small Package: MSOP8
Conversion Loss: 8 dB
LO / IF Isolation: 32 dB
LO / RF Isolation: 30 dB
Input IP3: +18 dBm

Functional Diagram

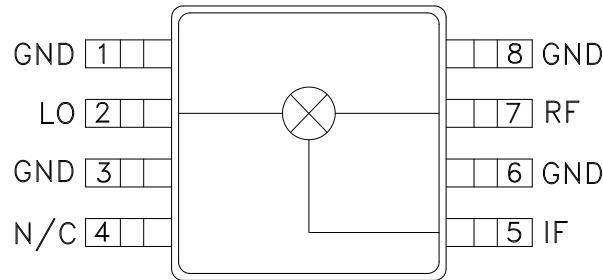


General Description

The HMC175MS8 & HMC175MS8E are miniature double-balanced mixers in 8-lead plastic surface mount Mini Small Outline Packages (MSOP). The device can be used as an upconverter or downconverter. The mixer provides exceptional isolation and Intermodulation performance for applications in high signal density environments. This device can also be used as a biphase modulator or demodulator. The MSOP8 is the smallest footprint available for a complete double-balanced mixer (0.118" x 0.190" x 0.040").


Electrical Specifications, $T_A = +25^\circ \text{C}$, LO Drive = +13 dBm

Parameter	Broadband			PCS Band			ISM Band			Units
	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Frequency Range, RF & LO	1.7 - 4.5			1.7 - 2.0			2.2 - 2.6			GHz
Frequency Range, IF	DC - 1.0			DC - 1.0			DC - 1.0			GHz
Conversion Loss		8	11		9	11		8	10	dB
Noise Figure (SSB)		8	11		9	11		8	10	dB
LO to RF Isolation	25	30		35	40		30	35		dB
LO to IF Isolation	27	32		28	32		28	32		dB
IP3 (Input)	15	20		15	18		15	18		dBm
1 dB Gain Compression (Input)	9	12		9	11		9	11		dBm


Conversion Gain vs Temperature @ LO = +13 dBm

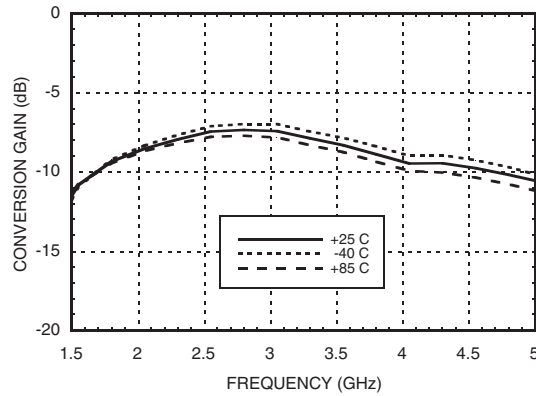


Isolation @ LO = +13 dBm

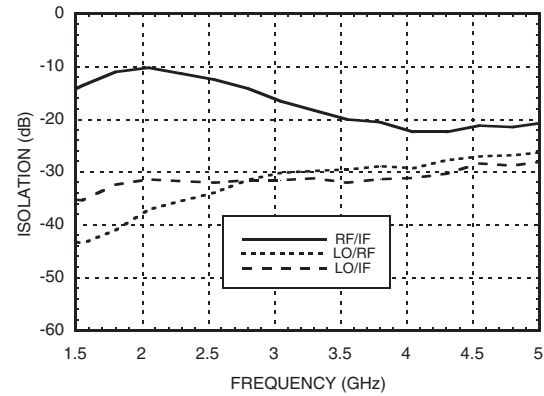


Conversion Gain vs LO Power

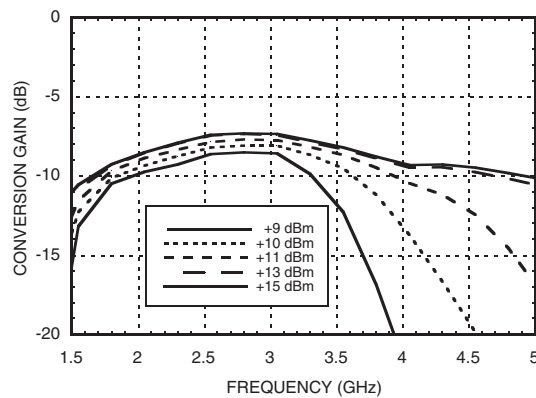


IF Bandwidth @ LO = +13 dBm

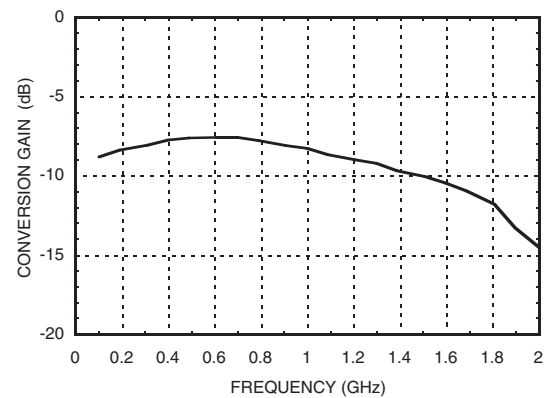

Return Loss @ LO = +13 dBm

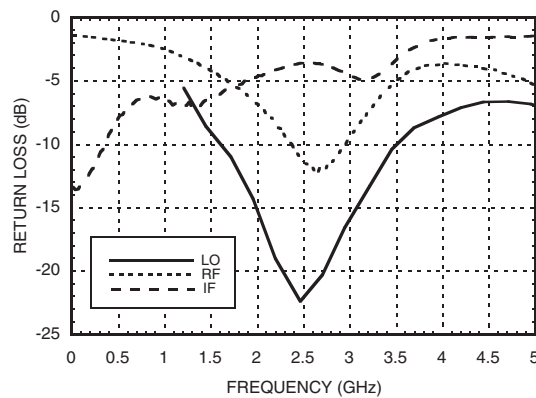


P1dB vs Temperature @ LO = +13 dBm

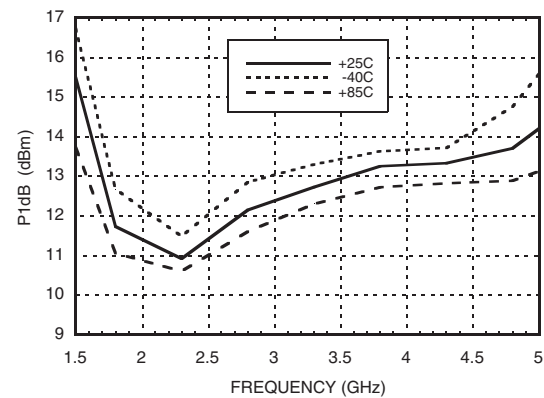


HMC175MS8 / 175MS8E

GaAs MMIC SMT DOUBLE-BALANCED MIXER, 1.7 - 4.5 GHz


Input IP3 vs. LO Drive

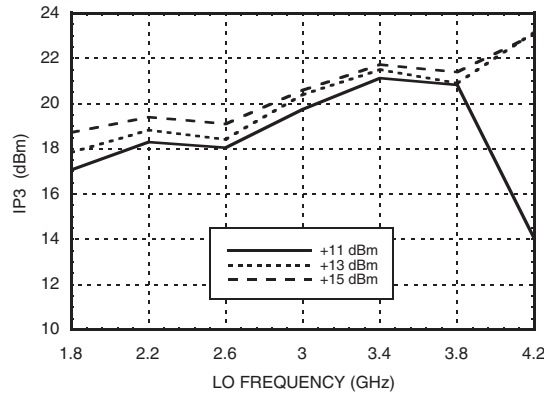


Input IP3 vs. Temperature @ LO = +13 dBm

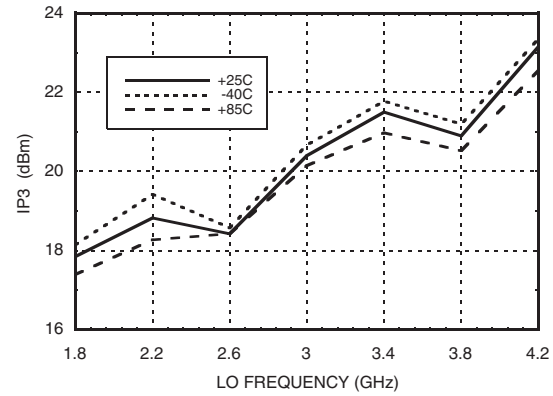

Input IP2 vs. LO Drive

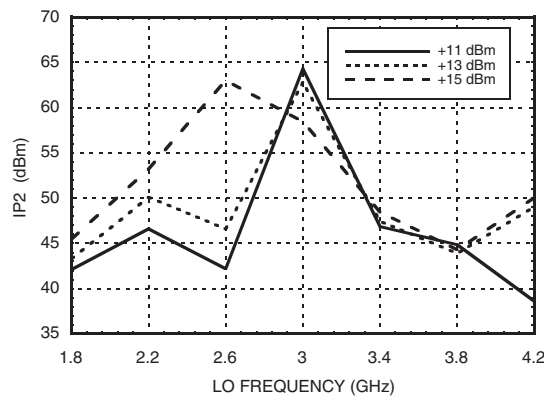

Input IP2 vs. Temperature @ LO = +13 dBm

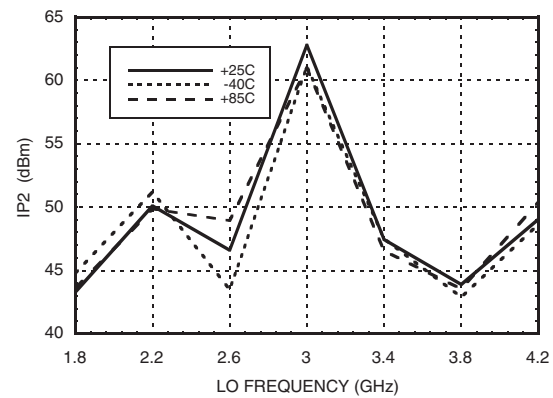

MxN Spurious Outputs

RF Frequency = 2.3 GHz @ -10 dBm					
LO Frequency = 2.4 GHz @ 13 dBm					
	nLO				
mRF	0	1	2	3	4
0	xx	1	12	12	37
1	4	0	27	39	38
2	74	53	56	60	67
3	78	>105	73	72	79
4	>105	>105	>105	>105	>105

All values in dBc below IF power level.

Harmonics of LO

LO Freq. (GHz)	nLO Spur at RF Port			
	1	2	3	4
1.8	37	32	63	53
2.2	35	30	37	63
2.6	32	28	33	55
3	30	29	53	52
3.1	29	30	56	51
3.6	29	39	52	53
4.2	27	46	48	61

LO = +13 dBm

Values in dBc below input LO level measured at RF Port.


Absolute Maximum Ratings

RF / IF Input	+13 dBm
LO Drive	+27 dBm
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 1A



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

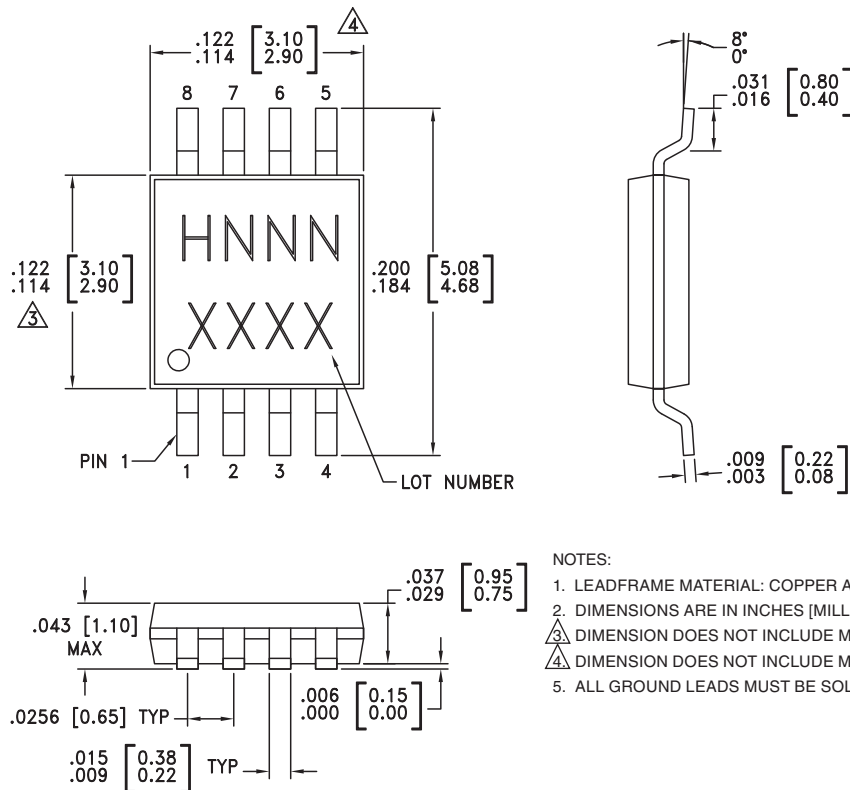

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC175MS8	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 ^[1]	H175 XXXX
HMC175MS8E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	H175 XXXX


[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373
Order On-line at www.hittite.com

Evaluation Circuit Board

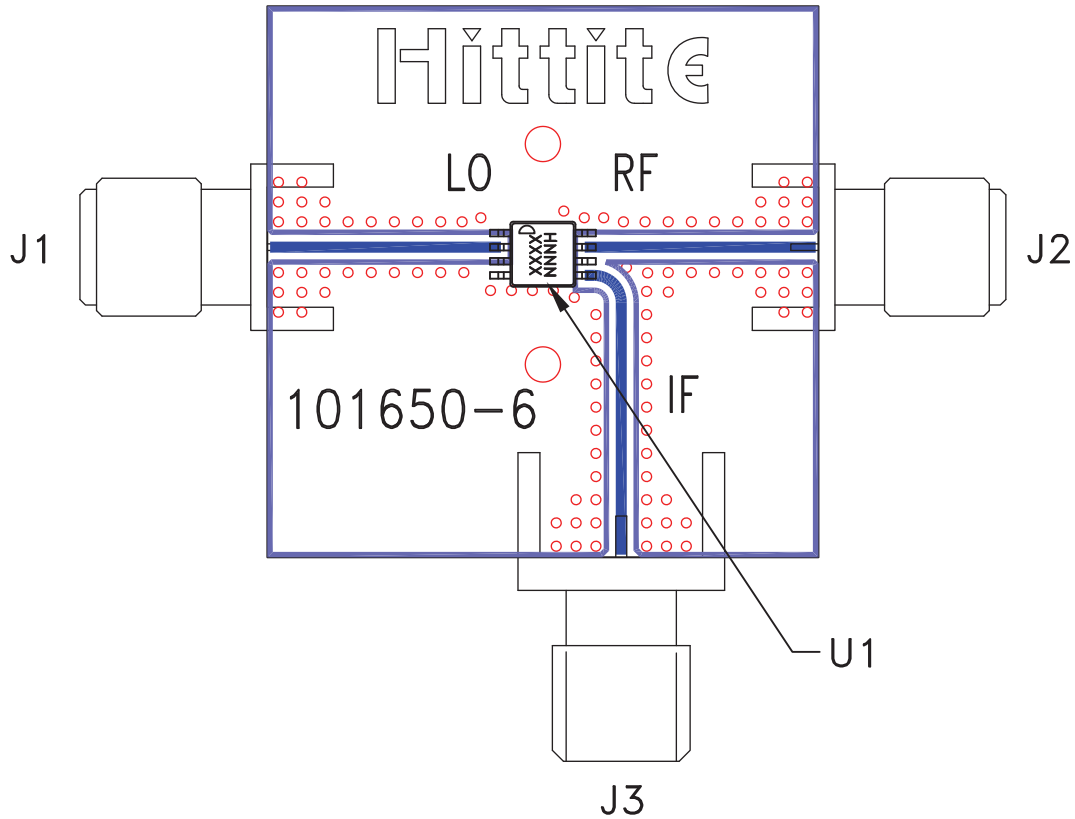

List of Materials for Evaluation PCB 103350 ^[1]

Item	Description
J1 - J3	PCB Mount SMA RF Connector
U1	HMC175MS8 / HMC175MS8E Mixer
PCB [2]	101650 Evaluation Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



HMC175MS8 / 175MS8E

**GaAs MMIC SMT DOUBLE-
BALANCED MIXER, 1.7 - 4.5 GHz**

Notes:



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.