

CMLDM7484

**SURFACE MOUNT SILICON
N-CHANNEL AND P-CHANNEL
ENHANCEMENT-MODE
COMPLEMENTARY MOSFET**



www.centrasemi.com



SOT-563 CASE

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMLDM7484 consists of complementary N-Channel and P-Channel enhancement-mode silicon MOSFETs designed for high speed pulsed amplifier and driver applications. These MOSFETs offer very low $r_{DS(ON)}$ and low threshold voltage.

MARKING CODE: 8C7

FEATURES:

- ESD Protection up to 2kV
- 350mW Power Dissipation
- Very Low $r_{DS(ON)}$
- Low Threshold Voltage
- Logic Level Compatible
- Small, SOT-563 Surface Mount Package

APPLICATIONS:

- Load/Power Switches
- Power Supply Converter Circuits
- Battery Powered Portable Devices

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Drain-Source Voltage
Gate-Source Voltage
Continuous Drain Current
Power Dissipation (Note 1)
Power Dissipation (Note 2)
Power Dissipation (Note 3)
Operating and Storage Junction Temperature
Thermal Resistance (Note 1)

SYMBOL

V_{DS}	30
V_{GS}	8.0
I_D	450
P_D	350
P_D	300
P_D	150
T_J, T_{stg}	-65 to +150
θ_{JA}	357

UNITS

V
V
mA
mW
mW
mW
$^\circ\text{C}$
$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$)

SYMBOL TEST CONDITIONS

I_{GSSF}, I_{GSSR}	$V_{GS}=8.0V, V_{DS}=0$
I_{DSS}	$V_{DS}=30V, V_{GS}=0$
BV_{DSS}	$V_{GS}=0, I_D=10\mu A$
BV_{DSS}	$V_{GS}=0, I_D=100\mu A$
$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$
V_{SD}	$V_{GS}=0, I_S=400mA$
V_{SD}	$V_{GS}=0, I_S=100mA$
$r_{DS(ON)}$	$V_{GS}=4.5V, I_D=200mA$
$r_{DS(ON)}$	$V_{GS}=4.5V, I_D=430mA$
$r_{DS(ON)}$	$V_{GS}=2.5V, I_D=100mA$
$r_{DS(ON)}$	$V_{GS}=2.5V, I_D=200mA$
$r_{DS(ON)}$	$V_{GS}=1.8V, I_D=75mA$
$r_{DS(ON)}$	$V_{GS}=1.8V, I_D=100mA$

N-CH (Q1)

MIN	MAX
-	3.0
-	1.0
30	-
-	-
0.5	1.0
0.5	1.1
-	-
-	0.46
-	-
-	0.56
-	-
-	0.73
-	-

P-CH (Q2)

MIN	MAX
-	3.0
-	1.0
-	-
30	-
0.5	1.0
-	-
0.5	1.1
-	-
-	-
-	1.1
-	-
-	2.0
-	-
-	3.3

UNITS

μA
μA
V
V
V
V
V
Ω
Ω
Ω
Ω
Ω
Ω
Ω

Notes: (1) Ceramic or aluminum core PC Board with copper mounting pad area of 4.0mm²
(2) FR-4 Epoxy PC Board with copper mounting pad area of 4.0mm²
(3) FR-4 Epoxy PC Board with copper mounting pad area of 1.4mm²

CMLDM7484


**SURFACE MOUNT SILICON
N-CHANNEL AND P-CHANNEL
ENHANCEMENT-MODE
COMPLEMENTARY MOSFET**




ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$)

SYMBOL	TEST CONDITIONS	N-CH (Q1)			P-CH (Q2)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
gFS	$V_{DS}=10\text{V}, I_D=100\text{mA}$	200	-	-	200	-	-	mS
C_{rss}	$V_{DS}=25\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	-	10	-	-	10	pF
C_{iss}	$V_{DS}=25\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	-	45	-	-	55	pF
C_{oss}	$V_{DS}=25\text{V}, V_{GS}=0, f=1.0\text{MHz}$	-	-	15	-	-	15	pF
$Q_{g(\text{tot})}$	$V_{DS}=15\text{V}, V_{GS}=4.5\text{V}, I_D=1.0\text{A}$	-	0.792	-	-	-	-	nC
$Q_{g(\text{tot})}$	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=1.0\text{A}$	-	-	-	-	0.88	-	nC
Q_{gs}	$V_{DS}=15\text{V}, V_{GS}=4.5\text{V}, I_D=1.0\text{A}$	-	0.15	-	-	-	-	nC
Q_{gs}	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=1.0\text{A}$	-	-	-	-	0.35	-	nC
Q_{gd}	$V_{DS}=15\text{V}, V_{GS}=4.5\text{V}, I_D=1.0\text{A}$	-	0.23	-	-	-	-	nC
Q_{gd}	$V_{DS}=10\text{V}, V_{GS}=4.5\text{V}, I_D=1.0\text{A}$	-	-	-	-	0.128	-	nC

SOT-563 CASE - MECHANICAL OUTLINE

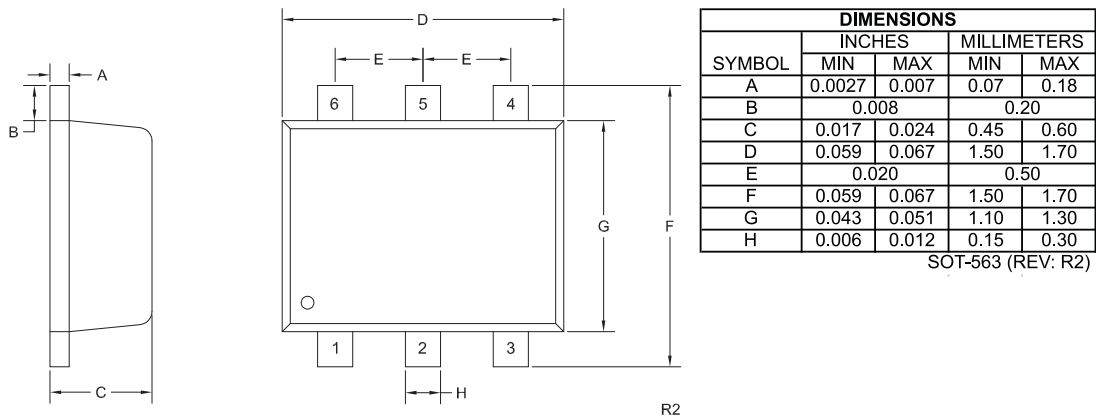

PIN CONFIGURATION

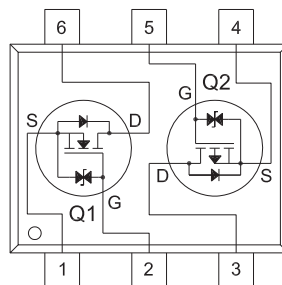

LEAD CODE:

- 1) Source Q1
- 2) Gate Q1
- 3) Drain Q2
- 4) Source Q2
- 5) Gate Q2
- 6) Drain Q1

MARKING CODE: 8C7

R5 (8-June 2015)

CMLDM7484

**SURFACE MOUNT SILICON
N-CHANNEL AND P-CHANNEL
ENHANCEMENT-MODE
COMPLEMENTARY MOSFET**



SERVICES

- Bonded Inventory
- Custom Electrical Screening
- Custom Electrical Characteristic Curves
- SPICE Models
- Custom Packaging
- Package Base Options
- Custom Device Development/ Multi Discrete Modules (MDM™)
- Bare Die Available for Hybrid Applications

LIMITATIONS AND DAMAGES DISCLAIMER: In no event shall Central be liable for any collateral, indirect, punitive, incidental, consequential, or exemplary damages in connection with or arising out of a purchase order or contract or the use of products provided hereunder, regardless of whether Central has been advised of the possibility of such damages. Excluded damages shall include, but not be restricted to: cost of removal or reinstallation, rework, ancillary costs to the procurement of substitute products, loss of profits, loss of savings, loss of use, loss of data, or business interruption. No claim, suit, or action shall be brought against Central more than two (2) years after the related cause of action has occurred.

In no event shall Central's aggregate liability from any warranty, indemnity, or other obligation arising out of or in connection with a purchase order or contract, or any use of any Central product provided hereunder, exceed the total amount paid to Central for the specific products sold under a purchase order or contract with respect to which losses or damages are claimed. The existence of more than one (1) claim against the specific products sold to Buyer under a purchase order or contract shall not enlarge or extend this limit.

Buyer understands and agrees that the foregoing liability limitations are essential elements of a purchase order or contract and that in the absence of such limitations, the material and economic terms of the purchase order or contract would be substantially different.

R5 (8-June 2015)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.