

Description

Single, double and three pole thermal-magnetic circuit breakers with high rupture capacity to UL 489 (5 kA), EN/IEC 60934 (6kA) and UL 1077 (5 kA). With toggle actuation, positively trip-free mechanism, a choice of characteristic curves and a wide range of current ratings in finely graded steps from 0.1 A through 32 A. Auxiliary contacts (make or break contacts) are optionally available. Track-mountable design, width only 12.5 mm. Ease of wiring by means of an integral busbar concept: line entry busbar LINE+ and signal busbars/signal jumpers.

US patent number: US 8,098,119 B2 (Modularity)

US patent number: US 7,978,033 B2 (Release Mechanism)

US patent number: US 7,834,290 B2 (Quenching Chamber)

Typical applications

Protection of power supplies, equipment and cables in centralised control systems and in decentralised installations serving automation, petro-chemical, power plant, steel industry and similar industrial applications.

Ordering Information

Type number

4220 thermal-magnetic high performance circuit breaker

Mounting	T1 track-mounting
Number of poles	<ul style="list-style-type: none"> 1 single pole 2 double pole 3 three pole
Additional feature	<ul style="list-style-type: none"> 0 without actuator guard 1 with actuator guard
Main terminals	K0 screw terminals 16 mm ² / 10 mm ²
Characteristic curve	<ul style="list-style-type: none"> F1 thermal-magnetic, extremely fast, DC F2 thermal-magnetic, fast, AC/DC M1 thermal-magnetic, medium delay, AC/DC T1 thermal-magnetic, long delay, AC/DC
Auxiliary contacts	<ul style="list-style-type: none"> H0 without H1 with auxiliary contacts in all poles H2 with auxiliary contacts only in pole 1 (2-pole plus) H3 with auxiliary contacts only in poles 1+3 (3-pole plus) H4 with auxiliary contacts only in pole 2 (3-pole plus) H5 with auxiliary contacts only in the last pole H6 with auxiliary contacts only in poles 1+2 (3-pole plus)
Auxiliary contact function	<ul style="list-style-type: none"> 0 without 2 make contact (N/O) 3 break contact (N/C) A pole 1 make contact, all other poles break contacts (2-pole plus) B poles 1+2 make contacts, other poles break contacts (3-pole plus) C pole 1 break contact, other poles make contacts (2-pole plus)
Auxiliary contacts – terminal design	<ul style="list-style-type: none"> 0 without 1 screw terminals 1 mm²
Voltage rating	<ul style="list-style-type: none"> A ≤ AC 277 V or ≤ DC 60 V
Current rating range	<ul style="list-style-type: none"> 0.1...32 A
Approval logo (optional)	<ul style="list-style-type: none"> V UL 489 (1-pole)
4220 - T1 1 0 - K0 M1- H1 2 1 - A - 10 A - V ordering example	



Technical data

For further details please see catalogue section: Technical Information

Voltage rating	AC 240 V; 3 AC 415 V (50/60 Hz); DC 60 V UL: AC 120 V; AC 277 V; 3 AC 415 V; DC 60 V																					
Current rating range	0.1...32 A																					
Auxiliary circuit	DC 10 - 30 V, 10 - 500 mA, resistive																					
Typical life	<table border="1"> <tr> <td>IEC 60934</td> <td>AC 240/415 V</td> <td>1,000 cycles at 1 x I_N, ind. load</td> </tr> <tr> <td></td><td>AC 240 V:</td> <td>6,000 cycles at 1 x I_N, inductive load</td> </tr> <tr> <td></td><td>DC 60 V:</td> <td>6,000 cycles at 1 x I_N, resistive load</td> </tr> <tr> <td>UL 489</td> <td>AC 120 V:</td> <td>6,000 cycles at 1 x I_N, inductive load</td> </tr> <tr> <td>UL 1077</td> <td>AC 277/480 V</td> <td>3,000 cycles at 1 x I_N, inductive load</td> </tr> <tr> <td></td><td>AC 277 V:</td> <td>6,000 cycles at 1 x I_N, inductive load</td> </tr> <tr> <td></td><td>DC 60 V:</td> <td>6,000 cycles at 1 x I_N, resistive load</td> </tr> </table>	IEC 60934	AC 240/415 V	1,000 cycles at 1 x I _N , ind. load		AC 240 V:	6,000 cycles at 1 x I _N , inductive load		DC 60 V:	6,000 cycles at 1 x I _N , resistive load	UL 489	AC 120 V:	6,000 cycles at 1 x I _N , inductive load	UL 1077	AC 277/480 V	3,000 cycles at 1 x I _N , inductive load		AC 277 V:	6,000 cycles at 1 x I _N , inductive load		DC 60 V:	6,000 cycles at 1 x I _N , resistive load
IEC 60934	AC 240/415 V	1,000 cycles at 1 x I _N , ind. load																				
	AC 240 V:	6,000 cycles at 1 x I _N , inductive load																				
	DC 60 V:	6,000 cycles at 1 x I _N , resistive load																				
UL 489	AC 120 V:	6,000 cycles at 1 x I _N , inductive load																				
UL 1077	AC 277/480 V	3,000 cycles at 1 x I _N , inductive load																				
	AC 277 V:	6,000 cycles at 1 x I _N , inductive load																				
	DC 60 V:	6,000 cycles at 1 x I _N , resistive load																				
Ambient temperature	-30...+60 °C (-22...+140 °F, T60)																					
Storage temperature	-40...+60 °C (-40...+140 °F)																					
Insulation co-ordination	IEC 60664 2.5 kV / 2 re-inforced insulation in the operating area																					
Dielectric strength operating area	<table border="1"> <tr> <td>IEC 60934</td> <td>test voltage AC 3,000 V (reinforced insulation)</td> </tr> <tr> <td></td> <td>test voltage AC 1,500 V</td> </tr> <tr> <td>pole to pole</td> <td>test voltage AC 1,500 V</td> </tr> <tr> <td>main circuit to auxiliary circuit</td> <td>test voltage AC 1,500 V</td> </tr> <tr> <td>open main circuit</td> <td>test voltage AC 250 V</td> </tr> <tr> <td>open auxiliary circuit</td> <td>test voltage AC 250 V</td> </tr> </table>	IEC 60934	test voltage AC 3,000 V (reinforced insulation)		test voltage AC 1,500 V	pole to pole	test voltage AC 1,500 V	main circuit to auxiliary circuit	test voltage AC 1,500 V	open main circuit	test voltage AC 250 V	open auxiliary circuit	test voltage AC 250 V									
IEC 60934	test voltage AC 3,000 V (reinforced insulation)																					
	test voltage AC 1,500 V																					
pole to pole	test voltage AC 1,500 V																					
main circuit to auxiliary circuit	test voltage AC 1,500 V																					
open main circuit	test voltage AC 250 V																					
open auxiliary circuit	test voltage AC 250 V																					
Insulation resistance	> 100 MΩ (DC 500 V)																					
Interrupting capacity I _{nc} PC1	AC 240 V, AC 240/415 V: 6,000 A DC 60 V: 6,000 A																					
IEC 60934																						
Interrupting capacity UL 489	AC 120 V: 5,000 A																					
Interrupting capacity UL 1077	AC 277 V, AC 277/480 V: 5,000 A DC 60 V: 5,000 A																					
Protection class (IEC 60529)	operating area IP30 terminal area IP00																					
Vibration (sinusoidal)	± 0.38 mm (10-57 Hz), 5 g (57-500 Hz) test to IEC 60068-2-6, test Fc, 10 frequency cycles/axis																					
Shock	25 g (11 ms) test to IEC 60068-2-27, test Ea																					
Corrosion	96 hrs in 5 % salt mist, test to IEC 60068-2-11, test Ka																					
Humidity	240 hrs in 95 % RH, test to IEC 60068-2-78, test Cab																					
Housing material	moulded material																					
Mounting	on symmetrical rail to EN 50022-35x7.5																					
Mounting dimension (w x h x d)	12.5 x 89.3 x 87.1 (per pole)																					


Technical data

LINE terminal	(LINE and/or DC+)
screw terminals	M5
max. cable cross section	
flexible with wire end ferrule w/wo plastic sleeve	1 – 16 mm ²
multi-lead connection (2 identical cables)	
flexible with wire end ferrule without plastic sleeve	1 – 6 mm ²
flexible with TWIN wire end ferrule with plastic sleeve	0.75 – 10 mm ²
wire stripping length	14 mm
tightening torque	2.5 – 3 Nm
LOAD terminal	
screw terminals	M4
max. cable cross section	
flexible with wire end ferrule w/wo plastic sleeve	0.5 – 10 mm
multi-lead connection (2 identical cables)	
flexible with wire end ferrule without plastic sleeve	0.5 – 2.5 mm ²
flexible with TWIN wire end ferrule with plastic sleeve	0.5 – 6 mm ²
wire stripping length	10 mm
tightening torque	1.2 – 1.4 Nm
Auxiliary contact terminals	
screw terminals	M2
max. cable cross section	
flexible with wire end ferrule w/wo plastic sleeve	0.25 – 0.75 mm ²
multi-lead connection (2 identical cables)	
flexible with wire end ferrule without plastic sleeve	0.25 – 0.34 mm ²
wire stripping length	6 mm
tightening torque	0.22 – 0.25 Nm
Mass	approx. 90 g per pole with aux. contact

Current ratings and typical internal resistance values


Current rating (A)	Internal resistance (Ω)			
	F1	F2	M1	T1
trip curve	fast DC only	fast AC + DC	medium delay AC + DC	long delay AC + DC
0.1	166	148	122	104
0.2	45	41	34	29
0.3	19	17	14	12
0.4	12	11	7.9	7.3
0.5	6.8	5.6	4.7	4.2
0.6	4.9	4.5	3.7	3.4
0.8	2.9	2.7	2.1	1.7
1	1.8	1.6	1.3	1.1
1.5	0.93	0.76	0.62	0.58
2	0.47	0.40	0.34	0.31
2.5	0.30	0.27	0.23	0.21
3	0.22	0.20	0.17	0.15
3.5	0.17	0.16	0.13	0.12
4	0.11	0.11	0.084	0.077
5	0.086	0.082	0.066	0.062
6	0.064	0.062	0.053	0.049
8	0.029	0.026	≤ 0.02	≤ 0.02
10	≤ 0.022	≤ 0.02	≤ 0.02	≤ 0.02
12	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
15	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
16	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
18	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
20	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
25	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
32	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02

Dimensions

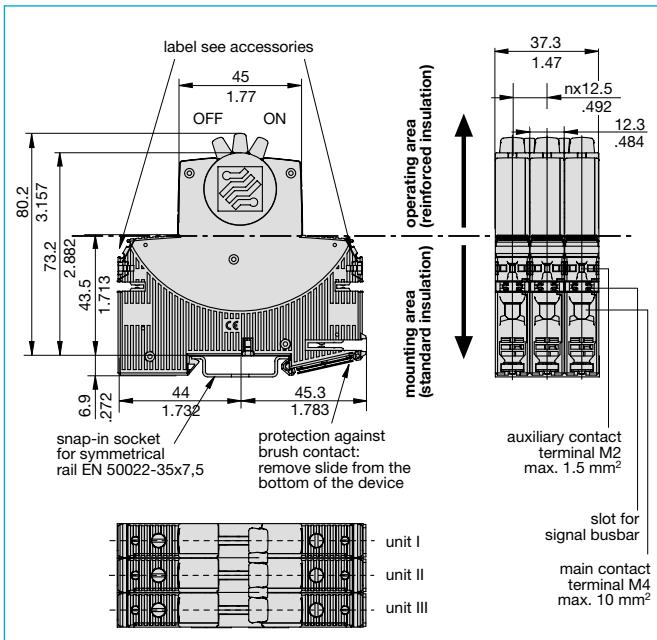


Installation drawing

allowable mounting position: vertical

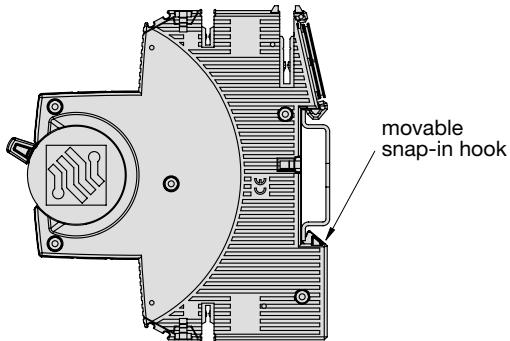


Internal connection diagrams

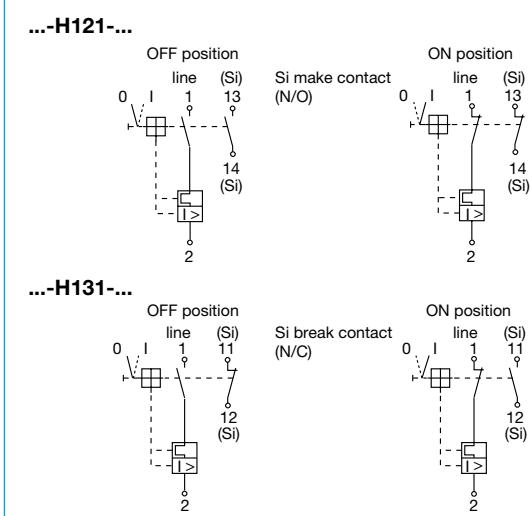


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Termination examples


4220-T with busbars and signal busbars (auxiliary contacts connected in parallel)

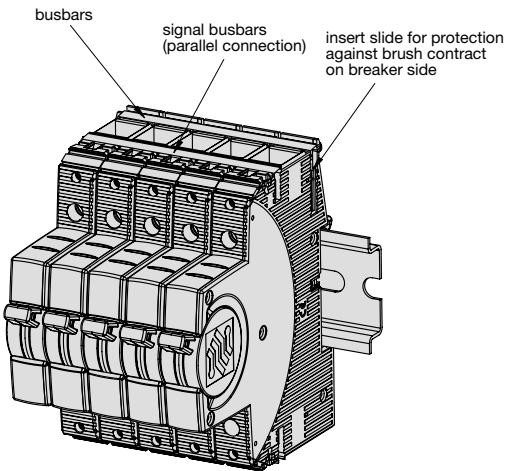

4220-T with busbars and jumpers (auxiliary contacts connected in parallel)

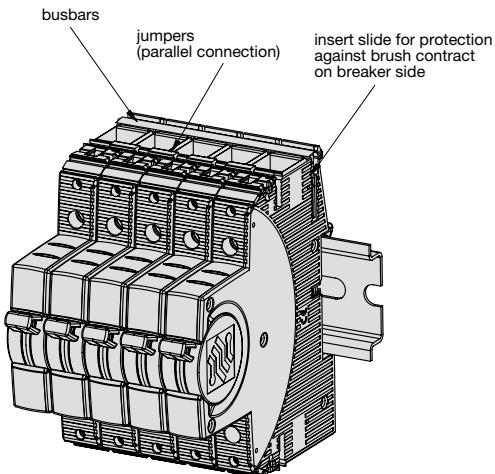


4220-T with busbars and signal busbars (auxiliary contacts connected in series)

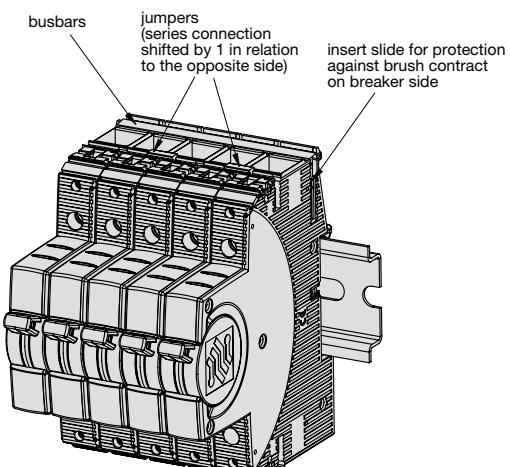

Busbars, signal busbars and jumpers: see accessories


Accessories

Description	Part number
busbar grey, 500 mm length, can be cut to length	X 222 611 02
signal busbar blue, 500 mm length, can be cut to length	X 222 005 01
signal busbar red, 500 mm length, can be cut to length	X 222 005 02
signal busbar grey, 500 mm length, can be cut to length	X 222 005 03
signal busbar grey (packing unit 25 pcs)	X 222 486 25
Label (packing unit 50 pcs) or from Phoenix ZBF 12	X 222 977 50

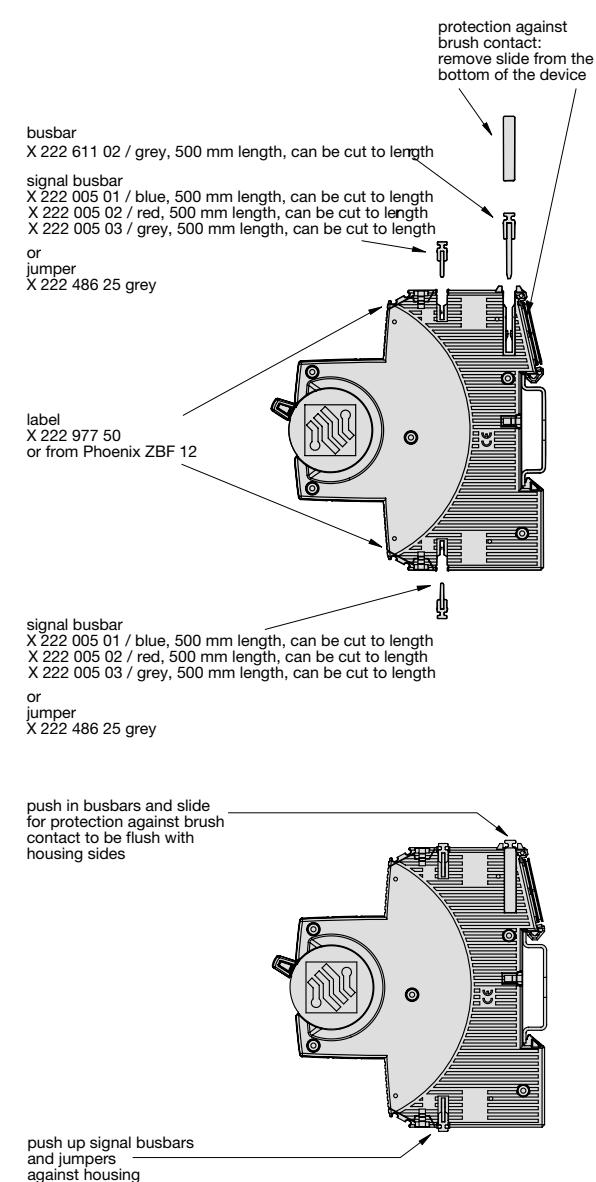


Typical time/current characteristics


F1 thermal, magnetic fast (DC)

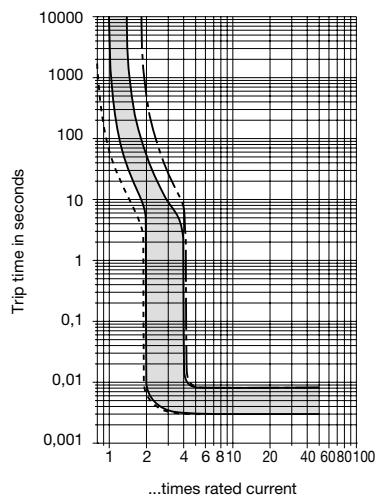


F2 thermal, magnetic fast (AC/DC)

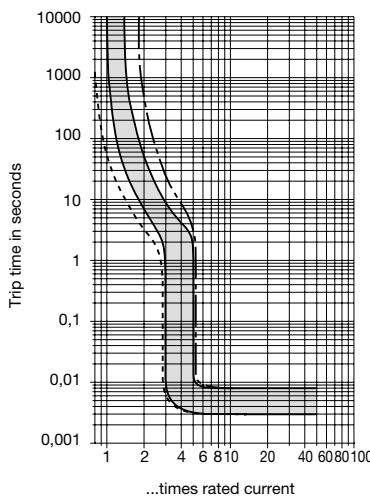

M1 thermal, magnetic medium delay (AC/DC)

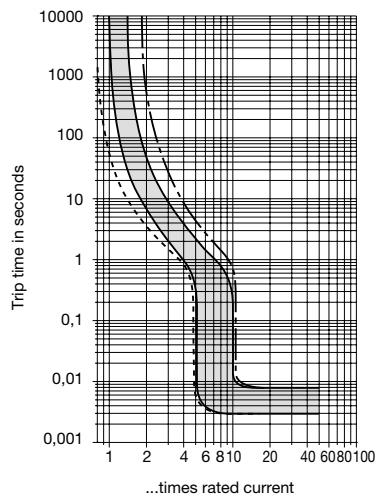

T1 thermal, magnetic long delay (AC/DC)

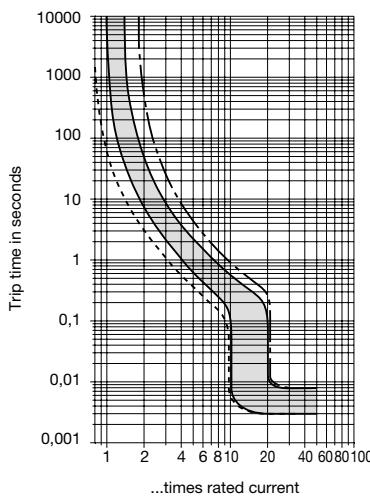

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

Magnetic tripping currents are increased by 30 % on DC supplies.

When several devices are mounted together, an air gap between each is recommended. If this is not possible, each device should carry only 80 % of its rating.

Ambient temp. °F °C	-22 -30	-4 -20	+14 -10	+32 0	+50 +10	+73.4 +23	+86 +30	+104 +40	+122 +50	+140 +60
Derating factor	0.76	0.79	0.83	0.88	0.93	1	1.04	1.12	1.22	1.35

Approvals

Authority	Standard	Rated voltage	Current ratings
VDE	IEC/EN 60934	AC 240/415 V AC 240 V DC 60 V	0.1 A...32 A 0.1 A...32 A 0.1 A...32 A
UL	UL 1077 C22.2 No 235	AC 277/480 V AC 277 V DC 60 V	0.1 A...32 A 0.1 A...32 A 0.1 A...32 A
UL	UL 489	AC 120 V DC 60 V	0.1 A...32 A (single pole) 0.1 A...32 A (single pole)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.