

1 Watt

- Single & Dual Output
- SMD Package
- Industry Standard Pinouts
- 1000 VDC Isolation, 3000 VDC Optional
- MTBF >3.5 Mhrs
- -40 °C to +85 °C Operation
- 3 Year Warranty



Dimensions:

ISF:
1.50 x 0.295 x 0.246" (12.7 x 7.5 x 6.25 mm)

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage Range	±10			%	% of nominal input
Input Reverse Voltage Protection					None

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage				V	See Models and Ratings table
Minimum Load	10			%	Operation at no load will not damage device but may not meet all specifications
Line Regulation		1.2 / 1		%	Δ Vin
Load Regulation			7.5	%	For a 10-100% load change
Setpoint Accuracy	100		110	%	of nominal at 10% load
Ripple & Noise			100	mV pk-pk	Single output: 20 MHz bandwidth
			75		Dual output: 20 MHz bandwidth
Temperature Coefficient			0.03	%/°C	

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		75		%	See Models and Ratings table
Isolation	1000			VDC	Standard
	3000				-H version
Isolation Resistance	10 ⁹			Ω	
Switching Frequency		100		kHz	5/12 V input at nominal input, full load
		500			24 V input at nominal input, full load
Mean Time Between Failure		>3.5		MHrs	MIL-HDBK-217F, +25 °C GB
Weight		0.004 (1.7)		lb (g)	

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-40		+85	°C	Full load
Storage Temperature	-55		+125	°C	
Case Temperature			+105	°C	
Cooling					Convection-cooled
Lead Temperature	260 °C, 0.06 in (1.5 mm) from case, 10 s, lead-free solder reflow process IPC/IEDEC J-STP-020D.1				

Models & Ratings: Single Output - Standard


Input Voltage	Output Voltage	Output Current	Isolation	Efficiency	Model Number ⁽⁵⁾
3.3 V	3.3 V	300 mA	1 kV	73%	ISF0303A
	5.0 V	200 mA	1 kV	72%	ISF0305A
5.0 V	5.0 V	200 mA	1 kV	79%	ISF0505A
	9.0 V	110 mA	1 kV	76%	ISF0509A
	12.0 V	84 mA	1 kV	79%	ISF0512A
	15.0 V	67 mA	1 kV	78%	ISF0515A
12.0 V	5.0 V	200 mA	1 kV	69%	ISF1205A
	9.0 V	110 mA	1 kV	76%	ISF1209A
	12.0 V	84 mA	1 kV	73%	ISF1212A
	15.0 V	67 mA	1 kV	74%	ISF1215A
24.0 V	5.0 V	200 mA	1 kV	72%	ISF2405A

Models & Ratings: Single Output - Option 'X'


Input Voltage	Output Voltage	Output Current	Isolation	Efficiency	Model Number ⁽⁵⁾
3.3 V	3.3 V	300 mA	1 kV	73%	ISF0303A-X
5.0 V	3.3 V	300 mA	1 kV	74%	ISF0503A-X
	5.0 V	200 mA	1 kV	77%	ISF0505A-X
	15.0 V	67 mA	1 kV	78%	ISF0515A-X

Mechanical Details


Single Output - Standard

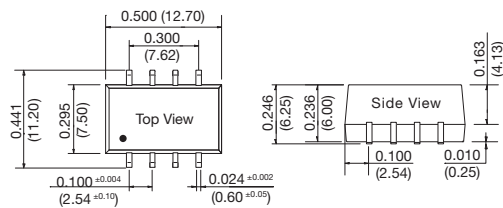


Recommended Footprint
Top View grid: 0.1 x 0.1 in (2.54 x 2.54 mm)




PIN CONNECTIONS					
+Vin	-Vin	-Vout	0 V	+Vout	N/C
2	1	N/A	4	5	3,6,7,8



Single Output - Option '-X'

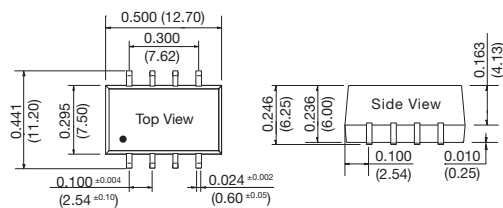

Recommended Footprint
Top View grid: 0.1 x 0.1 in (2.54 x 2.54 mm)



PIN CONNECTIONS					
+Vin	-Vin	-Vout	0 V	+Vout	N/C
2	1	N/A	4	5	8

Notes

1. All dimensions in inches (mm)
2. Tolerance: ±0.010 (±0.25)
3. Weight: 0.004 lbs (1.7 g)
4. Pin tolerance: ±0.004 (±0.10 mm)

5. For optional tape & reel option add suffix -TR to the end of the p/n.
Reel quantity = 500

Models & Ratings: Dual Output - Standard


Input Voltage	Output Voltage	Output Current	Isolation	Efficiency	Model Number ⁽⁵⁾
5.0 V	±9.0 V	55 mA	1 kV	76%	ISF0509
	±12.0 V	42 mA	1 kV	79%	ISF0512
	±15.0 V	33 mA	1 kV	78%	ISF0515
12.0 V	±15.0 V	33 mA	1 kV	74%	ISF1215
24.0V	±3.3 V	150 mA	1 kV	70%	ISF2403

Models & Ratings: Dual Output - Option 'X'


Input Voltage	Output Voltage	Output Current	Isolation	Efficiency	Model Number ⁽⁵⁾
5.0 V	±15.0 V	33 mA	1 kV	78%	ISF0515-X
24.0V	±3.3 V	150 mA	1 kV	70%	ISF2403-X
	±9.0 V	55 mA	1 kV	76%	ISF2409-X

Mechanical Details


Dual Output – Standard

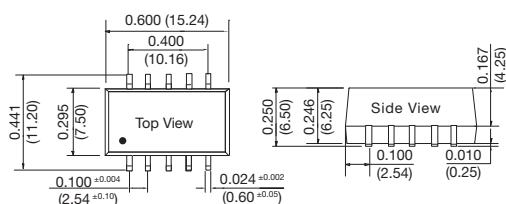


Recommended Footprint
Top View grid: 0.1 x 0.1 in (2.54 x 2.54 mm)




PIN CONNECTIONS					
+Vin	-Vin	-Vout	0 V	+Vout	N/C
2	1	5	4	7	3,6,8,9,10

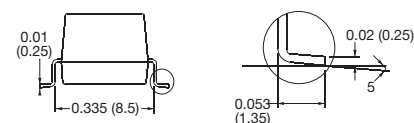

Dual Output – Option ‘-X’

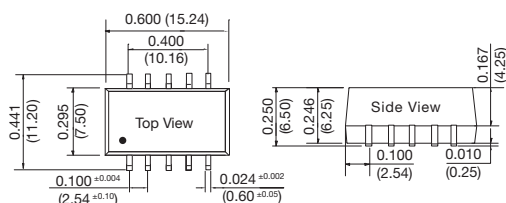

Recommended Footprint
Top View grid: 0.1 x 0.1 in (2.54 x 2.54 mm)



PIN CONNECTIONS					
+Vin	-Vin	-Vout	0 V	+Vout	N/C
2	1	5	4	7	10

Notes

1. All dimensions in inches (mm)
2. Tolerance: ±0.010 (±0.25)
3. Weight: 0.004 lbs (1.7 g)

4. Pin tolerance: ±0.004 (±0.10 mm)
5. For optional tape & reel option add suffix -TR to the end of the p/n.
Reel quantity = 500

Models & Ratings: Single Output - Option '-H'



Input Voltage	Output Voltage	Output Current	Isolation	Efficiency	Model Number ⁽⁵⁾
3.3 V	3.3 V	300 mA	3 kV	73%	ISF0303A-H
	5.0 V	200 mA	3 kV	74%	ISF0305A-H
5.0 V	3.3 V	300 mA	3 kV	73%	ISF0503A-H
	5.0 V	200 mA	3 kV	77%	ISF0505A-H
	9.0 V	110 mA	3 kV	76%	ISF0509A-H
	12.0 V	84 mA	3 kV	79%	ISF0512A-H
	15.0 V	67 mA	3 kV	78%	ISF0515A-H
12.0 V	5.0 V	200 mA	3 kV	69%	ISF1205A-H
	9.0 V	110 mA	3 kV	76%	ISF1209A-H
	12.0 V	84 mA	3 kV	73%	ISF1212A-H
	15.0 V	67 mA	3 kV	74%	ISF1215A-H
24.0 V	5.0 V	200 mA	3 kV	72%	ISF2405A-H

Models & Ratings: Dual Output - Option '-H'


Input Voltage	Output Voltage	Output Current	Isolation	Efficiency	Model Number ⁽⁵⁾
5.0 V	±5.0 V	100 mA	3 kV	76%	ISF0505-H
	±9.0 V	55 mA	3 kV	76%	ISF0509-H
	±12.0 V	42 mA	3 kV	79%	ISF0512-H
	±15.0 V	33 mA	3 kV	78%	ISF0515-H
12.0 V	±9.0 V	55 mA	3 kV	76%	ISF1209-H
	±12.0 V	42 mA	3 kV	79%	ISF1212-H
	±15.0 V	33 mA	3 kV	78%	ISF1215-H

Mechanical Details



Single Output - Option '-H'





Recommended Footprint
Top View grid: 0.1 x 0.1 in (2.54 x 2.54 mm)




PIN CONNECTIONS					
+Vin	-Vin	-Vout	0 V	+Vout	N/C
2	1	N/A	5	8	3,6,7,10,11,12



Dual Output - Option '-H'



Recommended Footprint
Top View grid: 0.1 x 0.1 in (2.54 x 2.54 mm)



PIN CONNECTIONS					
+Vin	-Vin	-Vout	0 V	+Vout	N/C
2	1	6	5	8	3,7,10,11,12

Notes

1. All dimensions in inches (mm)
2. Tolerance: ± 0.010 (± 0.25)
3. Weight: 0.004 lbs (1.7 g)

4. Pin tolerance: ± 0.004 (± 0.10 mm)
5. For optional tape & reel option add suffix -TR to the end of the p/n.
Reel quantity = 500



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.