


Panasonic
ideas for life

PHOTOVOLTAIC MOSFET DRIVER

PHOTOVOLTAIC MOSFET DRIVER (APV1,2)



FEATURES

1. High-speed switching

Since release time is 0.1 ms, the MOSFET or other load can be turned off quickly in urgent situations.

2. Space saving

With a built-in control circuit, an external resistor is not needed. This contributes to making substrates more compact.

3. High insulation

DIP type: 5,000 V

SOP type: 2,500 V

SSOP type: 1,500 V

4. Extensive product lineup

Products include the industry's smallest SSOP type, SOP4 type, and DIP 6 type.

TYPICAL APPLICATIONS

MOSFET driver

Power supply (V_{cc}) for electronic circuits

TYPES

Type	Output rating		Part No.				Packing quantity	
	Drop-out voltage (Typ.)	Short circuit current (Typ.)	Through hole terminal	Surface-mount terminal				
			Tube packing style	Tube packing style	Tape and reel packing style		Tube	Tape and reel
					Picked from 1/2/3-pin side*1	Picked from 4/5/6-pin side*2		
DIP6pin	8.7V	14μA	APV1122	APV1122A	APV1122AX	APV1122AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.
SOP4pin	8.7V	14μA	—	—	APV1121SX	APV1121SZ	—	
SOP4pin*3	8.2V	8μA	—	—	APV2121SX	APV2121SZ	—	
SSOP*4	8.2V	8μA	—	—	APV2111VY	APV2111VW	—	3,500 pcs.

Notes: *1 SOP type is picked from 1/2-pin side, SSOP type is picked from 1/4-pin side

*2 SOP type is picked from 3/4-pin side, SSOP type is picked from 2/3-pin side

*3 Tape package is the standard packing style. Also available in tube.

(Part No. suffix "X" or "Y" is not needed when ordering; Tube: 100 pcs.; Case: 2,000 pcs.)

For space reasons, the initial letters of the product number "AP" and "S" are omitted on the product seal.

The package type indicator "X" and "Z" are omitted from the seal. (Ex. the label for product number APV1121SX is V1121).

*4 Tape package is the standard packing style.

For space reasons, the initial letters of the product number "AP" and "V" are omitted on the product seal.

The package type indicator "Y" and "W" are omitted from the seal. (Ex. the label for product number APV2111VY is V2111).

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Remarks
Input	LED forward current	I _F	50mA				
	LED reverse voltage	V _R	5V				
	Peak forward current	I _{FP}	1A				f = 100 Hz, Duty Ratio = 0.1%
	Power dissipation	P _{in}	75mA				
I/O isolation voltage		V _{iso}	5,000V AC	2,500V AC	2,500V AC	1,500V AC	
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F				


PHOTOVOLTAIC MOSFET DRIVER (APV1,2)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)


Item			Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Condition
Input	LED operate current	Typical	I _{Fon}	0.6mA		0.85mA		V _{OC} = 5V
		Maximum		3mA				
	LED turn off current	Minimum	I _{Foff}	0.2mA				V _{OC} = 1V
		Typical		0.5mA		0.75mA		
	LED dropout voltage	Typical	V _F	1.15V				I _F = 10mA
		Maximum		1.5V				
Output	Drop-out voltage*	Minimum	V _{OC}	6V		5V		I _F = 10mA
		Typical		8.7V		8.2V		R _V = 10μΩ
	Short circuit current**	Minimum	I _{SC}	5μA		3μA		I _F = 10mA
		Typical		14μA		8μA		R _V = 100Ω
Transfer characteristics	Turn on time***	Typical	T _{On}	0.4ms		0.8ms		I _F = 10mA, C _L = 1,000pF
	Turn off time***	Typical	T _{Off}	0.1ms				I _F = 10mA, C _L = 1,000pF
	I/O capacitance	Typical	C _{iso}	0.8pF				V _B = 0V, f = 1MHz
		Maximum		1.5pF				
	Initial I/O isolation resistance	Minimum	R _{iso}	1,000MΩ				500V DC

Note: Recommended LED forward current I_{F-T} : 10mA.


*Drop-out voltage measurement circuit
APV1122(A)




APV1121S, APV2121S, APV2111V




**Short circuit current measurement circuit
APV1122(A)




APV1121S, APV2121S, APV2111V




***Turn on/Turn off time measurement circuit
APV1122(A)

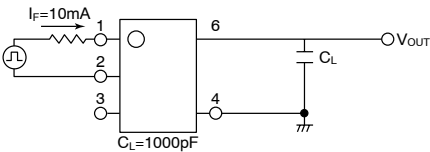

APV1121S, APV2121S, APV2111V

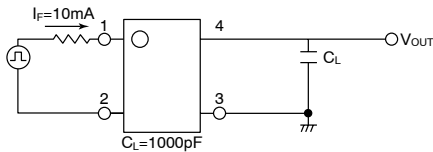

***Turn on time

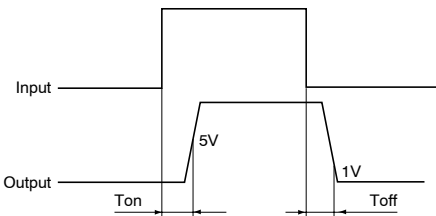


- For Dimensions, see catalog.
- For Schematic and Wiring Diagrams, see catalog.
- For Cautions for Use, see catalog.


PHOTOVOLTAIC MOSFET DRIVER (APV1,2)

REFERENCE DATA


1. Drop-out voltage vs. ambient temperature characteristics
Input current: 10mA

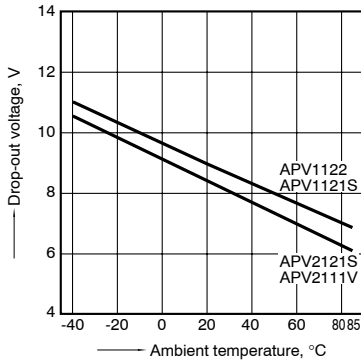


2. Short circuit current vs. ambient temperature characteristics
Input current: 10mA

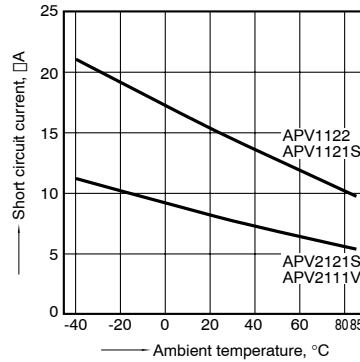


3. LED operate current vs. ambient temperature characteristics
Drop-out voltage: 5V

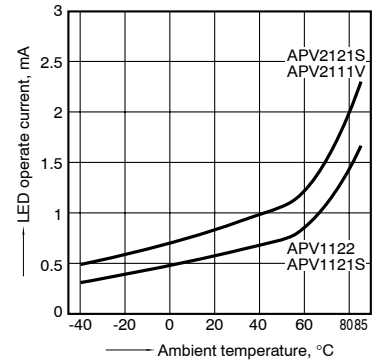


4. LED turn off current vs. ambient temperature characteristics
Drop-out voltage: 1V

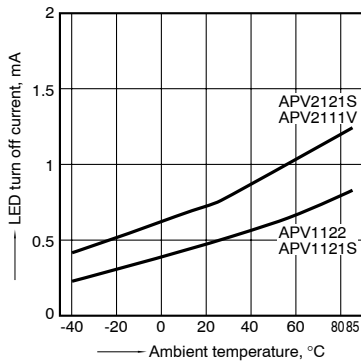


5. LED dropout voltage vs. ambient temperature characteristics
LED forward current: 5 to 50mA

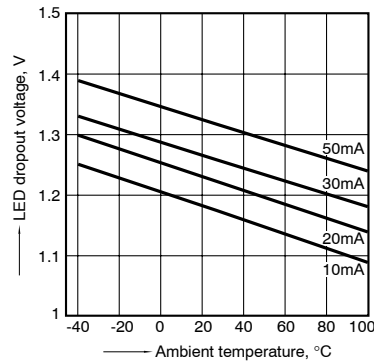


6. Turn on time vs. ambient temperature characteristics
LED forward current: 10mA
Load capacity: 1,000pF; output voltage: 5V

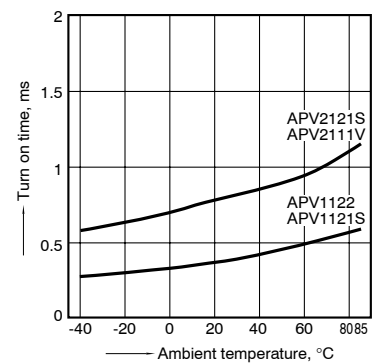


7. Turn off time vs. ambient temperature characteristics
LED forward current: 10mA
Load capacity: 1,000pF; output voltage: 1V

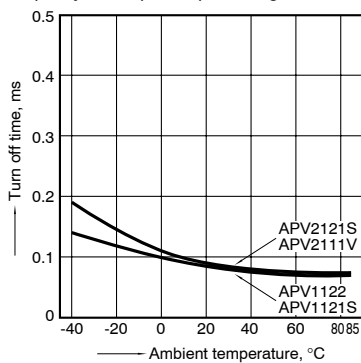

8. Turn on time vs. LED forward current characteristics
Load capacity: 1,000pF; output voltage: 5V

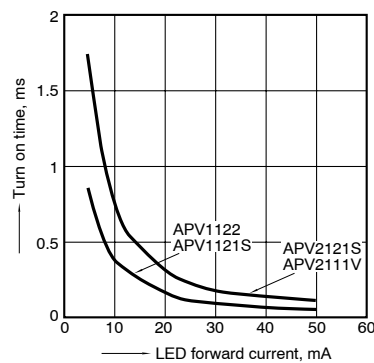

9. Turn off time vs. LED forward current characteristics
Load capacity: 1,000pF; output voltage: 1V

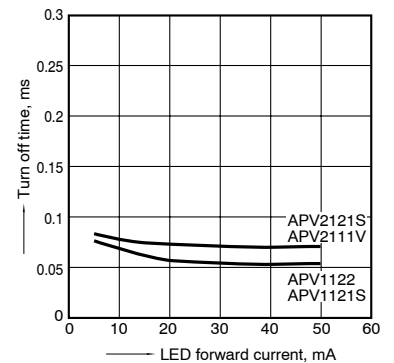



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.