



### Features

- 3" x 5" x 1.3" Package
- 200W with 100LFM Air
- 180W Convection Cooled
- Class B Conducted EMI
- Fits 1U Applications
- Universal Input 90-264 Vac
- Approved to CSA/EN/IEC/UL60950-1, 2<sup>nd</sup> Edition
- Efficiency 90% typical
- 3 Year Warranty
- RoHS Compliant



### Description

A power-packed, highly efficient AC to DC power supply designed for industrial and ITE applications. These models provide 180 Watts convection cooled, 200 Watts with moving air. The small heat footprint allows simple thermal design of systems which use this product. All models are CE marked to low voltage directive and approved to ITE standards of EN60950-1, 2nd edition.

### Model Selection

Model Number	Volts	Output Current		Minimum Load	Ripple & Noise**	Total Regulation	OVP Threshold***
		w/100LFM air	Convection*				
CINT1200A1275K01	12V	16.7A	15.0A	0A	120mV pk-pk	±3%	14.0 ± 1.1V
CINT1200A1575K01	15V	13.3A	12.0A	0A	150mV pk-pk	±3%	18.5 ± 1.2V
CINT1200A1875K01	18V	11.1A	10.0A	0A	180mV pk-pk	±3%	21.5 ± 2.0V
CINT1200A2475K01	24V	8.33A	7.50A	0A	240mV pk-pk	±3%	29.0 ± 2.5V
CINT1200A2875K01	28V	7.14A	6.40A	0A	280mV pk-pk	±3%	33.5 ± 2.5V
CINT1200A3275K01	32V	6.25A	5.62A	0A	320mV pk-pk	±3%	36.0 ± 3.0V
CINT1200A3675K01	36V	5.55A	5.00A	0A	360mV pk-pk	±3%	41.0 ± 3.0V
CINT1200A4875K01	48V	4.17A	3.75A	0A	480mV pk-pk	±3%	56.0 ± 3.0V

Notes: \* Total convection power is 180 Watts.

\*\* Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR capacitors.

### General Specifications


<b>AC Input</b>	100-240Vac, ±10%, 47-63Hz, 1Ø 120-370Vdc	<b>Turn On Time</b>	Less than 3 sec. @115Vac, Full Load
<b>Input Current</b>	115Vac: 1.8A, 230Vac: 0.9A	<b>Hold-up Time</b>	16mS at 200W, 120Vac/60Hz

**Specifications** (continued)

<b>Inrush Current</b>	264Vac, cold start: will not exceed 55A	<b>Overtemperature Protection</b>	Sensing transformer temperature, 165°C at full load, latching type, requires input power recycling to reset.
<b>Input Fuses</b>	F1, F2: 3.15A, 250Vac fuses provided on all models	<b>Overload Protection</b>	120 to 150% of rating, Hiccup Mode
<b>Earth Leakage Current</b>	<500µA@264Vac, 60Hz, NC; <1mA SFC	<b>Short Circuit Protection</b>	Hiccup Mode, auto recovery.
<b>Efficiency</b>	88% typical	<b>Overvoltage Protection</b>	OVP latch, see models chart for trip range.
<b>Output Power</b>	200W continuous, with 100 lfm airflow, 180W convection cooled – See chart for specific voltage model ratings.	<b>Switching Frequency</b>	PFC: Fixed, 65kHz Main Converter: Variable 35-200kHz, 65-70kHz at full load.
<b>Transient Response</b>	500µS typical, return to 0.5% of nominal, 50% load step. $\Delta i/\Delta t$ : <0.2A/µS. Max Voltage Deviation = 3%	<b>Isolation</b>	Input-Output: 4000Vac Input-Ground: 1800Vac Output-Ground: 1500Vac
<b>Ripple and Noise</b>	0.5%rms, 1% pk-pk, see chart.	<b>Operating Temperature</b>	-10°C to +70°C Start Up at -40°C, full load
<b>Output Voltage</b>	See chart	<b>Temperature Derating</b>	Derate output power linearly above 50°C to 50% at 70°C
<b>Voltage Adjustability</b>	+/-5% from nominal	<b>Storage Temperature</b>	-40°C to +85°C
<b>Minimum Load</b>	Not required	<b>Altitude</b>	Operating: -500 to 10,000 ft. Non-operating: -500 to 40,000 ft.
<b>Total Regulation</b>	+/- 3% combined line, load and initial setting.	<b>Relative Humidity</b>	5% to 95%, non-condensing
<b>Vibration</b>	Operating: 0.003g <sup>2</sup> /Hz, 1.5grms overall, 3 axes, 10 min/axis Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 1 hr/axis	<b>Shock</b>	Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3 axes, 6 shocks total
<b>Dimensions</b>	W: 3.0" x L: 5.0" x H: 1.3"	<b>Safety Standards</b>	EN/CSA/UL/IEC 60950-1, 2nd Edition
<b>Weight</b>	325g	<b>MTBF</b>	405,000 hours, 25°C, 110Vac

**Output vs. Temperature Derating Curve**

180W convection cooled and 200W continuous with 100 LFM airflow, derate output power to 50% at 70°C.

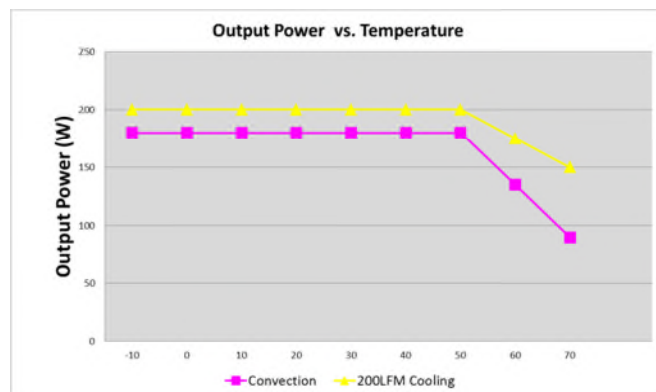


## EMI/EMC Compliance

<b>Conducted Emissions</b>	EN55011/22 Class B, FCC Part 15, Subpart B, Class B
<b>Radiated Emissions</b>	EN55011/22 Class A, FCC Part 15, Subpart B, Class A w/6db margin
<b>Static Discharge Immunity</b>	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
<b>Radiated RF Immunity</b>	EN61000-4-3, 3V/m.
<b>EFT/Burst Immunity</b>	EN61000-4-4, 2kV/5kHz
<b>Line Surge Immunity</b>	EN61000-4-5, 1kV differential, 2kV common-mode
<b>Conducted RF Immunity</b>	EN61000-4-6, 3Vrms
<b>Power Frequency Magnetic Field Immunity</b>	EN61000-4-8, 3A/m
<b>Voltage Dip Immunity</b>	EN61000-4-11, 100%, 10ms; 30%, 275ms; 60%, 100ms; Performance Criteria A, A, & A at 70% load.
<b>Line Harmonic Emissions</b>	EN61000-3-2, Class A, B, C, & D
<b>Flicker Test</b>	EN61000-3-3, Complies (dmax<6%)

## Mechanical Drawing

- Notes:**
1. All dimensions in inches (mm), tolerance is +/-0.000".
  2. Mounting holes should be grounded for EMI purposes.
  3. FG is safety ground connection.
  4. The power supply requires mounting on metal standoffs 0.20" (5mm) in height, min.

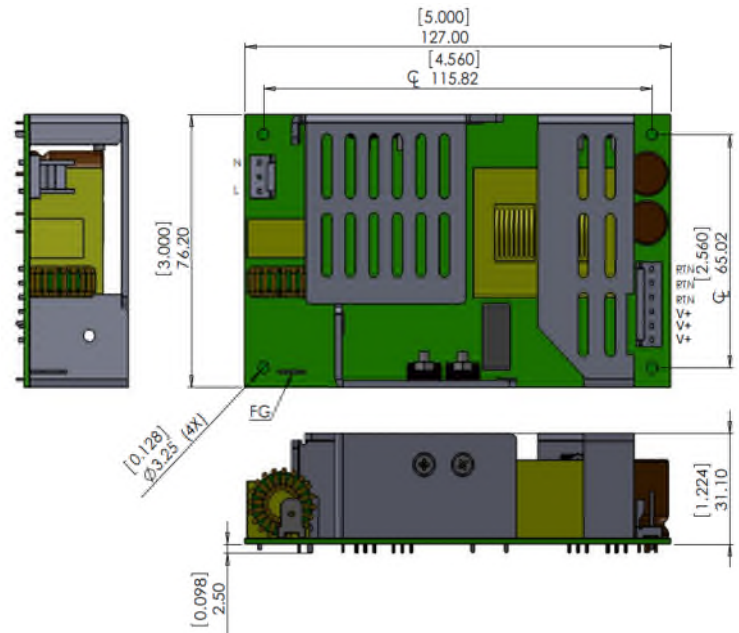

## Connector Information

Input Connector J100	Ground (FG)	DC Output Connector J300	
PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL	0.25" FASTON TAB	Term. 1,2,3: RTN Term. 4,5,6: +Vout	
Mating Connector: AMP Molex 640250-3 Pins: 640252-2	Mating Connector: Molex 01-90020001	Mating Connector: AMP 640250-6 Pins: 640252-2	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.