

DC Power Relays

G9EJ

DC Power Relays Capable of DC Loading at High Voltage and Current

- Actualize improvement of inrush-withstand performance and a long-life by adopting Omron's own contact driving system.
- Actualize a high capacity interruption through the function of extinction of magnetic arc by adopting high-efficiency magnetic circuit.
- Small and lightweight type. Size: H30 mm × W27 mm × L31 mm, Weight: approx. 50 g.

RoHS Compliant

Refer to the *Precautions* on page 4.

Model Number Structure

G9EJ-□-□-□-□
1 2 3 4

1. Number of Poles
1: 1 pole

3. Coil Terminals
Blank: Tab terminal

2. Contact Form
Blank: SPST-NO

4. Special Functions

Ordering Information

Models	Terminals		Contact form	Rated coil voltage	Model
	Coil terminals	Contact terminals			
Switching type	#250 Tab	#250 Tab	SPST-NO	12 VDC	G9EJ-1

Ratings

● Coil

Rated voltage	Rated current	Coil resistance	Must-operate voltage	Must-release voltage	Maximum voltage(See note 3)	Power consumption
12 VDC	167 mA	72 Ω	60% max. of rated voltage	5% min. of rated voltage	130% of rated voltage (at 23°C within 2 minutes)	Approx. 2 W

Note: 1. The figures for the rated current and coil resistance are for a coil temperature of 23°C and have a tolerance of ±10%.

Note: 2. The figures for the operating characteristics are for a coil temperature of 23°C.

Note: 3. The figure for the maximum voltage is the maximum voltage that can be applied to the relay coil.

● Contacts

Item	Condenser load
Rated load	25 A at 400 VDC
Maximum switching voltage	400 V
Maximum switching current	25 A

Characteristics

Item			G9EJ-1
Contact voltage drop			0.5 V max. (for a carry current of 5 A)
Operate time			50 ms max.
Release time			30 ms max.
Insulation resistance *1	Between coil and contacts		1,000 MΩ min.
	Between contacts of the same polarity		1,000 MΩ min.
Dielectric strength	Between coil and contacts		2,500 VAC 1 min
	Between contacts of the same polarity		2,500 VAC 1 min
Impulse withstand voltage *2			4,000 V
Vibration resistance *3	Destruction		5 to 200 to 5 Hz, Acceleration: 44.1 m/s ²
	Malfunction		5 to 200 to 5 Hz, Acceleration: 44.1 m/s ²
Shock resistance	Destruction		490 m/s ²
	Malfunction	Energized	490 m/s ²
		Deenergized	98 m/s ²
Mechanical endurance *4			200,000 min.
Electrical endurance (condenser load) *5			400 VDC, 25 A, 100,000 ops. min.
Short-time carry current			20 A (1 min)
Maximum interruption current (resistive load)			30 A at 400 VDC (100 times min.)
Overload interruption (resistive load)			20 A at 400 VDC (300 times min.)
Ambient operating temperature			-40 to 85°C (with no icing or condensation)
Ambient operating humidity			5% to 85%
Weight (including accessories)			Approx. 50 g

Note: The above values are initial values at an ambient temperature of 23°C unless otherwise specified.

*1. The insulation resistance was measured with a 500-VDC megohmmeter.

*2. The impulse withstand voltage was measured with a JEC-212 (1981) standard impulse voltage waveform (1.2 × 50 μs)


*3. The Upper limit of double amplitude: 10 mm P-P

*4. The mechanical endurance was measured at a switching frequency of 3,600 operations/hr.


*5. The electrical endurance was measured at a switching frequency of 60 operations/hr.

Engineering Data


Electrical Endurance (Inrush Current Performance)

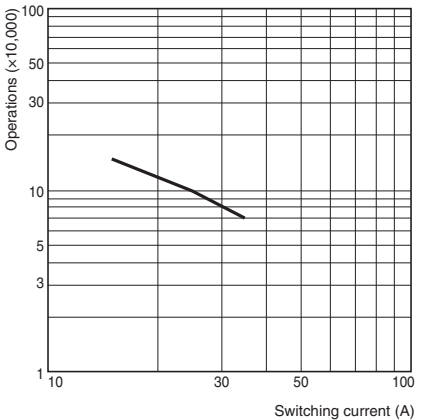


Electrical Endurance (Interruption Performance)

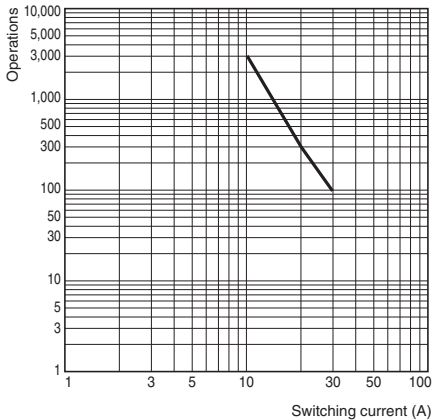


Carry Current vs. Energizing Time

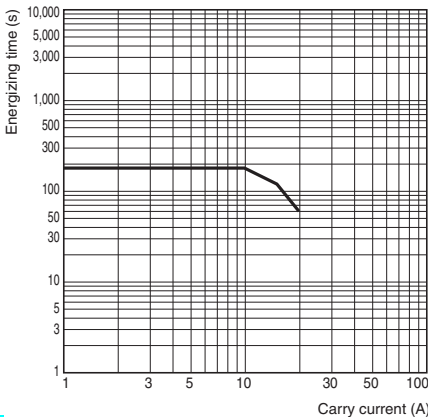


Must-operate Voltage and Must-release Voltage Distributions (Number of Relays × Percentage of Rated Voltage)

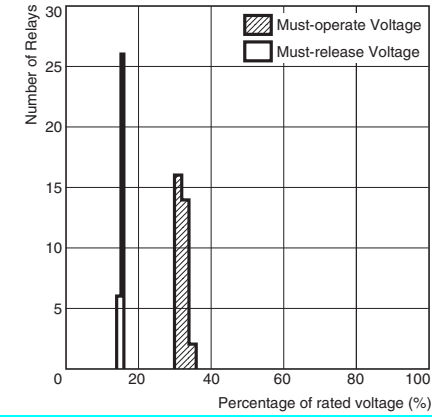


Time Characteristic Distributions (Number of Contacts × Time (ms))

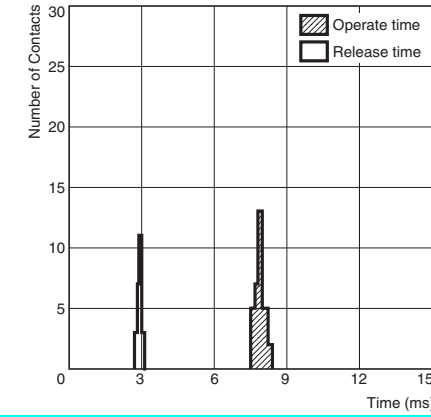

● Vibration Malfunction

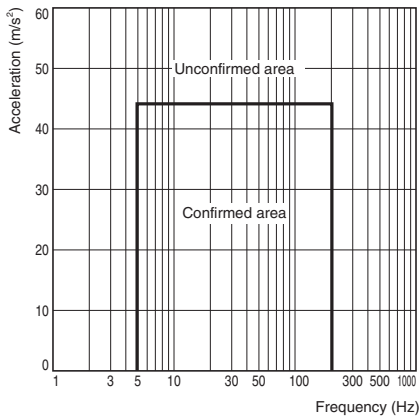


● Vibration Resistance

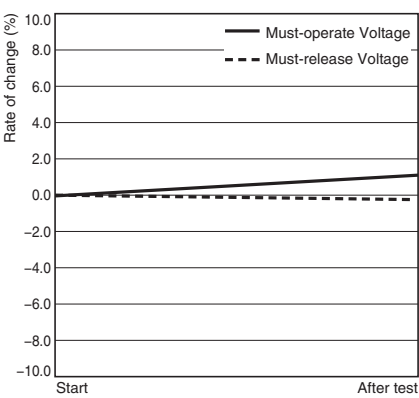


Characteristics were measured after applying vibration at a frequency of 5 to 200 to 5 Hz, acceleration of 44.1 m/s² to the test piece (not energized) for 2 hours each in 3 directions. The percentage rate of change is the average value for all of the samples.
Note: The Upper limit of double amplitude: 10 mm P-P

● Shock Malfunction

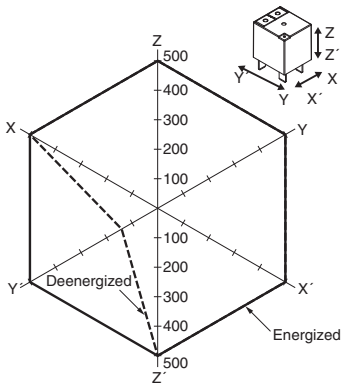

The value at which malfunction occurred was measured after applying shock to the test piece 3 times each in 6 directions along 3 axes.




● Shock Resistance

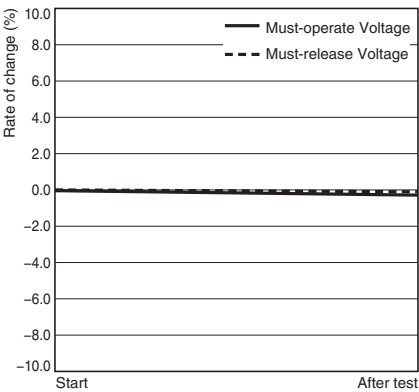


Characteristics were measured after applying a shock of 490 m/s² to the test piece 3 times each in 6 directions along 3 axes. The percentage rate of change is the average value for all of the samples.

Dimensions (Unit: mm)


G9EJ-1



Terminal Arrangement (BOTTOM VIEW)



Dimension (mm)	Tolerance (mm)
10 or lower	±0.3
10 to 50	±0.5



Precautions

WARNING

Take measures to prevent contact with charged parts when using the Relay for high voltages.



Precautions for Correct Use

Refer to the relevant catalog for common precautions.

1. The G9EJ Relays' contacts have polarity. Be sure to perform connections with the correct polarity. If the contacts are connected with the reverse polarity, the switching characteristics specified in this document cannot be assured.
2. Do not drop or disassemble this Relay. Not only may the Relay fail to meet the performance specifications, it may also result in damage, electric shock, or burning.
3. Do not use these Relays in strong magnetic fields of 800 A/m or higher (e.g., near transformers or magnets). The arc discharge that occurs during switching may be bent by the magnetic field, resulting in flashover or insulation faults.
4. This Relay is a device for switching high DC voltages. If it is used for voltages exceeding the specified range, it may not be possible to interrupt the load and burning may result. In order to prevent fire spreading, use a configuration in which the current load can be interrupted in the event of emergencies.
In order to ensure safety of the system, replace the Relay on a regular basis.
5. If the Relay is used for no-load and/or low-load switching, the contact resistance may increase and so confirm correct operation under the actual operating conditions.
6. With this Relay, if the rated voltage (or current) is continuously applied to the coil and contacts, and then turned OFF and immediately ON again, the coil temperature, and consequently the coil resistance, will be higher than usual. This means that the must operate voltage will also be higher than usual, exceeding the rated value ("hot start"). In this case, take the appropriate countermeasures, such as reducing the load current or restricting the energizing time or ambient operating temperature.
7. The ripple percentage for DC relays can cause fluctuations in the must-operate voltage or humming. For this reason, reduce the ripple percentage in full-wave rectified power supply circuits by adding a smoothing capacitor. Ensure that the ripple percentage is less than 5%.
8. Ensure that a voltage exceeding the specified maximum voltage is not continuously applied to the coil. Abnormal heating in the coil may shorten the lifetime of the insulation coating.
9. Do not use the Relay at a switching voltage or current greater than the specified maximum values. Doing so may result in arc discharge interruption failure or burning due to abnormal heating in the contacts.
10. The contact ratings are for resistive loads. The electrical endurance with inductive loads is inferior to that of resistive

loads. Confirm correct operation under the actual operating conditions.

11. Do not use the Relay in locations where water, solvents, chemicals, or oil may come in contact with the case or terminals. Doing so may result in deterioration of the case resin or abnormal heating due to corrosion or contamination of the terminals. Also, if electrolyte adheres to the output terminals, electrolysis may occur between the output terminals, resulting in corrosion of the terminals or wiring disconnections.
12. Be sure to turn OFF the power and confirm that there is no residual voltage before replacing the Relay or performing wiring.
13. The distance between crimp terminals or other conductive parts will be reduced and insulation properties will be lowered if wires are laid in the same direction from the contact terminals. Use insulating coverings, do not wire in the same direction, and take other measures as required to maintain insulation properties.
14. Use either a varistor, or a diode plus Zener diode as a protective circuit against reverse surge in the relay coil. Using a diode alone will reduce the switching characteristics.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.