



# P89LPC938

**8-bit microcontroller with accelerated two-clock 80C51 core  
8 kB 3 V byte-erasable Flash with 10-bit A/D converter**

Rev. 01 — 25 February 2005

Product data sheet

## 1. General description

---

The P89LPC938 is a single-chip microcontroller, available in low cost packages, based on a high performance processor architecture that executes instructions in two to four clocks, six times the rate of standard 80C51 devices. Many system-level functions have been incorporated into the P89LPC938 in order to reduce component count, board space, and system cost.

## 2. Features

---

### 2.1 Principal features

- 8 kB byte-erasable Flash code memory organized into 1 kB sectors and 64-byte pages. Single-byte erasing allows any byte(s) to be used as non-volatile data storage.
- 256-byte RAM data memory and a 512-byte auxiliary on-chip RAM.
- 512-byte customer Data EEPROM on chip allows serialization of devices, storage of set-up parameters, etc.
- 8-input multiplexed 10-bit A/D converter. Two analog comparators with selectable inputs and reference source.
- Two 16-bit counter/timers (each may be configured to toggle a port output upon timer overflow or to become a PWM output) and a 23-bit system timer that can also be used as a RTC.
- Enhanced UART with fractional baud rate generator, break detect, framing error detection, and automatic address detection; 400 kHz byte-wide I<sup>2</sup>C-bus communication port and SPI communication port.
- CCU provides PWM, input capture, and output compare functions.
- High-accuracy internal RC oscillator option allows operation without external oscillator components. The RC oscillator option is selectable and fine tunable.
- 2.4 V to 3.6 V  $V_{DD}$  operating range. I/O pins are 5 V tolerant (may be pulled up or driven to 5.5 V).
- 28-pin TSSOP, PLCC, and HVQFN packages with 23 I/O pins minimum and up to 26 I/O pins while using on-chip oscillator and reset options.

**PHILIPS**

## 2.2 Additional features

- A high performance 80C51 CPU provides instruction cycle times of 111 ns to 222 ns for all instructions except multiply and divide when executing at 18 MHz. This is six times the performance of the standard 80C51 running at the same clock frequency. A lower clock frequency for the same performance results in power savings and reduced EMI.
- Serial Flash ICP allows simple production coding with commercial EPROM programmers. Flash security bits prevent reading of sensitive application programs.
- Serial Flash ISP allows coding while the device is mounted in the end application.
- In-Application Programming of the Flash code memory. This allows changing the code in a running application.
- Watchdog timer with separate on-chip oscillator, requiring no external components. The watchdog prescaler is selectable from eight values.
- Low voltage reset (brownout detect) allows a graceful system shutdown when power fails. May optionally be configured as an interrupt.
- Idle and two different power-down reduced power modes. Improved wake-up from Power-down mode (a LOW interrupt input starts execution). Typical power-down current is 1  $\mu$ A (total power-down with voltage comparators disabled).
- Active-LOW reset. On-chip power-on reset allows operation without external reset components. A reset counter and reset glitch suppression circuitry prevent spurious and incomplete resets. A software reset function is also available.
- Configurable on-chip oscillator with frequency range options selected by user programmed Flash configuration bits. Oscillator options support frequencies from 20 kHz to the maximum operating frequency of 18 MHz.
- Oscillator fail detect. The watchdog timer has a separate fully on-chip oscillator allowing it to perform an oscillator fail detect function.
- Programmable port output configuration options: quasi-bidirectional, open drain, push-pull, input-only.
- Port 'input pattern match' detect. Port 0 may generate an interrupt when the value of the pins match or do not match a programmable pattern.
- LED drive capability (20 mA) on all port pins. A maximum limit is specified for the entire chip.
- Controlled slew rate port outputs to reduce EMI. Outputs have approximately 10 ns minimum ramp times.
- Only power and ground connections are required to operate the P89LPC938 when internal reset option is selected.
- Four interrupt priority levels.
- Eight keypad interrupt inputs, plus two additional external interrupt inputs.
- Schmitt trigger port inputs.
- Second data pointer.
- Emulation support.

### 3. Ordering information

Table 1: Ordering information

| Type number  | Package |                                                                                                    |          |
|--------------|---------|----------------------------------------------------------------------------------------------------|----------|
|              | Name    | Description                                                                                        | Version  |
| P89LPC938FA  | PLCC28  | plastic leaded chip carrier; 28 leads                                                              | SOT261-2 |
| P89LPC938FDH | TSSOP28 | plastic thin shrink small outline package; 28 leads; body width 4.4 mm                             | SOT361-1 |
| P89LPC938FHN | HVQFN28 | plastic thermal enhanced very thin quad flat package; no leads; 28 terminals; body 6 × 6 × 0.85 mm | SOT788-1 |

#### 3.1 Ordering options

Table 2: Ordering options

| Type number  | Flash memory | Temperature range | Frequency       |
|--------------|--------------|-------------------|-----------------|
| P89LPC938FA  | 8 kB         | −40 °C to +85 °C  | 0 MHz to 18 MHz |
| P89LPC938FDH | 8 kB         | −40 °C to +85 °C  | 0 MHz to 18 MHz |
| P89LPC938FHN | 8 kB         | −40 °C to +85 °C  | 0 MHz to 18 MHz |

4. Block diagram

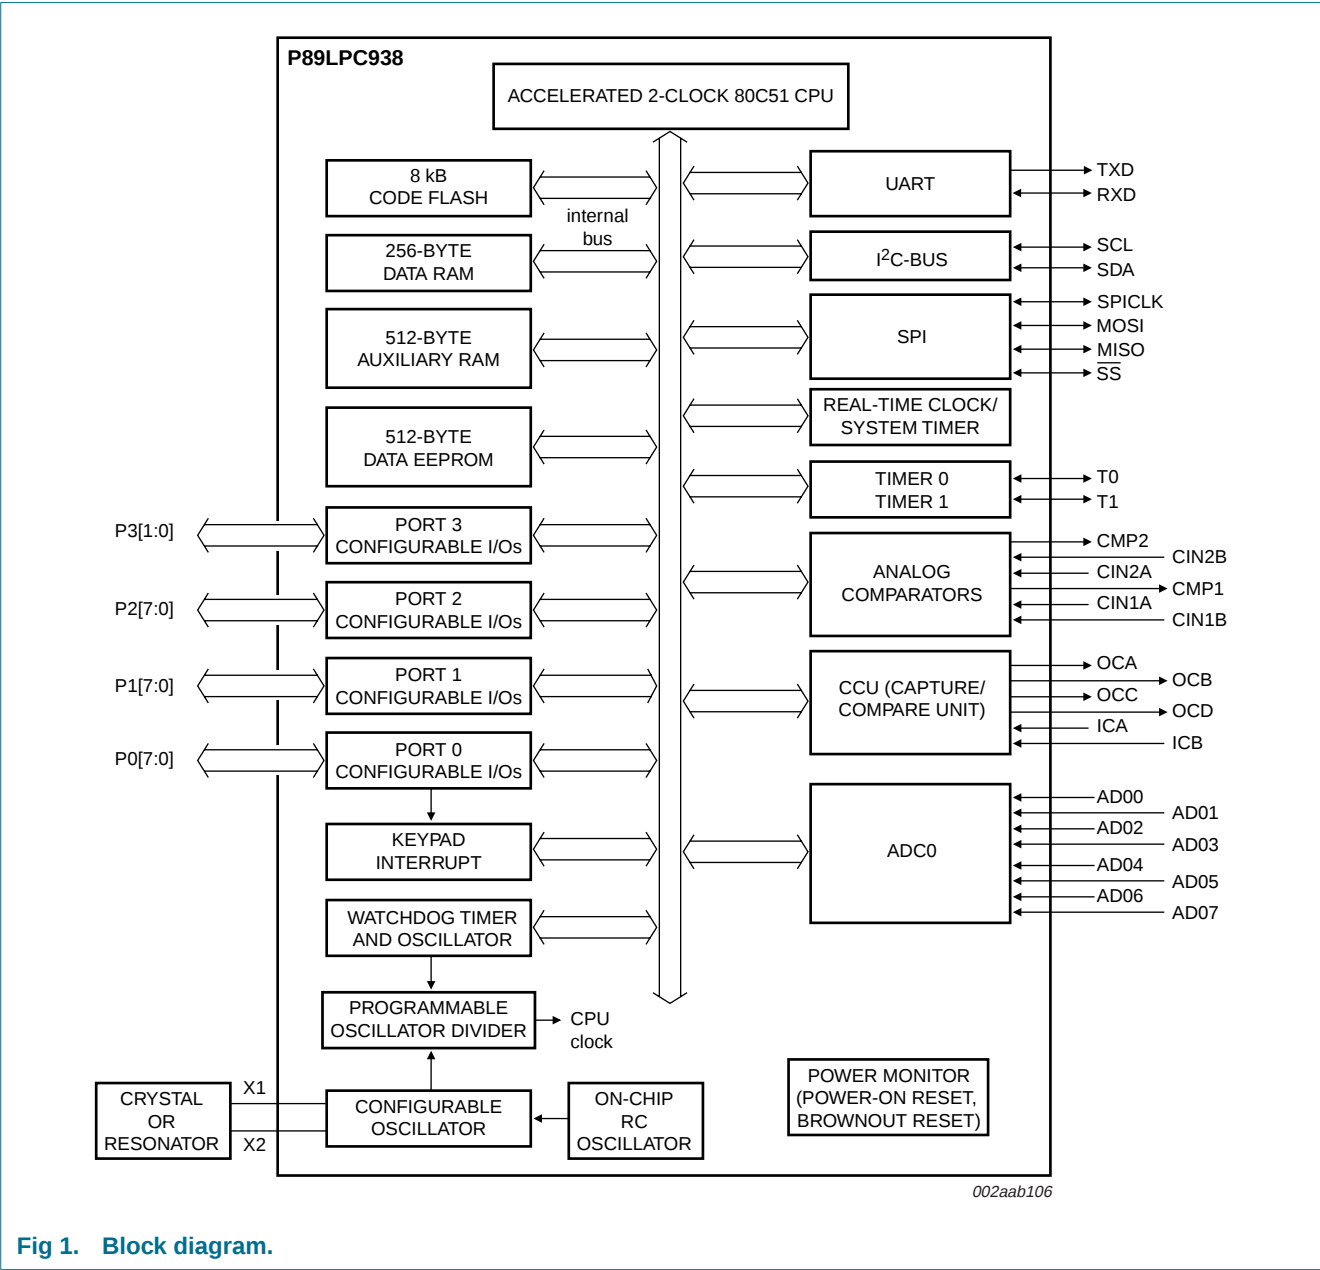


Fig 1. Block diagram.

5. Functional diagram

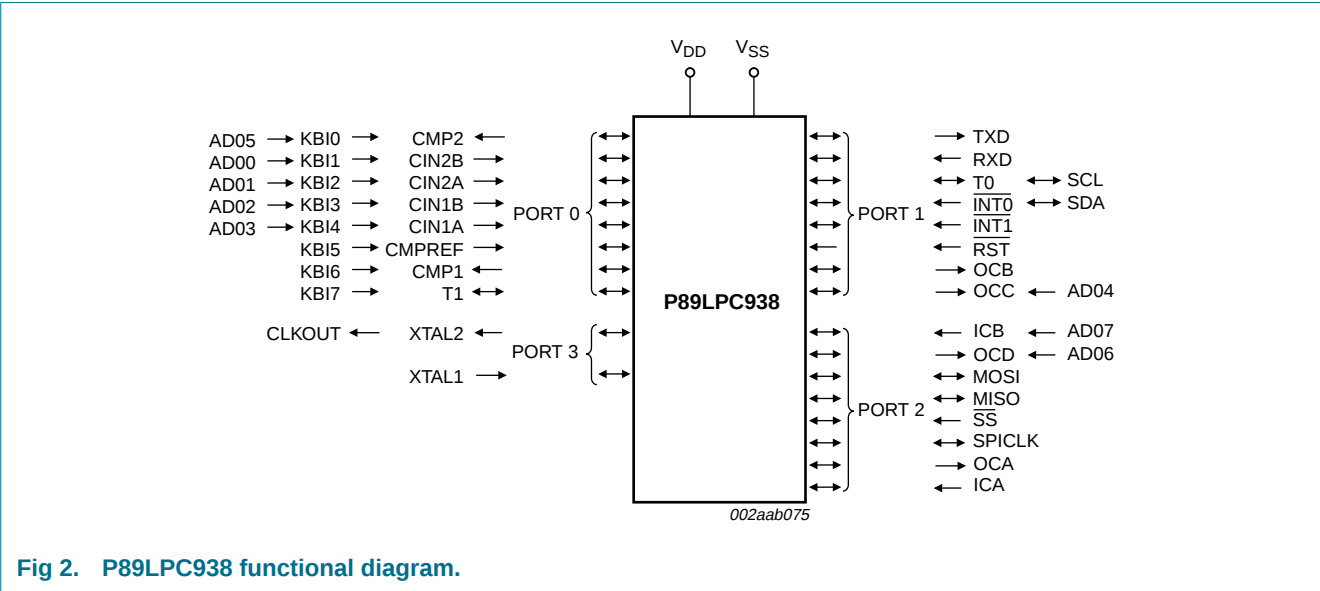


Fig 2. P89LPC938 functional diagram.

6. Pinning information

6.1 Pinning

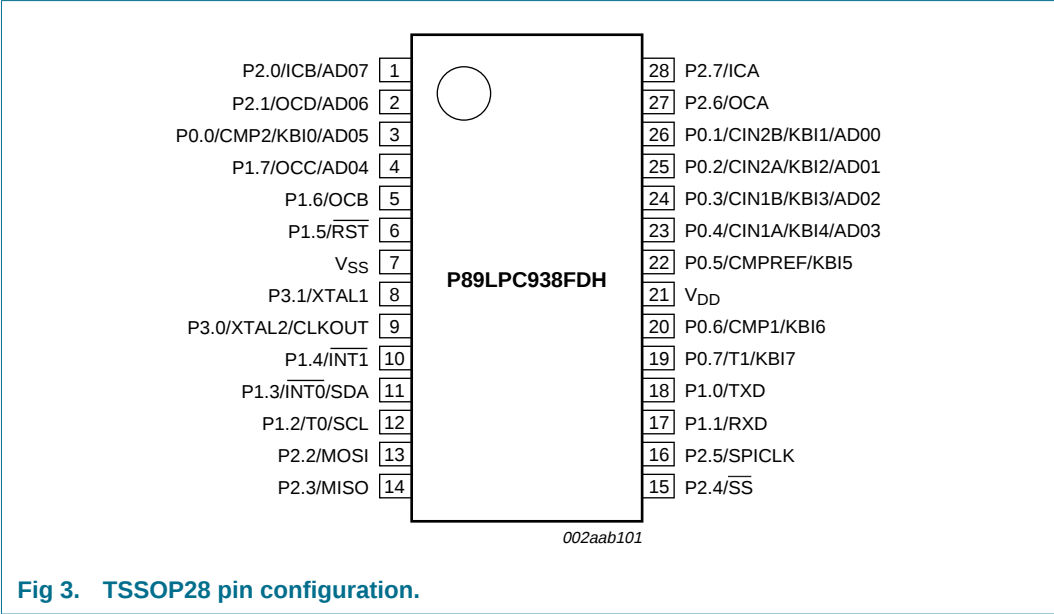


Fig 3. TSSOP28 pin configuration.

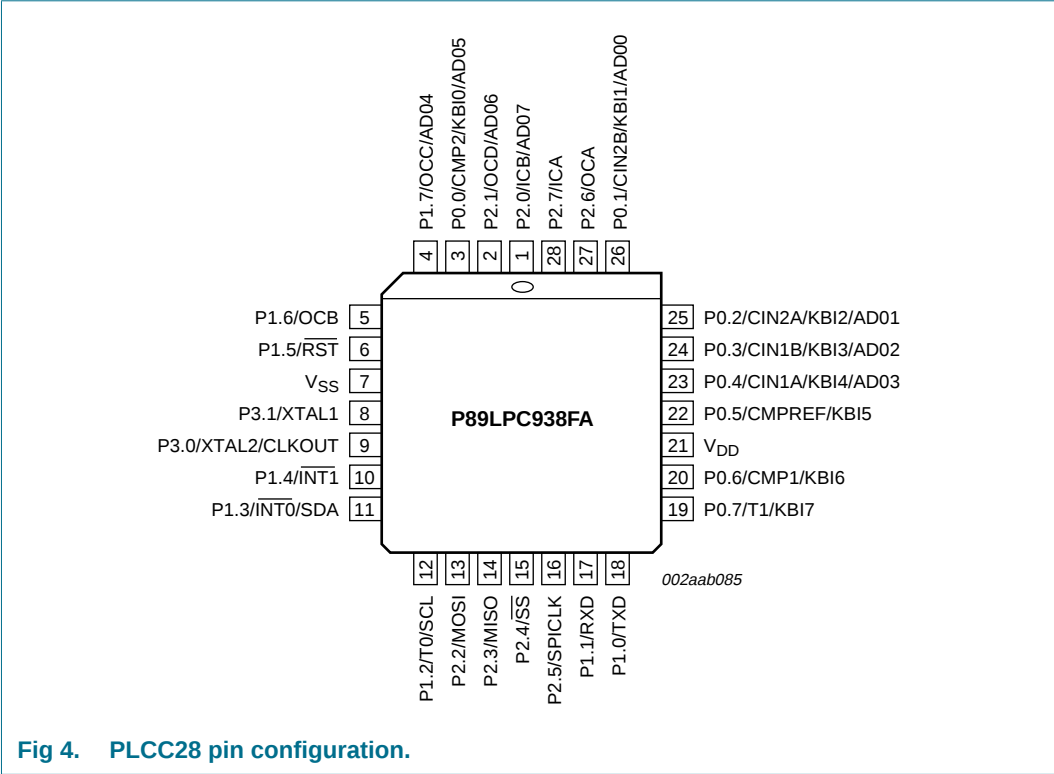


Fig 4. PLCC28 pin configuration.

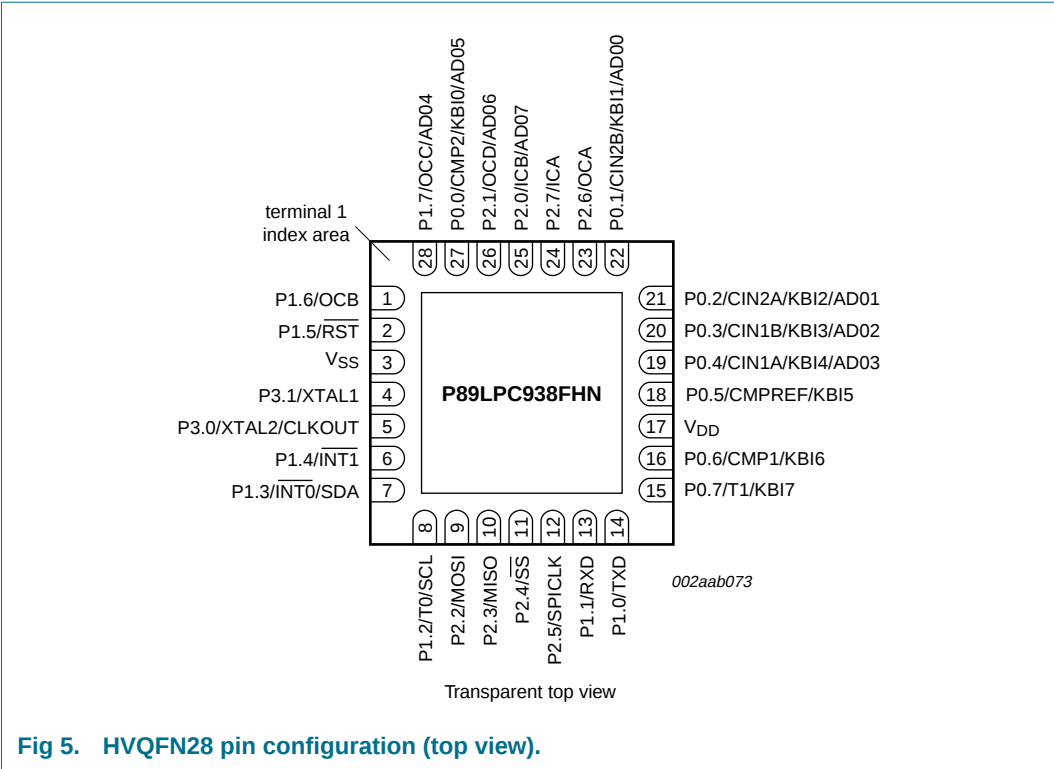


Fig 5. HVQFN28 pin configuration (top view).

6.2 Pin description

Table 3: Pin description

| Symbol                   | Pin             |         | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--------------------------|-----------------|---------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | TSSOP28, PLCC28 | HVQFN28 |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| P0.0 to P0.7             |                 |         | I/O  | <p><b>Port 0:</b> Port 0 is an 8-bit I/O port with a user-configurable output type. During reset Port 0 latches are configured in the input only mode with the internal pull-up disabled. The operation of Port 0 pins as inputs and outputs depends upon the port configuration selected. Each port pin is configured independently. Refer to <a href="#">Section 7.13.1 “Port configurations”</a> and <a href="#">Table 10 “DC electrical characteristics”</a> for details.</p> <p>The Keypad Interrupt feature operates with Port 0 pins.</p> <p>All pins have Schmitt triggered inputs.</p> <p>Port 0 also provides various special functions as described below:</p> |
| P0.0/CMP2/<br>KBI0/AD05  | 3               | 27      | I/O  | <b>P0.0</b> — Port 0 bit 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                          |                 |         | O    | <b>CMP2</b> — Comparator 2 output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                          |                 |         | I    | <b>KBI0</b> — Keyboard input 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                          |                 |         | I    | <b>AD05</b> — ADC0 channel 5 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| P0.1/CIN2B/<br>KBI1/AD00 | 26              | 22      | I/O  | <b>P0.1</b> — Port 0 bit 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                          |                 |         | I    | <b>CIN2B</b> — Comparator 2 positive input B.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                          |                 |         | I    | <b>KBI1</b> — Keyboard input 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                          |                 |         | I    | <b>AD00</b> — ADC0 channel 0 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Table 3: Pin description ...continued

| Symbol                   | Pin                |         | Type                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------|--------------------|---------|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                          | TSSOP28,<br>PLCC28 | HVQFN28 |                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| P0.2/CIN2A/<br>KBI2/AD01 | 25                 | 21      | I/O                           | <b>P0.2</b> — Port 0 bit 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | I                             | <b>CIN2A</b> — Comparator 2 positive input A.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                          |                    |         | I                             | <b>KBI2</b> — Keyboard input 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                          |                    |         | I                             | <b>AD01</b> — ADC0 channel 1 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| P0.3/CIN1B/<br>KBI3/AD02 | 24                 | 20      | I/O                           | <b>P0.3</b> — Port 0 bit 3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | I                             | <b>CIN1B</b> — Comparator 1 positive input B.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                          |                    |         | I                             | <b>KBI3</b> — Keyboard input 3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                          |                    |         | I                             | <b>AD02</b> — ADC0 channel 2 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| P0.4/CIN1A/<br>KBI4/AD03 | 23                 | 19      | I/O                           | <b>P0.4</b> — Port 0 bit 4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | I                             | <b>CIN1A</b> — Comparator 1 positive input A.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|                          |                    |         | I                             | <b>KBI4</b> — Keyboard input 4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                          |                    |         | I                             | <b>AD03</b> — ADC0 channel 3 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| P0.5/CMPREF/<br>KBI5     | 22                 | 18      | I/O                           | <b>P0.5</b> — Port 0 bit 5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | I                             | <b>CMPREF</b> — Comparator reference (negative) input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                          |                    |         | I                             | <b>KBI5</b> — Keyboard input 5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| P0.6/CMP1/<br>KBI6       | 20                 | 16      | I/O                           | <b>P0.6</b> — Port 0 bit 6.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | O                             | <b>CMP1</b> — Comparator 1 output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                          |                    |         | I                             | <b>KBI6</b> — Keyboard input 6.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| P0.7/T1/KBI7             | 19                 | 15      | I/O                           | <b>P0.7</b> — Port 0 bit 7.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | I/O                           | <b>T1</b> — Timer/counter 1 external count input or overflow output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                          |                    |         | I                             | <b>KBI7</b> — Keyboard input 7.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| P1.0 to P1.7             |                    |         | I/O, I<br><a href="#">[1]</a> | <p><b>Port 1:</b> Port 1 is an 8-bit I/O port with a user-configurable output type, except for three pins as noted below. During reset Port 1 latches are configured in the input only mode with the internal pull-up disabled. The operation of the configurable Port 1 pins as inputs and outputs depends upon the port configuration selected. Each of the configurable port pins are programmed independently. Refer to <a href="#">Section 7.13.1 “Port configurations”</a> and <a href="#">Table 10 “DC electrical characteristics”</a> for details. P1.2 to P1.3 are open drain when used as outputs. P1.5 is input only. All pins have Schmitt triggered inputs.</p> <p>Port 1 also provides various special functions as described below:</p> |
| P1.0/TXD                 | 18                 | 14      | I/O                           | <b>P1.0</b> — Port 1 bit 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | O                             | <b>TXD</b> — Transmitter output for the serial port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| P1.1/RXD                 | 17                 | 13      | I/O                           | <b>P1.1</b> — Port 1 bit 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                          |                    |         | I                             | <b>RXD</b> — Receiver input for the serial port.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| P1.2/T0/SCL              | 12                 | 8       | I/O                           | <b>P1.2</b> — Port 1 bit 2 (open-drain when used as output).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                          |                    |         | I/O                           | <b>T0</b> — Timer/counter 0 external count input or overflow output (open-drain when used as output).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                          |                    |         | I/O                           | <b>SCL</b> — I <sup>2</sup> C serial clock input/output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Table 3: Pin description ...continued

| Symbol                              | Pin                |         | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------|--------------------|---------|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                     | TSSOP28,<br>PLCC28 | HVQFN28 |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| P1.3/ $\overline{\text{INT0}}$ /SDA | 11                 | 7       | I/O  | <b>P1.3</b> — Port 1 bit 3 (open-drain when used as output).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                     |                    |         | I    | <b><math>\overline{\text{INT0}}</math></b> — External interrupt 0 input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                                     |                    |         | I/O  | <b>SDA</b> — I <sup>2</sup> C serial data input/output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| P1.4/ $\overline{\text{INT1}}$      | 10                 | 6       | I    | <b>P1.4</b> — Port 1 bit 4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                     |                    |         | I    | <b><math>\overline{\text{INT1}}</math></b> — External interrupt 1 input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| P1.5/ $\overline{\text{RST}}$       | 6                  | 2       | I    | <b>P1.5</b> — Port 1 bit 5 (input only).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                                     |                    |         | I    | <b><math>\overline{\text{RST}}</math></b> — External Reset input during power-on or if selected via UCFG1. When functioning as a reset input, a LOW on this pin resets the microcontroller, causing I/O ports and peripherals to take on their default states, and the processor begins execution at address 0. Also used during a power-on sequence to force In-System Programming mode. <b>When using an oscillator frequency above 12 MHz, the reset input function of P1.5 must be enabled. An external circuit is required to hold the device in reset at power-up until <math>V_{DD}</math> has reached its specified level. When system power is removed <math>V_{DD}</math> will fall below the minimum specified operating voltage. When using an oscillator frequency above 12 MHz, in some applications, an external brownout detect circuit may be required to hold the device in reset when <math>V_{DD}</math> falls below the minimum specified operating range.</b> |
| P1.6/OCB                            | 5                  | 1       | I/O  | <b>P1.6</b> — Port 1 bit 6.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                     |                    |         | O    | <b>OCB</b> — Output Compare B.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| P1.7/OCC/<br>AD04                   | 4                  | 28      | I/O  | <b>P1.7</b> — Port 1 bit 7.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                     |                    |         | O    | <b>OCC</b> — Output Compare C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                     |                    |         | I    | <b>AD04</b> — ADC0 channel 4 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| P2.0 to P2.7                        |                    |         | I/O  | <b>Port 2:</b> Port 2 is an 8-bit I/O port with a user-configurable output type. During reset Port 2 latches are configured in the input only mode with the internal pull-up disabled. The operation of Port 2 pins as inputs and outputs depends upon the port configuration selected. Each port pin is configured independently. Refer to <a href="#">Section 7.13.1 "Port configurations"</a> and <a href="#">Table 10 "DC electrical characteristics"</a> for details.<br><br>All pins have Schmitt triggered inputs.<br><br>Port 2 also provides various special functions as described below:                                                                                                                                                                                                                                                                                                                                                                                 |
| P2.0/ICB/AD07                       | 1                  | 25      | I/O  | <b>P2.0</b> — Port 2 bit 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                     |                    |         | I    | <b>ICB</b> — Input Capture B.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                                     |                    |         | I    | <b>AD07</b> — ADC0 channel 7 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| P2.1/OCD/<br>AD06                   | 2                  | 26      | I/O  | <b>P2.1</b> — Port 2 bit 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                     |                    |         | O    | <b>OCD</b> — Output Compare D.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                     |                    |         | I    | <b>AD06</b> — ADC0 channel 6 analog input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| P2.2/MOSI                           | 13                 | 9       | I/O  | <b>P2.2</b> — Port 2 bit 2.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                     |                    |         | I/O  | <b>MOSI</b> — SPI master out slave in. When configured as master, this pin is output; when configured as slave, this pin is input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| P2.3/MISO                           | 14                 | 10      | I/O  | <b>P2.3</b> — Port 2 bit 3.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                                     |                    |         | I/O  | <b>MISO</b> — When configured as master, this pin is input, when configured as slave, this pin is output.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

Table 3: Pin description ...continued

| Symbol                | Pin                |         | Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------|--------------------|---------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                       | TSSOP28,<br>PLCC28 | HVQFN28 |      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| P2.4/ $\overline{SS}$ | 15                 | 11      | I/O  | <b>P2.4</b> — Port 2 bit 4.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       |                    |         | I    | <b>SS</b> — SPI Slave select.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| P2.5/SPICLK           | 16                 | 12      | I/O  | <b>P2.5</b> — Port 2 bit 5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       |                    |         | I/O  | <b>SPICLK</b> — SPI clock. When configured as master, this pin is output; when configured as slave, this pin is input.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| P2.6/OCA              | 27                 | 23      | I/O  | <b>P2.6</b> — Port 2 bit 6.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       |                    |         | O    | <b>OCA</b> — Output Compare A.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| P2.7/ICA              | 28                 | 24      | I/O  | <b>P2.7</b> — Port 2 bit 7.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       |                    |         | I    | <b>ICA</b> — Input Capture A.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| P3.0 to P3.1          |                    |         | I/O  | <p><b>Port 3:</b> Port 3 is a 2-bit I/O port with a user-configurable output type. During reset Port 3 latches are configured in the input only mode with the internal pull-up disabled. The operation of Port 3 pins as inputs and outputs depends upon the port configuration selected. Each port pin is configured independently. Refer to <a href="#">Section 7.13.1 "Port configurations"</a> and <a href="#">Table 10 "DC electrical characteristics"</a> for details.</p> <p>All pins have Schmitt triggered inputs.</p> <p>Port 3 also provides various special functions as described below:</p> |
| P3.0/XTAL2/<br>CLKOUT | 9                  | 5       | I/O  | <b>P3.0</b> — Port 3 bit 0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       |                    |         | O    | <b>XTAL2</b> — Output from the oscillator amplifier (when a crystal oscillator option is selected via the Flash configuration).                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                       |                    |         | O    | <b>CLKOUT</b> — CPU clock divided by 2 when enabled via SFR bit (ENCLK -TRIM.6). It can be used if the CPU clock is the internal RC oscillator, watchdog oscillator or external clock input, except when XTAL1/XTAL2 are used to generate clock source for the RTC/system timer.                                                                                                                                                                                                                                                                                                                          |
| P3.1/XTAL1            | 8                  | 4       | I/O  | <b>P3.1</b> — Port 3 bit 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                       |                    |         | I    | <b>XTAL1</b> — Input to the oscillator circuit and internal clock generator circuits (when selected via the Flash configuration). It can be a port pin if internal RC oscillator or watchdog oscillator is used as the CPU clock source, <b>and</b> if XTAL1/XTAL2 are not used to generate the clock for the RTC/system timer.                                                                                                                                                                                                                                                                           |
| V <sub>SS</sub>       | 7                  | 3       | I    | <b>Ground:</b> 0 V reference.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| V <sub>DD</sub>       | 21                 | 17      | I    | <b>Power Supply:</b> This is the power supply voltage for normal operation as well as Idle and Power-down modes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

[1] Input/Output for P1.0 to P1.4, P1.6, P1.7. Input for P1.5.

## 7. Functional description

---

**Remark:** Please refer to the *P89LPC938 User's Manual* for a more detailed functional description.

### 7.1 Special function registers

**Remark:** SFR accesses are restricted in the following ways:

- User must **not** attempt to access any SFR locations not defined.
- Accesses to any defined SFR locations must be strictly for the functions for the SFRs.
- SFR bits labeled '-', '0' or '1' can **only** be written and read as follows:
  - '-' Unless otherwise specified, **must** be written with '0', but can return any value when read (even if it was written with '0'). It is a reserved bit and may be used in future derivatives.
  - '0' **must** be written with '0', and will return a '0' when read.
  - '1' **must** be written with '1', and will return a '1' when read.

**Table 4: P89LPC938 Special function registers**

\* indicates SFRs that are bit addressable.

| Name                      | Description                        | SFR addr.   | Bit functions and addresses |         |        |       |       |        |        |        | Reset value            |          |
|---------------------------|------------------------------------|-------------|-----------------------------|---------|--------|-------|-------|--------|--------|--------|------------------------|----------|
|                           |                                    |             | MSB                         |         |        |       | LSB   |        |        |        | Hex                    | Binary   |
|                           |                                    | Bit address | E7                          | E6      | E5     | E4    | E3    | E2     | E1     | E0     |                        |          |
| ACC*                      | Accumulator                        | E0H         |                             |         |        |       |       |        |        |        | 00                     | 00000000 |
| AD0CON                    | ADC0 control register              | 97H         | ENBI0                       | ENADCI0 | TMM0   | EDGE0 | ADCI0 | ENADC0 | ADCS01 | ADCS00 | 00                     | 00000000 |
| AD0INS                    | ADC0 input select                  | A3H         | ADI07                       | ADI06   | ADI05  | ADI04 | ADI03 | ADI02  | ADI01  | ADI00  | 00                     | 00000000 |
| AD0MOD A                  | ADC0 mode register A               | C0H         | BNDI0                       | BURST0  | SCC0   | SCAN0 | -     | -      | -      | -      | 00                     | 00000000 |
| AD0MOD B                  | ADC0 mode register B               | A1H         | CLK2                        | CLK1    | CLK0   | -     | -     | -      | -      | -      | 00                     | 000x0000 |
| AUXR1                     | Auxiliary function register        | A2H         | CLKLP                       | EBRR    | ENT1   | ENT0  | SRST  | 0      | -      | DPS    | 00                     | 000000x0 |
|                           |                                    | Bit address | F7                          | F6      | F5     | F4    | F3    | F2     | F1     | F0     |                        |          |
| B*                        | B register                         | F0H         |                             |         |        |       |       |        |        |        | 00                     | 00000000 |
| BRGR0 <a href="#">[1]</a> | Baud rate generator rate low       | BEH         |                             |         |        |       |       |        |        |        | 00                     | 00000000 |
| BRGR1 <a href="#">[1]</a> | Baud rate generator rate high      | BFH         |                             |         |        |       |       |        |        |        | 00                     | 00000000 |
| BRGCON                    | Baud rate generator control        | BDH         | -                           | -       | -      | -     | -     | -      | SBRGS  | BRGEN  | 00 <a href="#">[1]</a> | xxxxxx00 |
| CCCRA                     | Capture compare A control register | EAH         | ICECA2                      | ICECA1  | ICECA0 | ICESA | ICNFA | FCOA   | OCMA1  | OCMA0  | 00                     | 00000000 |
| CCCRB                     | Capture compare B control register | EBH         | ICECB2                      | ICECB1  | ICECB0 | ICESB | ICNFB | FCOB   | OCMB1  | OCMB0  | 00                     | 00000000 |
| CCCRC                     | Capture compare C control register | ECH         | -                           | -       | -      | -     | -     | FCOC   | OCMC1  | OCMC0  | 00                     | xxxxx000 |
| CCCRD                     | Capture compare D control register | EDH         | -                           | -       | -      | -     | -     | FCOD   | OCMD1  | OCMD0  | 00                     | xxxxx000 |
| CMP1                      | Comparator 1 control register      | ACH         | -                           | -       | CE1    | CP1   | CN1   | OE1    | CO1    | CMF1   | 00 <a href="#">[2]</a> | xx000000 |
| CMP2                      | Comparator 2 control register      | ADH         | -                           | -       | CE2    | CP2   | CN2   | OE2    | CO2    | CMF2   | 00 <a href="#">[2]</a> | xx000000 |
| DEECON                    | Data EEPROM control register       | F1H         | EEIF                        | HVERR   | ECTL1  | ECTL0 | -     | -      | -      | EADR8  | 0E                     | 00001110 |
| DEEDAT                    | Data EEPROM data register          | F2H         |                             |         |        |       |       |        |        |        | 00                     | 00000000 |
| DEEADR                    | Data EEPROM address register       | F3H         |                             |         |        |       |       |        |        |        | 00                     | 00000000 |
| DIVM                      | CPU clock divide-by-M control      | 95H         |                             |         |        |       |       |        |        |        | 00                     | 00000000 |

**Table 4: P89LPC938 Special function registers ...continued**

\* indicates SFRs that are bit addressable.

| Name   | Description                                            | SFR<br>addr. | Bit functions and addresses |             |             |             |             |             |             |             | Reset value            |          |
|--------|--------------------------------------------------------|--------------|-----------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------------------------|----------|
|        |                                                        |              | MSB                         |             |             |             | LSB         |             |             |             | Hex                    | Binary   |
| DPTR   | Data pointer (2 bytes)                                 |              |                             |             |             |             |             |             |             |             |                        |          |
| DPH    | Data pointer high                                      | 83H          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| DPL    | Data pointer low                                       | 82H          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| FMADRH | Program Flash address high                             | E7H          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| FMADRL | Program Flash address low                              | E6H          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| FMCON  | Program Flash control (Read)                           | E4H          | BUSY                        | -           | -           | -           | HVA         | HVE         | SV          | OI          | 70                     | 01110000 |
|        | Program Flash control (Write)                          | E4H          | FMCMD.<br>7                 | FMCMD.<br>6 | FMCMD.<br>5 | FMCMD.<br>4 | FMCMD.<br>3 | FMCMD.<br>2 | FMCMD.<br>1 | FMCMD.<br>0 |                        |          |
| FMDATA | Program Flash data                                     | E5H          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| I2ADR  | I <sup>2</sup> C slave address register                | DBH          | I2ADR.6                     | I2ADR.5     | I2ADR.4     | I2ADR.3     | I2ADR.2     | I2ADR.1     | I2ADR.0     | GC          | 00                     | 00000000 |
|        | Bit address                                            |              | DF                          | DE          | DD          | DC          | DB          | DA          | D9          | D8          |                        |          |
| I2CON* | I <sup>2</sup> C control register                      | D8H          | -                           | I2EN        | STA         | STO         | SI          | AA          | -           | CRSEL       | 00                     | x00000x0 |
| I2DAT  | I <sup>2</sup> C data register                         | DAH          |                             |             |             |             |             |             |             |             |                        |          |
| I2SCLH | Serial clock generator/SCL<br>duty cycle register high | DDH          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| I2SCLL | Serial clock generator/SCL<br>duty cycle register low  | DCH          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| I2STAT | I <sup>2</sup> C status register                       | D9H          | STA.4                       | STA.3       | STA.2       | STA.1       | STA.0       | 0           | 0           | 0           | F8                     | 11111000 |
| ICRAH  | Input capture A register high                          | ABH          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| ICRAL  | Input capture A register low                           | AAH          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| ICRBH  | Input capture B register high                          | AFH          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
| ICRBL  | Input capture B register low                           | AEH          |                             |             |             |             |             |             |             |             | 00                     | 00000000 |
|        | Bit address                                            |              | AF                          | AE          | AD          | AC          | AB          | AA          | A9          | A8          |                        |          |
| IEN0*  | Interrupt enable 0                                     | A8H          | EA                          | EWDRT       | EBO         | ES/ESR      | ET1         | EX1         | ET0         | EX0         | 00                     | 00000000 |
|        | Bit address                                            |              | EF                          | EE          | ED          | EC          | EB          | EA          | E9          | E8          |                        |          |
| IEN1*  | Interrupt enable 1                                     | E8H          | EIEE                        | EST         | -           | ECCU        | ESPI        | EC          | EKBI        | EI2C        | 00 <a href="#">[2]</a> | 00x00000 |
| IEN2   | Interrupt enable 2                                     | D5H          | -                           | -           | -           | -           | -           | -           | EADC        | -           | 00 <a href="#">[2]</a> | 00x00000 |
|        | Bit address                                            |              | BF                          | BE          | BD          | BC          | BB          | BA          | B9          | B8          |                        |          |
| IPO*   | Interrupt priority 0                                   | B8H          | -                           | PWDRT       | PBO         | PS/PSR      | PT1         | PX1         | PT0         | PX0         | 00 <a href="#">[2]</a> | x0000000 |

**Table 4: P89LPC938 Special function registers ...continued**  
*\* indicates SFRs that are bit addressable.*

| Name   | Description                    | SFR addr. | Bit functions and addresses |              |                |               |               |               |               |              | Reset value |          |
|--------|--------------------------------|-----------|-----------------------------|--------------|----------------|---------------|---------------|---------------|---------------|--------------|-------------|----------|
|        |                                |           | MSB                         |              |                |               | LSB           |               |               |              | Hex         | Binary   |
| IP0H   | Interrupt priority 0 high      | B7H       | -                           | PWDRT<br>H   | PBOH           | PSH/<br>PSRH  | PT1H          | PX1H          | PT0H          | PX0H         | 00 [2]      | x0000000 |
|        | <b>Bit address</b>             |           | <b>FF</b>                   | <b>FE</b>    | <b>FD</b>      | <b>FC</b>     | <b>FB</b>     | <b>FA</b>     | <b>F9</b>     | <b>F8</b>    |             |          |
| IP1*   | Interrupt priority 1           | F8H       | PADEE                       | PST          | -              | PCCU          | PSPI          | PC            | PKBI          | PI2C         | 00 [2]      | 00x00000 |
| IP1H   | Interrupt priority 1 high      | F7H       | PADEEH                      | PSTH         | -              | PCCUH         | PSPIH         | PCH           | PKBIH         | PI2CH        | 00 [2]      | 00x00000 |
| IP2    | Interrupt priority 2           | D6H       | -                           | -            | -              | -             | -             | -             | PADC          | -            | 00 [2]      | 00x00000 |
| IP2H   | Interrupt priority 2 high      | D7H       | -                           | -            | -              | -             | -             | -             | PADCH         | -            | 00 [2]      | 00x00000 |
| KBCON  | Keypad control register        | 94H       | -                           | -            | -              | -             | -             | -             | PATN<br>_SEL  | KBIF         | 00 [2]      | xxxxxx00 |
| KBMASK | Keypad interrupt mask register | 86H       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| KBPATN | Keypad pattern register        |           |                             |              |                |               |               |               |               |              | FF          | 11111111 |
| OCRAH  | Output compare A register high | EFH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| OCRAL  | Output compare A register low  | EEH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| OCRBH  | Output compare B register high | FBH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| OCRBL  | Output compare B register low  | FAH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| OCRCH  | Output compare C register high | FDH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| OCRCL  | Output compare C register low  | FCH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| OCRDH  | Output compare D register high | FFH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
| OCRDL  | Output compare D register low  | FEH       |                             |              |                |               |               |               |               |              | 00          | 00000000 |
|        | <b>Bit address</b>             |           | <b>87</b>                   | <b>86</b>    | <b>85</b>      | <b>84</b>     | <b>83</b>     | <b>82</b>     | <b>81</b>     | <b>80</b>    |             |          |
| P0*    | Port 0                         | 80H       | T1/KB7                      | CMP1<br>/KB6 | CMPREF<br>/KB5 | CIN1A<br>/KB4 | CIN1B<br>/KB3 | CIN2A<br>/KB2 | CIN2B<br>/KB1 | CMP2<br>/KB0 |             | [2]      |
|        | <b>Bit address</b>             |           | <b>97</b>                   | <b>96</b>    | <b>95</b>      | <b>94</b>     | <b>93</b>     | <b>92</b>     | <b>91</b>     | <b>90</b>    |             |          |

**Table 4: P89LPC938 Special function registers ...continued**

\* indicates SFRs that are bit addressable.

| Name   | Description                          | SFR addr.   | Bit functions and addresses |          |          |          |              |          |          |          | Reset value |          |
|--------|--------------------------------------|-------------|-----------------------------|----------|----------|----------|--------------|----------|----------|----------|-------------|----------|
|        |                                      |             | MSB                         |          |          |          |              |          |          |          | Hex         | Binary   |
| P1*    | Port 1                               | 90H         | OCC                         | OCB      | RST      | INT1     | INT0/<br>SDA | T0/SCL   | RXD      | TXD      |             | [2]      |
|        |                                      | Bit address | 97                          | 96       | 95       | 94       | 93           | 92       | 91       | 90       |             |          |
| P2*    | Port 2                               | A0H         | ICA                         | OCA      | SPICLK   | SS       | MISO         | MOSI     | OCD      | ICB      |             | [2]      |
|        |                                      | Bit address | B7                          | B6       | B5       | B4       | B3           | B2       | B1       | B0       |             |          |
| P3*    | Port 3                               | B0H         | -                           | -        | -        | -        | -            | -        | XTAL1    | XTAL2    |             | [2]      |
| P0M1   | Port 0 output mode 1                 | 84H         | (P0M1.7)                    | (P0M1.6) | (P0M1.5) | (P0M1.4) | (P0M1.3)     | (P0M1.2) | (P0M1.1) | (P0M1.0) | FF [2]      | 11111111 |
| P0M2   | Port 0 output mode 2                 | 85H         | (P0M2.7)                    | (P0M2.6) | (P0M2.5) | (P0M2.4) | (P0M2.3)     | (P0M2.2) | (P0M2.1) | (P0M2.0) | 00 [2]      | 00000000 |
| P1M1   | Port 1 output mode 1                 | 91H         | (P1M1.7)                    | (P1M1.6) | -        | (P1M1.4) | (P1M1.3)     | (P1M1.2) | (P1M1.1) | (P1M1.0) | D3 [2]      | 11x1xx11 |
| P1M2   | Port 1 output mode 2                 | 92H         | (P1M2.7)                    | (P1M2.6) | -        | (P1M2.4) | (P1M2.3)     | (P1M2.2) | (P1M2.1) | (P1M2.0) | 00 [2]      | 00x0xx00 |
| P2M1   | Port 2 output mode 1                 | A4H         | (P2M1.7)                    | (P2M1.6) | (P2M1.5) | (P2M1.4) | (P2M1.3)     | (P2M1.2) | (P2M1.1) | (P2M1.0) | FF [2]      | 11111111 |
| P2M2   | Port 2 output mode 2                 | A5H         | (P2M2.7)                    | (P2M2.6) | (P2M2.5) | (P2M2.4) | (P2M2.3)     | (P2M2.2) | (P2M2.1) | (P2M2.0) | 00 [2]      | 00000000 |
| P3M1   | Port 3 output mode 1                 | B1H         | -                           | -        | -        | -        | -            | -        | (P3M1.1) | (P3M1.0) | 03 [2]      | xxxxxx11 |
| P3M2   | Port 3 output mode 2                 | B2H         | -                           | -        | -        | -        | -            | -        | (P3M2.1) | (P3M2.0) | 00 [2]      | xxxxxx00 |
| PCON   | Power control register               | 87H         | SMOD1                       | SMOD0    | BOPD     | BOI      | GF1          | GF0      | PMOD1    | PMOD0    | 00          | 00000000 |
| PCONA  | Power control register A             | B5H         | RTCPD                       | DEEPD    | VCPD     | ADPD     | I2PD         | SPPD     | SPD      | CCUPD    | 00 [2]      | 00000000 |
|        |                                      | Bit address | D7                          | D6       | D5       | D4       | D3           | D2       | D1       | D0       |             |          |
| PSW*   | Program status word                  | D0H         | CY                          | AC       | F0       | RS1      | RS0          | OV       | F1       | P        | 00          | 00000000 |
| PT0AD  | Port 0 digital input disable         | F6H         | -                           | -        | PT0AD.5  | PT0AD.4  | PT0AD.3      | PT0AD.2  | PT0AD.1  | -        | 00          | xx00000x |
| RSTSRC | Reset source register                | DFH         | -                           | -        | BOF      | POF      | R_BK         | R_WD     | R_SF     | R_EX     |             | [3]      |
| RTCCON | RTC control                          | D1H         | RTCF                        | RTCS1    | RTCS0    | -        | -            | -        | ERTC     | RTCEN    | 60 [2] [4]  | 011xxx00 |
| RTCH   | RTC register high                    | D2H         |                             |          |          |          |              |          |          |          | 00 [4]      | 00000000 |
| RTCL   | RTC register low                     | D3H         |                             |          |          |          |              |          |          |          | 00 [4]      | 00000000 |
| SADDR  | Serial port address register         | A9H         |                             |          |          |          |              |          |          |          | 00          | 00000000 |
| SADEN  | Serial port address enable           | B9H         |                             |          |          |          |              |          |          |          | 00          | 00000000 |
| SBUF   | Serial Port data buffer register     | 99H         |                             |          |          |          |              |          |          |          | xx          | xxxxxxxx |
|        |                                      | Bit address | 9F                          | 9E       | 9D       | 9C       | 9B           | 9A       | 99       | 98       |             |          |
| SCON*  | Serial port control                  | 98H         | SM0/FE                      | SM1      | SM2      | REN      | TB8          | RB8      | TI       | RI       | 00          | 00000000 |
| SSTAT  | Serial port extended status register | BAH         | DBMOD                       | INTLO    | CIDIS    | DBISEL   | FE           | BR       | OE       | STINT    | 00          | 00000000 |

**Table 4: P89LPC938 Special function registers ...continued**

\* indicates SFRs that are bit addressable.

| Name        | Description                          | SFR<br>addr. | Bit functions and addresses |          |          |          |          |          |          |          | Reset value                             |          |
|-------------|--------------------------------------|--------------|-----------------------------|----------|----------|----------|----------|----------|----------|----------|-----------------------------------------|----------|
|             |                                      |              |                             |          |          |          |          |          |          |          | Hex                                     | Binary   |
|             |                                      |              | MSB                         |          |          |          |          |          |          |          | LSB                                     |          |
| SP          | Stack pointer                        | 81H          |                             |          |          |          |          |          |          |          | 07                                      | 00000111 |
| SPCTL       | SPI control register                 | E2H          | SSIG                        | SPEN     | DORD     | MSTR     | CPOL     | CPHA     | SPR1     | SPR0     | 04                                      | 00000100 |
| SPSTAT      | SPI status register                  | E1H          | SPIF                        | WCOL     | -        | -        | -        | -        | -        | -        | 00                                      | 00xxxxxx |
| SPDAT       | SPI data register                    | E3H          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TAMOD       | Timer 0 and 1 auxiliary mode         | 8FH          | -                           | -        | -        | T1M2     | -        | -        | -        | T0M2     | 00                                      | xxx0xxx0 |
| Bit address |                                      |              | 8F                          | 8E       | 8D       | 8C       | 8B       | 8A       | 89       | 88       |                                         |          |
| TCON*       | Timer 0 and 1 control                | 88H          | TF1                         | TR1      | TF0      | TR0      | IE1      | IT1      | IE0      | IT0      | 00                                      | 00000000 |
| TCR20*      | CCU control register 0               | C8H          | PLEEN                       | HLTRN    | HLTEN    | ALTCB    | ALTAB    | TDIR2    | TMOD21   | TMOD20   | 00                                      | 00000000 |
| TCR21       | CCU control register 1               | F9H          | TCOU2                       | -        | -        | -        | PLLDV.3  | PLLDV.2  | PLLDV.1  | PLLDV.0  | 00                                      | 0xxx0000 |
| TH0         | Timer 0 high                         | 8CH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TH1         | Timer 1 high                         | 8DH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TH2         | CCU timer high                       | CDH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TICR2       | CCU interrupt control register       | C9H          | TOIE2                       | TOCIE2D  | TOCIE2C  | TOCIE2B  | TOCIE2A  | -        | TICIE2B  | TICIE2A  | 00                                      | 00000x00 |
| TIFR2       | CCU interrupt flag register          | E9H          | TOIF2                       | TOCF2D   | TOCF2C   | TOCF2B   | TOCF2A   | -        | TICF2B   | TICF2A   | 00                                      | 00000x00 |
| TISE2       | CCU interrupt status encode register | DEH          | -                           | -        | -        | -        | -        | ENCINT.2 | ENCINT.1 | ENCINT.0 | 00                                      | xxxxx000 |
| TL0         | Timer 0 low                          | 8AH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TL1         | Timer 1 low                          | 8BH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TL2         | CCU timer low                        | CCH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TMOD        | Timer 0 and 1 mode                   | 89H          | T1GATE                      | T1C/T    | T1M1     | T1M0     | T0GATE   | T0C/T    | T0M1     | T0M0     | 00                                      | 00000000 |
| TOR2H       | CCU reload register high             | CFH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TOR2L       | CCU reload register low              | CEH          |                             |          |          |          |          |          |          |          | 00                                      | 00000000 |
| TPCR2H      | Prescaler control register high      | CBH          | -                           | -        | -        | -        | -        | -        | TPCR2H.1 | TPCR2H.0 | 00                                      | xxxxxx00 |
| TPCR2L      | Prescaler control register low       | CAH          | TPCR2L.7                    | TPCR2L.6 | TPCR2L.5 | TPCR2L.4 | TPCR2L.3 | TPCR2L.2 | TPCR2L.1 | TPCR2L.0 | 00                                      | 00000000 |
| TRIM        | Internal oscillator trim register    | 96H          | RCCLK                       | ENCLK    | TRIM.5   | TRIM.4   | TRIM.3   | TRIM.2   | TRIM.1   | TRIM.0   | <a href="#">[5]</a> <a href="#">[4]</a> |          |
| WDCON       | Watchdog control register            | A7H          | PRE2                        | PRE1     | PRE0     | -        | -        | WDRUN    | WDTOF    | WDCLK    | <a href="#">[6]</a> <a href="#">[4]</a> |          |

**Table 4: P89LPC938 Special function registers ...continued**

\* indicates SFRs that are bit addressable.

| Name   | Description     | SFR<br>addr. | Bit functions and addresses |     | Reset value |          |
|--------|-----------------|--------------|-----------------------------|-----|-------------|----------|
|        |                 |              | MSB                         | LSB | Hex         | Binary   |
| WDL    | Watchdog load   | C1H          |                             |     | FF          | 11111111 |
| WFEED1 | Watchdog feed 1 | C2H          |                             |     |             |          |
| WFEED2 | Watchdog feed 2 | C3H          |                             |     |             |          |

- [1] BRGR1 and BRGR0 must only be written if BRGEN in BRGCON SFR is logic 0. If any are written while BRGEN = 1, the result is unpredictable.
- [2] All ports are in input only (high-impedance) state after power-up.
- [3] The RSTSRC register reflects the cause of the P89LPC938 reset. Upon a power-up reset, all reset source flags are cleared except POF and BOF; the power-on reset value is xx110000.
- [4] The only reset source that affects these SFRs is power-on reset.
- [5] On power-on reset, the TRIM SFR is initialized with a factory preprogrammed value. Other resets will not cause initialization of the TRIM register.
- [6] After reset, the value is 111001x1, i.e., PRE2-PRE0 are all logic 1, WDRUN = 1 and WDCLK = 1. WDTOF bit is logic 1 after watchdog reset and is logic 0 after power-on reset. Other resets will not affect WDTOF.

Table 5: P89LPC938 extended special function registers

| Name     | Description                              | SFR addr. | Bit functions and addresses |              | Reset value |          |
|----------|------------------------------------------|-----------|-----------------------------|--------------|-------------|----------|
|          |                                          |           | MSB                         | LSB          | Hex         | Binary   |
| ADC0HBND | ADC0 high _boundary register, left (MSB) | FFEFh     |                             |              | FF          | 11111111 |
| ADC0LBND | ADC0 low _boundary register (MSB)        | FFEEh     |                             |              | 00          | 00000000 |
| AD0DAT0R | ADC0 data register 0, right (LSB)        | FFFEh     |                             | AD0DAT0[7:0] | 00          | 00000000 |
| AD0DAT0L | ADC0 data register 0, left (MSB)         | FFFFh     |                             | AD0DAT0[9:2] | 00          | 00000000 |
| AD0DAT1R | ADC0 data register 1, right (LSB)        | FFFCh     |                             | AD0DAT1[7:0] | 00          | 00000000 |
| AD0DAT1L | ADC0 data register 1, left (MSB)         | FFFDh     |                             | AD0DAT1[9:2] | 00          | 00000000 |
| AD0DAT2R | ADC0 data register 2, right (LSB)        | FFFAh     |                             | AD0DAT2[7:0] | 00          | 00000000 |
| AD0DAT2L | ADC0 data register 2, left (MSB)         | FFFBh     |                             | AD0DAT2[9:2] | 00          | 00000000 |
| AD0DAT3R | ADC0 data register 3, right (LSB)        | FFF8h     |                             | AD0DAT3[7:0] | 00          | 00000000 |
| AD0DAT3L | ADC0 data register 3, left (MSB)         | FFF9h     |                             | AD0DAT3[9:2] | 00          | 00000000 |
| AD0DAT4R | ADC0 data register 4, right (LSB)        | FFF6h     |                             | AD0DAT4[7:0] | 00          | 00000000 |
| AD0DAT4L | ADC0 data register 4, left (MSB)         | FFF7h     |                             | AD0DAT4[9:2] | 00          | 00000000 |
| AD0DAT5R | ADC0 data register 5, right (LSB)        | FFF4h     |                             | AD0DAT5[7:0] | 00          | 00000000 |
| AD0DAT5L | ADC0 data register 5, left (MSB)         | FFF5h     |                             | AD0DAT5[9:2] | 00          | 00000000 |
| AD0DAT6R | ADC0 data register 6, right (LSB)        | FFF2h     |                             | AD0DAT6[7:0] | 00          | 00000000 |
| AD0DAT6L | ADC0 data register 6, left (MSB)         | FFF3h     |                             | AD0DAT6[9:2] | 00          | 00000000 |
| AD0DAT7R | ADC0 data register 7, right (LSB)        | FFF0h     |                             | AD0DAT7[7:0] |             |          |
| AD0DAT7L | ADC0 data register 7, left (MSB)         | FFF1h     |                             | AD0DAT7[9:2] |             |          |
| BNDSTA0  | ADC0 boundary status register            | FFEDh     |                             |              |             |          |

## 7.2 Enhanced CPU

The P89LPC938 uses an enhanced 80C51 CPU which runs at six times the speed of standard 80C51 devices. A machine cycle consists of two CPU clock cycles, and most instructions execute in one or two machine cycles.

## 7.3 Clocks

### 7.3.1 Clock definitions

The P89LPC938 device has several internal clocks as defined below:

**OSCCLK** — Input to the DIVM clock divider. OSCCLK is selected from one of four clock sources (see [Figure 6](#)) and can also be optionally divided to a slower frequency (see [Section 7.8 “CCLK modification: DIVM register”](#)).

**Note:**  $f_{osc}$  is defined as the OSCCLK frequency.

**CCLK** — CPU clock; output of the clock divider. There are two CCLK cycles per machine cycle, and most instructions are executed in one to two machine cycles (two or four CCLK cycles).

**RCCLK** — The internal 7.373 MHz RC oscillator output.

**PCLK** — Clock for the various peripheral devices and is  $CCLK/2$ .

### 7.3.2 CPU clock (OSCCLK)

The P89LPC938 provides several user-selectable oscillator options in generating the CPU clock. This allows optimization for a range of needs from high precision to lowest possible cost. These options are configured when the Flash is programmed and include an on-chip watchdog oscillator, an on-chip RC oscillator, an oscillator using an external crystal, or an external clock source. The crystal oscillator can be optimized for low, medium, or high frequency crystals covering a range from 20 kHz to 18 MHz.

### 7.3.3 Low speed oscillator option

This option supports an external crystal in the range of 20 kHz to 100 kHz. Ceramic resonators are also supported in this configuration.

### 7.3.4 Medium speed oscillator option

This option supports an external crystal in the range of 100 kHz to 4 MHz. Ceramic resonators are also supported in this configuration.

### 7.3.5 High speed oscillator option

This option supports an external crystal in the range of 4 MHz to 18 MHz. Ceramic resonators are also supported in this configuration.

### 7.3.6 Clock output

The P89LPC938 supports a user-selectable clock output function on the XTAL2/CLKOUT pin when crystal oscillator is not being used. This condition occurs if another clock source has been selected (on-chip RC oscillator, watchdog oscillator, external clock input on X1) and if the RTC is not using the crystal oscillator as its clock source. This allows external devices to synchronize to the P89LPC938. This output is enabled by the ENCLK bit in the TRIM register.

The frequency of this clock output is  $\frac{1}{2}$  that of the CCLK. If the clock output is not needed in Idle mode, it may be turned off prior to entering Idle, saving additional power.

#### 7.4 On-chip RC oscillator option

The P89LPC938 has a 6-bit TRIM register that can be used to tune the frequency of the RC oscillator. During reset, the TRIM value is initialized to a factory pre-programmed value to adjust the oscillator frequency to 7.373 MHz,  $\pm 1\%$  at room temperature. End-user applications can write to the TRIM register to adjust the on-chip RC oscillator to other frequencies.

#### 7.5 Watchdog oscillator option

The watchdog has a separate oscillator which has a frequency of 400 kHz. This oscillator can be used to save power when a high clock frequency is not needed.

#### 7.6 External clock input option

In this configuration, the processor clock is derived from an external source driving the XTAL1/P3.1 pin. The rate may be from 0 Hz up to 18 MHz. The XTAL2/P3.0 pin may be used as a standard port pin or a clock output. **When using an oscillator frequency above 12 MHz, the reset input function of P1.5 must be enabled. An external circuit is required to hold the device in reset at power-up until  $V_{DD}$  has reached its specified level. When system power is removed  $V_{DD}$  will fall below the minimum specified operating voltage. When using an oscillator frequency above 12 MHz, in some applications, an external brownout detect circuit may be required to hold the device in reset when  $V_{DD}$  falls below the minimum specified operating voltage.**

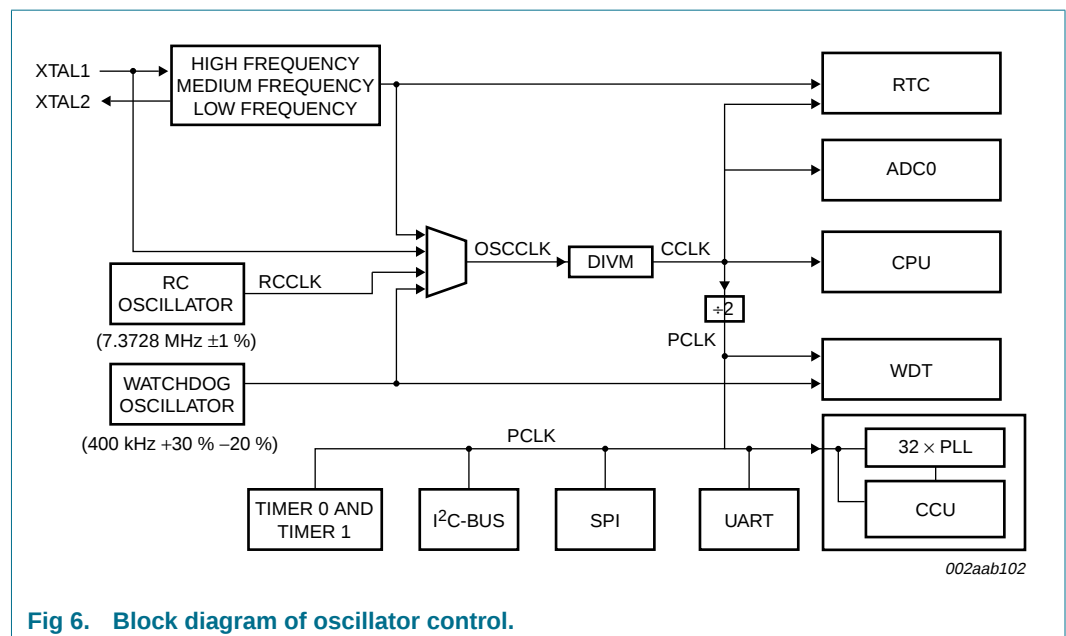


Fig 6. Block diagram of oscillator control.

### 7.7 CCLK wake-up delay

The P89LPC938 has an internal wake-up timer that delays the clock until it stabilizes depending on the clock source used. If the clock source is any of the three crystal selections (low, medium and high frequencies) the delay is 992 OSCCLK cycles plus 60 to 100  $\mu$ s. If the clock source is either the internal RC oscillator, watchdog oscillator, or external clock, the delay is 224 OSCCLK cycles plus 60  $\mu$ s to 100  $\mu$ s.

### 7.8 CCLK modification: DIVM register

The OSCCLK frequency can be divided down up to 510 times by configuring a dividing register, DIVM, to generate CCLK. This feature makes it possible to temporarily run the CPU at a lower rate, reducing power consumption. By dividing the clock, the CPU can retain the ability to respond to events that would not exit Idle mode by executing its normal program at a lower rate. This can also allow bypassing the oscillator start-up time in cases where Power-down mode would otherwise be used. The value of DIVM may be changed by the program at any time without interrupting code execution.

### 7.9 Low power select

The P89LPC938 is designed to run at 12 MHz (CCLK) maximum. However, if CCLK is 8 MHz or slower, the CLKLP SFR bit (AUXR1.7) can be set to '1' to lower the power consumption further. On any reset, CLKLP is '0' allowing highest performance access. This bit can then be set in software if CCLK is running at 8 MHz or slower.

### 7.10 Memory organization

The various P89LPC938 memory spaces are as follows:

- DATA  
128 bytes of internal data memory space (00h:7Fh) accessed via direct or indirect addressing, using instructions other than MOVX and MOVC. All or part of the Stack may be in this area.
- IDATA  
Indirect Data. 256 bytes of internal data memory space (00h:FFh) accessed via indirect addressing using instructions other than MOVX and MOVC. All or part of the Stack may be in this area. This area includes the DATA area and the 128 bytes immediately above it.
- SFR  
Special Function Registers. Selected CPU registers and peripheral control and status registers, accessible only via direct addressing.
- XDATA  
'External' Data or Auxiliary RAM. Duplicates the classic 80C51 64 kB memory space addressed via the MOVX instruction using the SPTR, R0, or R1. All or part of this space could be implemented on-chip. The P89LPC938 has 512 bytes of on-chip XDATA memory, plus extended SFRs located in XDATA.

- CODE

64 kB of Code memory space, accessed as part of program execution and via the MOVC instruction. The P89LPC938 has 8 kB of on-chip Code memory.

The P89LPC938 also has 512 bytes of on-chip Data EEPROM that is accessed via SFRs (see [Section 7.27 "Data EEPROM"](#)).

## 7.11 Data RAM arrangement

The 768 bytes of on-chip RAM are organized as shown in [Table 6](#).

**Table 6: On-chip data memory usages**

| Type  | Data RAM                                                                                | Size (bytes) |
|-------|-----------------------------------------------------------------------------------------|--------------|
| DATA  | Memory that can be addressed directly and indirectly                                    | 128          |
| IDATA | Memory that can be addressed indirectly                                                 | 256          |
| XDATA | Auxiliary ('External Data') on-chip memory that is accessed using the MOVX instructions | 512          |

## 7.12 Interrupts

The P89LPC938 uses a four priority level interrupt structure. This allows great flexibility in controlling the handling of the many interrupt sources. The P89LPC938 supports 15 interrupt sources: external interrupts 0 and 1, timers 0 and 1, serial port Tx, serial port Rx, combined serial port Rx/Tx, brownout detect, watchdog/RTC, I<sup>2</sup>C, keyboard, comparators 1 and 2, SPI, CCU, data EEPROM write/ADC completion.

Each interrupt source can be individually enabled or disabled by setting or clearing a bit in the interrupt enable registers IEN0 or IEN1. The IEN0 register also contains a global disable bit, EA, which disables all interrupts.

Each interrupt source can be individually programmed to one of four priority levels by setting or clearing bits in the interrupt priority registers IP0, IP0H, IP1, and IP1H. An interrupt service routine in progress can be interrupted by a higher priority interrupt, but not by another interrupt of the same or lower priority. The highest priority interrupt service cannot be interrupted by any other interrupt source. If two requests of different priority levels are pending at the start of an instruction, the request of higher priority level is serviced.

If requests of the same priority level are pending at the start of an instruction, an internal polling sequence determines which request is serviced. This is called the arbitration ranking. Note that the arbitration ranking is only used to resolve pending requests of the same priority level.


### 7.12.1 External interrupt inputs

The P89LPC938 has two external interrupt inputs as well as the Keypad Interrupt function. The two interrupt inputs are identical to those present on the standard 80C51 microcontrollers.

These external interrupts can be programmed to be level-triggered or edge-triggered by setting or clearing bit IT1 or IT0 in Register TCON.

In edge-triggered mode, if successive samples of the  $\overline{\text{INTn}}$  pin show a HIGH in one cycle and a LOW in the next cycle, the interrupt request flag  $\text{IE}_n$  in TCON is set, causing an interrupt request.

If an external interrupt is enabled when the P89LPC938 is put into Power-down or Idle mode, the interrupt will cause the processor to wake-up and resume operation. Refer to [Section 7.15 "Power reduction modes"](#) for details.

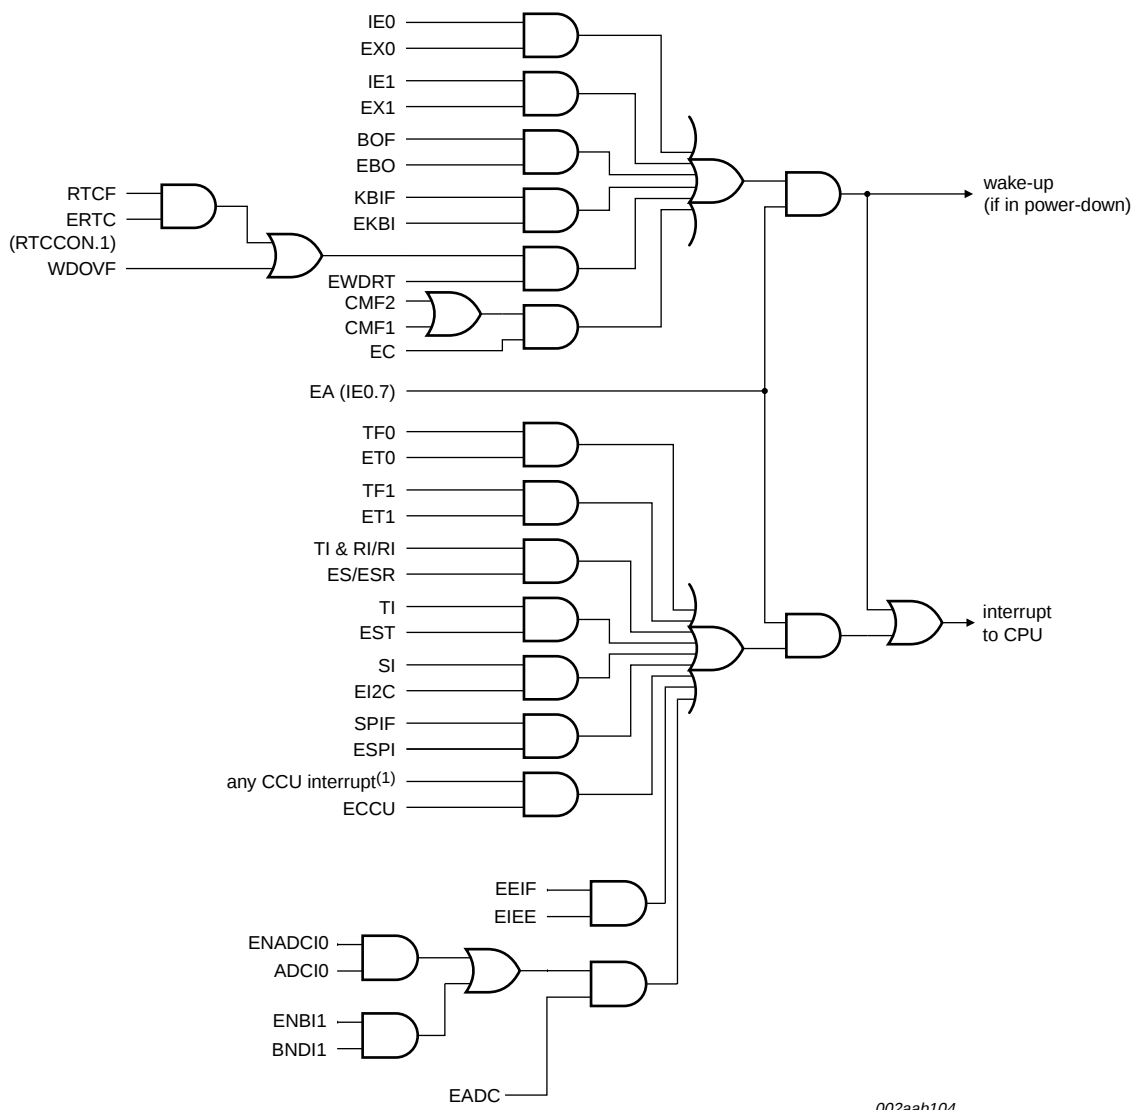

(1) See [Section 7.19 "CCU"](#)

**Fig 7. Interrupt sources, interrupt enables, and power-down wake-up sources.**

## 7.13 I/O ports

The P89LPC938 has four I/O ports: Port 0, Port 1, Port 2, and Port 3. Ports 0, 1 and 2 are 8-bit ports, and Port 3 is a 2-bit port. The exact number of I/O pins available depends upon the clock and reset options chosen, as shown in [Table 7](#).

**Table 7: Number of I/O pins available**

| Clock source                                                     | Reset option                                                       | Number of I/O pins (28-pin package) |
|------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------|
| On-chip oscillator or watchdog oscillator                        | No external reset (except during power-up)                         | 26                                  |
|                                                                  | External $\overline{\text{RST}}$ pin supported                     | 25                                  |
| External clock input                                             | No external reset (except during power-up)                         | 25                                  |
|                                                                  | External $\overline{\text{RST}}$ pin supported <a href="#">[1]</a> | 24                                  |
| Low/medium/high speed oscillator (external crystal or resonator) | No external reset (except during power-up)                         | 24                                  |
|                                                                  | External $\overline{\text{RST}}$ pin supported <a href="#">[1]</a> | 23                                  |

[1] Required for operation above 12 MHz.

### 7.13.1 Port configurations

All but three I/O port pins on the P89LPC938 may be configured by software to one of four types on a bit-by-bit basis. These are: quasi-bidirectional (standard 80C51 port outputs), push-pull, open drain, and input-only. Two configuration registers for each port select the output type for each port pin.

1. P1.5 ( $\overline{\text{RST}}$ ) can only be an input and cannot be configured.
2. P1.2 (SCL/T0) and P1.3 (SDA/ $\overline{\text{INT0}}$ ) may only be configured to be either input-only or open-drain.

#### 7.13.1.1 Quasi-bidirectional output configuration

Quasi-bidirectional output type can be used as both an input and output without the need to reconfigure the port. This is possible because when the port outputs a logic HIGH, it is weakly driven, allowing an external device to pull the pin LOW. When the pin is driven LOW, it is driven strongly and able to sink a fairly large current. These features are somewhat similar to an open-drain output except that there are three pull-up transistors in the quasi-bidirectional output that serve different purposes.

The P89LPC938 is a 3 V device, but the pins are 5 V-tolerant. In quasi-bidirectional mode, if a user applies 5 V on the pin, there will be a current flowing from the pin to  $V_{DD}$ , causing extra power consumption. Therefore, applying 5 V in quasi-bidirectional mode is discouraged.

A quasi-bidirectional port pin has a Schmitt triggered input that also has a glitch suppression circuit.

#### 7.13.1.2 Open-drain output configuration

The open-drain output configuration turns off all pull-ups and only drives the pull-down transistor of the port driver when the port latch contains a logic 0. To be used as a logic output, a port configured in this manner must have an external pull-up, typically a resistor tied to  $V_{DD}$ .

An open-drain port pin has a Schmitt triggered input that also has a glitch suppression circuit.

#### 7.13.1.3 Input-only configuration

The input-only port configuration has no output drivers. It is a Schmitt triggered input that also has a glitch suppression circuit.

#### 7.13.1.4 Push-pull output configuration

The push-pull output configuration has the same pull-down structure as both the open-drain and the quasi-bidirectional output modes, but provides a continuous strong pull-up when the port latch contains a logic 1. The push-pull mode may be used when more source current is needed from a port output. A push-pull port pin has a Schmitt triggered input that also has a glitch suppression circuit.

### 7.13.2 Port 0 analog functions

The P89LPC938 incorporates two Analog Comparators. In order to give the best analog function performance and to minimize power consumption, pins that are being used for analog functions must have the digital outputs and digital inputs disabled.

Digital outputs are disabled by putting the port output into the Input-Only (high-impedance) mode.

Digital inputs on Port 0 may be disabled through the use of the PT0AD register, bits 1:5. On any reset, PT0AD[1:5] defaults to '0's to enable digital functions.

### 7.13.3 Additional port features

After power-up, all pins are in Input-Only mode. **Please note that this is different from the LPC76x series of devices.**

- After power-up, all I/O pins except P1.5, may be configured by software.
- Pin P1.5 is input only. Pins P1.2 and P1.3 and are configurable for either input-only or open-drain.

Every output on the P89LPC938 has been designed to sink typical LED drive current. However, there is a maximum total output current for all ports which must not be exceeded. Please refer to [Table 10 "DC electrical characteristics"](#) for detailed specifications.

All ports pins that can function as an output have slew rate controlled outputs to limit noise generated by quickly switching output signals. The slew rate is factory-set to approximately 10 ns rise and fall times.

### 7.14 Power monitoring functions

The P89LPC938 incorporates power monitoring functions designed to prevent incorrect operation during initial power-up and power loss or reduction during operation. This is accomplished with two hardware functions: Power-on detect and brownout detect.

### 7.14.1 Brownout detection

The brownout detect function determines if the power supply voltage drops below a certain level. The default operation is for a brownout detection to cause a processor reset, however it may alternatively be configured to generate an interrupt.

Brownout detection may be enabled or disabled in software.

If brownout detection is enabled, the brownout condition occurs when  $V_{DD}$  falls below the brownout trip voltage,  $V_{bo}$  (see [Table 10 “DC electrical characteristics”](#)), and is negated when  $V_{DD}$  rises above  $V_{bo}$ . If the P89LPC938 device is to operate with a power supply that can be below 2.7 V, BOE should be left in the unprogrammed state so that the device can operate at 2.4 V, otherwise continuous brownout reset may prevent the device from operating.

For correct activation of brownout detect, the  $V_{DD}$  rise and fall times must be observed. Please see [Table 10 “DC electrical characteristics”](#) for specifications.

### 7.14.2 Power-on detection

The Power-on detect has a function similar to the brownout detect, but is designed to work as power comes up initially, before the power supply voltage reaches a level where brownout detect can work. The POF flag in the RSTSRC register is set to indicate an initial power-up condition. The POF flag will remain set until cleared by software.

## 7.15 Power reduction modes

The P89LPC938 supports three different power reduction modes. These modes are Idle mode, Power-down mode, and total Power-down mode.

### 7.15.1 Idle mode

Idle mode leaves peripherals running in order to allow them to activate the processor when an interrupt is generated. Any enabled interrupt source or reset may terminate Idle mode.

### 7.15.2 Power-down mode

The Power-down mode stops the oscillator in order to minimize power consumption. The P89LPC938 exits Power-down mode via any reset, or certain interrupts. In Power-down mode, the power supply voltage may be reduced to the data retention voltage ( $V_{DDR}$ ). This retains the RAM contents at the point where Power-down mode was entered. SFR contents are not guaranteed after  $V_{DD}$  has been lowered to  $V_{DDR}$ , therefore it is highly recommended to wake up the processor via reset in this case.  $V_{DD}$  must be raised to within the operating range before the Power-down mode is exited.

Some chip functions continue to operate and draw power during Power-down mode, increasing the total power used during power-down. These include: brownout detect, watchdog timer, comparators (note that comparators can be powered-down separately), and RTC/system timer. The internal RC oscillator is disabled unless both the RC oscillator has been selected as the system clock and the RTC is enabled.

### 7.15.3 Total Power-down mode

This is the same as Power-down mode except that the brownout detection circuitry and the voltage comparators are also disabled to conserve additional power. The internal RC oscillator is disabled unless both the RC oscillator has been selected as the system clock **and** the RTC is enabled. If the internal RC oscillator is used to clock the RTC during power-down, there will be high power consumption. Please use an external low frequency clock to achieve low power with the RTC running during power-down.

### 7.16 Reset

The P1.5/ $\overline{\text{RST}}$  pin can function as either an active-LOW reset input or as a digital input, P1.5. The RPE (Reset Pin Enable) bit in UCFG1, when set to '1', enables the external reset input function on P1.5. When cleared, P1.5 may be used as an input pin.

**Remark:** During a power-up sequence, The RPE selection is overridden and this pin will always function as a reset input. **An external circuit connected to this pin should not hold this pin LOW during a power-on sequence as this will keep the device in reset.** After power-up this input will function either as an external reset input or as a digital input as defined by the RPE bit. Only a power-up reset will temporarily override the selection defined by RPE bit. Other sources of reset will not override the RPE bit.

Reset can be triggered from the following sources:

- External reset pin (during power-up or if user configured via UCFG1);
- Power-on detect;
- Brownout detect;
- Watchdog timer;
- Software reset;
- UART break character detect reset.

For every reset source, there is a flag in the Reset Register, RSTSRC. The user can read this register to determine the most recent reset source. These flag bits can be cleared in software by writing a '0' to the corresponding bit. More than one flag bit may be set:

- During a power-on reset, both POF and BOF are set but the other flag bits are cleared.
- For any other reset, previously set flag bits that have not been cleared will remain set.

#### 7.16.1 Reset vector

Following reset, the P89LPC938 will fetch instructions from either address 0000h or the Boot address. The Boot address is formed by using the Boot Vector as the high byte of the address and the low byte of the address = 00h.

The Boot address will be used if a UART break reset occurs, or the non-volatile Boot Status bit (BOOTSTAT.0) = 1, or the device is forced into ISP mode during power-on (see *P89LPC938 User's Manual*). Otherwise, instructions will be fetched from address 0000H.

## 7.17 Timers/counters 0 and 1

The P89LPC938 has two general purpose counter/timers which are upward compatible with the standard 80C51 Timer 0 and Timer 1. Both can be configured to operate either as timers or event counter. An option to automatically toggle the T0 and/or T1 pins upon timer overflow has been added.

In the 'Timer' function, the register is incremented every machine cycle.

In the 'Counter' function, the register is incremented in response to a 1-to-0 transition at its corresponding external input pin, T0 or T1. In this function, the external input is sampled once during every machine cycle.

Timer 0 and Timer 1 have five operating modes (modes 0, 1, 2, 3 and 6). Modes 0, 1, 2 and 6 are the same for both Timers/Counters. Mode 3 is different.

### 7.17.1 Mode 0

Putting either Timer into Mode 0 makes it look like an 8048 Timer, which is an 8-bit Counter with a divide-by-32 prescaler. In this mode, the Timer register is configured as a 13-bit register. Mode 0 operation is the same for Timer 0 and Timer 1.

### 7.17.2 Mode 1

Mode 1 is the same as Mode 0, except that all 16 bits of the timer register are used.

### 7.17.3 Mode 2

Mode 2 configures the Timer register as an 8-bit Counter with automatic reload. Mode 2 operation is the same for Timer 0 and Timer 1.

### 7.17.4 Mode 3

When Timer 1 is in Mode 3 it is stopped. Timer 0 in Mode 3 forms two separate 8-bit counters and is provided for applications that require an extra 8-bit timer. When Timer 1 is in Mode 3 it can still be used by the serial port as a baud rate generator.

### 7.17.5 Mode 6

In this mode, the corresponding timer can be changed to a PWM with a full period of 256 timer clocks.

### 7.17.6 Timer overflow toggle output

Timers 0 and 1 can be configured to automatically toggle a port output whenever a timer overflow occurs. The same device pins that are used for the T0 and T1 count inputs are also used for the timer toggle outputs. The port outputs will be a logic 1 prior to the first timer overflow when this mode is turned on.

## 7.18 RTC/system timer

The P89LPC938 has a simple RTC that allows a user to continue running an accurate timer while the rest of the device is powered-down. The RTC can be a wake-up or an interrupt source. The RTC is a 23-bit down counter comprised of a 7-bit prescaler and a 16-bit loadable down counter. When it reaches all '0's, the counter will be reloaded again and the RTCF flag will be set. The clock source for this counter can be either the CPU clock (CCLK) or the XTAL oscillator, provided that the XTAL oscillator is not being used as

the CPU clock. If the XTAL oscillator is used as the CPU clock, then the RTC will use CCLK as its clock source. Only power-on reset will reset the RTC and its associated SFRs to the default state.

## 7.19 CCU

This unit features:

- A 16-bit timer with 16-bit reload on overflow.
- Selectable clock, with prescaler to divide clock source by any integral number between 1 and 1024.
- Four compare/PWM outputs with selectable polarity
- Symmetrical/Asymmetrical PWM selection
- Two capture inputs with event counter and digital noise rejection filter
- Seven interrupts with common interrupt vector (one Overflow, two Capture, four Compare)
- Safe 16-bit read/write via shadow registers.

### 7.19.1 CCU Clock (CCUCLK)

The CCU runs on the CCUCLK, which is either PCLK in basic timer mode, or the output of a PLL. The PLL is designed to use a clock source between 0.5 MHz to 1 MHz that is multiplied by 32 to produce a CCUCLK between 16 MHz and 32 MHz in PWM mode (asymmetrical or symmetrical). The PLL contains a 4-bit divider to help divide PCLK into a frequency between 0.5 MHz and 1 MHz.

### 7.19.2 CCU clock prescaling

This CCUCLK can further be divided down by a prescaler. The prescaler is implemented as a 10-bit free-running counter with programmable reload at overflow.

### 7.19.3 Basic timer operation

The Timer is a free-running up/down counter with a direction control bit. If the timer counting direction is changed while the counter is running, the count sequence will be reversed. The timer can be written or read at any time.

When a reload occurs, the CCU Timer Overflow Interrupt Flag will be set, and an interrupt generated if enabled. The 16-bit CCU Timer may also be used as an 8-bit up/down timer.

### 7.19.4 Output compare

There are four output compare channels A, B, C and D. Each output compare channel needs to be enabled in order to operate and the user will have to set the associated I/O pin to the desired output mode to connect the pin. When the contents of the timer matches that of a capture compare control register, the Timer Output Compare Interrupt Flag (TOCFx) becomes set. An interrupt will occur if enabled.

### 7.19.5 Input capture

Input capture is always enabled. Each time a capture event occurs on one of the two input capture pins, the contents of the timer is transferred to the corresponding 16-bit input capture register. The capture event can be programmed to be either rising or falling edge triggered. A simple noise filter can be enabled on the input capture by enabling the Input

Capture Noise Filter bit. If set, the capture logic needs to see four consecutive samples of the same value in order to recognize an edge as a capture event. An event counter can be set to delay a capture by a number of capture events.

### 7.19.6 PWM operation

PWM operation has two main modes, symmetrical and asymmetrical.

In asymmetrical PWM operation the CCU Timer operates in down-counting mode regardless of the direction control bit.

In symmetrical mode, the timer counts up/down alternately. The main difference from basic timer operation is the operation of the compare module, which in PWM mode is used for PWM waveform generation.

As with basic timer operation, when the PWM (compare) pins are connected to the compare logic, their logic state remains unchanged. However, since bit FCO is used to hold the halt value, only a compare event can change the state of the pin.

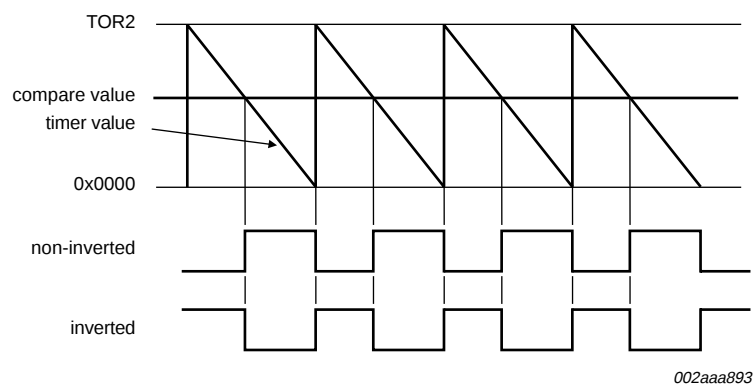


Fig 8. Asymmetrical PWM, down-counting.

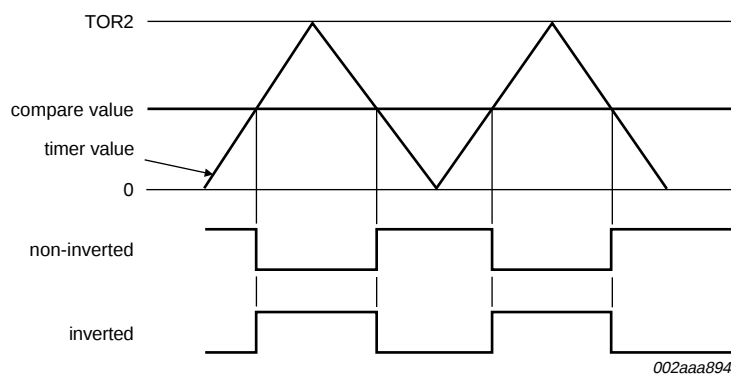


Fig 9. Symmetrical PWM.

### 7.19.7 Alternating output mode

In asymmetrical mode, the user can set up PWM channels A/B and C/D as alternating pairs for bridge drive control. In this mode the output of these PWM channels are alternately gated on every counter cycle.

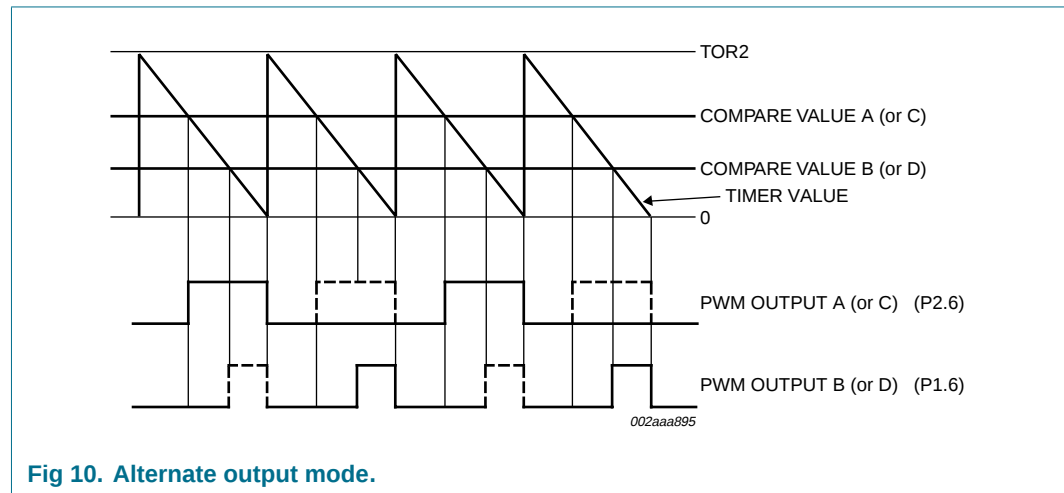


Fig 10. Alternate output mode.

### 7.19.8 PLL operation

The PWM module features a Phase Locked Loop that can be used to generate a CCUCLK frequency between 16 MHz and 32 MHz. At this frequency the PWM module provides ultrasonic PWM frequency with 10-bit resolution provided that the crystal frequency is 1 MHz or higher. The PLL is fed an input signal of 0.5 - 1 MHz and generates an output signal of 32 times the input frequency. This signal is used to clock the timer. The user will have to set a divider that scales PCLK by a factor of 1-16. This divider is found in the SFR register TCR21. The PLL frequency can be expressed as shown in [Equation 1](#).

$$\text{PLL frequency} = \frac{\text{PCLK}}{(N + 1)} \quad (1)$$

Where: N is the value of PLLDV3:0.

Since N ranges in 0 - 15, the CCLK frequency can be in the range of PCLK to  $\text{PCLK}/_{16}$ .

### 7.19.9 CCU interrupts

There are seven interrupt sources on the CCU which share a common interrupt vector.

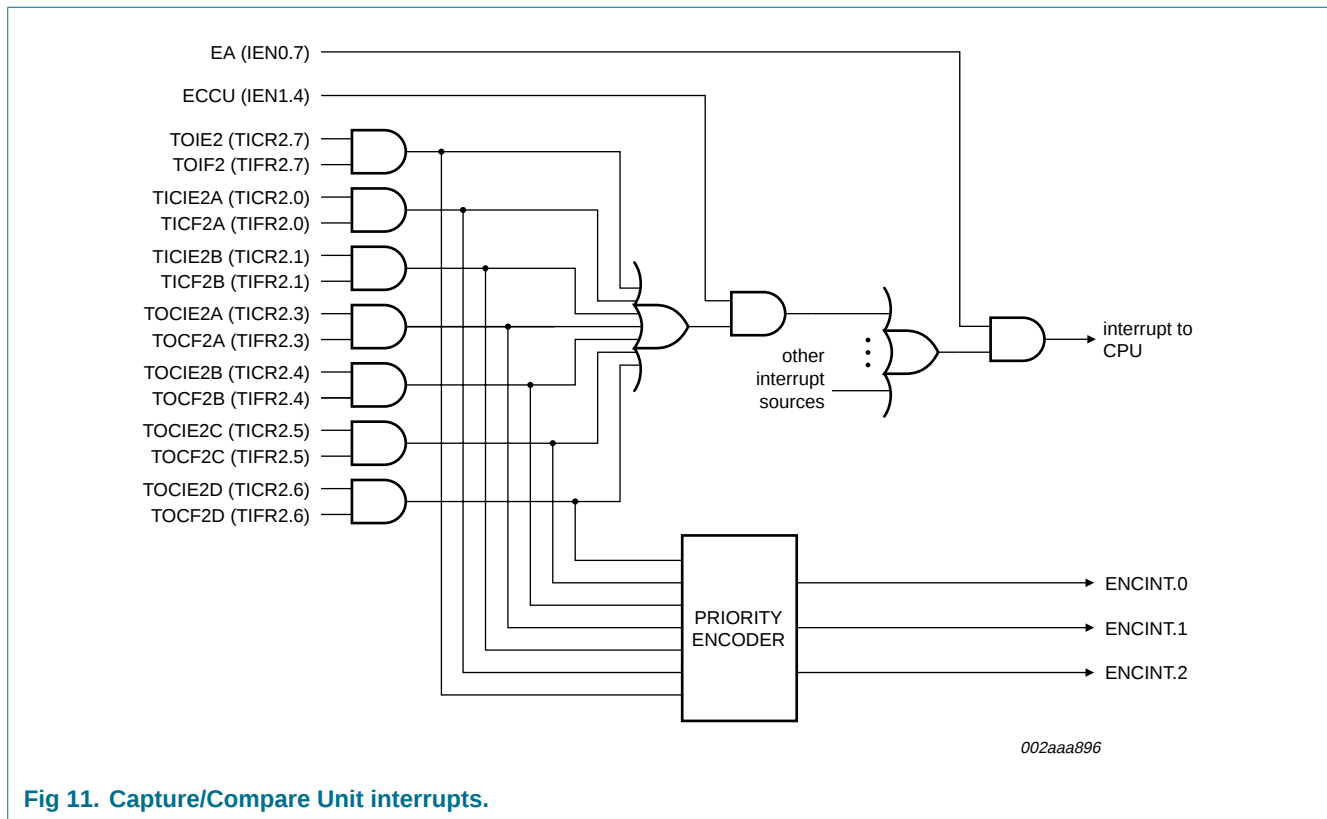


Fig 11. Capture/Compare Unit interrupts.

## 7.20 UART

The P89LPC938 has an enhanced UART that is compatible with the conventional 80C51 UART except that Timer 2 overflow cannot be used as a baud rate source. The P89LPC938 does include an independent Baud Rate Generator. The baud rate can be selected from the oscillator (divided by a constant), Timer 1 overflow, or the independent Baud Rate Generator. In addition to the baud rate generation, enhancements over the standard 80C51 UART include Framing Error detection, automatic address recognition, selectable double buffering and several interrupt options. The UART can be operated in 4 modes: shift register, 8-bit UART, 9-bit UART, and CPU clock/32 or CPU clock/16.

### 7.20.1 Mode 0

Serial data enters and exits through RXD. TXD outputs the shift clock. 8 bits are transmitted or received, LSB first. The baud rate is fixed at  $\frac{1}{16}$  of the CPU clock frequency.

### 7.20.2 Mode 1

10 bits are transmitted (through TXD) or received (through RXD): a start bit (logic 0), 8 data bits (LSB first), and a stop bit (logic 1). When data is received, the stop bit is stored in RB8 in Special Function Register SCON. The baud rate is variable and is determined by the Timer 1 overflow rate or the Baud Rate Generator (described in [Section 7.20.5 "Baud rate generator and selection"](#)).

### 7.20.3 Mode 2

11 bits are transmitted (through TXD) or received (through RXD): start bit (logic 0), 8 data bits (LSB first), a programmable 9<sup>th</sup> data bit, and a stop bit (logic 1). When data is transmitted, the 9<sup>th</sup> data bit (TB8 in SCON) can be assigned the value of '0' or '1'. Or, for example, the parity bit (P, in the PSW) could be moved into TB8. When data is received, the 9<sup>th</sup> data bit goes into RB8 in Special Function Register SCON, while the stop bit is not saved. The baud rate is programmable to either  $\frac{1}{16}$  or  $\frac{1}{32}$  of the CPU clock frequency, as determined by the SMOD1 bit in PCON.

### 7.20.4 Mode 3

11 bits are transmitted (through TXD) or received (through RXD): a start bit (logic 0), 8 data bits (LSB first), a programmable 9<sup>th</sup> data bit, and a stop bit (logic 1). In fact, Mode 3 is the same as Mode 2 in all respects except baud rate. The baud rate in Mode 3 is variable and is determined by the Timer 1 overflow rate or the Baud Rate Generator (described in [Section 7.20.5 "Baud rate generator and selection"](#)).

### 7.20.5 Baud rate generator and selection

The P89LPC938 enhanced UART has an independent Baud Rate Generator. The baud rate is determined by a baud-rate preprogrammed into the BRGR1 and BRGR0 SFRs which together form a 16-bit baud rate divisor value that works in a similar manner as Timer 1 but is much more accurate. If the baud rate generator is used, Timer 1 can be used for other timing functions.

The UART can use either Timer 1 or the baud rate generator output (see [Figure 12](#)). Note that Timer T1 is further divided by 2 if the SMOD1 bit (PCON.7) is cleared. The independent Baud Rate Generator uses OSCCLK.

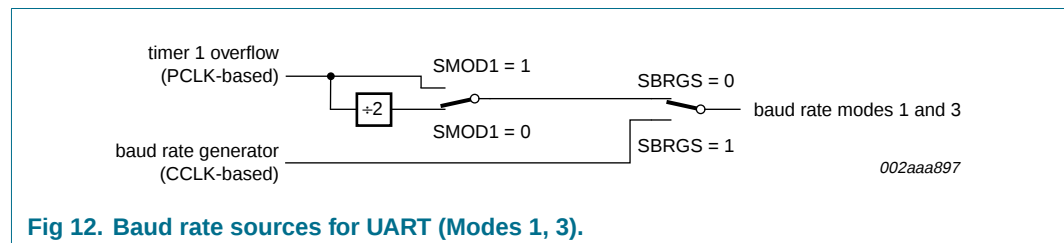


Fig 12. Baud rate sources for UART (Modes 1, 3).

### 7.20.6 Framing error

Framing error is reported in the status register (SSTAT). In addition, if SMOD0 (PCON.6) is '1', framing errors can be made available in SCON.7 respectively. If SMOD0 is '0', SCON.7 is SM0. It is recommended that SM0 and SM1 (SCON.7:6) are set up when SMOD0 is '0'.

### 7.20.7 Break detect

Break detect is reported in the status register (SSTAT). A break is detected when 11 consecutive bits are sensed LOW. The break detect can be used to reset the device and force the device into ISP mode.

### 7.20.8 Double buffering

The UART has a transmit double buffer that allows buffering of the next character to be written to SBUF while the first character is being transmitted. Double buffering allows transmission of a string of characters with only one stop bit between any two characters, as long as the next character is written between the start bit and the stop bit of the previous character.

Double buffering can be disabled. If disabled (DBMOD, i.e., SSTAT.7 = 0), the UART is compatible with the conventional 80C51 UART. If enabled, the UART allows writing to SBUF while the previous data is being shifted out. Double buffering is only allowed in Modes 1, 2 and 3. When operated in Mode 0, double buffering must be disabled (DBMOD = 0).

### 7.20.9 Transmit interrupts with double buffering enabled (Modes 1, 2 and 3)

Unlike the conventional UART, in double buffering mode, the Tx interrupt is generated when the double buffer is ready to receive new data.

### 7.20.10 The 9<sup>th</sup> bit (bit 8) in double buffering (Modes 1, 2 and 3)

If double buffering is disabled TB8 can be written before or after SBUF is written, as long as TB8 is updated some time before that bit is shifted out. TB8 must not be changed until the bit is shifted out, as indicated by the Tx interrupt.


If double buffering is enabled, TB8 **must** be updated before SBUF is written, as TB8 will be double-buffered together with SBUF data.

## 7.21 I<sup>2</sup>C-bus serial interface

I<sup>2</sup>C-bus uses two wires (SDA and SCL) to transfer information between devices connected to the bus, and it has the following features:

- Bi-directional data transfer between masters and slaves
- Multi master bus (no central master)
- Arbitration between simultaneously transmitting masters without corruption of serial data on the bus
- Serial clock synchronization allows devices with different bit rates to communicate via one serial bus
- Serial clock synchronization can be used as a handshake mechanism to suspend and resume serial transfer
- The I<sup>2</sup>C-bus may be used for test and diagnostic purposes.

A typical I<sup>2</sup>C-bus configuration is shown in [Figure 13](#). The P89LPC938 device provides a byte-oriented I<sup>2</sup>C-bus interface that supports data transfers up to 400 kHz.

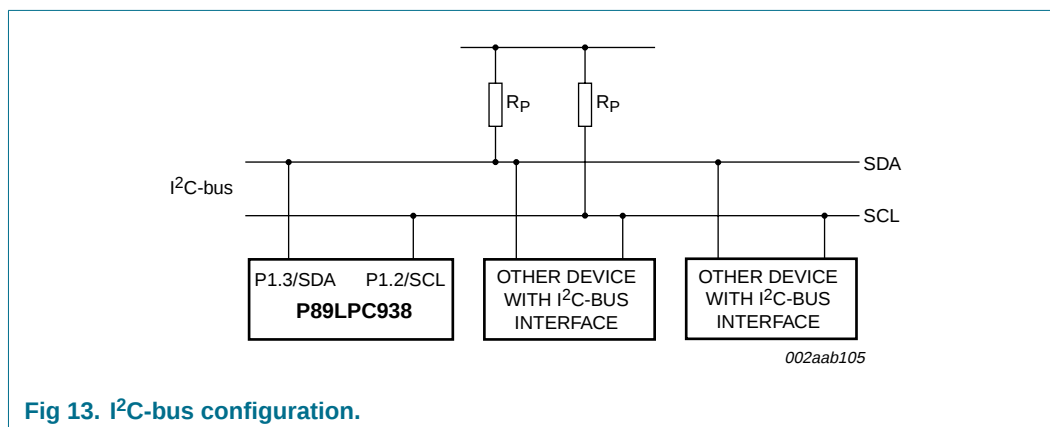

**Fig 13. I<sup>2</sup>C-bus configuration.**

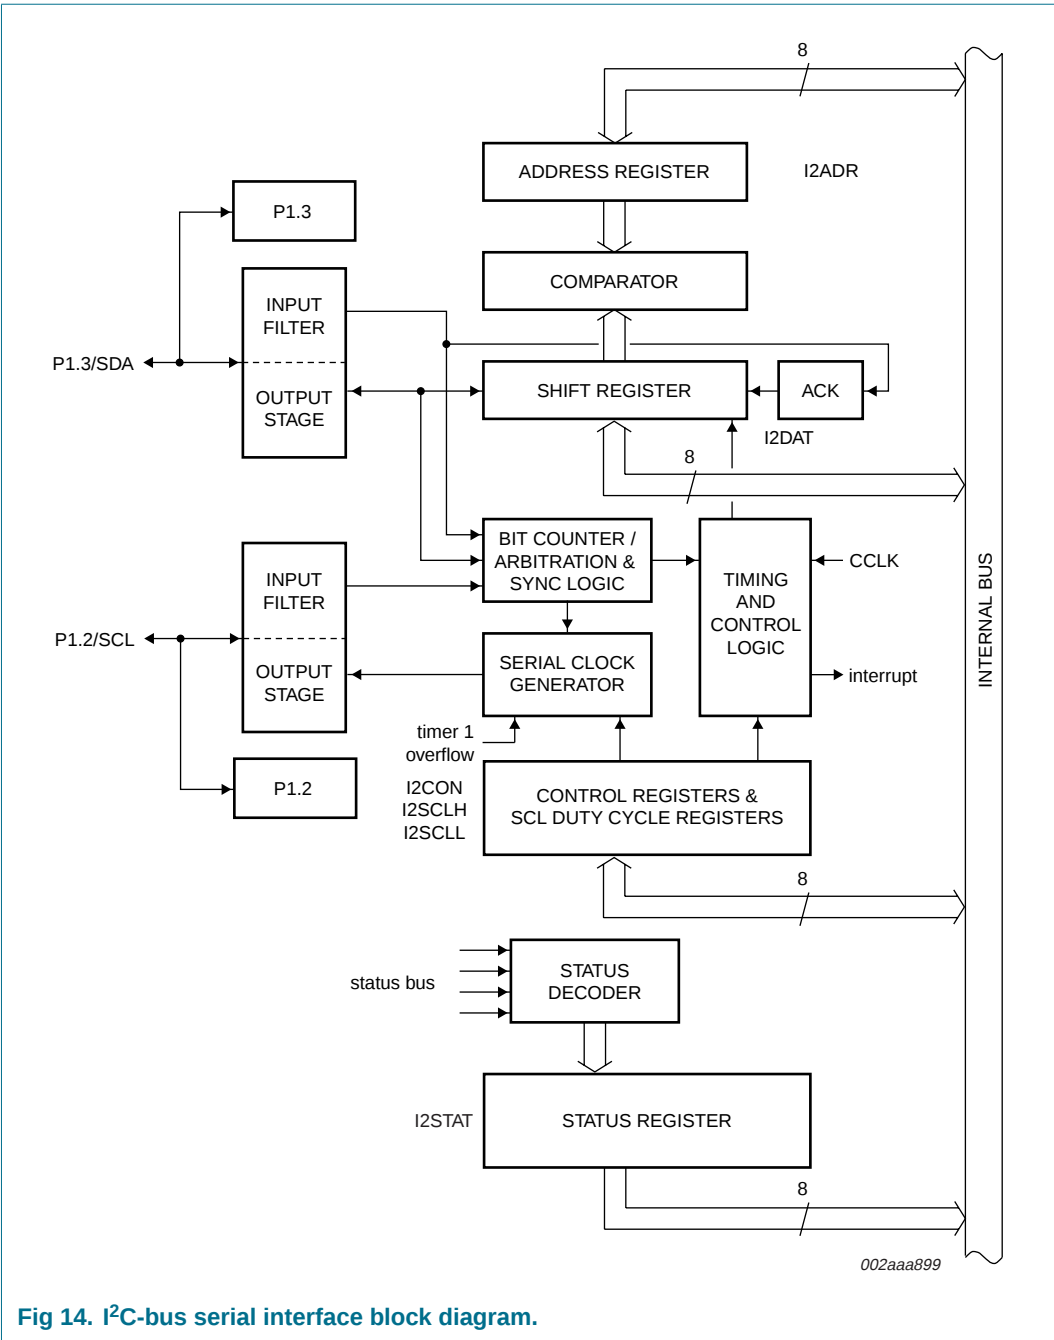


Fig 14. I²C-bus serial interface block diagram.

## 7.22 SPI

The P89LPC938 provides another high-speed serial communication interface—the SPI interface. SPI is a full-duplex, high-speed, synchronous communication bus with two operation modes: Master mode and Slave mode. Up to 3 Mbit/s can be supported in either Master or Slave mode. It has a Transfer Completion Flag and Write Collision Flag Protection.

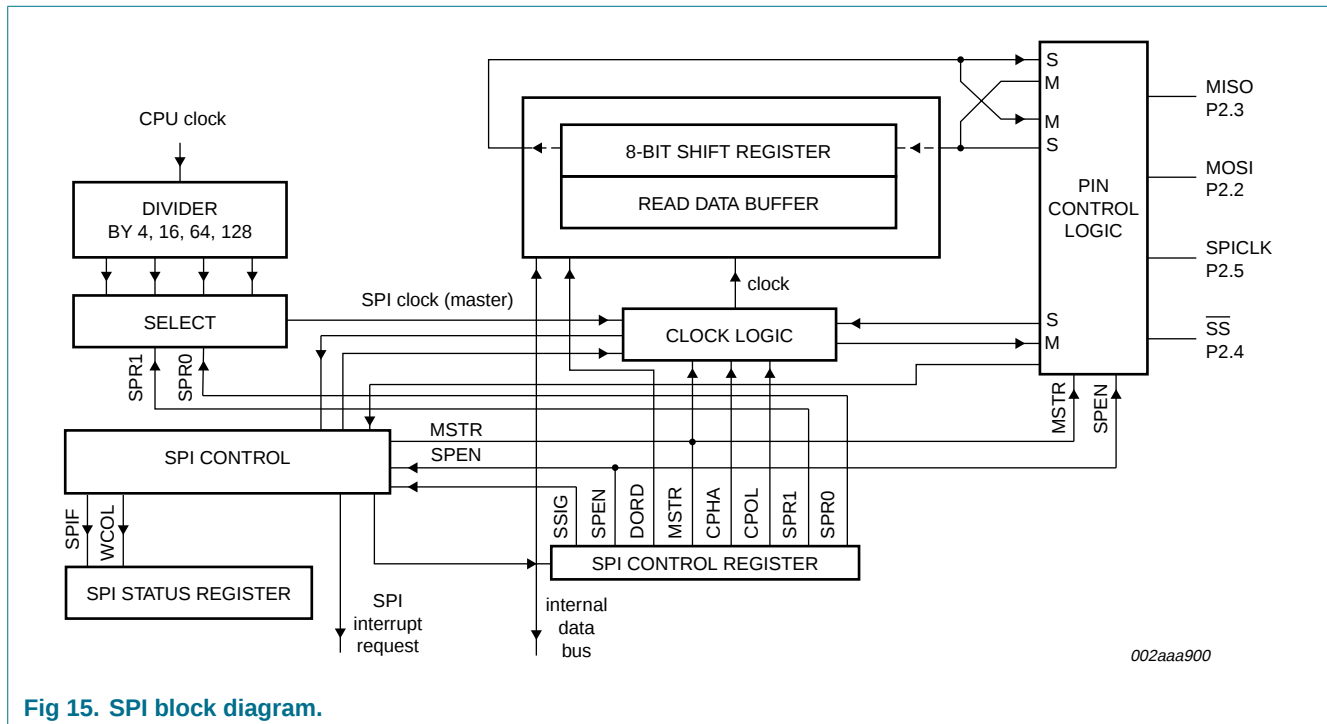




Fig 15. SPI block diagram.


The SPI interface has four pins: SPICLK, MOSI, MISO and  $\overline{SS}$ :

- SPICLK, MOSI and MISO are typically tied together between two or more SPI devices. Data flows from master to slave on MOSI (Master Out Slave In) pin and flows from slave to master on MISO (Master In Slave Out) pin. The SPICLK signal is output in the master mode and is input in the slave mode. If the SPI system is disabled, i.e., SPEN (SPCTL.6) = 0 (reset value), these pins are configured for port functions.
- $\overline{SS}$  is the optional slave select pin. In a typical configuration, an SPI master asserts one of its port pins to select one SPI device as the current slave. An SPI slave device uses its  $\overline{SS}$  pin to determine whether it is selected.

Typical connections are shown in [Figure 16](#) through [Figure 18](#).

7.22.1 Typical SPI configurations

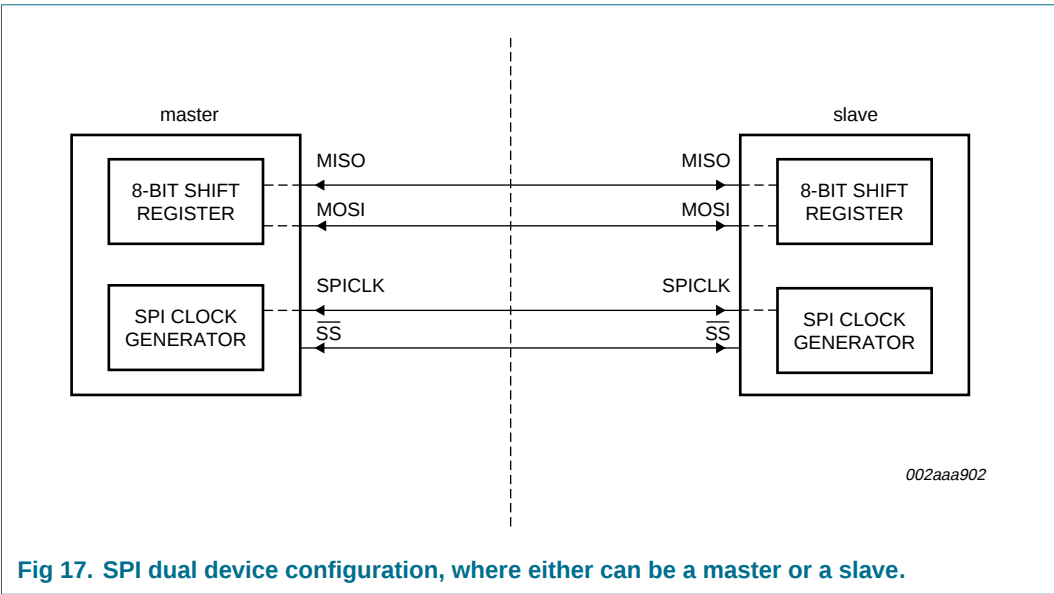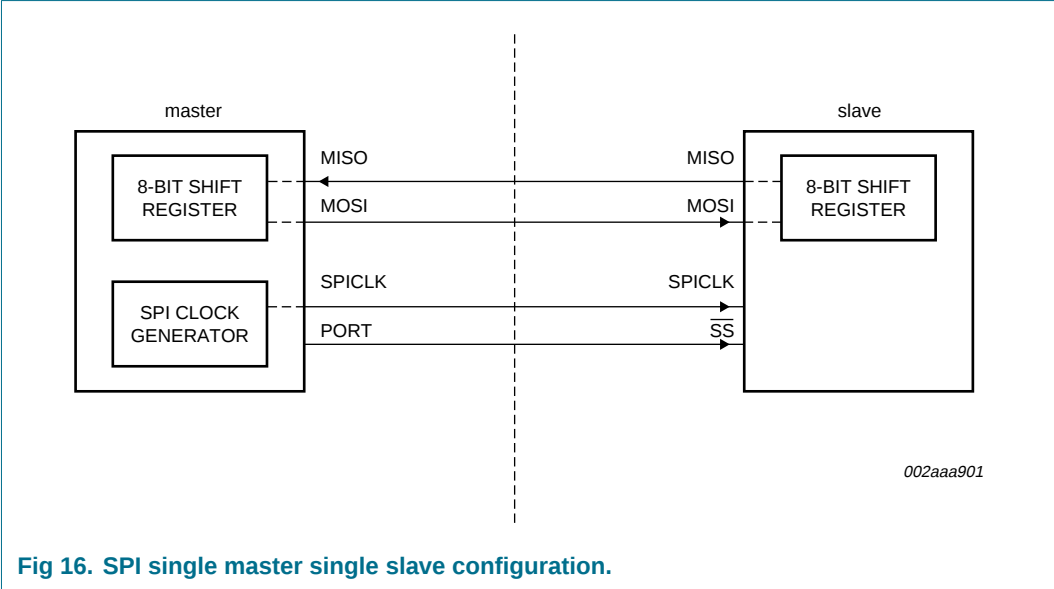

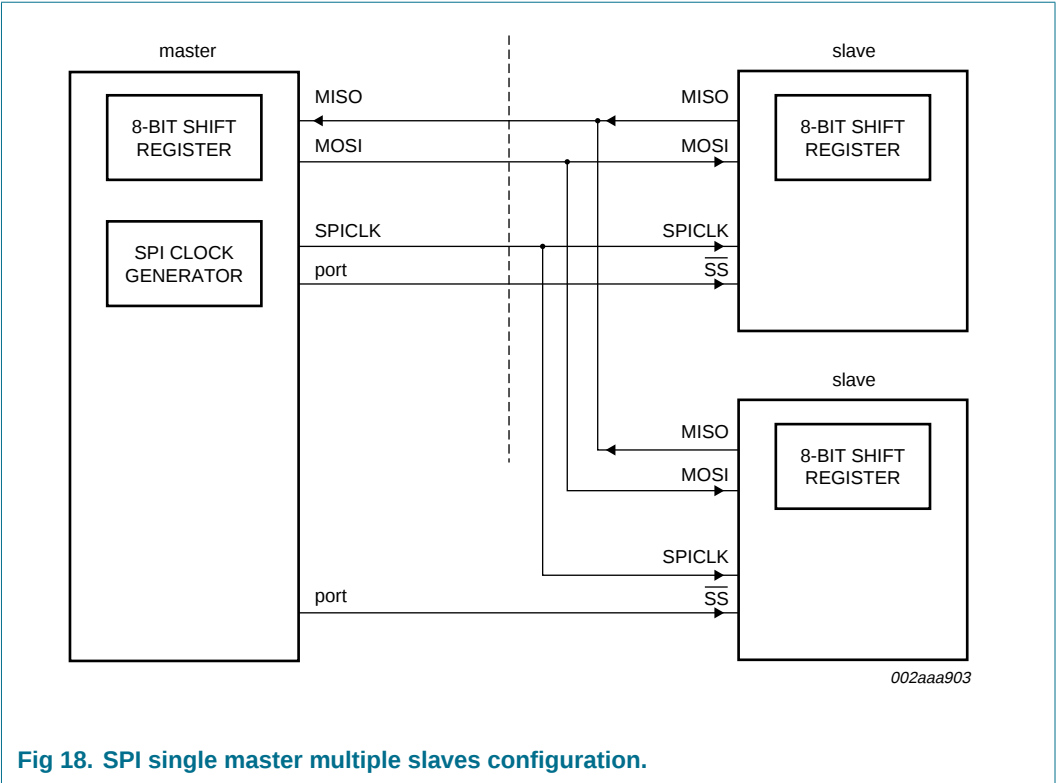

### 7.23 Analog comparators

Two analog comparators are provided on the P89LPC938. Input and output options allow use of the comparators in a number of different configurations. Comparator operation is such that the output is a logical one (which may be read in a register and/or routed to a pin) when the positive input (one of two selectable pins) is greater than the negative input (selectable from a pin or an internal reference voltage). Otherwise the output is a zero. Each comparator may be configured to cause an interrupt when the output value changes.

The overall connections to both comparators are shown in [Figure 19](#). The comparators function to  $V_{DD} = 2.4 \text{ V}$ .

When each comparator is first enabled, the comparator output and interrupt flag are not guaranteed to be stable for 10 microseconds. The corresponding comparator interrupt should not be enabled during that time, and the comparator interrupt flag must be cleared before the interrupt is enabled in order to prevent an immediate interrupt service.

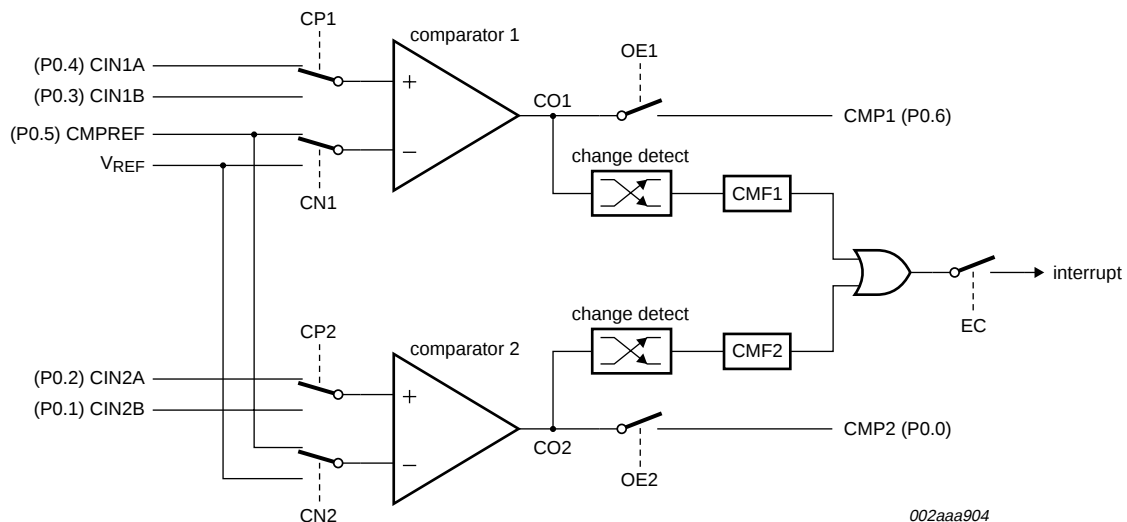


Fig 19. Comparator input and output connections.

#### 7.23.1 Internal reference voltage

An internal reference voltage generator may supply a default reference when a single comparator input pin is used. The value of the internal reference voltage, referred to as  $V_{REF}$ , is  $1.23 \text{ V} \pm 10 \%$ .

#### 7.23.2 Comparator interrupt

Each comparator has an interrupt flag contained in its configuration register. This flag is set whenever the comparator output changes state. The flag may be polled by software or may be used to generate an interrupt. The two comparators use one common interrupt vector. If both comparators enable interrupts, after entering the interrupt service routine, the user needs to read the flags to determine which comparator caused the interrupt.

#### 7.23.3 Comparators and power reduction modes

Either or both comparators may remain enabled when Power-down or Idle mode is activated, but both comparators are disabled automatically in Total Power-down mode.

If a comparator interrupt is enabled (except in Total Power-down mode), a change of the comparator output state will generate an interrupt and wake up the processor. If the comparator output to a pin is enabled, the pin should be configured in the push-pull mode in order to obtain fast switching times while in Power-down mode. The reason is that with the **oscillator** stopped, the temporary strong pull-up that normally occurs during switching on a quasi-bidirectional port pin does not take place.

Comparators consume power in Power-down and Idle modes, as well as in the normal operating mode. This fact should be taken into account when system power consumption is an issue. To minimize power consumption, the user can disable the comparators via PCONA.5, or put the device in Total Power-down mode.

## 7.24 KBI

The Keypad Interrupt function is intended primarily to allow a single interrupt to be generated when Port 0 is equal to or not equal to a certain pattern. This function can be used for bus address recognition or keypad recognition. The user can configure the port via SFRs for different tasks.


The Keypad Interrupt Mask Register (KBMASK) is used to define which input pins connected to Port 0 can trigger the interrupt. The Keypad Pattern Register (KBPATN) is used to define a pattern that is compared to the value of Port 0. The Keypad Interrupt Flag (KBIF) in the Keypad Interrupt Control Register (KBCON) is set when the condition is matched while the Keypad Interrupt function is active. An interrupt will be generated if enabled. The PATN\_SEL bit in the Keypad Interrupt Control Register (KBCON) is used to define equal or not-equal for the comparison.

In order to use the Keypad Interrupt as an original KBI function like in 87LPC76x series, the user needs to set KBPATN = 0FFH and PATN\_SEL = 1 (not equal), then any key connected to Port 0 which is enabled by the KBMASK register will cause the hardware to set KBIF and generate an interrupt if it has been enabled. The interrupt may be used to wake up the CPU from Idle or Power-down modes. This feature is particularly useful in handheld, battery-powered systems that need to carefully manage power consumption yet also need to be convenient to use.

In order to set the flag and cause an interrupt, the pattern on Port 0 must be held longer than 6 CCLKs.

## 7.25 Watchdog timer

The watchdog timer causes a system reset when it underflows as a result of a failure to feed the timer prior to the timer reaching its terminal count. It consists of a programmable 12-bit prescaler, and an 8-bit down counter. The down counter is decremented by a tap taken from the prescaler. The clock source for the prescaler is either the PCLK or the nominal 400 kHz Watchdog oscillator. The watchdog timer can only be reset by a power-on reset. When the watchdog feature is disabled, it can be used as an interval timer and may generate an interrupt. Figure 20 shows the watchdog timer in Watchdog mode. Feeding the watchdog requires a two-byte sequence. If PCLK is selected as the watchdog clock and the CPU is powered-down, the watchdog is disabled. The watchdog timer has a time-out period that ranges from a few  $\mu$ s to a few seconds. Please refer to the *P89LPC938 User's Manual* for more details.

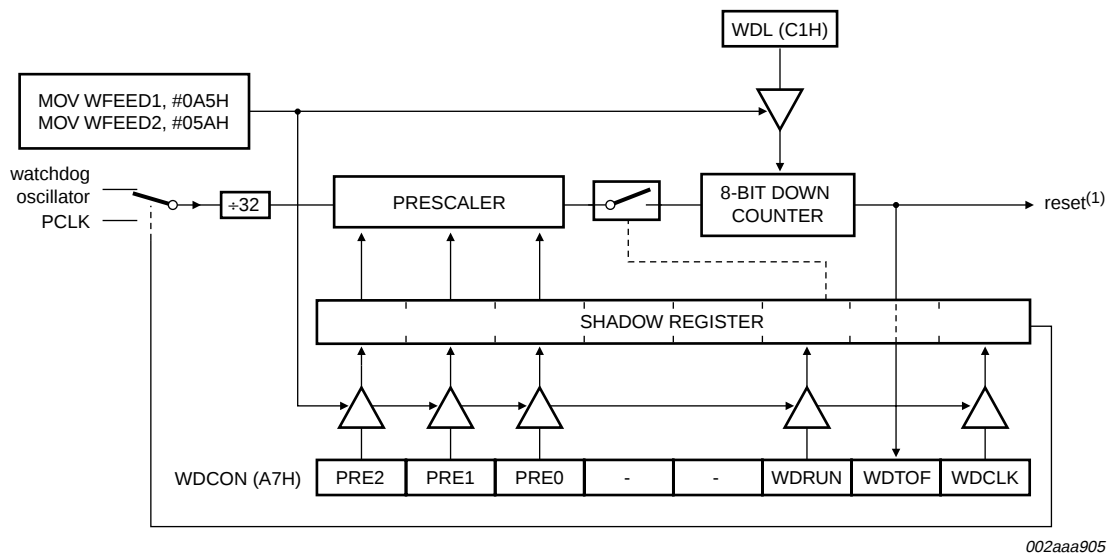

- (1) Watchdog reset can also be caused by an invalid feed sequence, or by writing to WDCON not immediately followed by a feed sequence.

Fig 20. Watchdog timer in Watchdog mode (WDTE = '1').

## 7.26 Additional features

### 7.26.1 Software reset

The SRST bit in AUXR1 gives software the opportunity to reset the processor completely, as if an external reset or watchdog reset had occurred. Care should be taken when writing to AUXR1 to avoid accidental software resets.

### 7.26.2 Dual data pointers

The dual Data Pointers (DPTR) provides two different Data Pointers to specify the address used with certain instructions. The DPS bit in the AUXR1 register selects one of the two Data Pointers. Bit 2 of AUXR1 is permanently wired as a logic 0 so that the DPS bit may be toggled (thereby switching Data Pointers) simply by incrementing the AUXR1 register, without the possibility of inadvertently altering other bits in the register.

## 7.27 Data EEPROM

The P89LPC938 has 512 bytes of on-chip Data EEPROM. The Data EEPROM is SFR based, byte readable, byte writable, and erasable (via row fill and sector fill). The user can read, write and fill the memory via SFRs and one interrupt. This Data EEPROM provides 100,000 minimum erase/program cycles for each byte.

- **Byte Mode:** In this mode, data can be read and written one byte at a time.
- **Row Fill:** In this mode, the addressed row (64 bytes) is filled with a single value. The entire row can be erased by writing 00h.
- **Sector Fill:** In this mode, all 512 bytes are filled with a single value. The entire sector can be erased by writing 00h.

After the operation finishes, the hardware will set the EEIF bit, which if enabled will generate an interrupt. The flag is cleared by software.

## 7.28 Flash program memory

### 7.28.1 General description

The P89LPC938 Flash memory provides in-circuit electrical erasure and programming. The Flash can be erased, read, and written as bytes. The Sector and Page Erase functions can erase any Flash sector (1 kB) or page (64 bytes). The Chip Erase operation will erase the entire program memory. In-Circuit Programming using standard commercial programmers is available. In addition, IAP and byte-erase allows code memory to be used for non-volatile data storage. On-chip erase and write timing generation contribute to a user-friendly programming interface. The P89LPC938 Flash reliably stores memory contents even after 100,000 erase and program cycles. The cell is designed to optimize the erase and programming mechanisms. The P89LPC938 uses  $V_{DD}$  as the supply voltage to perform the Program/Erase algorithms.

### 7.28.2 Features

- Programming and erase over the full operating voltage range.
- Byte erase allows code memory to be used for data storage.
- Read/Programming/Erase using ISP/IAP/ICP.
- Internal fixed boot ROM, containing low-level IAP routines available to user code.
- Default loader providing In-System Programming via the serial port, located in upper end of user program memory.
- Boot vector allows user-provided Flash loader code to reside anywhere in the Flash memory space, providing flexibility to the user.
- Any flash program/erase operation in 2 ms.
- Programming with industry-standard commercial programmers.
- Programmable security for the code in the Flash for each sector.
- 100,000 typical erase/program cycles for each byte.
- 10 year minimum data retention.

### 7.28.3 Flash organization

The program memory consists of eight 1 kB sectors on the P89LPC938 devices. Each sector can be further divided into 64-byte pages. In addition to sector erase, page erase, and byte erase, a 64-byte page register is included which allows from 1 to 64 bytes of a given page to be programmed at the same time, substantially reducing overall programming time.

### 7.28.4 Using Flash as data storage

The Flash code memory array of this device supports individual byte erasing and programming. Any byte in the code memory array may be read using the MOVC instruction, provided that the sector containing the byte has not been secured (a MOVC instruction is not allowed to read code memory contents of a secured sector). Thus any byte in a non-secured sector may be used for non-volatile data storage.

### 7.28.5 Flash programming and erasing

Four different methods of erasing or programming of the Flash are available. The Flash may be programmed or erased in the end-user application (IAP) under control of the application's firmware. Another option is to use the ICP mechanism. This ICP system provides for programming through a serial clock/serial data interface. As shipped from the factory, the upper 512 bytes of user code space contains a serial ISP routine allowing for the device to be programmed in circuit through the serial port. The Flash may also be programmed or erased using a commercially available EPROM programmer which supports this device. This device does not provide for direct verification of code memory contents. Instead, this device provides a 32-bit CRC result on either a sector or the entire user code space.

### 7.28.6 ICP

In-Circuit Programming is performed without removing the microcontroller from the system. The In-Circuit Programming facility consists of internal hardware resources to facilitate remote programming of the P89LPC938 through a two-wire serial interface. The Philips In-Circuit Programming facility has made in-circuit programming in an embedded application—using commercially available programmers—possible with a minimum of additional expense in components and circuit board area. The ICP function uses five pins. Only a small connector needs to be available to interface your application to a commercial programmer in order to use this feature. Additional details may be found in the *P89LPC938 User's Manual*.

### 7.28.7 IAP

In-Application Programming is performed in the application under the control of the microcontroller's firmware. The IAP facility consists of internal hardware resources to facilitate programming and erasing. The Philips In-Application Programming has made in-application programming in an embedded application possible without additional components. Two methods are available to accomplish IAP. A set of predefined IAP functions are provided in a Boot ROM and can be called through a common interface, PGM\_MTP. Several IAP calls are available for use by an application program to permit selective erasing and programming of Flash sectors, pages, security bits, configuration bytes, and device ID. These functions are selected by setting up the microcontroller's registers before making a call to PGM\_MTP at FF03H. The Boot ROM occupies the program memory space at the top of the address space from FF00 to FFFF hex, thereby not conflicting with the user program memory space.

In addition, IAP operations can be accomplished through the use of four SFRs consisting of a control/status register, a data register, and two address registers. Additional details may be found in the *P89LPC938 User's Manual*.

### 7.28.8 ISP

In-System Programming is performed without removing the microcontroller from the system. The In-System Programming facility consists of a series of internal hardware resources coupled with internal firmware to facilitate remote programming of the P89LPC938 through the serial port. This firmware is provided by Philips and embedded within each P89LPC938 device. The Philips In-System Programming facility has made in-system programming in an embedded application possible with a minimum of additional expense in components and circuit board area. The ISP function uses five pins ( $V_{DD}$ ,  $V_{SS}$ , TXD, RXD, and  $\overline{RST}$ ). Only a small connector needs to be available to interface your application to an external circuit in order to use this feature.

### 7.28.9 Power-on reset code execution

The P89LPC938 contains two special Flash elements: the Boot Vector and the Boot Status Bit. Following reset, the P89LPC938 examines the contents of the Boot Status Bit. If the Boot Status Bit is set to zero, power-up execution starts at location 0000H, which is the normal start address of the user's application code. When the Boot Status Bit is set to a value other than zero, the contents of the Boot Vector is used as the high byte of the execution address and the low byte is set to 00H.

[Table 8](#) shows the factory default Boot Vector setting for this device. A factory-provided boot loader is pre-programmed into the address space indicated and uses the indicated boot loader entry point to perform ISP functions. This code can be erased by the user.

**Users who wish to use this loader should take precautions to avoid erasing the 1 kB sector that contains this boot loader. Instead, the page erase function can be used to erase the first eight 64-byte pages located in this sector.** A custom boot loader can be written with the Boot Vector set to the custom boot loader, if desired.

**Table 8: Default Boot Vector values and ISP entry points**

| Device    | Default Boot Vector | Default boot loader entry point | Default boot loader code range | 1 kB sector range |
|-----------|---------------------|---------------------------------|--------------------------------|-------------------|
| P89LPC938 | 1FH                 | 1F00H                           | 1E00H to 1FFFFH                | 1C00H to 1FFFFH   |

### 7.28.10 Hardware activation of the boot loader

The boot loader can also be executed by forcing the device into ISP mode during a power-on sequence (see the *P89LPC938 User's Manual* for specific information). This has the same effect as having a non-zero status byte. This allows an application to be built that will normally execute user code but can be manually forced into ISP operation. If the factory default setting for the Boot Vector (1FH) is changed, it will no longer point to the factory pre-programmed ISP boot loader code. After programming the Flash, the status byte should be programmed to zero in order to allow execution of the user's application code beginning at address 0000H.

### 7.29 User configuration bytes

Some user-configurable features of the P89LPC938 must be defined at power-up and therefore cannot be set by the program after start of execution. These features are configured through the use of the Flash byte UCFG1. Please see the *P89LPC938 User's Manual* for additional details.

### 7.30 User sector security bytes

There are eight User Sector Security Bytes on the P89LPC938. Each byte corresponds to one sector. Please see the *P89LPC938 User's Manual* for additional details.

## 8. A/D converter

### 8.1 General description

The P89LPC938 has a 10-bit, 8-channel multiplexed successive approximation analog-to-digital converter module. A block diagram of the A/D converter is shown in [Figure 21](#). The A/D consists of an 8-input multiplexer which feeds a sample-and-hold circuit providing an input signal to one of two comparator inputs. The control logic in combination with the SAR drives a digital-to-analog converter which provides the other input to the comparator. The output of the comparator is fed to the SAR.

### 8.2 Features

- 10-bit, 8-channel multiplexed input, successive approximation A/D converter.
- Eight result register pairs.
- Six operating modes
  - ◆ Fixed channel, single conversion mode
  - ◆ Fixed channel, continuous conversion mode
  - ◆ Auto scan, single conversion mode
  - ◆ Auto scan, continuous conversion mode
  - ◆ Dual channel, continuous conversion mode
  - ◆ Single step mode
- Three conversion start modes
  - ◆ Timer triggered start
  - ◆ Start immediately
  - ◆ Edge triggered
- 10-bit conversion time of 4  $\mu$ s at an A/D clock of 9 MHz
- Interrupt or polled operation
- High and Low Boundary limits interrupt; selectable in or out-of-range
- Clock divider
- Power-down mode

### 8.3 Block diagram

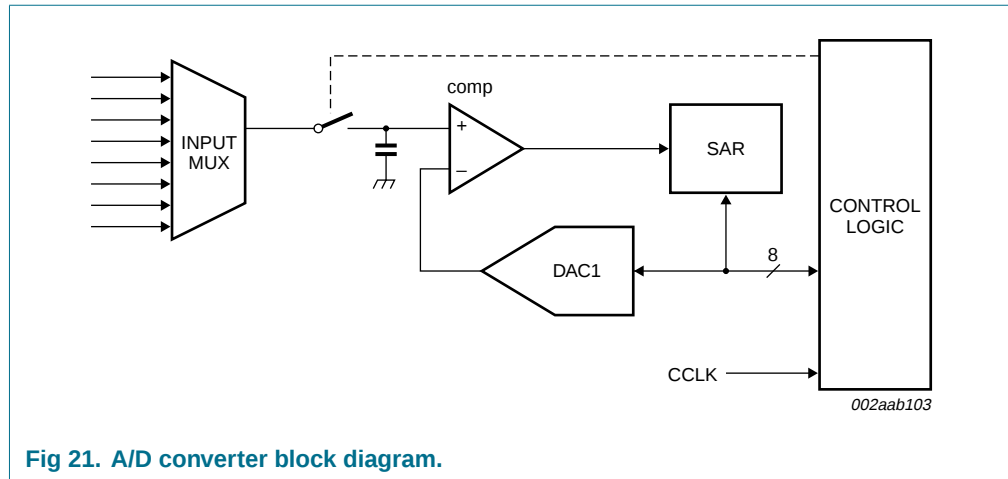


Fig 21. A/D converter block diagram.

### 8.4 A/D operating modes

#### 8.4.1 Fixed channel, single conversion mode

A single input channel can be selected for conversion. A single conversion will be performed and the result placed in the result register pair which corresponds to the selected input channel. An interrupt, if enabled, will be generated after the conversion completes.

#### 8.4.2 Fixed channel, continuous conversion mode

A single input channel can be selected for continuous conversion. The results of the conversions will be sequentially placed in the eight result register pairs. The user may select whether an interrupt can be generated after every four or every eight conversions. Additional conversion results will again cycle through the result register pairs, overwriting the previous results. Continuous conversions continue until terminated by the user.

#### 8.4.3 Auto scan, single conversion mode

Any combination of the eight input channels can be selected for conversion. A single conversion of each selected input will be performed and the result placed in the result register pair which corresponds to the selected input channel. The user may select whether an interrupt, if enabled, will be generated after either the first four conversions have occurred or all selected channels have been converted. If the user selects to generate an interrupt after the four input channels have been converted, a second interrupt will be generated after the remaining input channels have been converted. If only a single channel is selected this is equivalent to single channel, single conversion mode.

#### 8.4.4 Auto scan, continuous conversion mode

Any combination of the eight input channels can be selected for conversion. A conversion of each selected input will be performed and the result placed in the result register pair which corresponds to the selected input channel. The user may select whether an interrupt, if enabled, will be generated after either the first four conversions have occurred or all selected channels have been converted. If the user selects to generate an interrupt after the four input channels have been converted, a second interrupt will be generated

after the remaining input channels have been converted. After all selected channels have been converted, the process will repeat starting with the first selected channel. Additional conversion results will again cycle through the eight result register pairs, overwriting the previous results. Continuous conversions continue until terminated by the user.

#### 8.4.5 Dual channel, continuous conversion mode

This is a variation of the auto scan continuous conversion mode where conversion occurs on two user-selectable inputs. The result of the conversion of the first channel is placed in the result register pair, AD0DAT0R and AD0DAT0L. The result of the conversion of the second channel is placed in result register pair, AD0DAT1R and AD0DAT1L. The first channel is again converted and its result stored in AD0DAT2R and AD0DAT2L. The second channel is again converted and its result placed in AD0DAT3R and AD0DAT3L, etc. An interrupt is generated, if enabled, after every set of four or eight conversions (user selectable).

#### 8.4.6 Single step mode

This special mode allows 'single-stepping' in an auto scan conversion mode. Any combination of the eight input channels can be selected for conversion. After each channel is converted, an interrupt is generated, if enabled, and the A/D waits for the next start condition. May be used with any of the start modes.

### 8.5 Conversion start modes

#### 8.5.1 Timer triggered start

An A/D conversion is started by the overflow of Timer 0. Once a conversion has started, additional Timer 0 triggers are ignored until the conversion has completed. The Timer triggered start mode is available in all A/D operating modes.

#### 8.5.2 Start immediately

Programming this mode immediately starts a conversion. This start mode is available in all A/D operating modes.

#### 8.5.3 Edge triggered

An A/D conversion is started by rising or falling edge of P1.4. Once a conversion has started, additional edge triggers are ignored until the conversion has completed. The edge triggered start mode is available in all A/D operating modes.

### 8.6 Boundary limits interrupt

The A/D converter has both a high and low boundary limit register. The user may select whether an interrupt is generated when the conversion result is within (or equal to) the high and low boundary limits or when the conversion result is outside the boundary limits. An interrupt will be generated, if enabled, if the result meets the selected interrupt criteria. The boundary limit may be disabled by clearing the boundary limit interrupt enable.

An early detection mechanism exists when the interrupt criteria has been selected to be outside the boundary limits. In this case, after the four MSBs have been converted, these four bits are compared with the four MSBs of the boundary high and low registers. If the four MSBs of the conversion meet the interrupt criteria (i.e., outside the boundary limits) an interrupt will be generated, if enabled. If the four MSBs do not meet the interrupt

criteria, the boundary limits will again be compared after all 8 MSBs have been converted. A boundary status register (BNDSTA0) flags the channels which caused a boundary interrupt.

### 8.7 Clock divider

The A/D converter requires that its internal clock source be in the range of 500 kHz to 3 MHz to maintain accuracy. A programmable clock divider that divides the clock from 1 to 8 is provided for this purpose.

### 8.8 Power-down and Idle mode

In Idle mode the A/D converter, if enabled, will continue to function and can cause the device to exit Idle mode when the conversion is completed if the A/D interrupt is enabled. In Power-down mode or Total Power-down mode, the A/D does not function. If the A/D is enabled, it will consume power. Power can be reduced by disabling the A/D.

## 9. Limiting values

**Table 9: Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). [\[1\]](#)

| Symbol                     | Parameter                                      | Conditions                                                   | Min | Max                   | Unit |
|----------------------------|------------------------------------------------|--------------------------------------------------------------|-----|-----------------------|------|
| $T_{\text{amb(bias)}}$     | operating bias ambient temperature             |                                                              | –55 | +125                  | °C   |
| $T_{\text{stg}}$           | storage temperature range                      |                                                              | –65 | +150                  | °C   |
| $V_{\text{xtal}}$          | voltage on XTAL1, XTAL2 pin to $V_{\text{SS}}$ |                                                              | -   | $V_{\text{DD}} + 0.5$ | V    |
| $I_{\text{OH(I/O)}}$       | HIGH-level output current per I/O pin          |                                                              | -   | 20                    | mA   |
| $I_{\text{OL(I/O)}}$       | LOW-level output current per I/O pin           |                                                              | -   | 20                    | mA   |
| $I_{\text{I/O(tot)(max)}}$ | maximum total I/O current                      |                                                              | -   | 100                   | mA   |
| $P_{\text{tot(pack)}}$     | total power dissipation per package            | based on package heat transfer, not device power consumption | -   | 1.5                   | W    |

[1] The following applies to [Table 9 “Limiting values”](#)

- Stresses above those listed may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any conditions other than those described in [Table 10 “DC electrical characteristics”](#) and [Table 11 “AC characteristics”](#) of this specification are not implied.
- This product includes circuitry specifically designed for the protection of its internal devices from the damaging effects of excessive static charge. Nonetheless, it is suggested that conventional precautions be taken to avoid applying greater than the rated maximum.
- Parameters are valid over operating temperature range unless otherwise specified. All voltages are with respect to  $V_{\text{SS}}$  unless otherwise noted.

## 10. Static characteristics

**Table 10: DC electrical characteristics**
 $V_{DD} = 2.4\text{ V to }3.6\text{ V unless otherwise specified.}$ 
 $T_{amb} = -40\text{ °C to }+85\text{ °C for industrial applications, unless otherwise specified.}$ 

| Symbol         | Parameter                                                                     | Conditions                                                                                                     | Min                | Typ <sup>[1]</sup> | Max         | Unit  |
|----------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|--------------------|--------------------|-------------|-------|
| $I_{DD(oper)}$ | operating supply current                                                      | 3.6 V; 12 MHz                                                                                                  | <sup>[2]</sup> -   | 14                 | 23          | mA    |
| $I_{DD(idle)}$ | Idle mode supply current                                                      | 3.6 V; 12 MHz                                                                                                  | <sup>[2]</sup> -   | 5                  | 7           | mA    |
| $I_{DD(pd)}$   | power supply current,<br>Power-down mode, voltage<br>comparators powered-down | 3.6 V                                                                                                          | <sup>[2]</sup> -   | 55                 | 80          | μA    |
| $I_{DD(tpd)}$  | total Power-down mode supply<br>current                                       | 3.6 V                                                                                                          | <sup>[3]</sup> -   | 1                  | 5           | μA    |
| $(dV/dt)_r$    | rise rate                                                                     | of $V_{DD}$                                                                                                    | -                  | -                  | 2           | mV/μs |
| $(dV/dt)_f$    | fall rate                                                                     | of $V_{DD}$                                                                                                    | -                  | -                  | 50          | mV/μs |
| $V_{DDR}$      | data retention voltage                                                        |                                                                                                                | 1.5                | -                  | -           | V     |
| $V_{th(HL)}$   | HIGH-LOW threshold voltage                                                    | except SCL, SDA                                                                                                | $0.22V_{DD}$       | $0.4V_{DD}$        | -           | V     |
| $V_{IL}$       | LOW-level input voltage                                                       | SCL, SDA only                                                                                                  | -0.5               | -                  | $0.3V_{DD}$ | V     |
| $V_{th(LH)}$   | LOW-HIGH threshold voltage                                                    | except SCL, SDA                                                                                                | -                  | $0.6V_{DD}$        | $0.7V_{DD}$ | V     |
| $V_{IH}$       | HIGH-level input voltage                                                      | SCL, SDA only                                                                                                  | $0.7V_{DD}$        | -                  | 5.5         | V     |
| $V_{hys}$      | hysteresis voltage                                                            | Port 1                                                                                                         | -                  | $0.2V_{DD}$        | -           | V     |
| $V_{OL}$       | LOW-level output voltage                                                      | $I_{OL} = 20\text{ mA};$<br>$V_{DD} = 2.4\text{ V} - 3.6\text{ V},$<br>all ports,<br>all modes except Hi-Z     | <sup>[4]</sup> -   | 0.6                | 1.0         | V     |
|                |                                                                               | $I_{OL} = 3.2\text{ mA};$<br>$V_{DD} = 2.4\text{ V} - 3.6\text{ V},$<br>all ports,<br>all modes except Hi-Z    | <sup>[4]</sup> -   | 0.2                | 0.3         | V     |
| $V_{OH}$       | HIGH-level output voltage                                                     | $I_{OH} = -20\text{ μA};$<br>$V_{DD} = 2.4\text{ V} - 3.6\text{ V};$<br>quasi-bidirectional mode,<br>all ports | $V_{DD} - 0.3$     | $V_{DD} - 0.2$     | -           | V     |
|                |                                                                               | $I_{OH} = -3.2\text{ mA};$<br>$V_{DD} = 2.4\text{ V} - 3.6\text{ V};$<br>push-pull mode, all ports             | $V_{DD} - 0.7$     | $V_{DD} - 0.4$     | -           | V     |
|                |                                                                               | $I_{OH} = -20\text{ mA};$<br>$V_{DD} = 2.4\text{ V} - 3.6\text{ V};$<br>push-pull mode, all ports              | $V_{DD} - 1.0$     | -                  | -           | V     |
| $C_{iss}$      | input capacitance                                                             |                                                                                                                | <sup>[5]</sup> -   | -                  | 15          | pF    |
| $I_{IL}$       | logical 0 input current                                                       | $V_I = 0.4\text{ V}$                                                                                           | <sup>[6]</sup> -   | -                  | -80         | μA    |
| $I_{LI}$       | input leakage current                                                         | $V_I = V_{IL}, V_{IH}, V_{th(HL)}$                                                                             | <sup>[7]</sup> -   | -                  | ±10         | μA    |
| $I_{TL}$       | logical 1-to-0 transition current,<br>all ports                               | $V_I = 1.5\text{ V at }V_{DD} = 3.6\text{ V}$                                                                  | <sup>[8]</sup> -30 | -                  | -450        | μA    |
| $R_{RST(int)}$ | internal pull-up resistance on<br>pin $\overline{RST}$                        |                                                                                                                | 10                 | -                  | 30          | kΩ    |

**Table 10: DC electrical characteristics ...continued** $V_{DD} = 2.4 \text{ V}$  to  $3.6 \text{ V}$  unless otherwise specified. $T_{amb} = -40^\circ\text{C}$  to  $+85^\circ\text{C}$  for industrial applications, unless otherwise specified.

| Symbol        | Parameter                           | Conditions                                                           | Min  | Typ <sup>[1]</sup> | Max  | Unit                  |
|---------------|-------------------------------------|----------------------------------------------------------------------|------|--------------------|------|-----------------------|
| $V_{bo}$      | brownout trip voltage               | $2.4 \text{ V} < V_{DD} < 3.6 \text{ V}$ ; with<br>BOV = 1, BOPD = 0 | 2.40 | -                  | 2.70 | V                     |
| $V_{ref(bg)}$ | band gap reference voltage          |                                                                      | 1.11 | 1.23               | 1.34 | V                     |
| $TC_{bg}$     | band gap temperature<br>coefficient |                                                                      | -    | 10                 | 20   | ppm/ $^\circ\text{C}$ |

- [1] Typical ratings are not guaranteed. The values listed are at room temperature,  $V_{DD} = 3 \text{ V}$ .
- [2] The  $I_{DD(oper)}$ ,  $I_{DD(idle)}$ , and  $I_{DD(pd)}$  specifications are measured using an external clock with the following functions disabled: comparators, real-time clock, and watchdog timer.
- [3] The  $I_{DD(tpd)}$  specification is measured using an external clock with the following functions disabled: comparators, real-time clock, brownout detect, and watchdog timer.
- [4] See [Section 9 "Limiting values" on page 50](#) for steady state (non-transient) limits on  $I_{OL}$  or  $I_{OH}$ . If  $I_{OL}/I_{OH}$  exceeds the test condition,  $V_{OL}/V_{OH}$  may exceed the related specification.
- [5] Pin capacitance is characterized but not tested.
- [6] Measured with port in quasi-bidirectional mode.
- [7] Measured with port in high-impedance mode.
- [8] Port pins source a transition current when used in quasi-bidirectional mode and externally driven from logic 1 to logic 0. This current is highest when  $V_I$  is approximately 2 V.

## 11. Dynamic characteristics

**Table 11: AC characteristics**
 $V_{DD} = 2.4\text{ V to }3.6\text{ V}$ , unless otherwise specified.

 $T_{amb} = -40\text{ °C to }+85\text{ °C}$  for industrial applications, unless otherwise specified. [\[1\]](#) [\[2\]](#)

| Symbol        | Parameter                              | Conditions                    | Variable clock |       | $f_{osc} = 12\text{ MHz}$ |       | Unit |
|---------------|----------------------------------------|-------------------------------|----------------|-------|---------------------------|-------|------|
|               |                                        |                               | Min            | Max   | Min                       | Max   |      |
| $f_{OSC(RC)}$ | internal RC oscillator frequency       |                               | 7.189          | 7.557 | 7.189                     | 7.557 | MHz  |
| $f_{OSC(WD)}$ | internal watchdog oscillator frequency |                               | 320            | 520   | 320                       | 520   | kHz  |
| $f_{osc}$     | oscillator frequency                   |                               | 0              | 12    | -                         | -     | MHz  |
| $T_{cy(CLK)}$ | clock cycle time                       | see <a href="#">Figure 23</a> | 83             | -     | -                         | -     | ns   |
| $f_{CLKLP}$   | low power select frequency             |                               | 0              | 8     | -                         | -     | MHz  |

### Glitch filter

|          |                   |                                       |     |    |     |    |    |
|----------|-------------------|---------------------------------------|-----|----|-----|----|----|
| $t_{gr}$ | glitch rejection  | P1.5/ $\overline{RST}$ pin            | -   | 50 | -   | 50 | ns |
|          |                   | any pin except P1.5/ $\overline{RST}$ | -   | 15 | -   | 15 | ns |
| $t_{sa}$ | signal acceptance | P1.5/ $\overline{RST}$ pin            | 125 | -  | 125 | -  | ns |
|          |                   | any pin except P1.5/ $\overline{RST}$ | 50  | -  | 50  | -  | ns |

### External clock

|            |                 |                               |    |                          |    |   |    |
|------------|-----------------|-------------------------------|----|--------------------------|----|---|----|
| $t_{CHCX}$ | clock HIGH time | see <a href="#">Figure 23</a> | 33 | $T_{cy(CLK)} - t_{CLCX}$ | 33 | - | ns |
| $t_{CLCX}$ | clock LOW time  | see <a href="#">Figure 23</a> | 33 | $T_{cy(CLK)} - t_{CHCX}$ | 33 | - | ns |
| $t_{CLCH}$ | clock rise time | see <a href="#">Figure 23</a> | -  | 8                        | -  | 8 | ns |
| $t_{CHCL}$ | clock fall time | see <a href="#">Figure 23</a> | -  | 8                        | -  | 8 | ns |

### Shift register (UART mode 0)

|            |                                               |                               |                  |                    |      |     |    |
|------------|-----------------------------------------------|-------------------------------|------------------|--------------------|------|-----|----|
| $t_{XLXL}$ | serial port clock cycle time                  | see <a href="#">Figure 22</a> | 16 $T_{cy(CLK)}$ | -                  | 1333 | -   | ns |
| $t_{QVXH}$ | output data set-up to clock rising edge time  | see <a href="#">Figure 22</a> | 13 $T_{cy(CLK)}$ | -                  | 1083 | -   | ns |
| $t_{XHQX}$ | output data hold after clock rising edge time | see <a href="#">Figure 22</a> | -                | $T_{cy(CLK)} + 20$ | -    | 103 | ns |
| $t_{XHDX}$ | input data hold after clock rising edge time  | see <a href="#">Figure 22</a> | -                | 0                  | -    | 0   | ns |
| $t_{XHdV}$ | input data valid to clock rising edge time    | see <a href="#">Figure 22</a> | 150              | -                  | 150  | -   | ns |

### SPI interface

|               |                         |                                                                                                 |          |          |     |     |     |
|---------------|-------------------------|-------------------------------------------------------------------------------------------------|----------|----------|-----|-----|-----|
| $f_{SPI}$     | SPI operating frequency |                                                                                                 |          |          |     |     |     |
|               | 2.0 MHz (slave)         |                                                                                                 | 0        | $CCLK/6$ | 0   | 2.0 | MHz |
|               | 3.0 MHz (master)        |                                                                                                 | -        | $CCLK/4$ | -   | 3.0 | MHz |
| $t_{SPICYC}$  | SPI cycle time          | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |          |          |     |     |     |
|               | 2.0 MHz (slave)         |                                                                                                 | $6/CCLK$ | -        | 500 | -   | ns  |
|               | 3.0 MHz (master)        |                                                                                                 | $4/CCLK$ | -        | 333 | -   | ns  |
| $t_{SPILEAD}$ | SPI enable lead time    | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |          |          |     |     |     |
|               | 2.0 MHz (slave)         |                                                                                                 | 250      | -        | 250 | -   | ns  |
| $t_{SPILAG}$  | SPI enable lag time     | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |          |          |     |     |     |
|               | 2.0 MHz (slave)         |                                                                                                 | 250      | -        | 250 | -   | ns  |

**Table 11: AC characteristics ...continued** $V_{DD} = 2.4\text{ V to } 3.6\text{ V}$ , unless otherwise specified. $T_{amb} = -40\text{ °C to } +85\text{ °C}$  for industrial applications, unless otherwise specified. [\[1\]](#) [\[2\]](#)

| Symbol         | Parameter                                            | Conditions                                                                                      | Variable clock   |      | $f_{osc} = 12\text{ MHz}$ |      | Unit |
|----------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------|------|---------------------------|------|------|
|                |                                                      |                                                                                                 | Min              | Max  | Min                       | Max  |      |
| $t_{SPICLK H}$ | SPICLK HIGH time                                     | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | 3.0 MHz (master)                                     |                                                                                                 | $\frac{2}{CCLK}$ | -    | 165                       | -    | ns   |
|                | 2.0 MHz (slave)                                      |                                                                                                 | $\frac{3}{CCLK}$ | -    | 250                       | -    | ns   |
| $t_{SPICLK L}$ | SPICLK LOW time                                      | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | 3.0 MHz (master)                                     |                                                                                                 | $\frac{2}{CCLK}$ | -    | 165                       | -    | ns   |
|                | 2.0 MHz (slave)                                      |                                                                                                 | $\frac{3}{CCLK}$ | -    | 250                       | -    | ns   |
| $t_{SPIDSU}$   | SPI data set-up time                                 | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> | 100              | -    | 100                       | -    | ns   |
| $t_{SPIDH}$    | SPI data hold time                                   | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> | 100              | -    | 100                       | -    | ns   |
| $t_{SPIA}$     | SPI access time                                      | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |                  |      |                           |      |      |
|                | 2.0 MHz (slave)                                      |                                                                                                 | 0                | 120  | 0                         | 120  | ns   |
| $t_{SPIDIS}$   | SPI disable time                                     | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |                  |      |                           |      |      |
|                | 2.0 MHz (slave)                                      |                                                                                                 | 0                | 240  | -                         | 240  | ns   |
| $t_{SPIDV}$    | SPI enable to output data valid time                 | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | 2.0 MHz (slave)                                      |                                                                                                 | -                | 240  | -                         | 240  | ns   |
|                | 3.0 MHz (master)                                     |                                                                                                 | -                | 167  | -                         | 167  | ns   |
| $t_{SPIOH}$    | SPI output data hold time                            | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> | 0                | -    | 0                         | -    | ns   |
| $t_{SPIR}$     | SPI rise time                                        | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | SPI outputs<br>(SPICLK, MOSI, MISO)                  |                                                                                                 | -                | 100  | -                         | 100  | ns   |
|                | SPI inputs<br>(SPICLK, MOSI, MISO, $\overline{SS}$ ) |                                                                                                 | -                | 2000 | -                         | 2000 | ns   |
| $t_{SPIF}$     | SPI fall time                                        | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | SPI outputs<br>(SPICLK, MOSI, MISO)                  |                                                                                                 | -                | 100  | -                         | 100  | ns   |
|                | SPI inputs<br>(SPICLK, MOSI, MISO, $\overline{SS}$ ) |                                                                                                 | -                | 2000 | -                         | 2000 | ns   |

[1] Parameters are valid over operating temperature range unless otherwise specified.

[2] Parts are tested to 2 MHz, but are guaranteed to operate down to 0 Hz.

**Table 12: AC characteristics** $V_{DD} = 3.0\text{ V to }3.6\text{ V}$ , unless otherwise specified. $T_{amb} = -40\text{ °C to }+85\text{ °C}$  for industrial applications, unless otherwise specified. [\[1\]](#) [\[2\]](#)

| Symbol                       | Parameter                                     | Conditions                                                                                      | Variable clock         |                                          | f <sub>osc</sub> = 18 MHz |       | Unit |
|------------------------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------|------------------------------------------|---------------------------|-------|------|
|                              |                                               |                                                                                                 | Min                    | Max                                      | Min                       | Max   |      |
| f <sub>OSC(RC)</sub>         | internal RC oscillator frequency              |                                                                                                 | 7.189                  | 7.557                                    | 7.189                     | 7.557 | MHz  |
| f <sub>OSC(WD)</sub>         | internal watchdog oscillator frequency        |                                                                                                 | 320                    | 520                                      | 320                       | 520   | kHz  |
| f <sub>osc</sub>             | oscillator frequency                          |                                                                                                 | 0                      | 18                                       | -                         | -     | MHz  |
| T <sub>cy(CLK)</sub>         | clock cycle time                              | see <a href="#">Figure 23</a>                                                                   | 55                     | -                                        | -                         | -     | ns   |
| f <sub>CLKLP</sub>           | low power select frequency                    |                                                                                                 | 0                      | 8                                        | -                         | -     | MHz  |
| Glitch filter                |                                               |                                                                                                 |                        |                                          |                           |       |      |
| t <sub>gr</sub>              | glitch rejection                              | P1.5/ $\overline{\text{RST}}$ pin                                                               | -                      | 50                                       | -                         | 50    | ns   |
|                              |                                               | any pin except P1.5/ $\overline{\text{RST}}$                                                    | -                      | 15                                       | -                         | 15    | ns   |
| t <sub>sa</sub>              | signal acceptance                             | P1.5/ $\overline{\text{RST}}$ pin                                                               | 125                    | -                                        | 125                       | -     | ns   |
|                              |                                               | any pin except P1.5/ $\overline{\text{RST}}$                                                    | 50                     | -                                        | 50                        | -     | ns   |
| External clock               |                                               |                                                                                                 |                        |                                          |                           |       |      |
| t <sub>CHCX</sub>            | clock HIGH time                               | see <a href="#">Figure 23</a>                                                                   | 22                     | T <sub>cy(CLK)</sub> – t <sub>CLCX</sub> | 22                        | -     | ns   |
| t <sub>CLCX</sub>            | clock LOW time                                | see <a href="#">Figure 23</a>                                                                   | 22                     | T <sub>cy(CLK)</sub> – t <sub>CHCX</sub> | 22                        | -     | ns   |
| t <sub>CLCH</sub>            | clock rise time                               | see <a href="#">Figure 23</a>                                                                   | -                      | 5                                        | -                         | 5     | ns   |
| t <sub>CHCL</sub>            | clock fall time                               | see <a href="#">Figure 23</a>                                                                   | -                      | 5                                        | -                         | 5     | ns   |
| Shift register (UART mode 0) |                                               |                                                                                                 |                        |                                          |                           |       |      |
| t <sub>XLXL</sub>            | serial port clock cycle time                  | see <a href="#">Figure 22</a>                                                                   | 16T <sub>cy(CLK)</sub> | -                                        | 888                       | -     | ns   |
| t <sub>QVXH</sub>            | output data set-up to clock rising edge time  | see <a href="#">Figure 22</a>                                                                   | 13T <sub>cy(CLK)</sub> | -                                        | 722                       | -     | ns   |
| t <sub>XHQX</sub>            | output data hold after clock rising edge time | see <a href="#">Figure 22</a>                                                                   | -                      | T <sub>cy(CLK)</sub> + 20                | -                         | 75    | ns   |
| t <sub>XHDX</sub>            | input data hold after clock rising edge time  | see <a href="#">Figure 22</a>                                                                   | -                      | 0                                        | -                         | 0     | ns   |
| t <sub>XHDV</sub>            | input data valid to clock rising edge time    | see <a href="#">Figure 22</a>                                                                   | 150                    | -                                        | 150                       | -     | ns   |
| SPI interface                |                                               |                                                                                                 |                        |                                          |                           |       |      |
| f <sub>SPI</sub>             | SPI operating frequency                       |                                                                                                 |                        |                                          |                           |       |      |
|                              | 3.0 MHz (slave)                               |                                                                                                 | 0                      | CCLK/6                                   | 0                         | 3.0   | MHz  |
|                              | 4.5 MHz (master)                              |                                                                                                 | -                      | CCLK/4                                   | -                         | 4.5   | MHz  |
| t <sub>SPICYC</sub>          | SPI cycle time                                | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                        |                                          |                           |       |      |
|                              | 3.0 MHz (slave)                               |                                                                                                 | 6/CCLK                 | -                                        | 333                       | -     | ns   |
|                              | 4.5 MHz (master)                              |                                                                                                 | 4/CCLK                 | -                                        | 222                       | -     | ns   |
| t <sub>SPILEAD</sub>         | SPI enable lead time                          | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |                        |                                          |                           |       |      |
|                              | 3.0 MHz (slave)                               |                                                                                                 | 250                    | -                                        | 250                       | -     | ns   |
| t <sub>SPILAG</sub>          | SPI enable lag time                           | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |                        |                                          |                           |       |      |
|                              | 3.0 MHz (slave)                               |                                                                                                 | 250                    | -                                        | 250                       | -     | ns   |

**Table 12: AC characteristics ...continued** $V_{DD} = 3.0\text{ V to }3.6\text{ V}$ , unless otherwise specified. $T_{amb} = -40\text{ }^{\circ}\text{C to }+85\text{ }^{\circ}\text{C}$  for industrial applications, unless otherwise specified. [\[1\]](#) [\[2\]](#)

| Symbol         | Parameter                                            | Conditions                                                                                      | Variable clock   |      | $f_{osc} = 18\text{ MHz}$ |      | Unit |
|----------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------|------|---------------------------|------|------|
|                |                                                      |                                                                                                 | Min              | Max  | Min                       | Max  |      |
| $t_{SPICLK H}$ | SPICLK HIGH time                                     | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | 4.5 MHz (master)                                     |                                                                                                 | $\frac{2}{CCLK}$ | -    | 111                       | -    | ns   |
|                | 3.0 MHz (slave)                                      |                                                                                                 | $\frac{3}{CCLK}$ | -    | 167                       | -    | ns   |
| $t_{SPICLK L}$ | SPICLK LOW time                                      | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | 4.5 MHz (master)                                     |                                                                                                 | $\frac{2}{CCLK}$ | -    | 111                       | -    | ns   |
|                | 3.0 MHz (slave)                                      |                                                                                                 | $\frac{3}{CCLK}$ | -    | 167                       | -    | ns   |
| $t_{SPIDSU}$   | SPI data set-up time                                 | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> | 100              | -    | 100                       | -    | ns   |
| $t_{SPIDH}$    | SPI data hold time                                   | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> | 100              | -    | 100                       | -    | ns   |
| $t_{SPIA}$     | SPI access time                                      | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |                  |      |                           |      |      |
|                | 3.0 MHz (slave)                                      |                                                                                                 | 0                | 80   | 0                         | 80   | ns   |
| $t_{SPIDIS}$   | SPI disable time                                     | see <a href="#">Figure 26</a> ,<br><a href="#">27</a>                                           |                  |      |                           |      |      |
|                | 3.0 MHz (slave)                                      |                                                                                                 | 0                | 160  | -                         | 160  | ns   |
| $t_{SPIDV}$    | SPI enable to output data valid time                 | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | 3.0 MHz (slave)                                      |                                                                                                 | -                | 160  | -                         | 160  | ns   |
|                | 4.5 MHz (master)                                     |                                                                                                 | -                | 111  | -                         | 111  | ns   |
| $t_{SPIOH}$    | SPI output data hold time                            | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> | 0                | -    | 0                         | -    | ns   |
| $t_{SPIR}$     | SPI rise time                                        | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | SPI outputs<br>(SPICLK, MOSI, MISO)                  |                                                                                                 | -                | 100  | -                         | 100  | ns   |
|                | SPI inputs<br>(SPICLK, MOSI, MISO, $\overline{SS}$ ) |                                                                                                 | -                | 2000 | -                         | 2000 | ns   |
| $t_{SPIF}$     | SPI fall time                                        | see <a href="#">Figure 24</a> ,<br><a href="#">25</a> , <a href="#">26</a> , <a href="#">27</a> |                  |      |                           |      |      |
|                | SPI outputs<br>(SPICLK, MOSI, MISO)                  |                                                                                                 | -                | 100  | -                         | 100  | ns   |
|                | SPI inputs<br>(SPICLK, MOSI, MISO, $\overline{SS}$ ) |                                                                                                 | -                | 2000 | -                         | 2000 | ns   |

[\[1\]](#) Parameters are valid over operating temperature range unless otherwise specified.[\[2\]](#) Parts are tested to 2 MHz, but are guaranteed to operate down to 0 Hz.

11.1 Waveforms

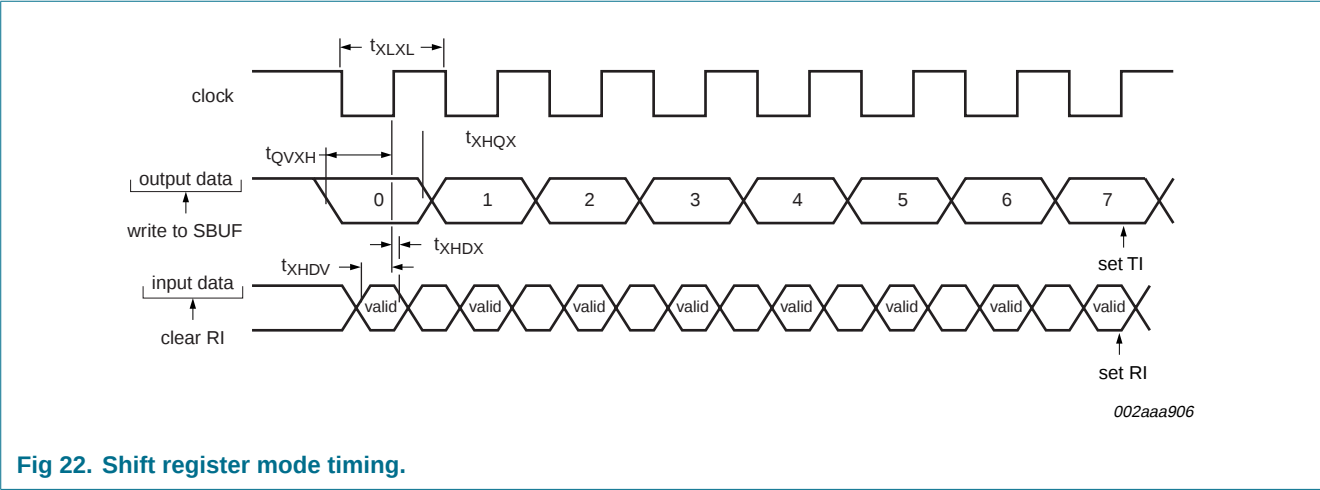


Fig 22. Shift register mode timing.



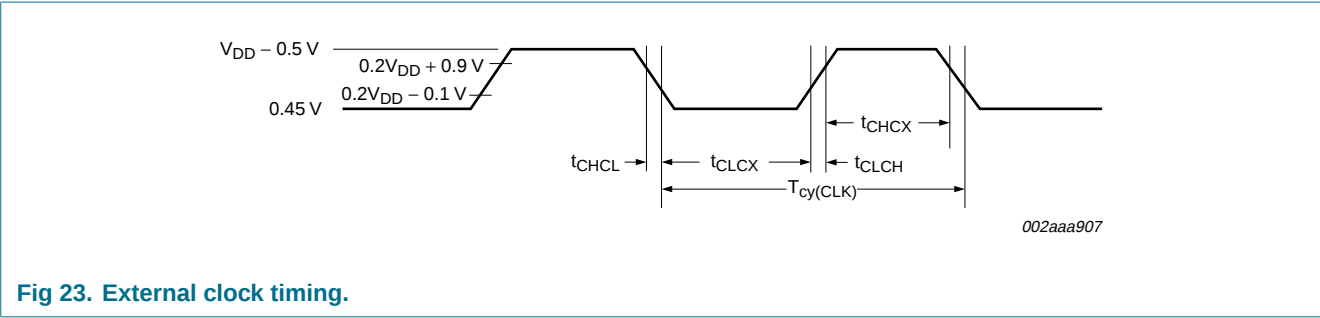


Fig 23. External clock timing.

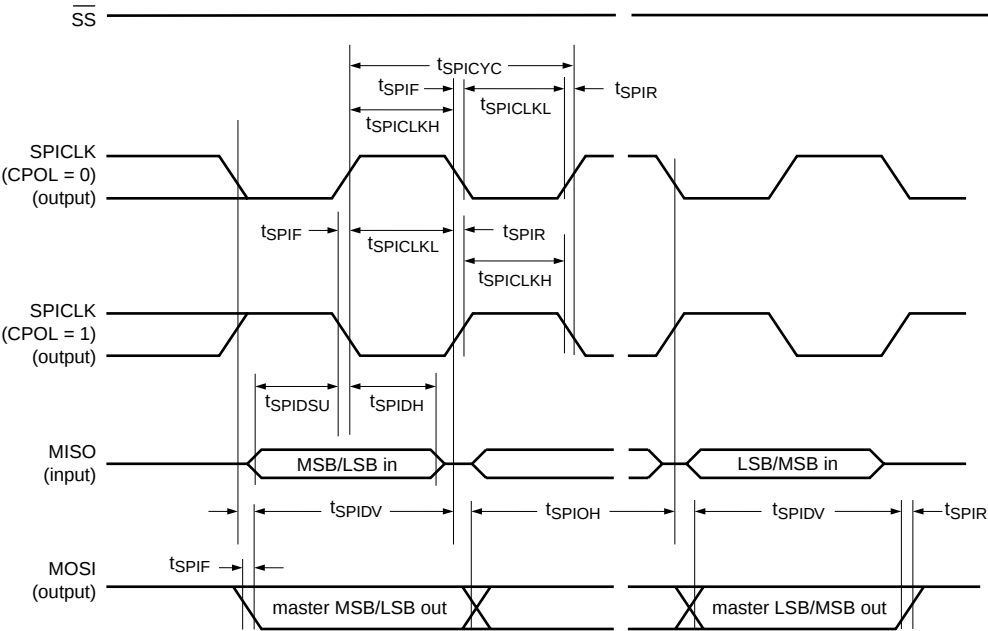

002aaa908

Fig 24. SPI master timing (CPHA = '0').

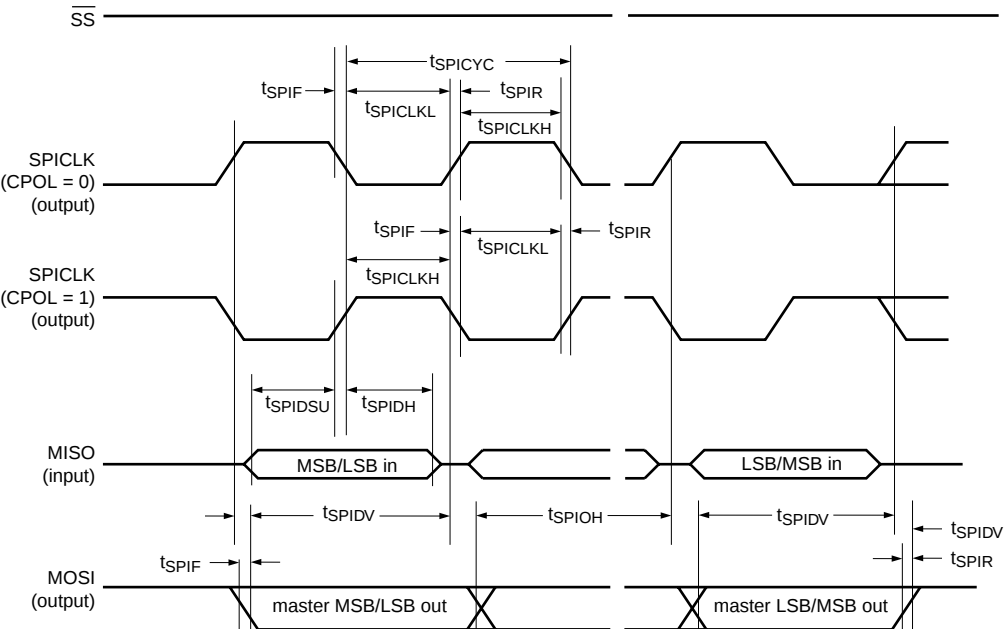

002aaa909

Fig 25. SPI master timing (CPHA = '1').



## 11.2 ISP entry mode

**Table 13: AC characteristics, ISP entry mode**

$V_{DD} = 2.4\text{ V}$  to  $3.6\text{ V}$ , unless otherwise specified.

$T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  for industrial applications, unless otherwise specified.

| Symbol   | Parameter                                               | Conditions | Min | Typ | Max | Unit          |
|----------|---------------------------------------------------------|------------|-----|-----|-----|---------------|
| $t_{VR}$ | $\overline{\text{RST}}$ delay from $V_{DD}$ active time |            | 50  | -   | -   | $\mu\text{s}$ |
| $t_{RH}$ | $\overline{\text{RST}}$ HIGH time                       |            | 1   | -   | 32  | $\mu\text{s}$ |
| $t_{RL}$ | $\overline{\text{RST}}$ LOW time                        |            | 1   | -   | -   | $\mu\text{s}$ |

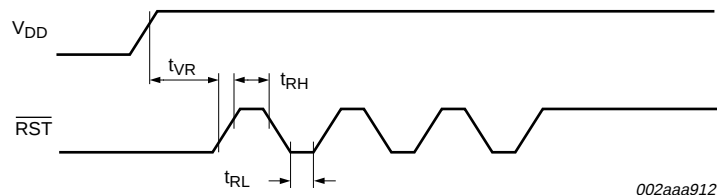


Fig 28. ISP entry waveform.

## 12. Other characteristics

### 12.1 Comparator electrical characteristics

**Table 14: Comparator electrical characteristics**

$V_{DD} = 2.4\text{ V}$  to  $3.6\text{ V}$ , unless otherwise specified.

$T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  for industrial applications, unless otherwise specified.

| Symbol         | Parameter                              | Conditions         | Min | Typ | Max            | Unit          |
|----------------|----------------------------------------|--------------------|-----|-----|----------------|---------------|
| $V_{IO}$       | offset voltage input voltage           |                    | -   | -   | $\pm 20$       | mV            |
| $V_{IC}$       | common mode input voltage              |                    | 0   | -   | $V_{DD} - 0.3$ | V             |
| CMRR           | common mode rejection ratio            |                    | [1] | -   | -50            | dB            |
| $t_{res(tot)}$ | total response time                    |                    | -   | 250 | 500            | ns            |
| $t_{(CE-OV)}$  | comparator enable to output valid time |                    | -   | -   | 10             | $\mu\text{s}$ |
| $I_{LI}$       | input leakage current                  | $0 < V_I < V_{DD}$ | -   | -   | $\pm 10$       | $\mu\text{A}$ |

[1] This parameter is characterized, but not tested in production.

## 12.2 A/D converter electrical characteristics

**Table 15: A/D converter electrical characteristics**

$V_{DD} = 2.4\text{ V}$  to  $3.6\text{ V}$ , unless otherwise specified.

$T_{amb} = -40\text{ °C}$  to  $+85\text{ °C}$  for industrial applications, unless otherwise specified.

All limits valid for an external source impedance of less than  $10\text{ k}\Omega$ .

| Symbol              | Parameter                     | Conditions       | Min            | Typ | Max             | Unit          |
|---------------------|-------------------------------|------------------|----------------|-----|-----------------|---------------|
| $V_{IA}$            | analog input voltage          |                  | $V_{SS} - 0.2$ | -   | $V_{SS} + 0.2$  | V             |
| $C_{iss}$           | analog input capacitance      |                  | -              | -   | 15              | pF            |
| $E_D$               | differential non-linearity    |                  | -              | -   | $\pm 1$         | LSB           |
| $E_{L(adj)}$        | integral non-linearity        |                  | -              | -   | $\pm 1$         | LSB           |
| $E_O$               | offset error                  |                  | -              | -   | $\pm 2$         | LSB           |
| $E_G$               | gain error                    |                  | -              | -   | $\pm 1$         | %             |
| $E_{u(tot)}$        | total unadjusted error        |                  | -              | -   | $\pm 2$         | LSB           |
| $M_{CTC}$           | channel-to-channel matching   |                  | -              | -   | $\pm 1$         | LSB           |
| $\alpha_{ct(port)}$ | crosstalk between port inputs | 0 kHz to 100 kHz | -              | -   | -60             | dB            |
| $SR_{in}$           | input slew rate               |                  | -              | -   | 100             | V/ms          |
| $T_{cy(ADC)}$       | ADC clock cycle               |                  | 111            | -   | 3125            | ns            |
| $t_{ADC}$           | conversion time               | A/D enabled      | -              | -   | $36T_{cy(ADC)}$ | $\mu\text{s}$ |

13. Package outline

PLCC28: plastic leaded chip carrier; 28 leads

SOT261-2

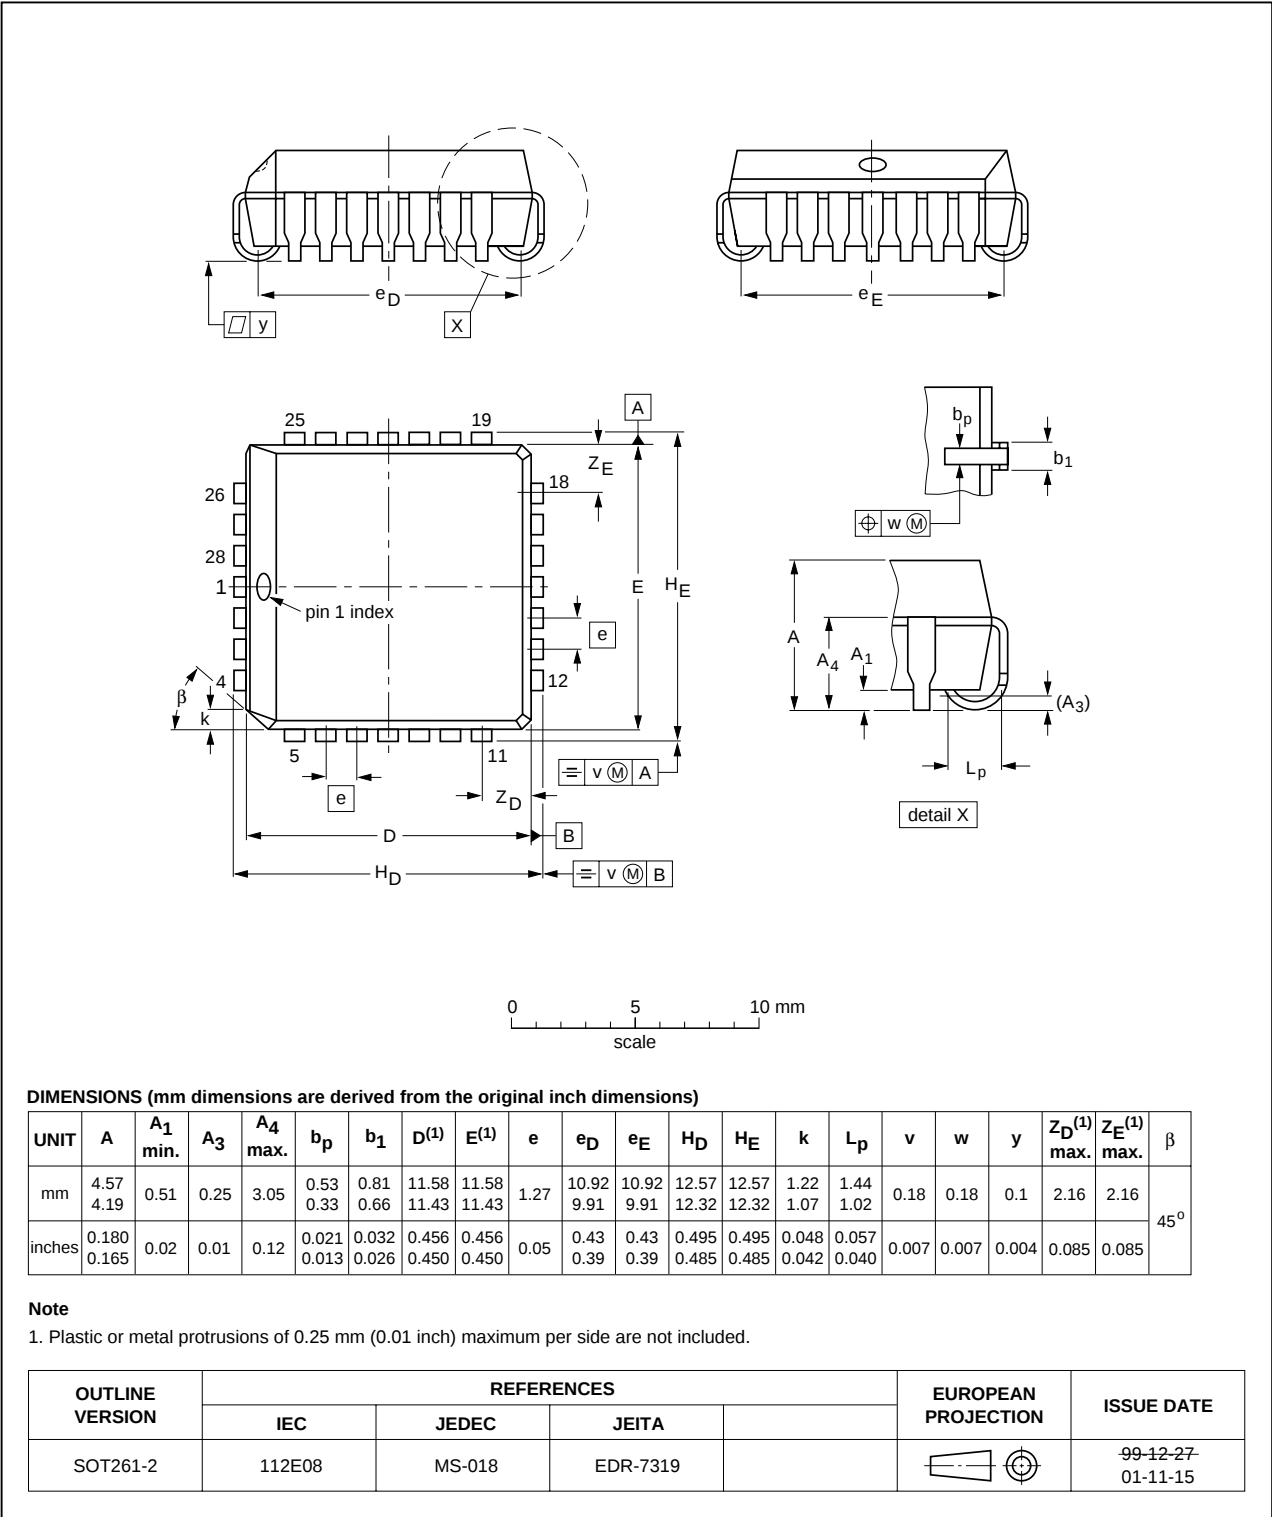


Fig 29. Package outline SOT261-2 (PLCC28).

TSSOP28: plastic thin shrink small outline package; 28 leads; body width 4.4 mm

SOT361-1

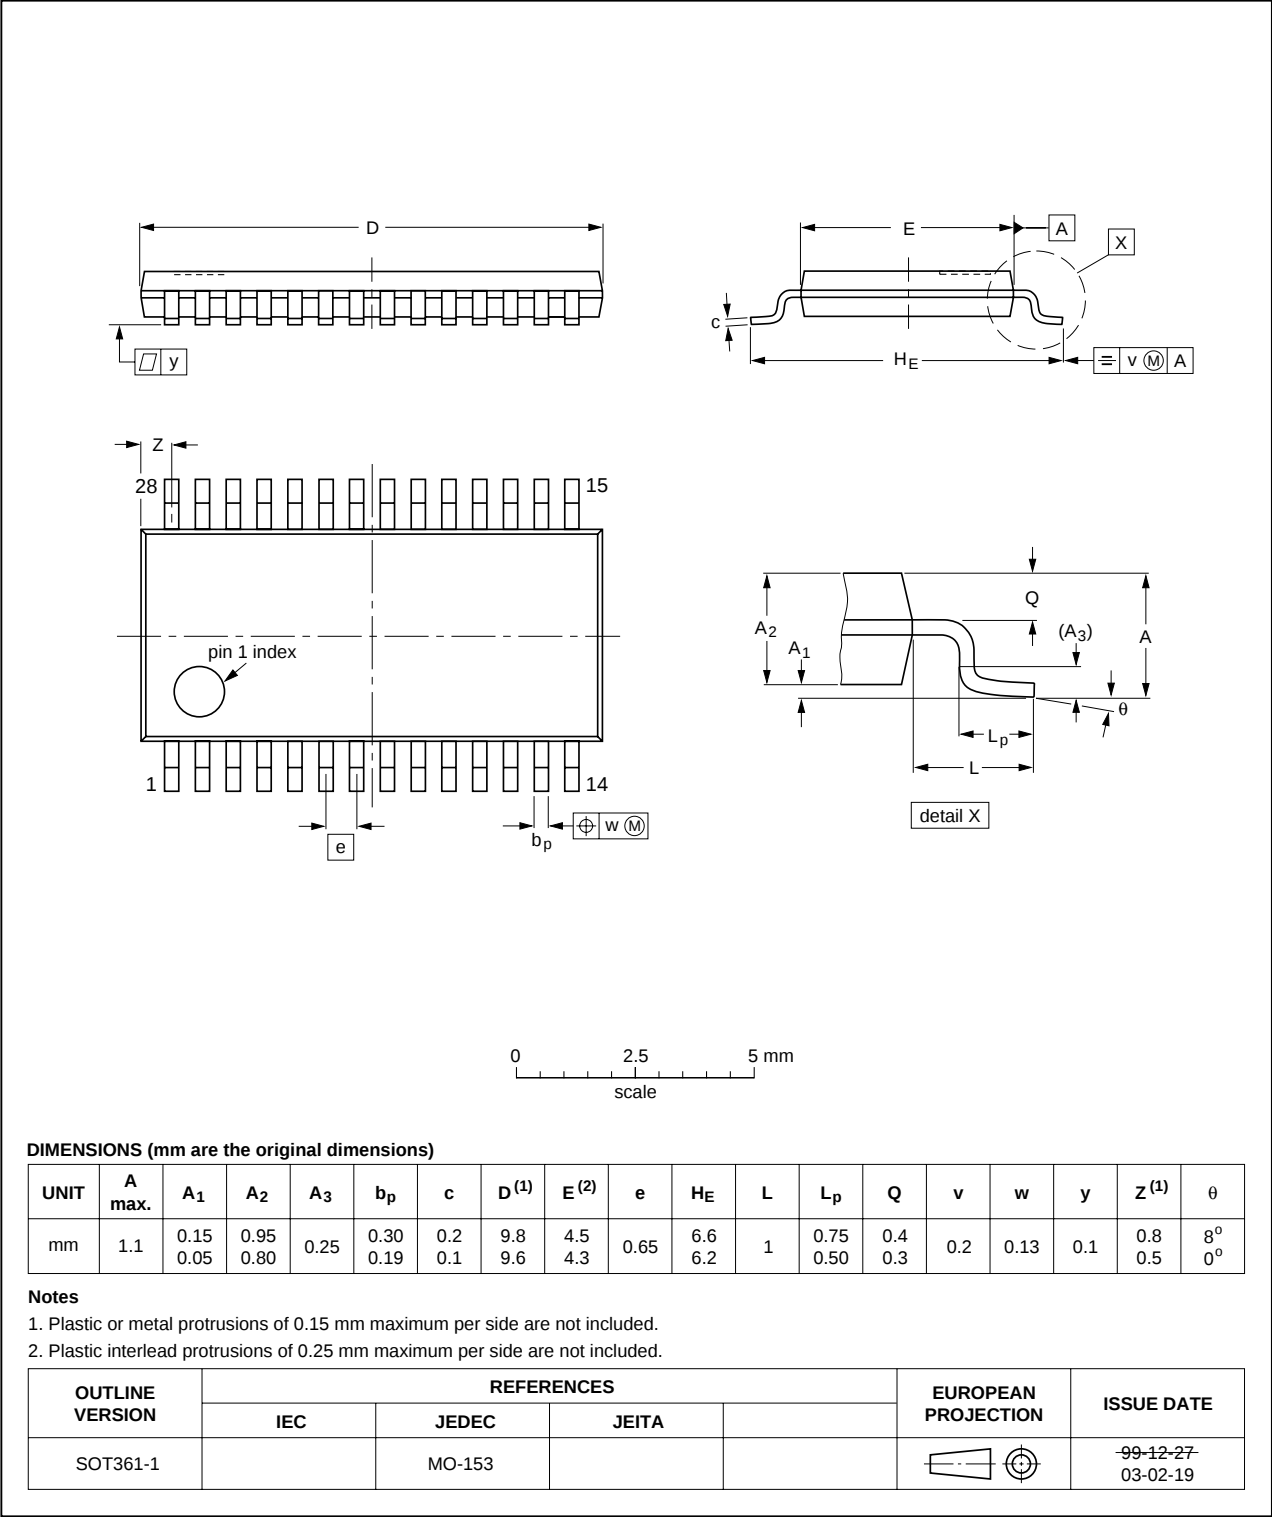


Fig 30. Package outline SOT361-1 (TSSOP28).

HVQFN28: plastic thermal enhanced very thin quad flat package; no leads;  
28 terminals; body 6 x 6 x 0.85 mm

SOT788-1

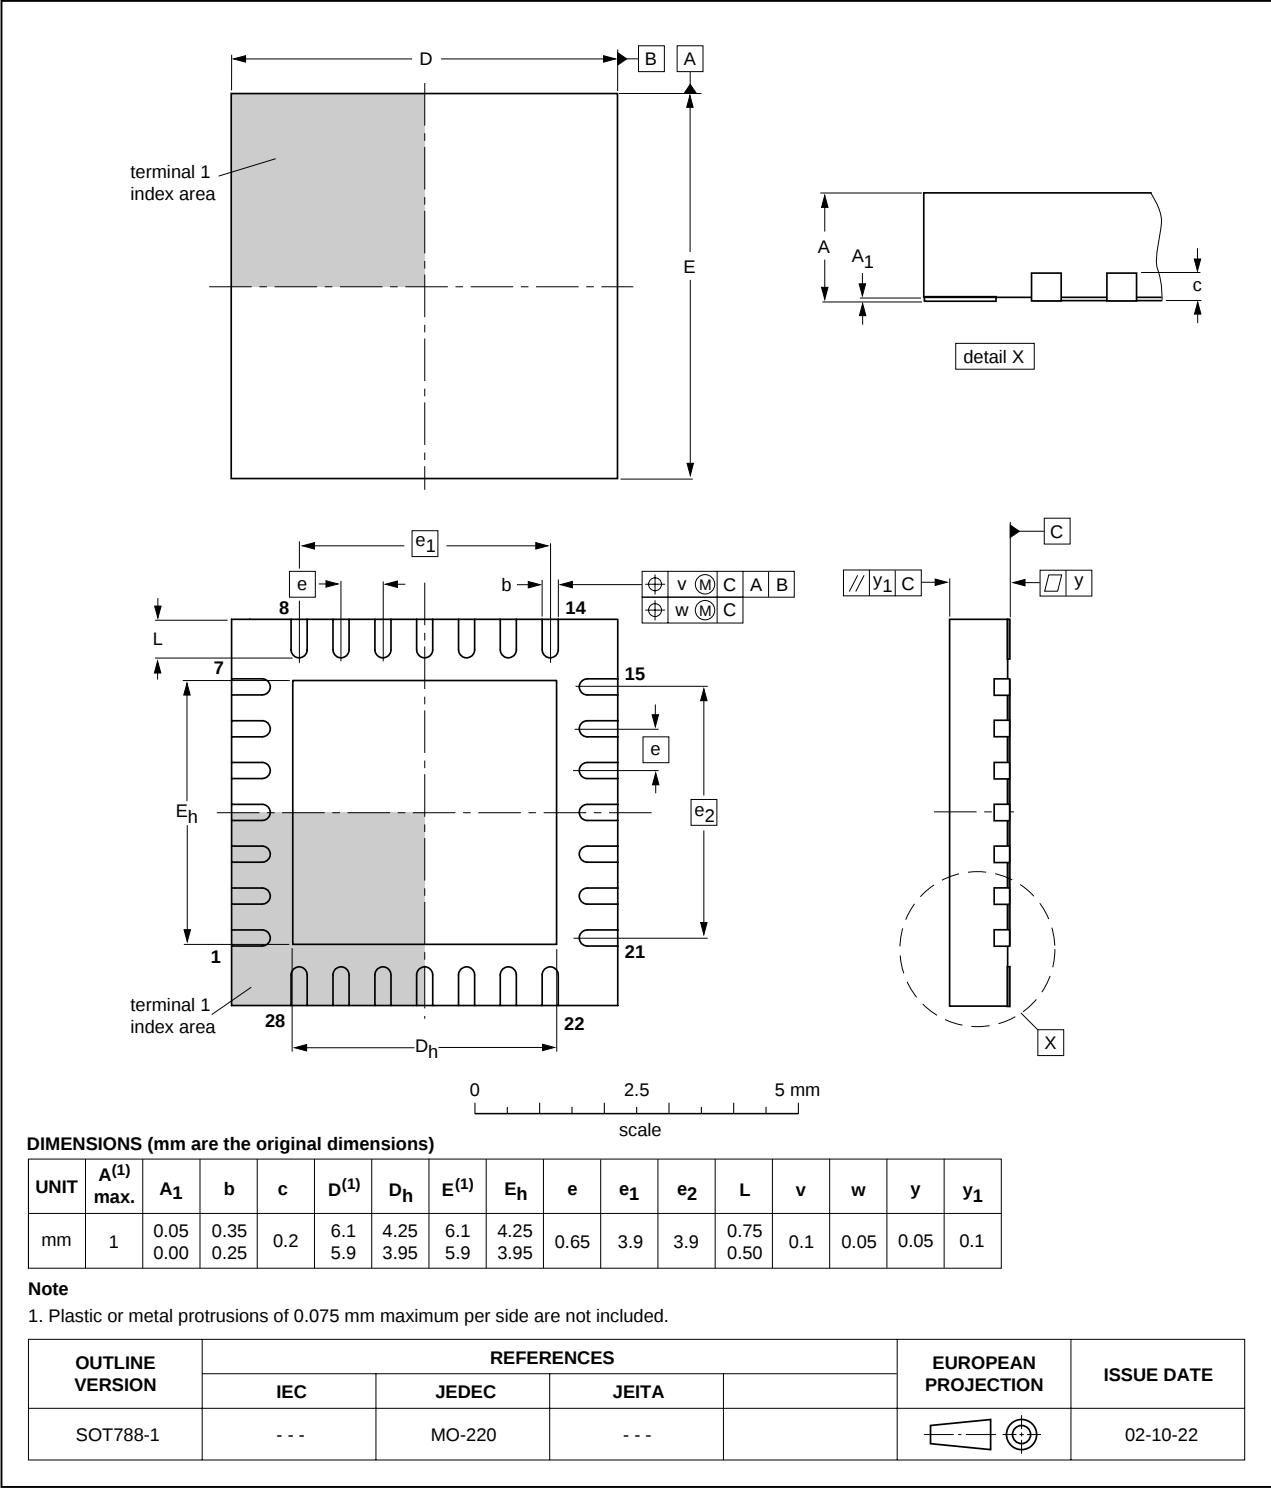


Fig 31. Package outline SOT788-1 (HVQFN28).

## 14. Abbreviations

Table 16: Acronym list

| Acronym | Description                                         |
|---------|-----------------------------------------------------|
| A/D     | Analog to Digital                                   |
| ADC     | Analog to Digital Converter                         |
| CCU     | Capture/Compare Unit                                |
| CPU     | Central Processing Unit                             |
| DAC     | Digital to Analog Converter                         |
| EPROM   | Erasable Programmable Read-Only Memory              |
| EEPROM  | Electrically Erasable Programmable Read-Only Memory |
| EMI     | Electromagnetic Interference                        |
| IAP     | In-Application Programming                          |
| ICP     | In-Circuit Programming                              |
| ISP     | In-System Programming                               |
| LED     | Light Emitting Diode                                |
| PLL     | Phase-Locked Loop                                   |
| PWM     | Pulse Width Modulator                               |
| RAM     | Random Access Memory                                |
| RC      | Resistance-Capacitance                              |
| RTC     | Real-Time Clock                                     |
| SAR     | Successive Approximation Register                   |
| SFR     | Special Function Register                           |
| SPI     | Serial Peripheral Interface                         |
| UART    | Universal Asynchronous Receiver/Transmitter         |

15. Revision history

Table 17: Revision history

| Document ID | Release date | Data sheet status  | Change notice | Doc. number    | Supersedes |
|-------------|--------------|--------------------|---------------|----------------|------------|
| P89LPC938_1 | 20050225     | Product data sheet | -             | 9397 750 14051 | -          |

## 16. Data sheet status

| Level | Data sheet status <sup>[1]</sup> | Product status <sup>[2] [3]</sup> | Definition                                                                                                                                                                                                                                                                                     |
|-------|----------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I     | Objective data                   | Development                       | This data sheet contains data from the objective specification for product development. Philips Semiconductors reserves the right to change the specification in any manner without notice.                                                                                                    |
| II    | Preliminary data                 | Qualification                     | This data sheet contains data from the preliminary specification. Supplementary data will be published at a later date. Philips Semiconductors reserves the right to change the specification without notice, in order to improve the design and supply the best possible product.             |
| III   | Product data                     | Production                        | This data sheet contains data from the product specification. Philips Semiconductors reserves the right to make changes at any time in order to improve the design, manufacturing and supply. Relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). |

[1] Please consult the most recently issued data sheet before initiating or completing a design.

[2] The product status of the device(s) described in this data sheet may have changed since this data sheet was published. The latest information is available on the Internet at URL <http://www.semiconductors.philips.com>.

[3] For data sheets describing multiple type numbers, the highest-level product status determines the data sheet status.

## 17. Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## 18. Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes in the products - including circuits, standard cells, and/or software - described or contained herein in order to improve design and/or performance. When the product is in full production (status 'Production'), relevant changes will be communicated via a Customer Product/Process Change Notification (CPCN). Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

## 19. Contact information

For additional information, please visit: <http://www.semiconductors.philips.com>

For sales office addresses, send an email to: [sales.addresses@www.semiconductors.philips.com](mailto:sales.addresses@www.semiconductors.philips.com)

## 20. Contents

|          |                                                 |           |           |                                                    |           |
|----------|-------------------------------------------------|-----------|-----------|----------------------------------------------------|-----------|
| <b>1</b> | <b>General description</b> . . . . .            | <b>1</b>  | 8.4       | A/D operating modes . . . . .                      | 47        |
| <b>2</b> | <b>Features</b> . . . . .                       | <b>1</b>  | 8.5       | Conversion start modes . . . . .                   | 48        |
| 2.1      | Principal features . . . . .                    | 1         | 8.6       | Boundary limits interrupt . . . . .                | 48        |
| 2.2      | Additional features . . . . .                   | 2         | 8.7       | Clock divider . . . . .                            | 49        |
| <b>3</b> | <b>Ordering information</b> . . . . .           | <b>3</b>  | 8.8       | Power-down and Idle mode . . . . .                 | 49        |
| 3.1      | Ordering options . . . . .                      | 3         | <b>9</b>  | <b>Limiting values</b> . . . . .                   | <b>50</b> |
| <b>4</b> | <b>Block diagram</b> . . . . .                  | <b>4</b>  | <b>10</b> | <b>Static characteristics</b> . . . . .            | <b>51</b> |
| <b>5</b> | <b>Functional diagram</b> . . . . .             | <b>5</b>  | <b>11</b> | <b>Dynamic characteristics</b> . . . . .           | <b>53</b> |
| <b>6</b> | <b>Pinning information</b> . . . . .            | <b>6</b>  | 11.1      | Waveforms . . . . .                                | 57        |
| 6.1      | Pinning . . . . .                               | 6         | 11.2      | ISP entry mode . . . . .                           | 60        |
| 6.2      | Pin description . . . . .                       | 7         | <b>12</b> | <b>Other characteristics</b> . . . . .             | <b>60</b> |
| <b>7</b> | <b>Functional description</b> . . . . .         | <b>11</b> | 12.1      | Comparator electrical characteristics . . . . .    | 60        |
| 7.1      | Special function registers . . . . .            | 11        | 12.2      | A/D converter electrical characteristics . . . . . | 61        |
| 7.2      | Enhanced CPU . . . . .                          | 19        | <b>13</b> | <b>Package outline</b> . . . . .                   | <b>62</b> |
| 7.3      | Clocks . . . . .                                | 19        | <b>14</b> | <b>Abbreviations</b> . . . . .                     | <b>65</b> |
| 7.4      | On-chip RC oscillator option . . . . .          | 20        | <b>15</b> | <b>Revision history</b> . . . . .                  | <b>66</b> |
| 7.5      | Watchdog oscillator option . . . . .            | 20        | <b>16</b> | <b>Data sheet status</b> . . . . .                 | <b>67</b> |
| 7.6      | External clock input option . . . . .           | 20        | <b>17</b> | <b>Definitions</b> . . . . .                       | <b>67</b> |
| 7.7      | CCLK wake-up delay . . . . .                    | 21        | <b>18</b> | <b>Disclaimers</b> . . . . .                       | <b>67</b> |
| 7.8      | CCLK modification: DIVM register . . . . .      | 21        | <b>19</b> | <b>Contact information</b> . . . . .               | <b>67</b> |
| 7.9      | Low power select . . . . .                      | 21        |           |                                                    |           |
| 7.10     | Memory organization . . . . .                   | 21        |           |                                                    |           |
| 7.11     | Data RAM arrangement . . . . .                  | 22        |           |                                                    |           |
| 7.12     | Interrupts . . . . .                            | 22        |           |                                                    |           |
| 7.13     | I/O ports . . . . .                             | 24        |           |                                                    |           |
| 7.14     | Power monitoring functions . . . . .            | 25        |           |                                                    |           |
| 7.15     | Power reduction modes . . . . .                 | 26        |           |                                                    |           |
| 7.16     | Reset . . . . .                                 | 27        |           |                                                    |           |
| 7.17     | Timers/counters 0 and 1 . . . . .               | 28        |           |                                                    |           |
| 7.18     | RTC/system timer . . . . .                      | 28        |           |                                                    |           |
| 7.19     | CCU . . . . .                                   | 29        |           |                                                    |           |
| 7.20     | UART . . . . .                                  | 32        |           |                                                    |           |
| 7.21     | I <sup>2</sup> C-bus serial interface . . . . . | 35        |           |                                                    |           |
| 7.22     | SPI . . . . .                                   | 37        |           |                                                    |           |
| 7.23     | Analog comparators . . . . .                    | 40        |           |                                                    |           |
| 7.24     | KBI . . . . .                                   | 41        |           |                                                    |           |
| 7.25     | Watchdog timer . . . . .                        | 42        |           |                                                    |           |
| 7.26     | Additional features . . . . .                   | 42        |           |                                                    |           |
| 7.27     | Data EEPROM . . . . .                           | 43        |           |                                                    |           |
| 7.28     | Flash program memory . . . . .                  | 43        |           |                                                    |           |
| 7.29     | User configuration bytes . . . . .              | 46        |           |                                                    |           |
| 7.30     | User sector security bytes . . . . .            | 46        |           |                                                    |           |
| <b>8</b> | <b>A/D converter</b> . . . . .                  | <b>46</b> |           |                                                    |           |
| 8.1      | General description . . . . .                   | 46        |           |                                                    |           |
| 8.2      | Features . . . . .                              | 46        |           |                                                    |           |
| 8.3      | Block diagram . . . . .                         | 47        |           |                                                    |           |

© Koninklijke Philips Electronics N.V. 2005

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release: 25 February 2005  
Document number: 9397 750 14051

Published in the Netherlands



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP:

P89LPC938FHN-S



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.