

SIDE ROTARY

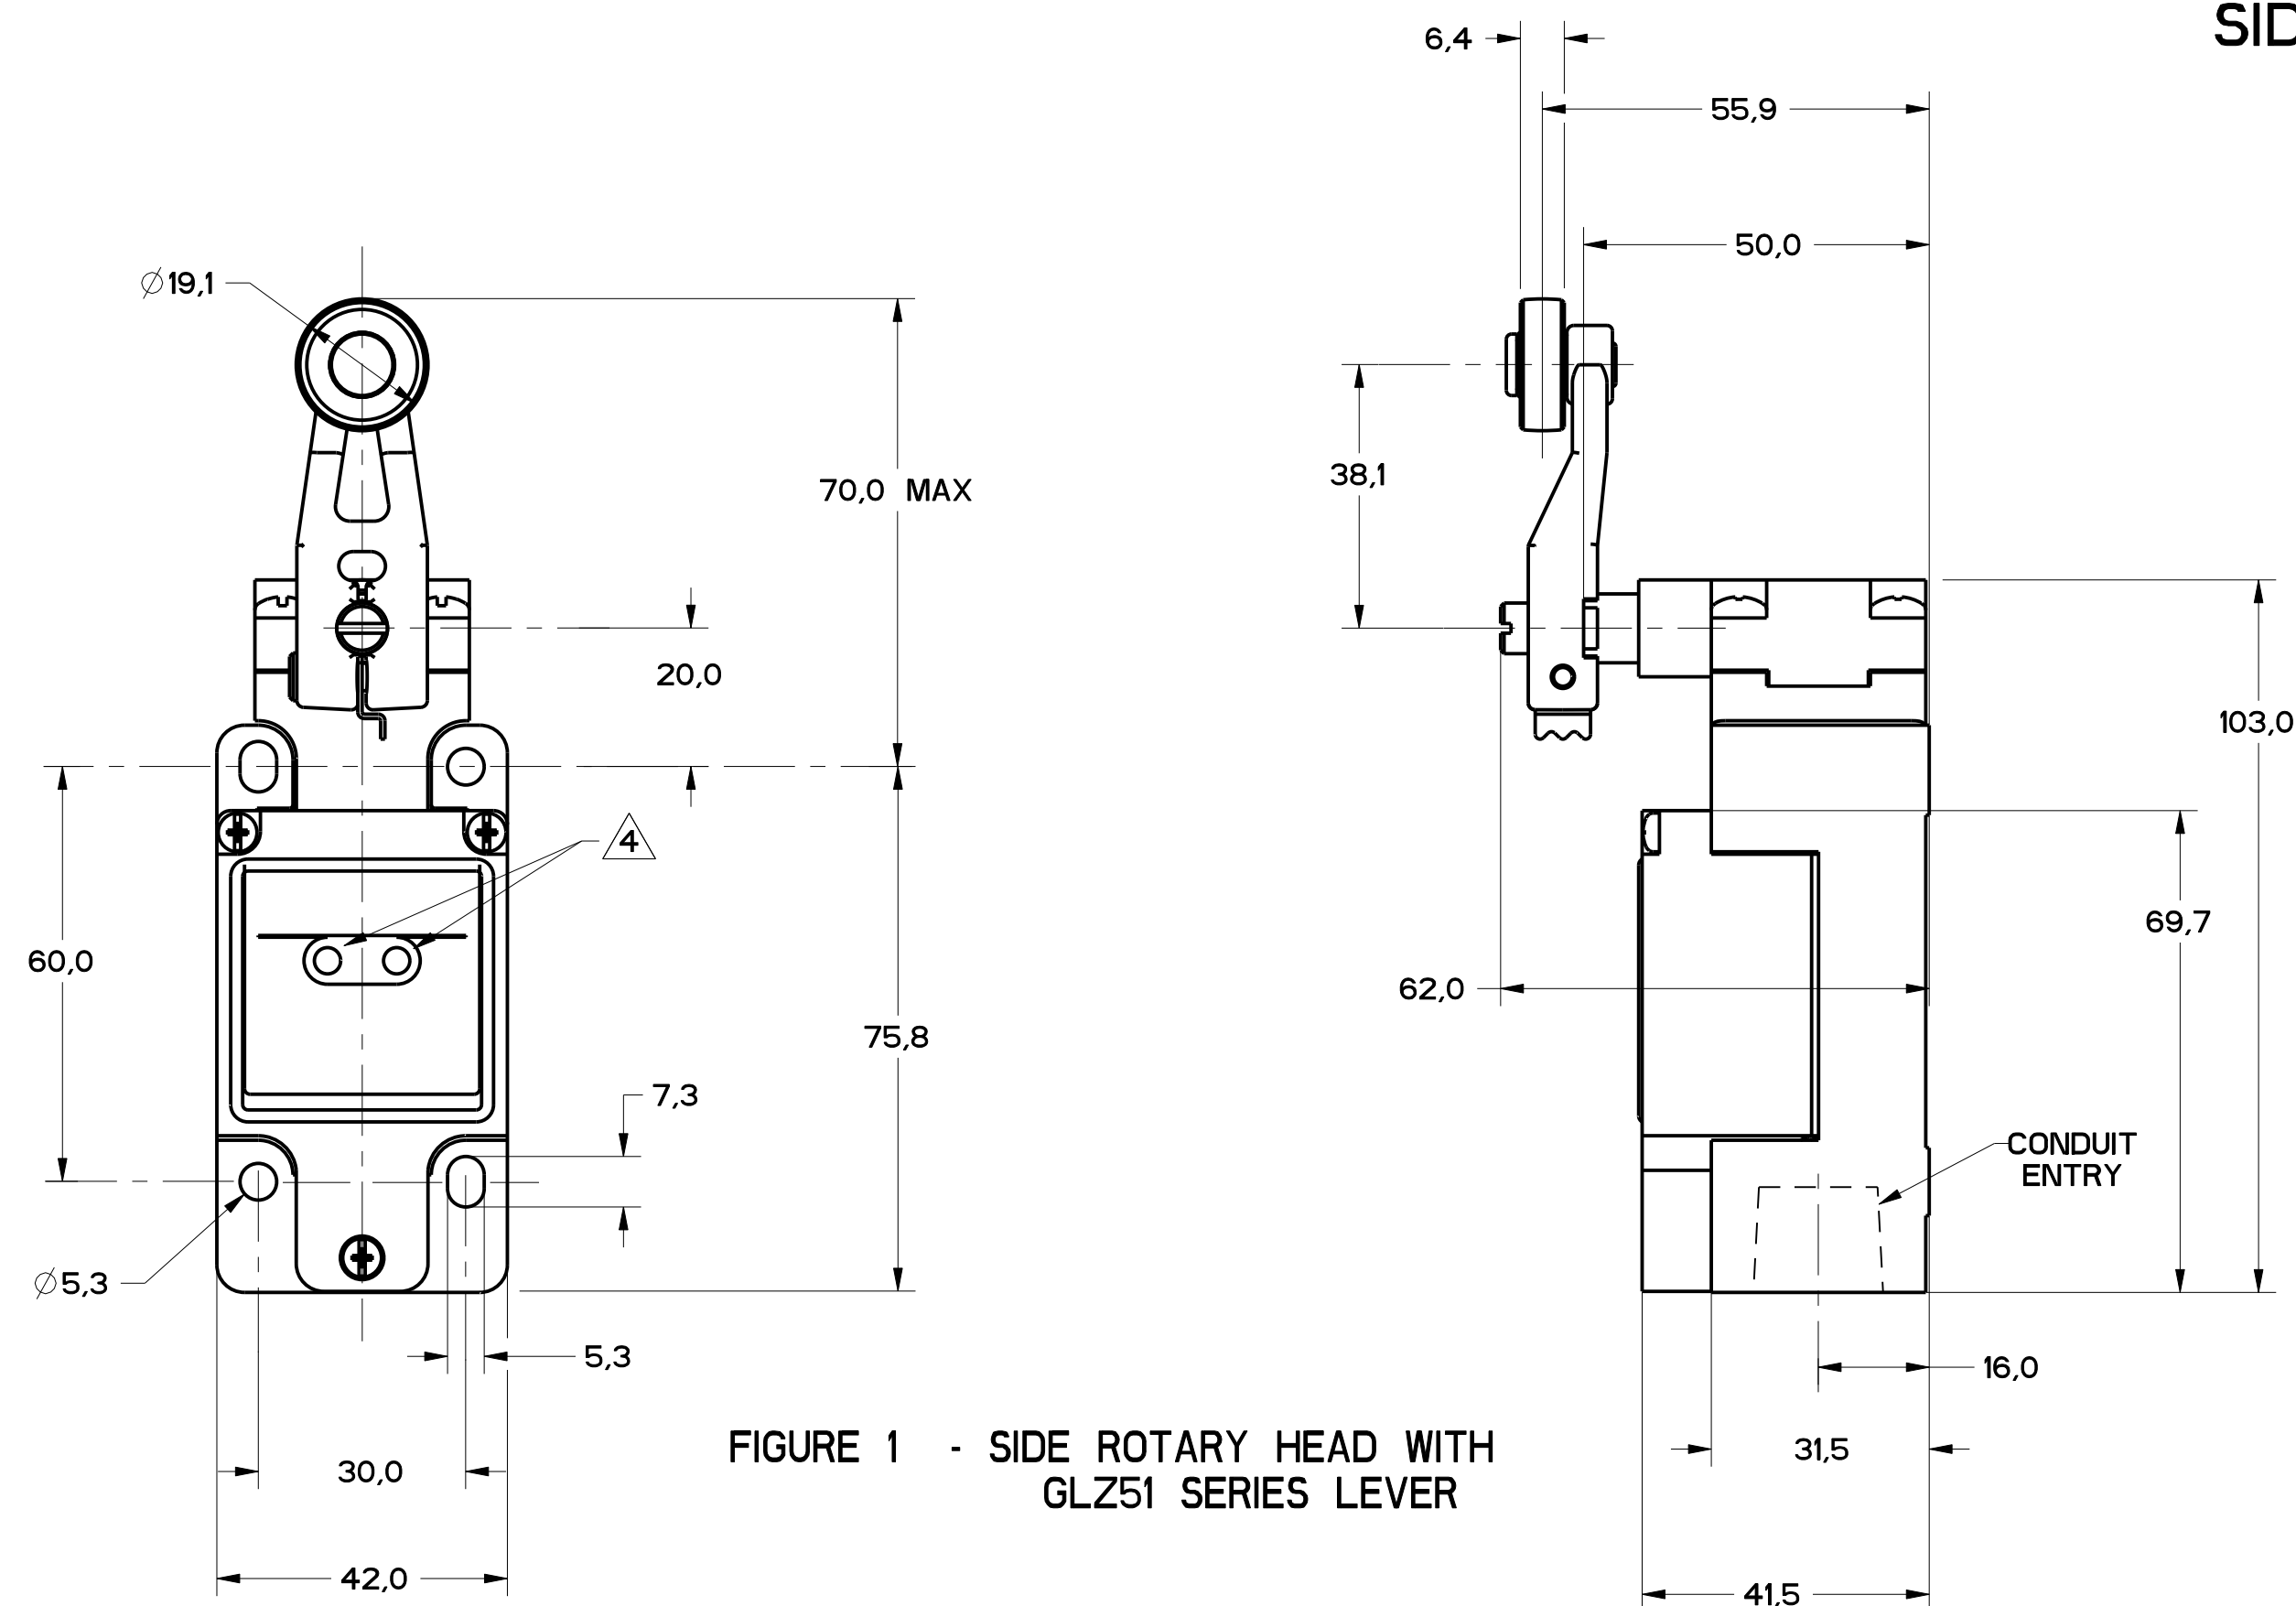


FIGURE 1 - SIDE ROTARY HEAD WITH GLZ51 SERIES LEVER

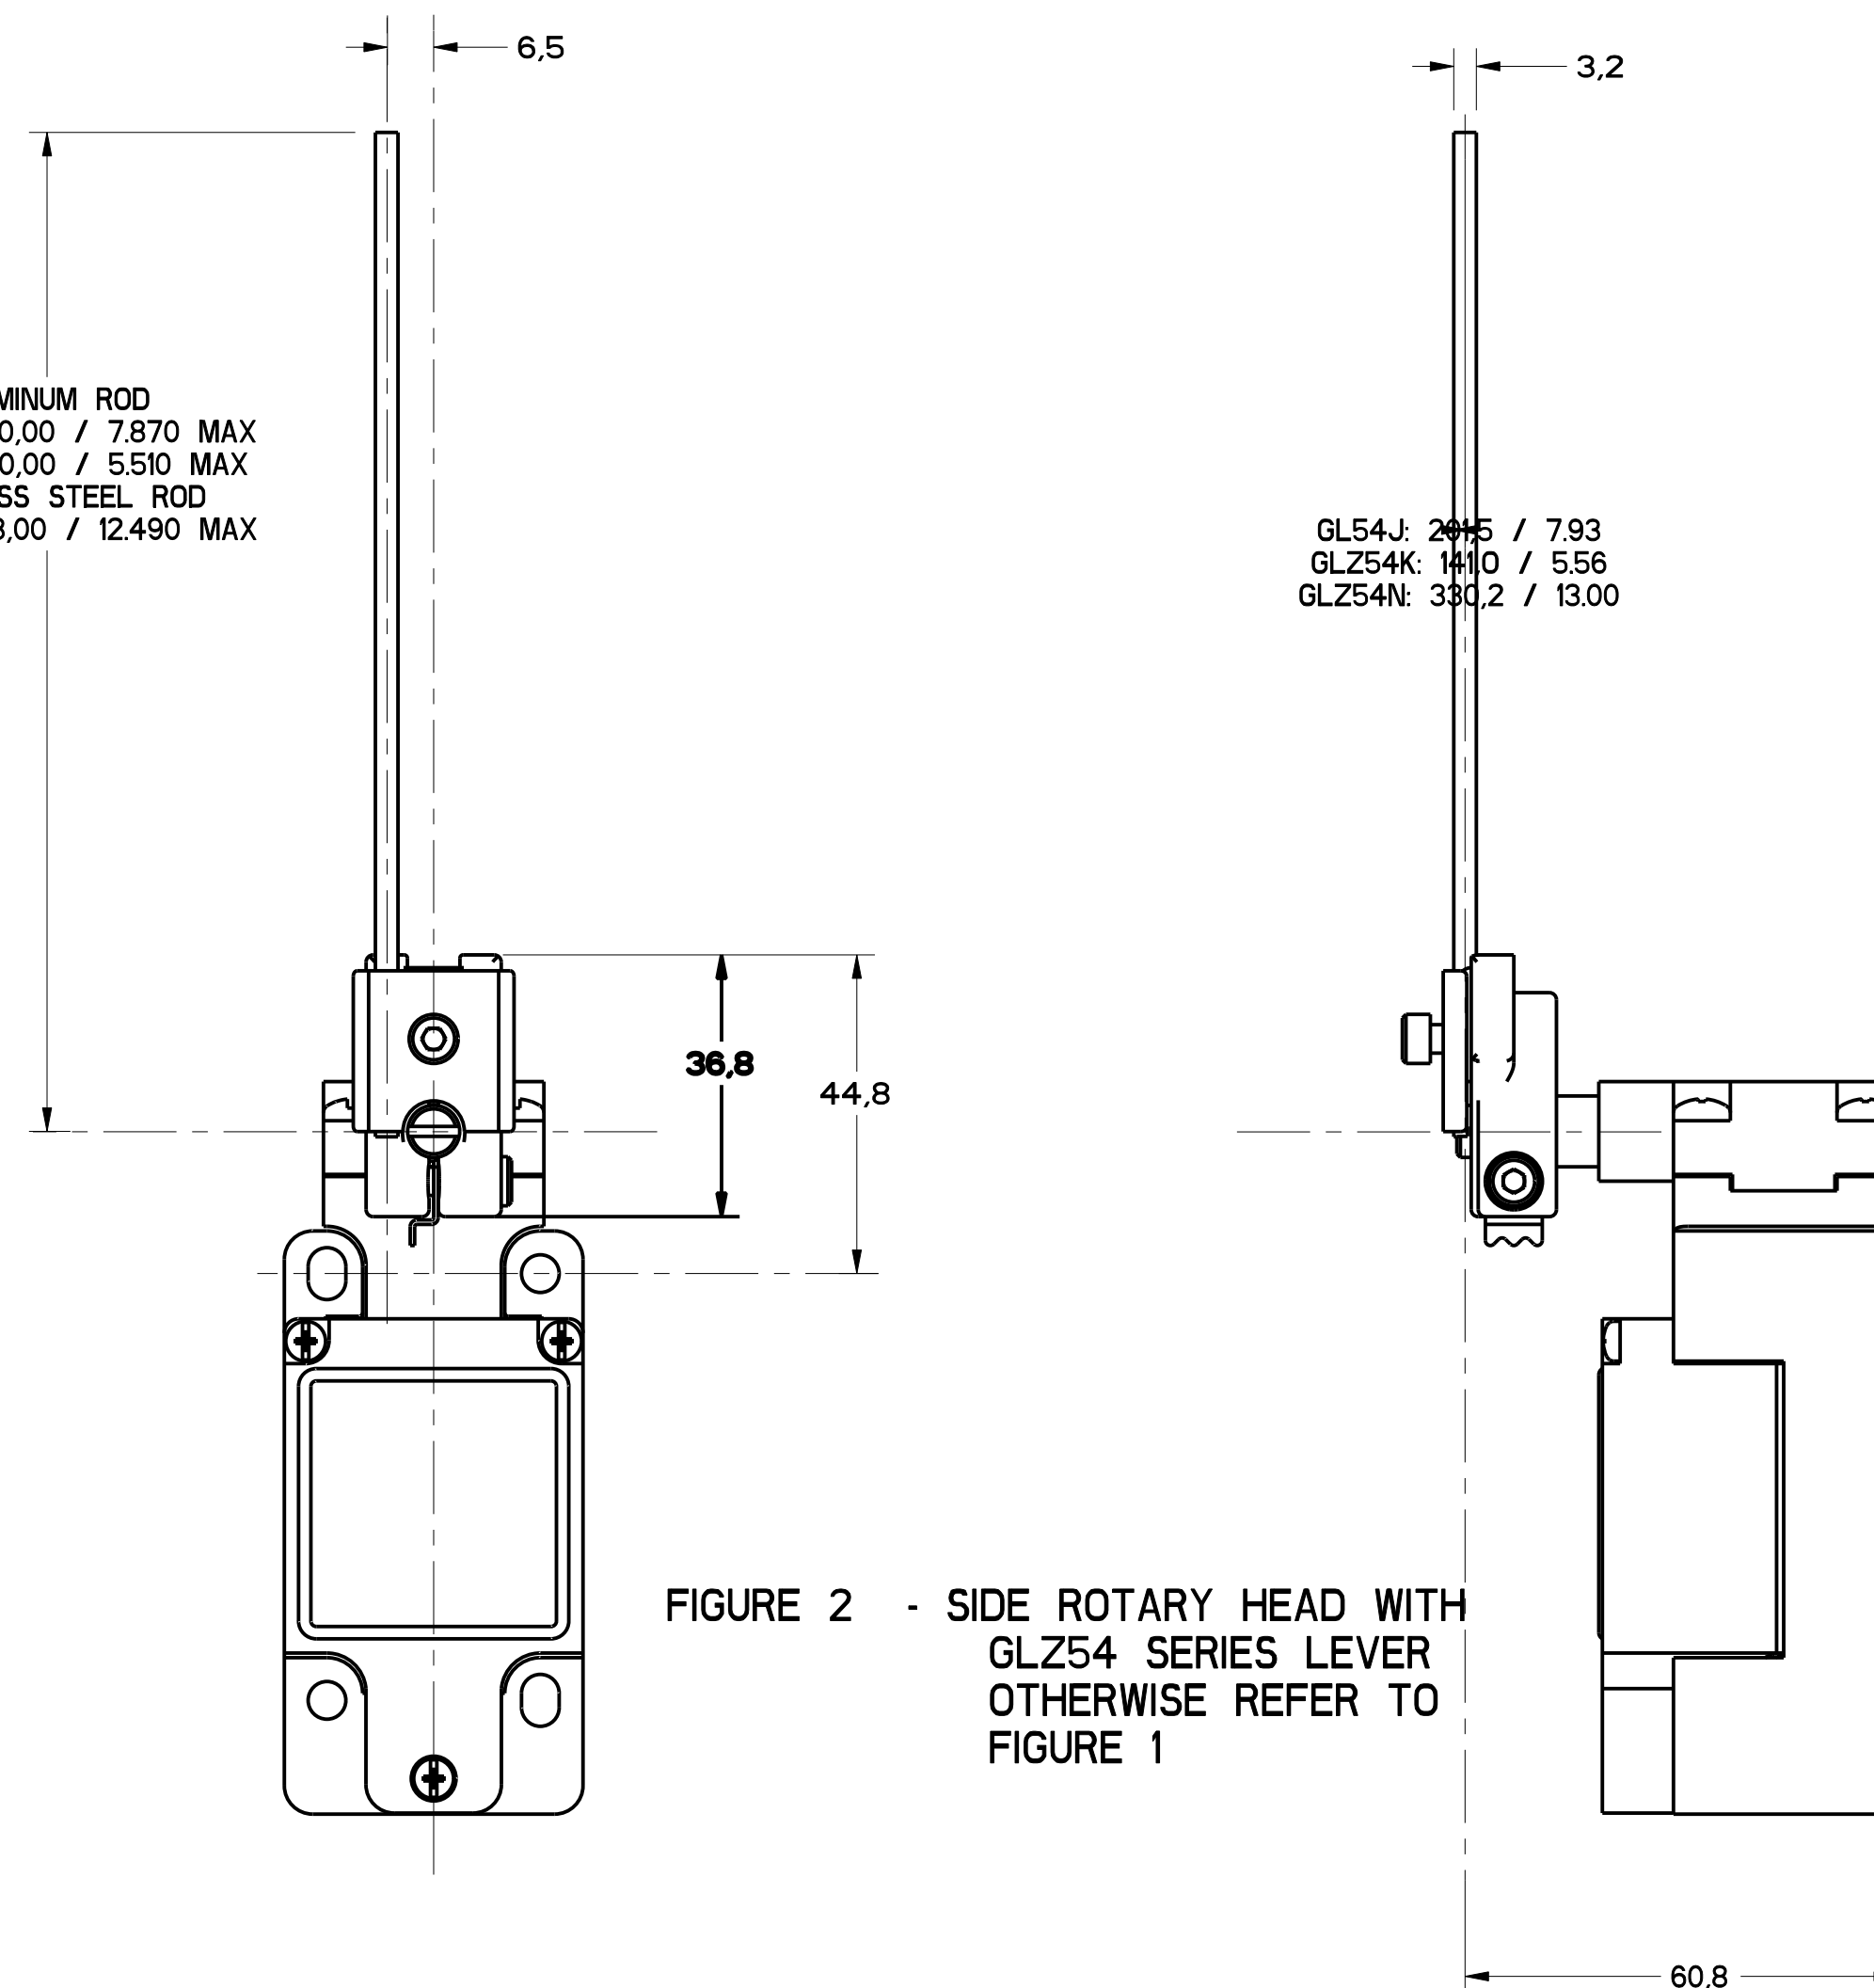


FIGURE 2 - SIDE ROTARY HEAD WITH GLZ54 SERIES LEVER OTHERWISE REFER TO FIGURE 1

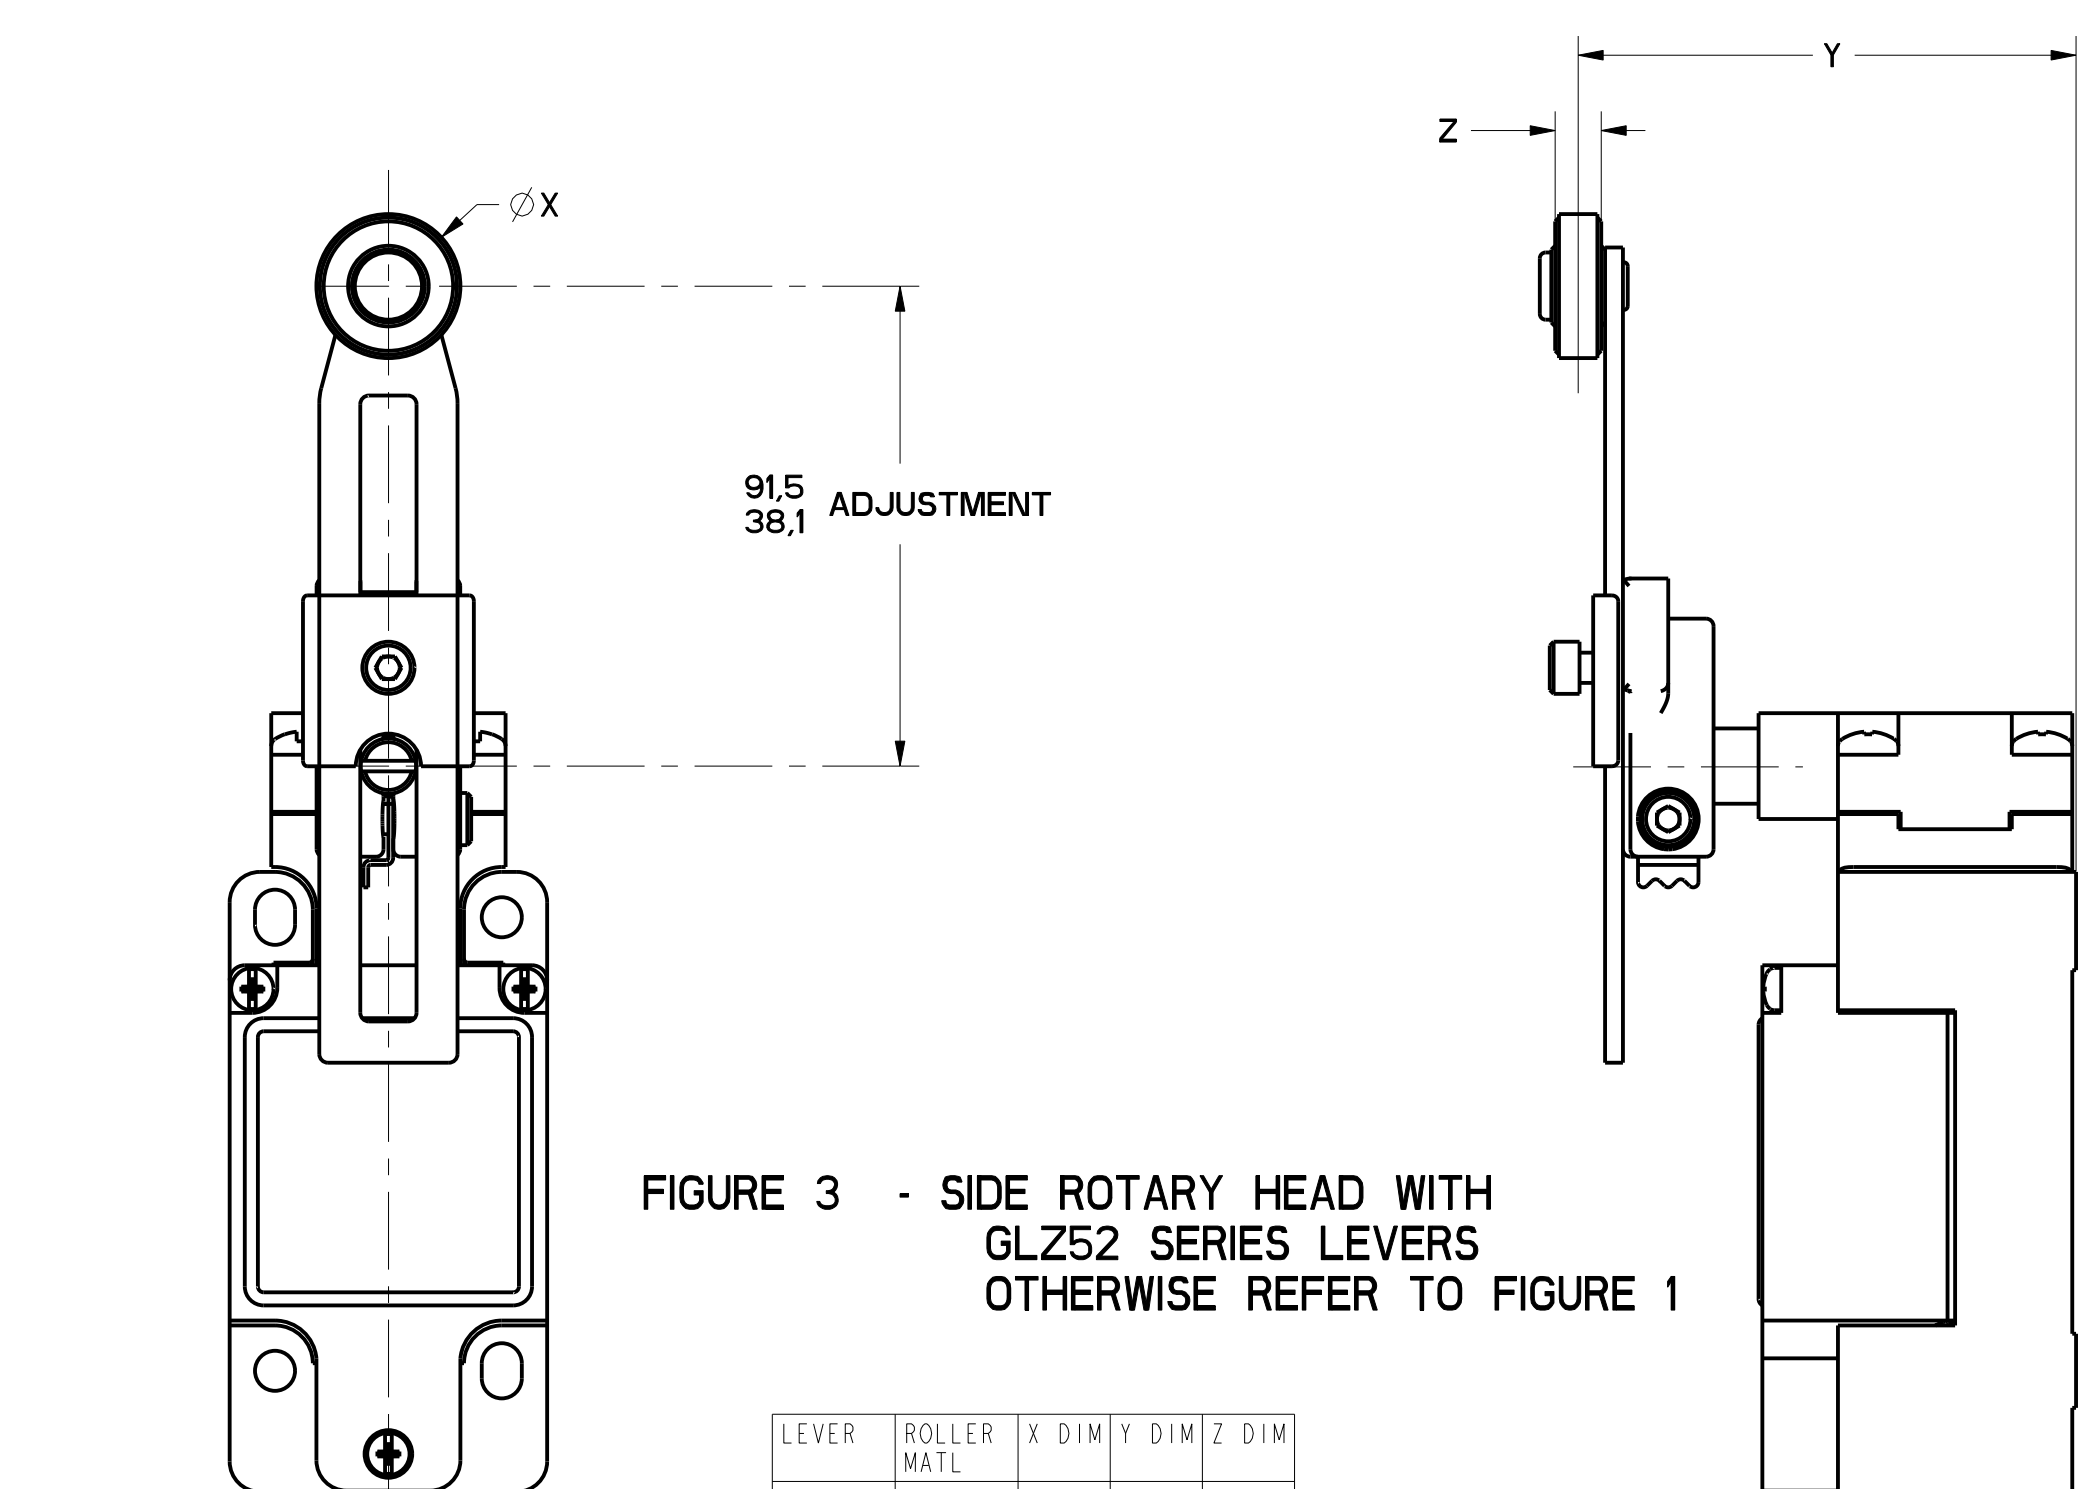


FIGURE 3 - SIDE ROTARY HEAD WITH GLZ52 SERIES LEVERS OTHERWISE REFER TO FIGURE 1

FIGURE	CATALOG LISTING	CONDUIT ENTRY
1A	GL*A SERIES	1/2-14 NPT
1B	GL*B SERIES	PG13.5
1C	GL*C SERIES	20mm
1D	GL*D SERIES	PF1/2

ELECTRICAL RATING $\Delta 5$			
AC		DC	
A600 Ue	AC15 Ie	0300 Ue	DC13 Ie
(VOLTS)	(AMPS)	(VOLTS)	(AMPS)
120	6	24	2.8
240	3	125	.55
380	1.9	250	.27
480	1.5		
500	1.4		
600	1.2		

ENVIRONMENTAL RATING	
IP67	
NEMA/UL TYPES 1, 4, 12, 13	

- NOTES
- HEADS MAY BE INDEXED IN 90° INCREMENTS
 - LEVERS MAY BE KEYED TO THE SHAFT AT 90° INCREMENTS. THEY MAY ALSO BE ATTACHED, BUT NOT KEYED ANYWHERE ON THE SHAFT.
 - FOR ADDITIONAL LEVERS SEE "M" DRAWING CHART GLZ5
 - THE RIGHT INDICATOR IS YELLOW AND INDICATES "OUTPUT STATUS" IT IS ON GLG SERIES PRODUCTS ONLY.
 - THE MAXIMUM VOLTAGE, V_e OF GLG SERIES PRODUCTS IS THE MAXIMUM RATED VOLTAGE OF INDICATION LIGHTS
 - FREE POSITION, OPERATE POINT, OVERTRAVEL AND PRETRAVEL ALL TO EN50041
 - CAM TRAVEL FOR FIG 9 ONLY APPLIES WHEN LEVER IS ADJUSTED TO 38.1 / 1.50
 - TEMPERATURE RANGE
(ALL PRODUCTS EXCEPT W/SIDE ROTARY OPERATING HEAD)
OPERATING: -25°C TO +85°C / -13°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F
(PRODUCTS W/SIDE ROTARY OPERATING HEAD)
OPERATING: -40°C TO +85°C / -40°F TO +185°F
STORAGE: -40°C TO +85°C / -40°F TO +185°F

LEVER	ROLLER MATL	X DIM	Y DIM	Z DIM
GLZ52A	NYLON	19.1 .75	65.9 2.59	6.4 .25
GLZ52B	STEEL	19.1 .75	65.9 2.59	6.4 .25
GLZ52D	NYLON	38.1 1.5	65.9 2.59	6.4 .25
GLZ52E	NYLON	19.1 .75	79.37 3.125	33.07 1.300
GLZ52W	RUBBER	40.0 1.5	71.5 2.81	12.7 .5
GLZ52Y	RUBBER	50.9 2.0	71.5 2.81	12.7 .5

CATALOG LISTING	BODY DIMENSIONS, FIGURE	HEAD DIMENSIONS, FIGURE	HEAD ACTUATION, FIGURE
GLB***	I	N/A	N/A
GLG***	I	N/A	N/A
GLJ***	I	N/A	N/A
GLA***	1A	N/A	N/A
GLB***	1B	N/A	N/A
GLC***	1C	N/A	N/A
GLD***	1D	N/A	N/A
GL***A1*	I	1	8
GL***A2*	I	3	9
GL***A4*	I	2	10
GL***A5*	I		8
GL***B	I	4	11
GL***C	I	5	13A, 13B
GL***D	I	6	14A, 14B
GL***E7A	I	7A	12
GL***E7B	I	7	12
GL***E7C	I	7E	12
GL***E7D	I	7B	12
GL***K8A	I	7C	15
GL***K8B	I	7D	15
GL***K8C	I	7	15

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

SI METRIC US CUSTOMARY

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:

NO. PLACES	SI	US	NO. PLACES	SI	US
TWO PLACES	0.01	0.0015	TWO PLACES	0.01	0.0015
THREE PLACES	0.001	0.00015	THREE PLACES	0.001	0.00015
ANGLES	±0.05	±0.0015	ANGLES	±0.05	±0.0015

DESIGN UNITS SI METRIC US CUSTOMARY

WEIGHT

MGL SERIES CHART 2

DRAWING NUMBER 1 OF 8

RELEASE NO. PR-20782

ISSUE 11

DATE 28 MARCH 98

DESIGNED BY PTC/CAD

DRAWN BY S.A.V.

CHECKED BY MDM

DATE 28 MARCH 98

REV. 0000401

REV. 0000396

REV. 0000394

REV. 0000392

REV. 0000390

REV. 0000388

REV. 0000386

REV. 0000384

REV. 0000382

REV. 0000380

REV. 0000378

REV. 0000376

REV. 0000374

REV. 0000372

REV. 0000370

REV. 0000368

REV. 0000366

REV. 0000364

REV. 0000362

REV. 0000360

REV. 0000358

REV. 0000356

REV. 0000354

REV. 0000352

REV. 0000350

REV. 0000348

REV. 0000346

REV. 0000344

REV. 0000342

REV. 0000340

REV. 0000338

REV. 0000336

REV. 0000334

REV. 0000332

REV. 0000330

REV. 0000328

REV. 0000326

REV. 0000324

REV. 0000322

REV. 0000320

REV. 0000318

REV. 0000316

REV. 0000314

REV. 0000312

REV. 0000310

REV. 0000308

REV. 0000306

REV. 0000304

REV. 0000302

REV. 0000300

REV. 0000298

REV. 0000296

REV. 0000294

REV. 0000292

REV. 0000290

REV. 0000288

REV. 0000286

REV. 0000284

REV. 0000282

REV. 0000280

REV. 0000278

REV. 0000276

REV. 0000274

REV. 0000272

REV. 0000270

REV. 0000268

REV. 0000266

REV. 0000264

REV. 0000262

REV. 0000260

REV. 0000258

REV. 0000256

REV. 0000254

REV. 0000252

REV. 0000250

REV. 0000248

REV. 0000246

REV. 0000244

REV. 0000242

REV. 0000240

REV. 0000238

REV. 0000236

REV. 0000234

REV. 0000232

REV. 0000230

REV. 0000228

REV. 0000226

REV. 0000224

REV. 0000222

REV. 0000220

REV. 0000218

REV. 0000216

REV. 0000214

REV. 0000212

REV. 0000210

REV. 0000208

REV. 0000206

REV. 0000204

REV. 0000202

REV. 0000200

REV. 0000198

REV. 0000196

REV. 0000194

REV. 0000192

REV. 0000190

REV. 0000188

REV. 0000186

REV. 0000184

REV. 0000182

REV. 0000180

REV. 0000178

REV. 0000176

REV. 0000174

REV. 0000172

REV. 0000170

REV. 0000168

REV. 0000166

REV. 0000164

REV. 0000162

REV. 0000160

REV. 0000158

REV. 0000156

REV. 0000154

REV. 0000152

REV. 0000150

REV. 0000148

REV. 0000146

REV. 0000144

REV. 0000142

REV. 0000140

REV. 0000138

REV. 0000136

REV. 0000134

REV. 0000132

REV. 0000130

REV. 0000128

REV. 0000126

REV. 0000124

REV. 0000122

REV. 0000120

REV. 0000118

REV. 0000116

REV. 0000114

REV. 0000112

REV. 0000110

REV. 0000108

REV. 0000106

REV. 0000104

REV. 0000102

REV. 0000100

REV. 0000098

REV. 0000096

REV. 0000094

REV. 0000092

REV. 0000090

REV. 0000088

REV. 0000086

REV. 0000084

REV. 0000082

REV. 0000080

REV. 0000078

REV. 0000076

REV. 0000074

REV. 0000072

REV. 0000070

REV. 0000068

REV. 0000066

REV. 0000064

REV. 0000062

REV. 0000060

REV. 0000058

REV. 0000056

REV. 0000054

REV. 0000052

REV. 0000050

REV. 0000048

REV. 0000046

REV. 0000044

REV. 0000042

REV. 0000040

REV. 0000038

REV. 0000036

REV. 0000034

REV. 0000032

REV. 0000030

REV. 0000028

REV. 0000026

REV. 0000024

REV. 0000022

REV. 0000020

REV. 0000018

REV. 0000016

REV. 0000014

REV. 0000012

REV. 0000010

REV. 0000008

REV. 0000006

REV. 0000004

REV. 0000002

REV. 0000000

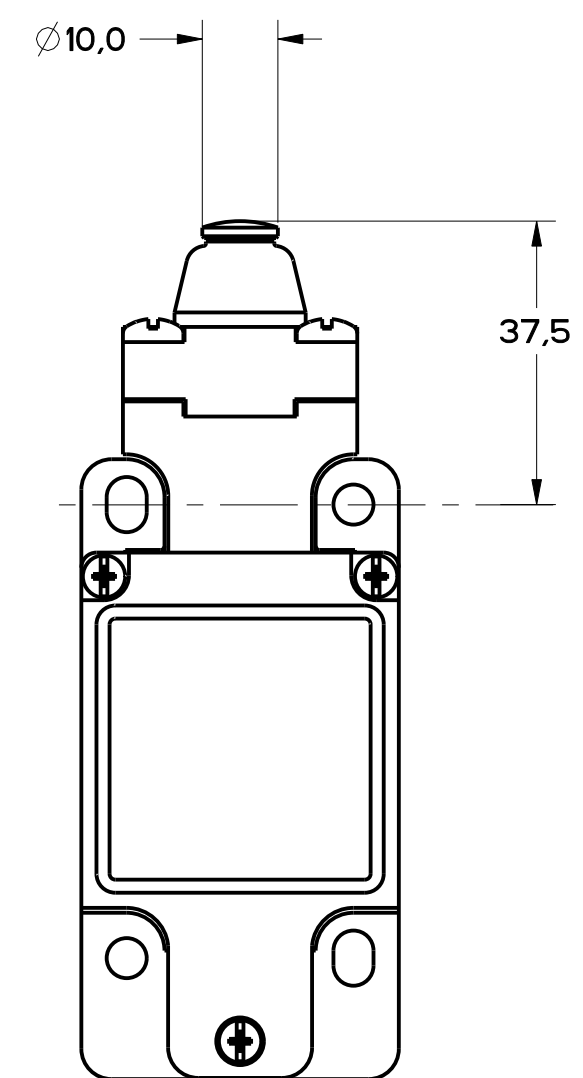


FIGURE 4 - TOP PIN PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1

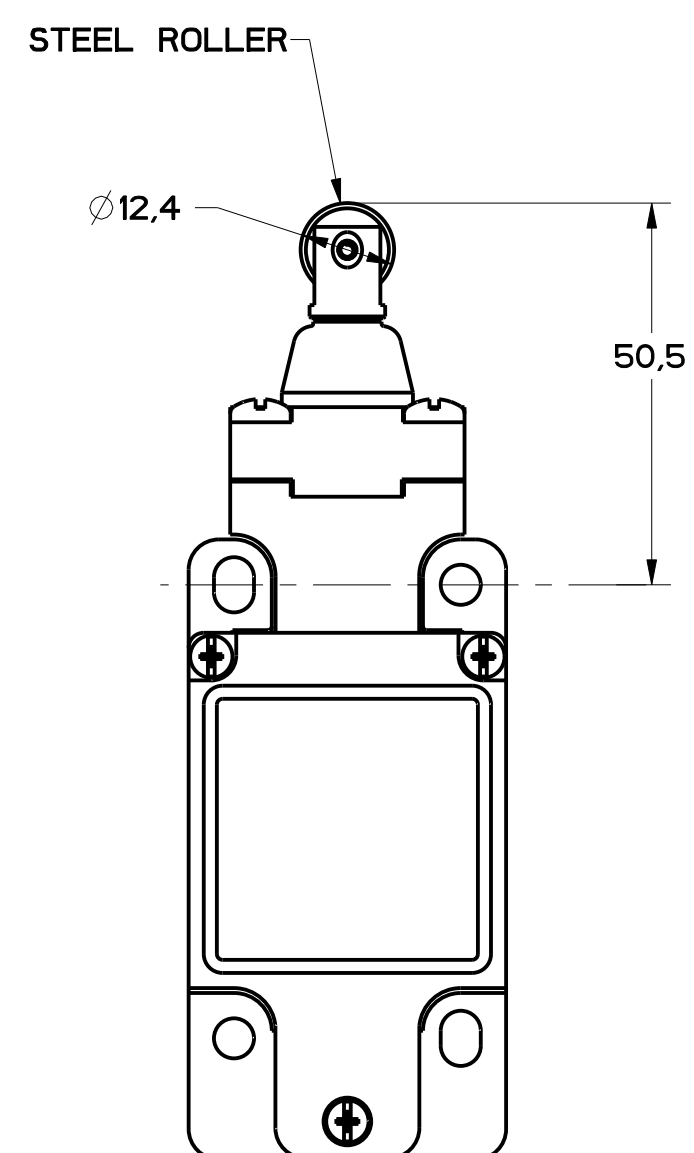
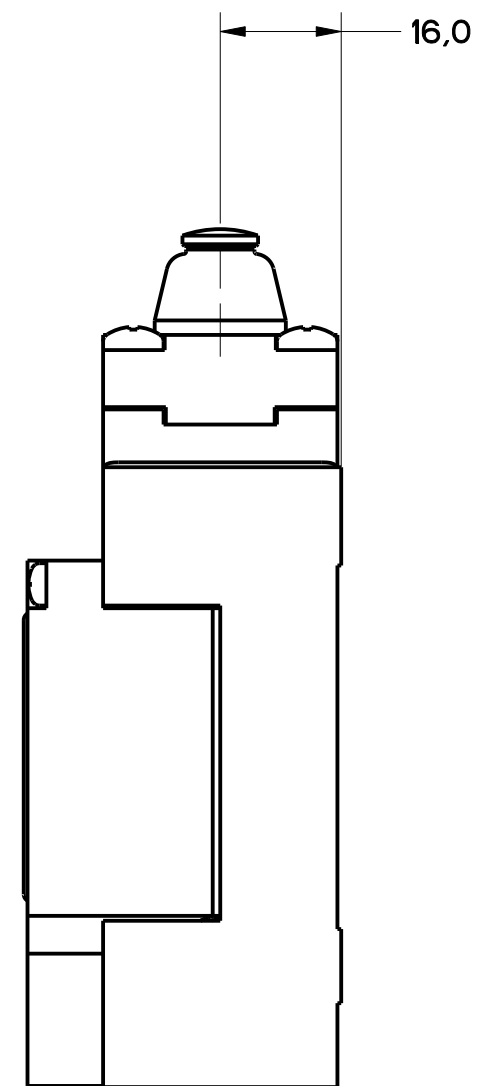


FIGURE 5 - TOP ROLLER PLUNGER HEAD
OTHERWISE REFER TO
FIGURE 1



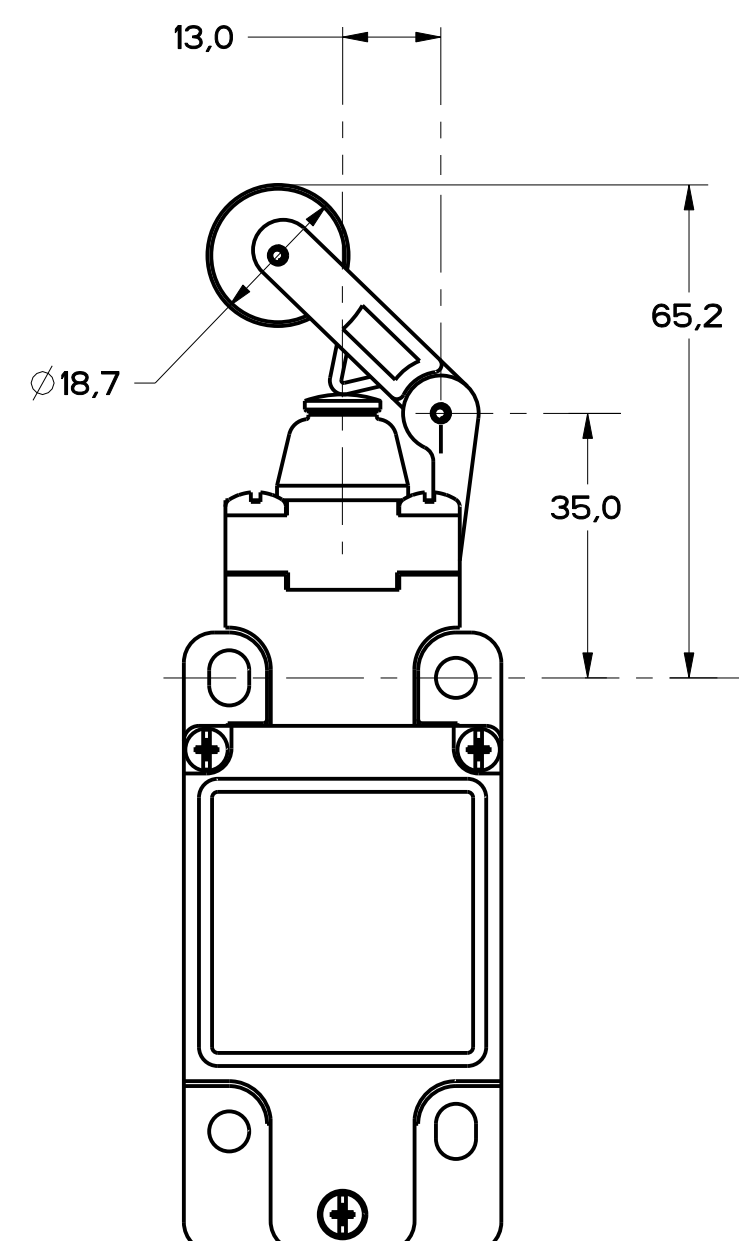


FIGURE 6 - TOP LEVER HEAD,
OTHERWISE REFER TO
FIGURE 1

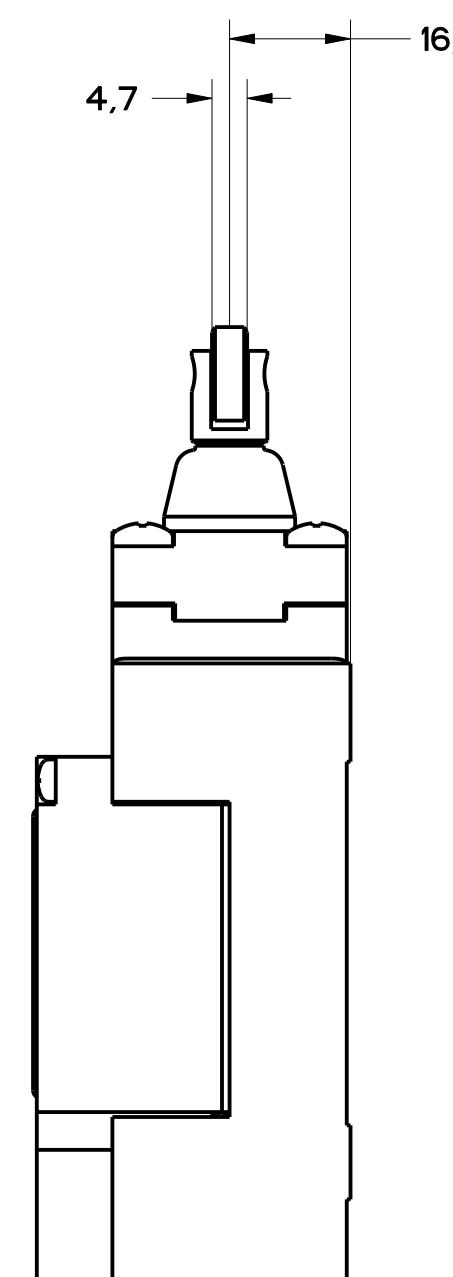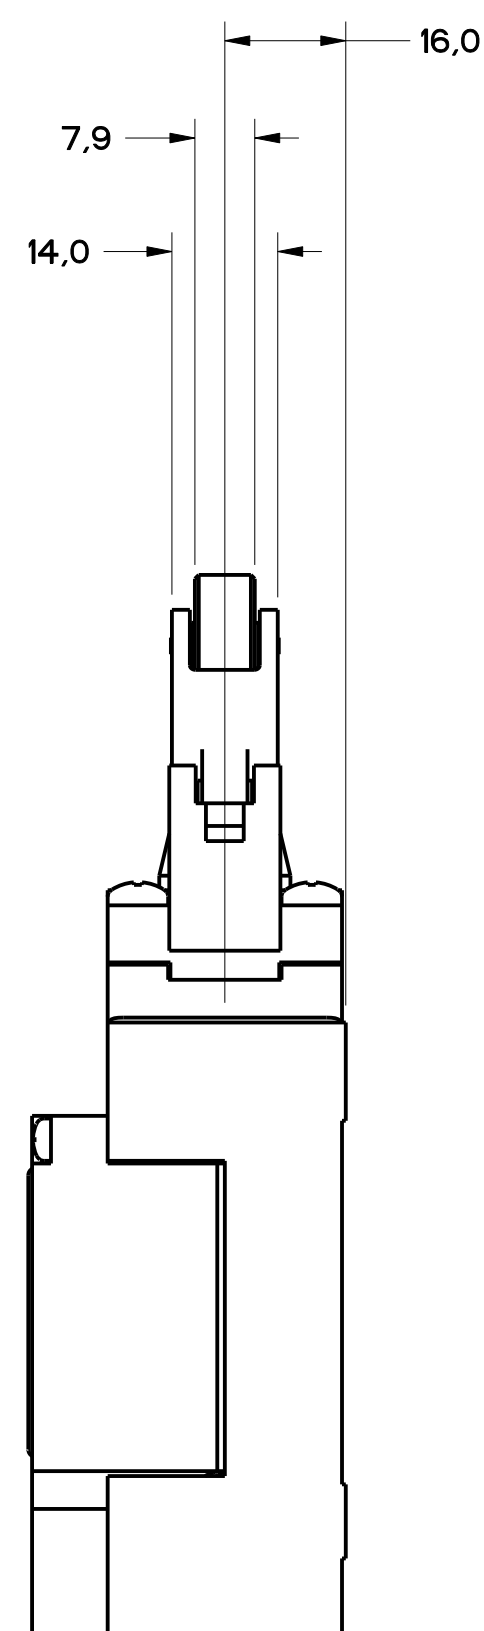

MBL SERIES CHART 2
 DRAWING NUMBER: 11
 PAGE 1 OF 8
 RELEASE NO. PR-20782
 REVISIONS: 11
 CHECK: MDM
 DATE: 12/01/83
 CHECK: R.L.
 DATE: 01/15/82
 CHECK: G.L.H.
 DATE: 02/05/85
 CHECK: G.L.H.
 DATE: 02/05/85

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

THIRD ANGLE PROJECTION			
SCALE FULL			
DO NOT SCALE PRINT			
TOLERANCES			
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED. TOLERANCES ARE:			
	SI METRIC	US CUSTOMARY	
NO PLACES	±0.04	±0.0015	±0.0015
ONE PLACE	±0.05	±0.002	±0.002
TWO PLACES	±0.02	±0.001	±0.001
THREE PLACES	±0.01	±0.0005	±0.0005
ANGLES	±2'		
DESIGN UNITS	<input checked="" type="checkbox"/> SI METRIC	<input type="checkbox"/> US CUSTOMARY	
WEIGHT			

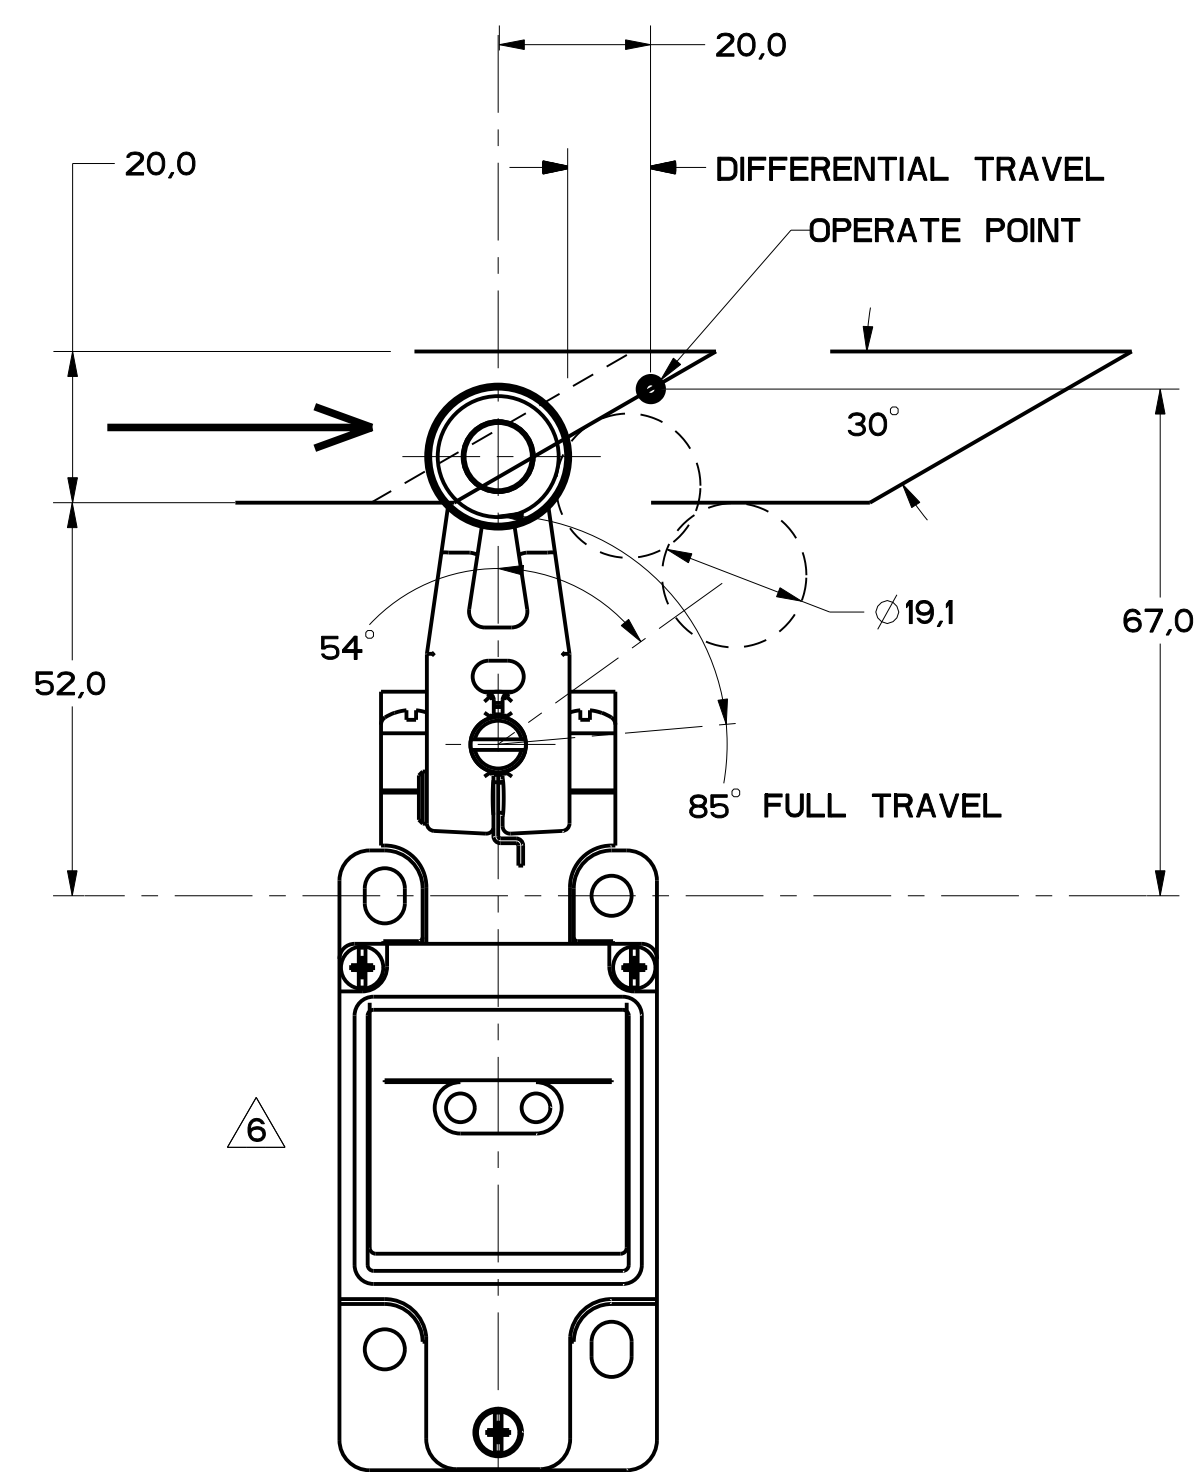


FIGURE 8

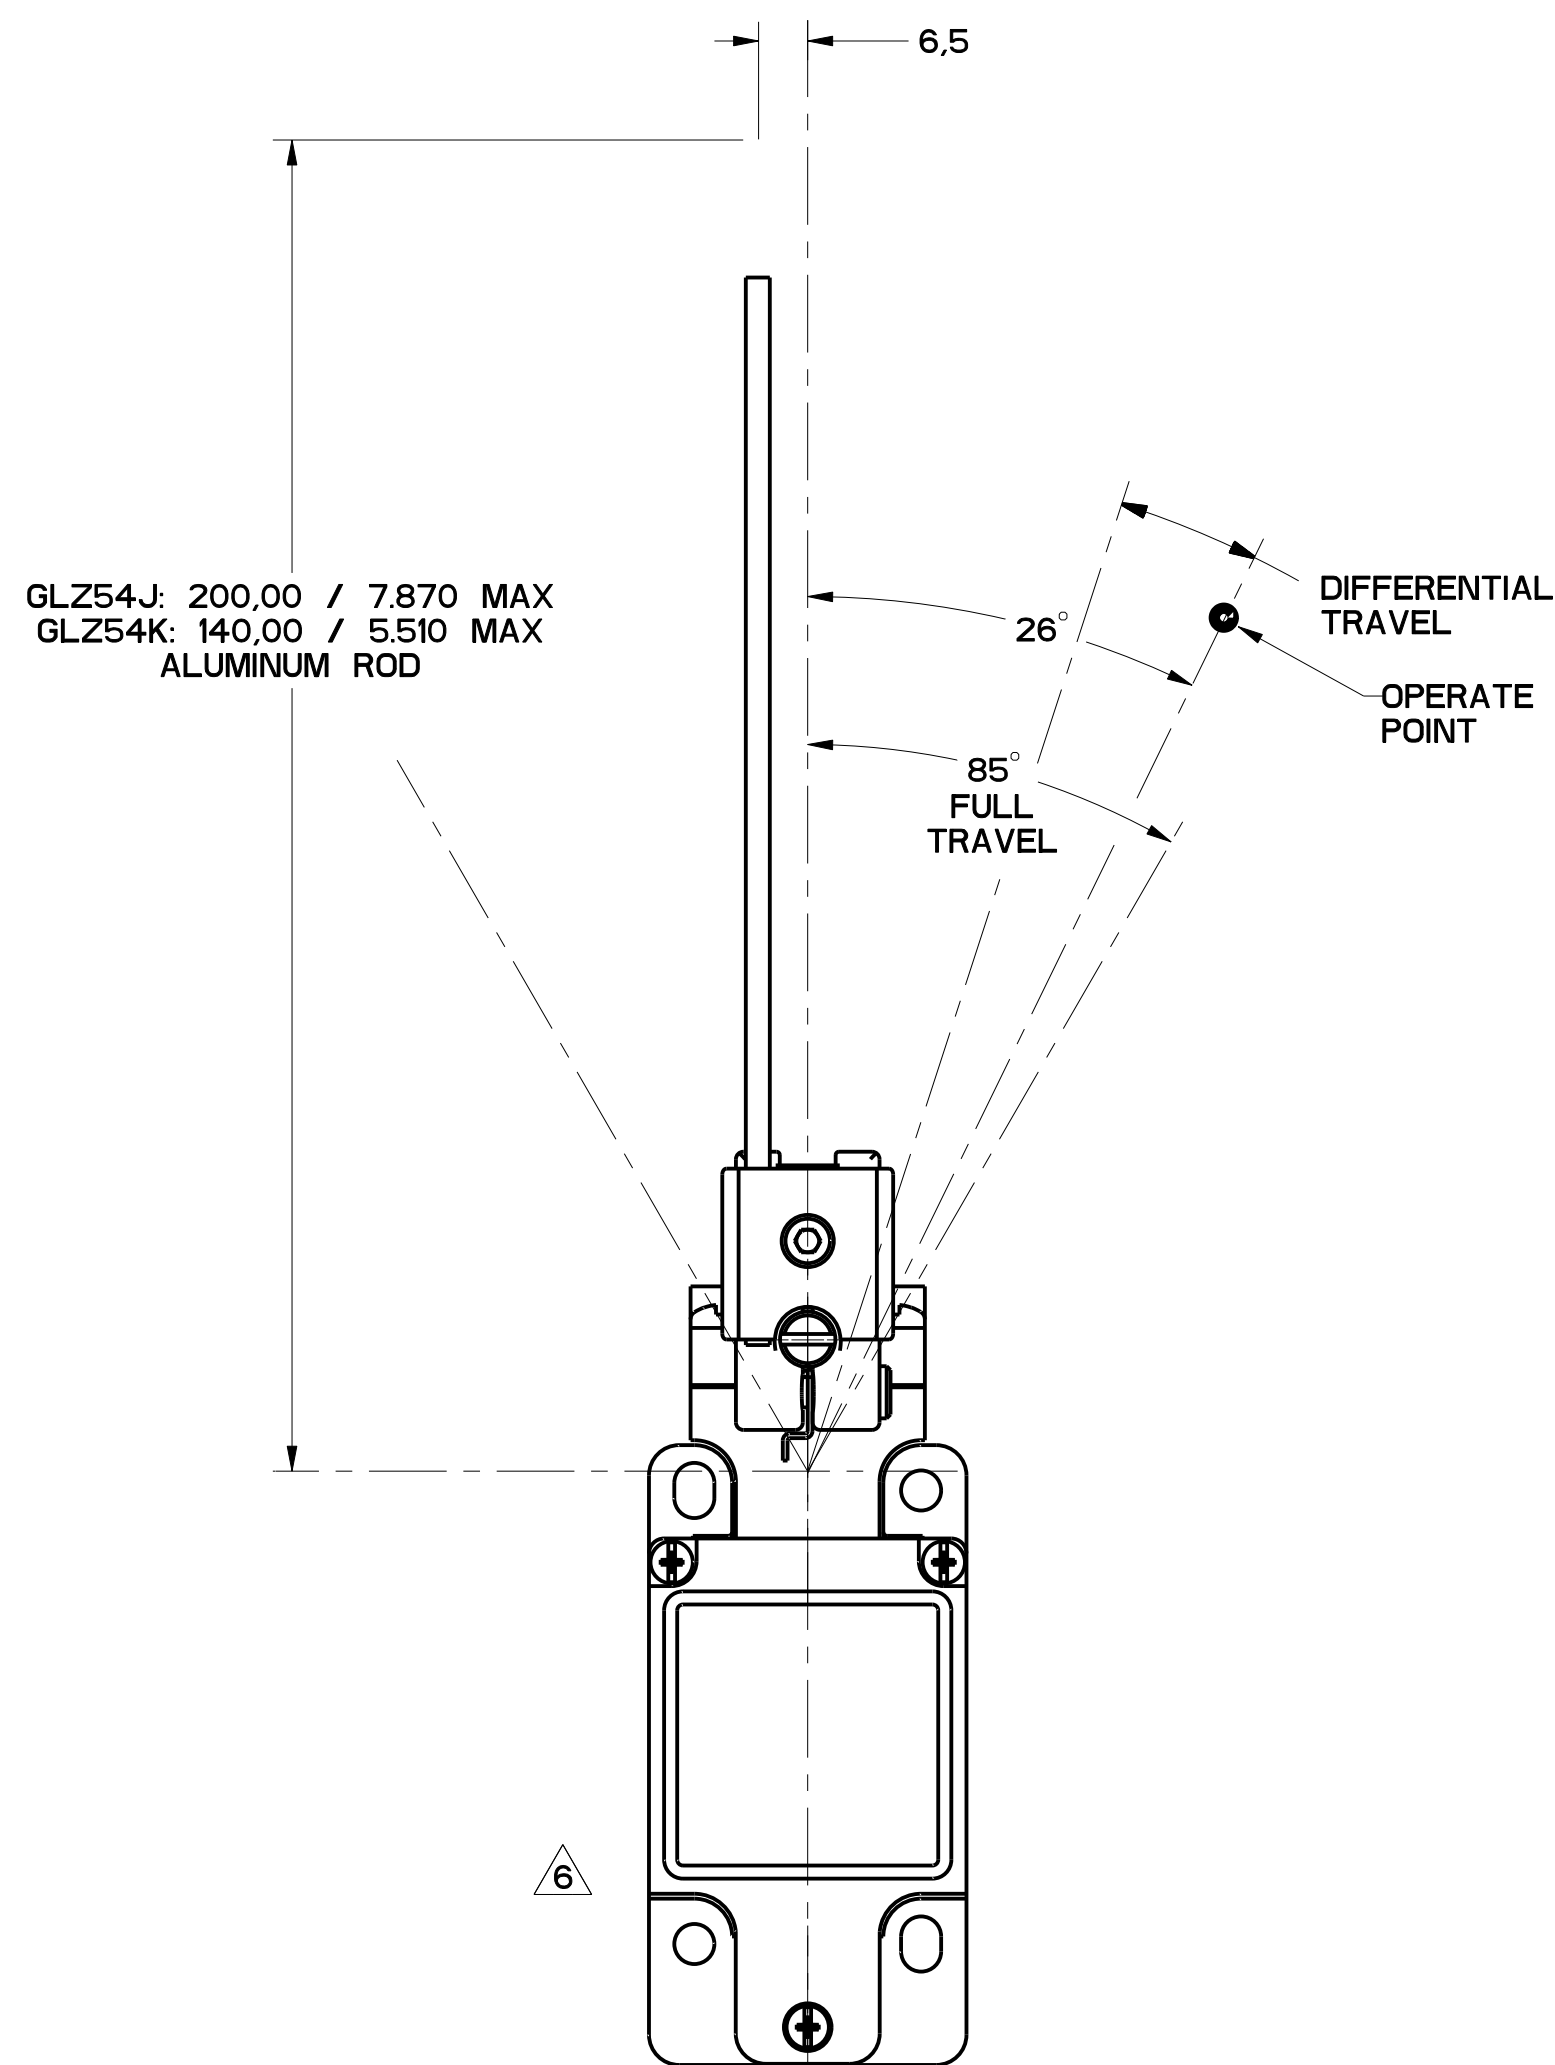


FIGURE 10

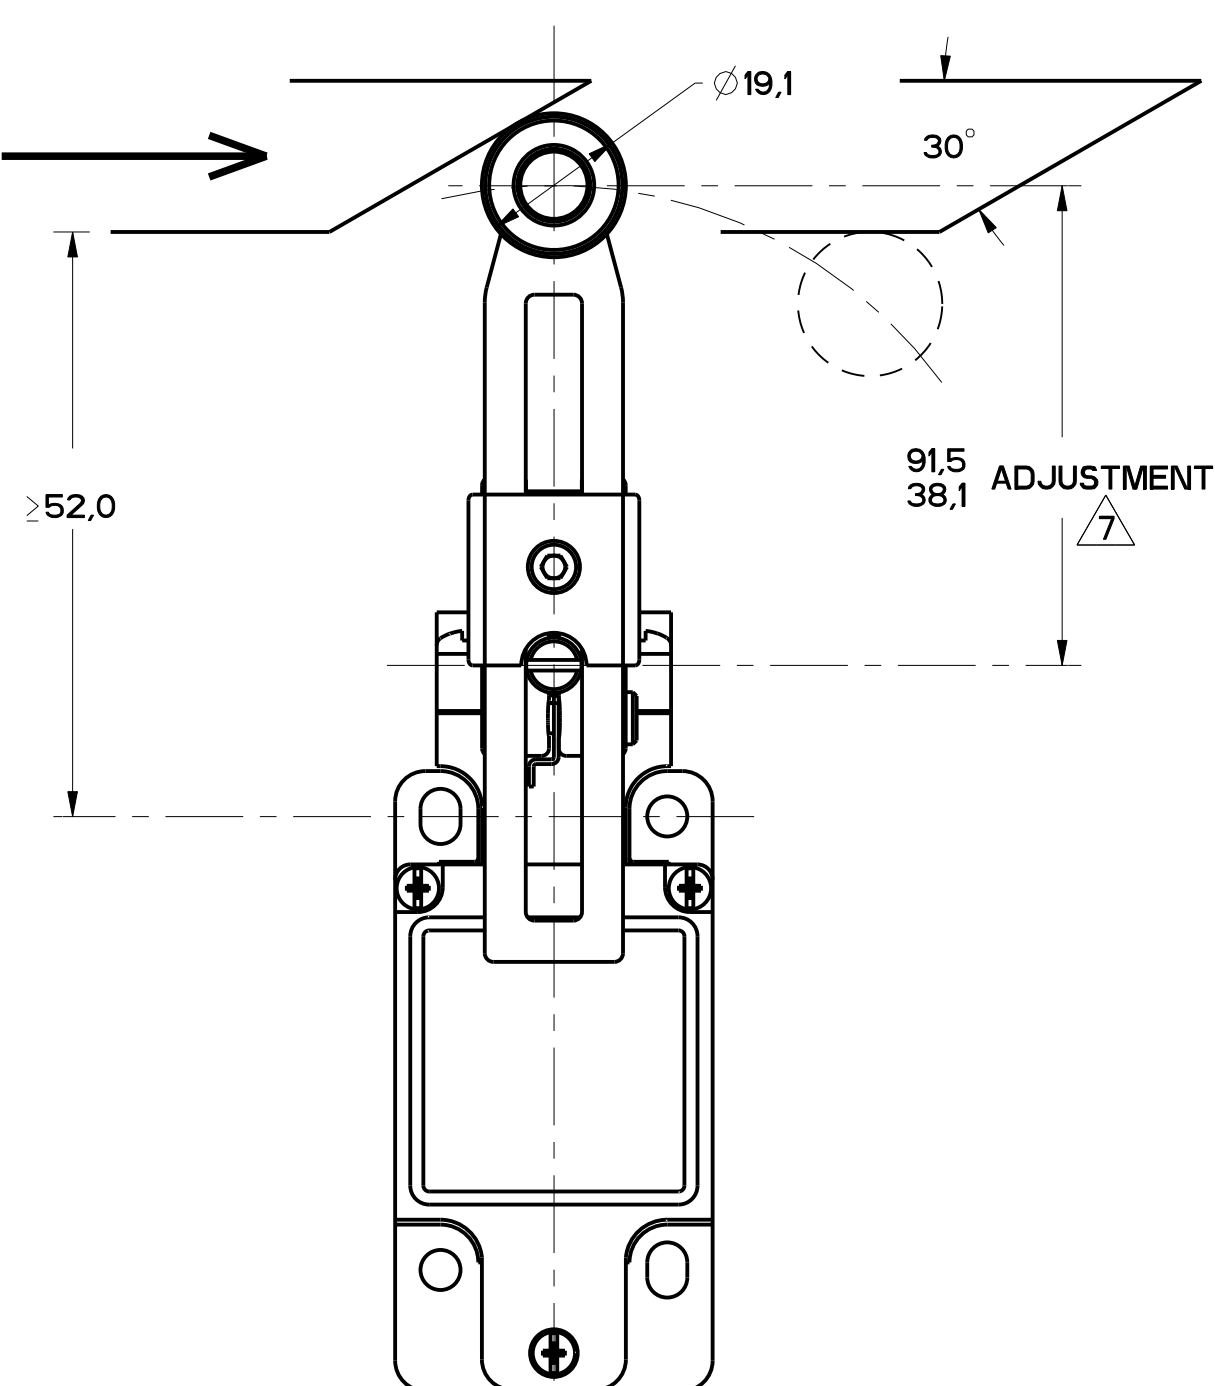


FIGURE 9

FIGURES 8, 9, 10 ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING TORQUE LB-IN	MAXIMUM DISCONNECT TORQUE LB-IN	MAX OPERATE DEGREE/S	MIN OPERATE DEGREE/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 26° 55**° 85° 12° DIFFERENTIAL TRAVEL	.330 2.9	.385 3.4	1290	13	250

CAM ACTUATION PER EN50041, FIGURES 8 AND 9

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5 DIMENSIONS IN mm	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL IN/S	MIN OPERATE VEL IN/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02A*	SNAP - ACTION CONTACTS SINGLE POLE 	21-22 13-14 0 20 56** 12 DIFFERENTIAL TRAVEL	9.7 2.2	11.4 2.6	.85 33.5	8.5 .33	250

MGL SERIES CHART 2
 DRAWING NUMBER: 11
 CHECK: MDM
 RELEASE NO. PR-20782
 PAGES: 4 OF 8
 S. A. V. 28MAR06
 PTC/CAD
 02DEC05
 002805
 0017532
 28JAN04
 0002886
 2JUN03
 0000401
 28NOV08
 CD-93189
 28MAY96
 PA-21603
 000010285

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

NO PLACES	1/16	±.005	1/8	±.010	3/16	±.015
TWO PLACES	1/16	±.004	1/8	±.008	3/16	±.012
THREE PLACES	1/16	±.003	1/8	±.006	3/16	±.009

DESIGN UNITS: SI METRIC US CUSTOMARY

WEIGHT

THIRD ANGLE PROJECTION

SCALE: FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONCESSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED. TOLERANCES ARE:

FIGURE 13A, ROLLER PLUNGER HEAD, PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL in/S	MIN OPERATE VEL in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 0.9 DIFFERENTIAL TRAVEL	$\frac{16}{3.6}$	$\frac{27}{6.0}$	$\frac{0.1}{3.9}$	$\frac{1.0}{.04}$	250

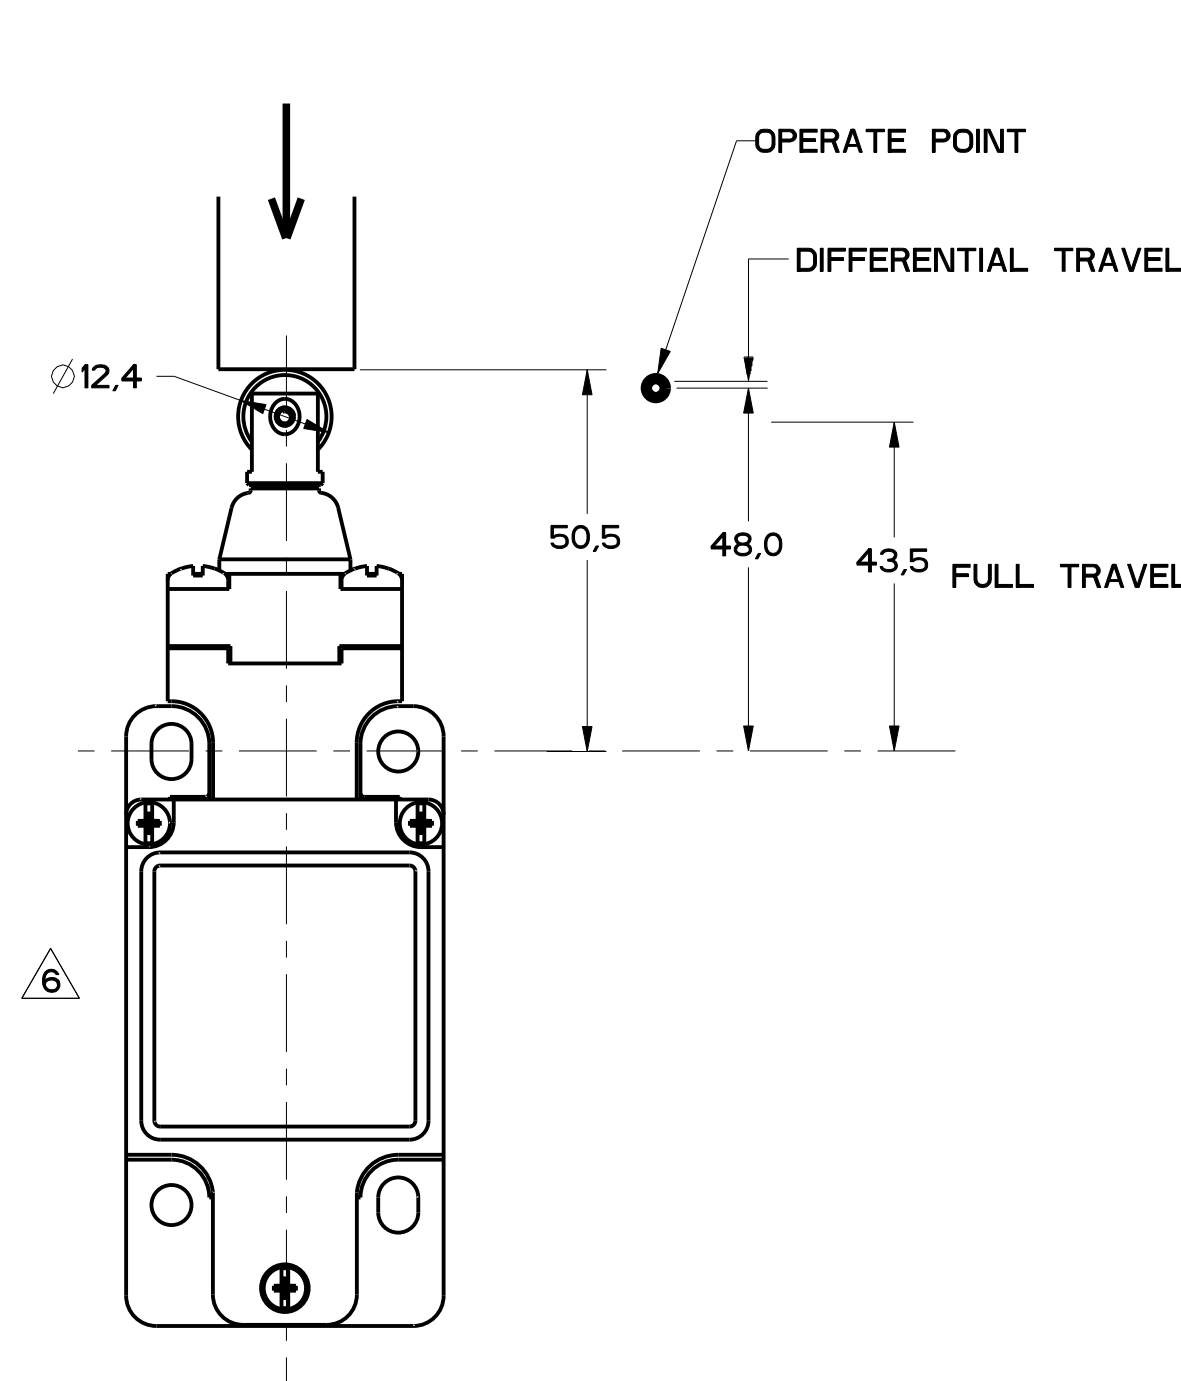


FIGURE 13A

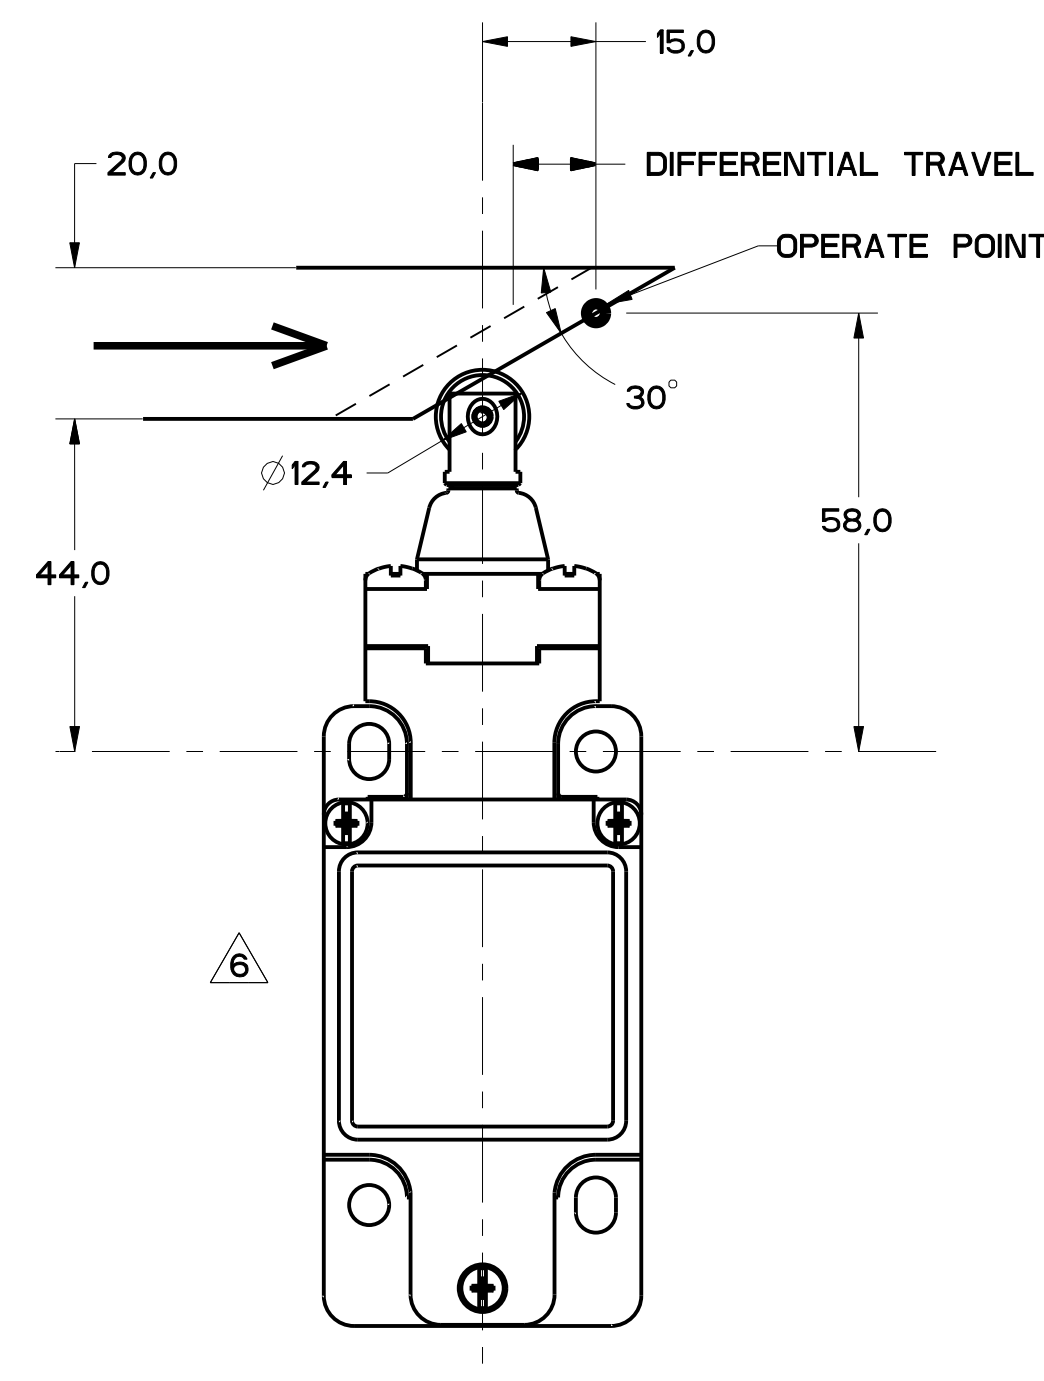


FIGURE 13B

FIGURE 13B, TOP ROLLER PLUNGER HEAD, CAM ACTUATION PER EN50041

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL in/S	MIN OPERATE VEL in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02C	SNAP - ACTION CONTACTS SINGLE POLE 	 1.8 DIFFERENTIAL TRAVEL	$\frac{9.3}{2.1}$	$\frac{15.6}{3.5}$	$\frac{0.17}{6.7}$	$\frac{1.7}{.067}$	250

MBL SERIES CHART 2
 DRAWING NUMBER: 6 OF 8
 RELEASE NO. PR-20782
 REVISIONS: 11
 CHECK: MDM
 DATE: 11/18/94
 BY: MAM

PTC/CAD
 WLS/LODEC3
 MAM
 5-JAN-94
 CHECK: MAM
 DATE: 11/18/94
 BY: MAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. FED. MFG. CODE 91929		CATALOG LISTING SWITCH, ENCLOSED GL SERIES CHART 2	
MICRO SWITCH a Honeywell Division	SI METRIC DESIGN UNITS: <input checked="" type="checkbox"/> SI METRIC <input type="checkbox"/> US CUSTOMARY	TOLERANCES APPLY TO DESIGN UNITS. CONCESSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED. TOLERANCES ARE:	THIRD ANGLE PROJECTION SCALE: FULL DO NOT SCALE PRINT TOLERANCES:

FIGURE 14A, TOP ROLLER LEVER HEAD WITH PIN ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL in/S	MIN OPERATE VEL in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 1.7 DIFFERENTIAL TRAVEL	9.5 2.1	12 2.7	0.17 6.7	1.7 .067	250

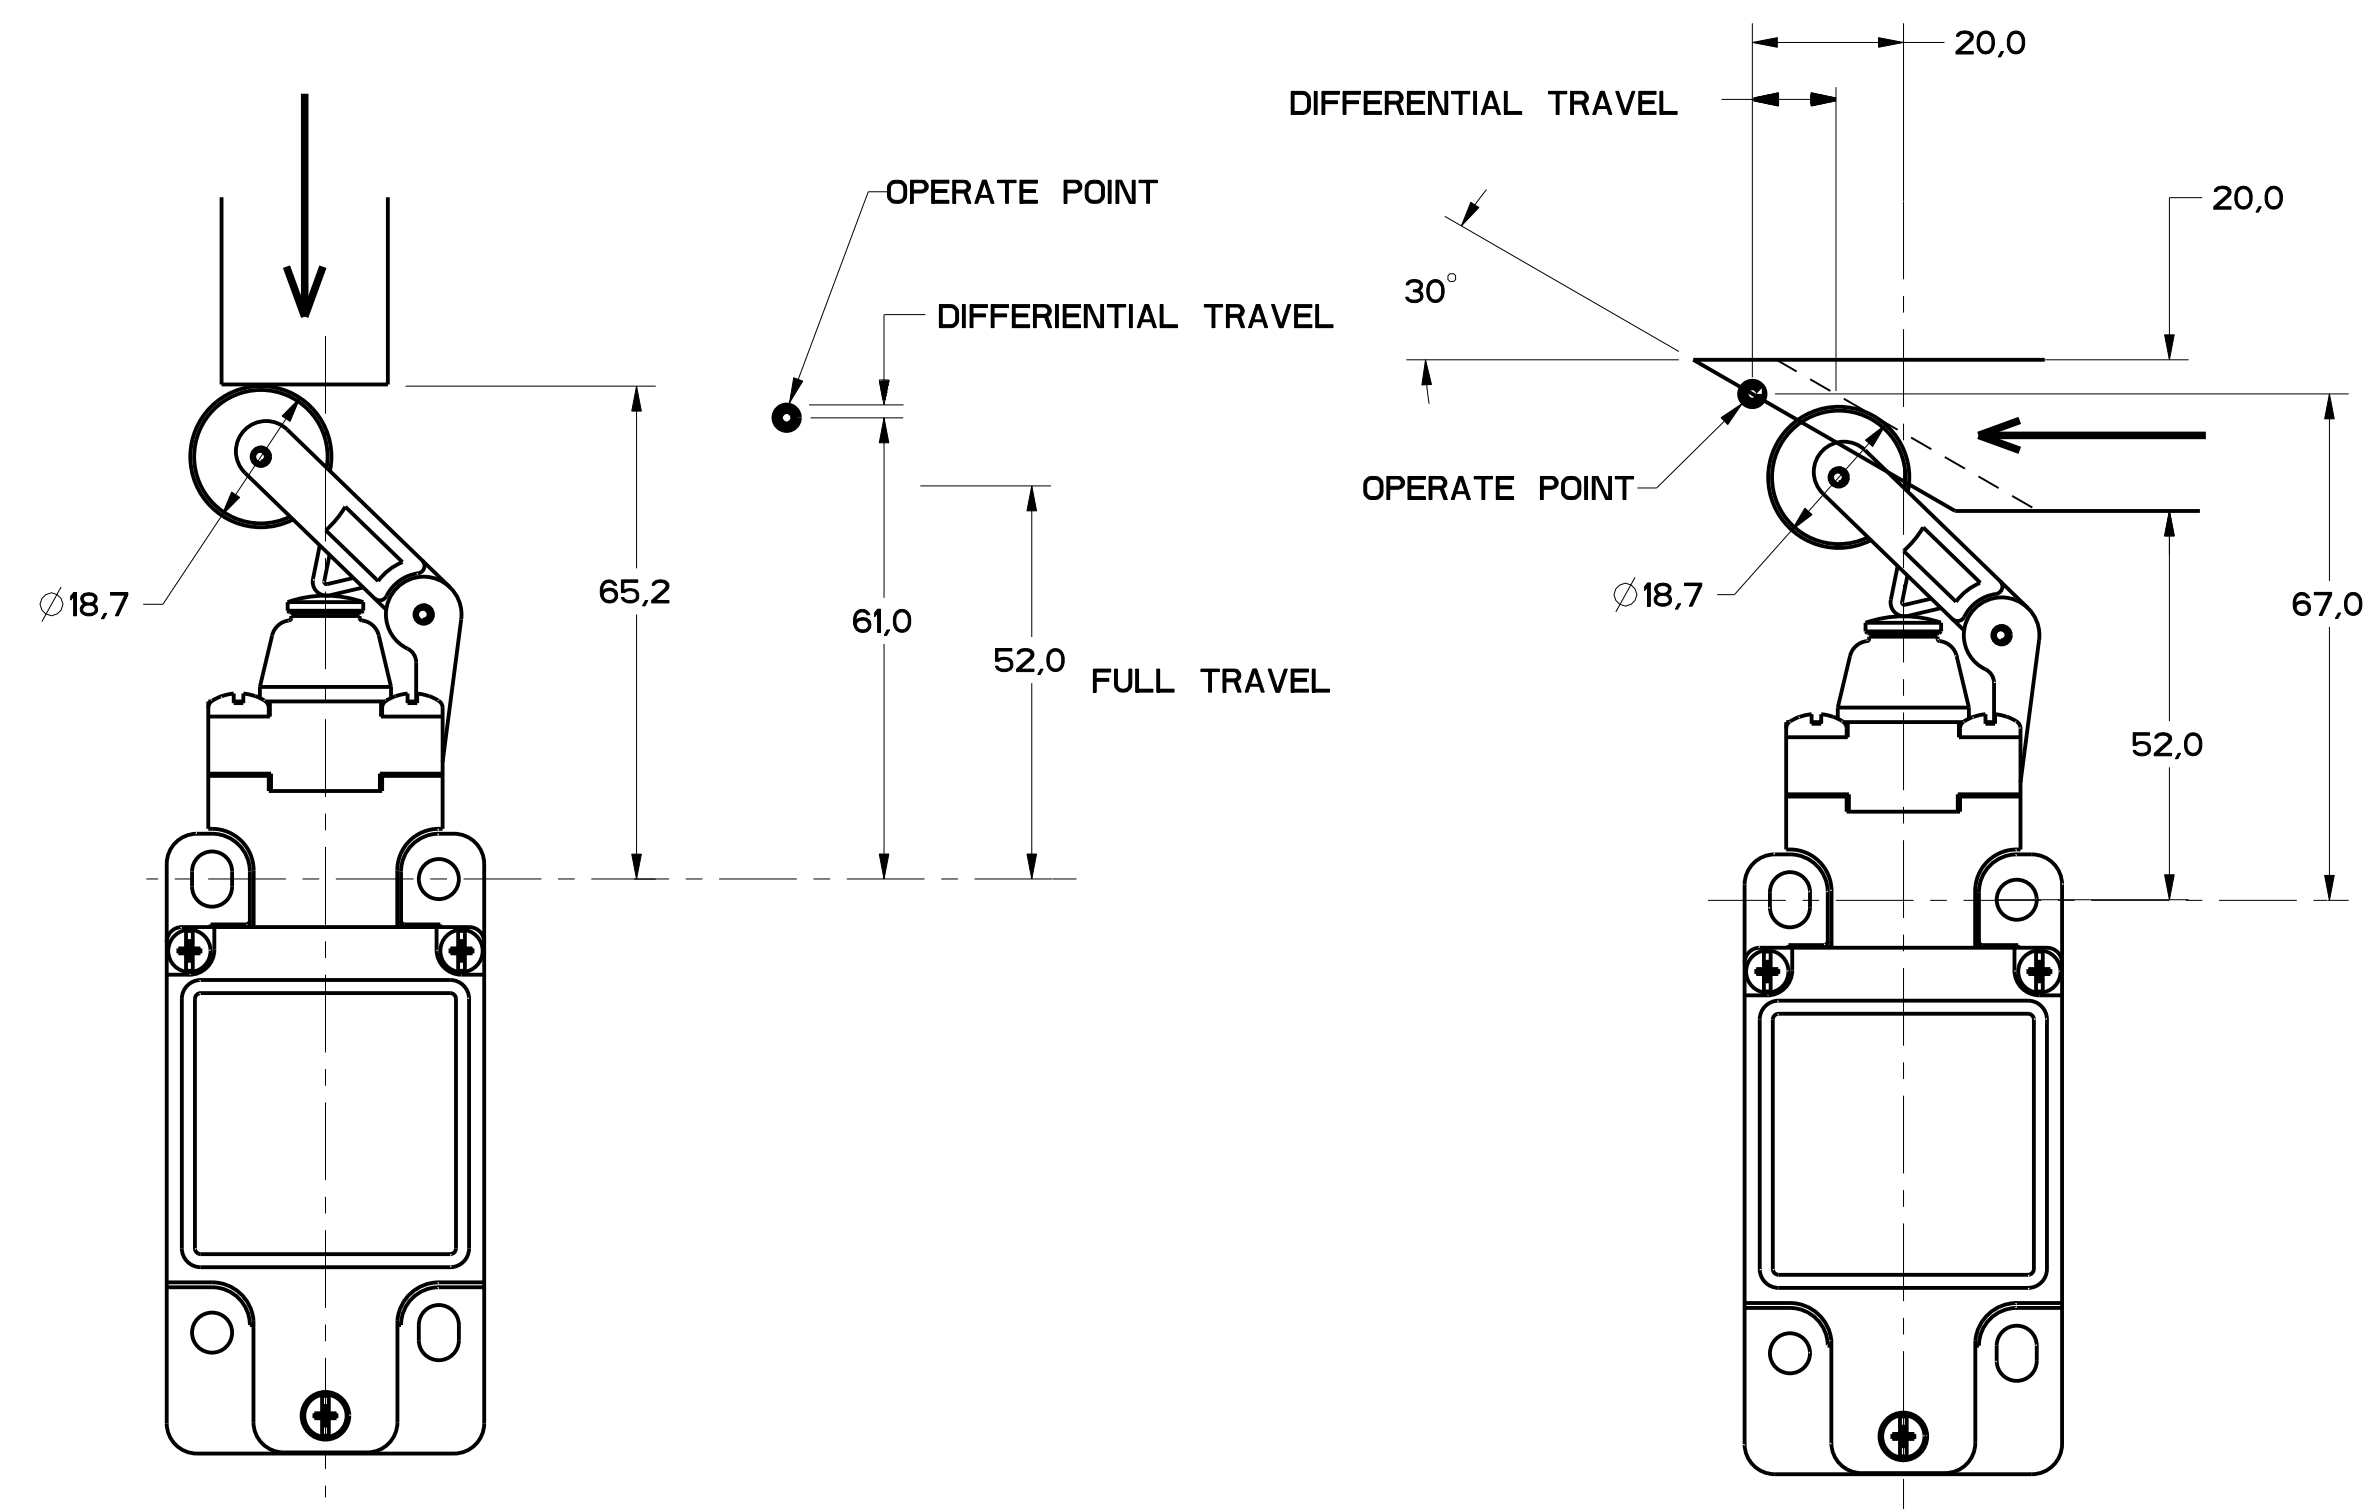


FIGURE 14A

FIGURE 14B

FIGURE 14B, TOP ROLLER LEVER HEAD WITH CAM ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS CONTACT CLOSED, CONTACT OPEN, CONTACT CLOSED DIFFERENTIAL TRAVEL, ** POSITIVE OPENING TO IEC 947-5	MAXIMUM OPERATING FORCE LB	MAXIMUM DISCONNECT FORCE LB	MAX OPERATE VEL in/S	MIN OPERATE VEL in/S	MAX OPERATE FREQUENCY OPS/MIN
GL**02D	SNAP - ACTION CONTACTS SINGLE POLE 	 4.1 DIFFERENTIAL TRAVEL	5.5 1.2	7.0 1.6	0.29 11.4	2.9 .11	250

REV	DATE	BY	CHKD	DESCRIPTION
1	10/20/82	WLS	MDM	REVISED TO IEC 947-5
2	11/14/84	WLS	MDM	REVISED TO IEC 947-5
3	01/18/85	WLS	MDM	REVISED TO IEC 947-5
4	02/28/88	WLS	MDM	REVISED TO IEC 947-5
5	02/28/88	WLS	MDM	REVISED TO IEC 947-5
6	02/28/88	WLS	MDM	REVISED TO IEC 947-5
7	02/28/88	WLS	MDM	REVISED TO IEC 947-5
8	02/28/88	WLS	MDM	REVISED TO IEC 947-5
9	02/28/88	WLS	MDM	REVISED TO IEC 947-5
10	02/28/88	WLS	MDM	REVISED TO IEC 947-5
11	02/28/88	WLS	MDM	REVISED TO IEC 947-5
12	02/28/88	WLS	MDM	REVISED TO IEC 947-5
13	02/28/88	WLS	MDM	REVISED TO IEC 947-5
14	02/28/88	WLS	MDM	REVISED TO IEC 947-5
15	02/28/88	WLS	MDM	REVISED TO IEC 947-5
16	02/28/88	WLS	MDM	REVISED TO IEC 947-5
17	02/28/88	WLS	MDM	REVISED TO IEC 947-5
18	02/28/88	WLS	MDM	REVISED TO IEC 947-5
19	02/28/88	WLS	MDM	REVISED TO IEC 947-5
20	02/28/88	WLS	MDM	REVISED TO IEC 947-5
21	02/28/88	WLS	MDM	REVISED TO IEC 947-5
22	02/28/88	WLS	MDM	REVISED TO IEC 947-5
23	02/28/88	WLS	MDM	REVISED TO IEC 947-5
24	02/28/88	WLS	MDM	REVISED TO IEC 947-5
25	02/28/88	WLS	MDM	REVISED TO IEC 947-5
26	02/28/88	WLS	MDM	REVISED TO IEC 947-5
27	02/28/88	WLS	MDM	REVISED TO IEC 947-5
28	02/28/88	WLS	MDM	REVISED TO IEC 947-5
29	02/28/88	WLS	MDM	REVISED TO IEC 947-5
30	02/28/88	WLS	MDM	REVISED TO IEC 947-5
31	02/28/88	WLS	MDM	REVISED TO IEC 947-5
32	02/28/88	WLS	MDM	REVISED TO IEC 947-5
33	02/28/88	WLS	MDM	REVISED TO IEC 947-5
34	02/28/88	WLS	MDM	REVISED TO IEC 947-5
35	02/28/88	WLS	MDM	REVISED TO IEC 947-5
36	02/28/88	WLS	MDM	REVISED TO IEC 947-5
37	02/28/88	WLS	MDM	REVISED TO IEC 947-5
38	02/28/88	WLS	MDM	REVISED TO IEC 947-5
39	02/28/88	WLS	MDM	REVISED TO IEC 947-5
40	02/28/88	WLS	MDM	REVISED TO IEC 947-5
41	02/28/88	WLS	MDM	REVISED TO IEC 947-5
42	02/28/88	WLS	MDM	REVISED TO IEC 947-5
43	02/28/88	WLS	MDM	REVISED TO IEC 947-5
44	02/28/88	WLS	MDM	REVISED TO IEC 947-5
45	02/28/88	WLS	MDM	REVISED TO IEC 947-5
46	02/28/88	WLS	MDM	REVISED TO IEC 947-5
47	02/28/88	WLS	MDM	REVISED TO IEC 947-5
48	02/28/88	WLS	MDM	REVISED TO IEC 947-5
49	02/28/88	WLS	MDM	REVISED TO IEC 947-5
50	02/28/88	WLS	MDM	REVISED TO IEC 947-5

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH a Honeywell Division

SWITCH, ENCLOSED

GL SERIES CHART 2

THIRD ANGLE PROJECTION

SCALE: FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONCESSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED. TOLERANCES ARE:

	IN	TOL.	MM	TOL.
NO PLACES	X	±.04	X	±.0015
ONE PLACE	X, XX	±.02	X, XX	±.0015
TWO PLACES	X, XX	±.01	X, XX	±.0015
THREE PLACES	X, XX, XXX	±.005	X, XX, XXX	±.0015

DESIGN UNITS: SI METRIC [X] US CUSTOMARY []

WEIGHT

FIGURE 15, CAT WISKER HEAD, ANGULAR ACTUATION

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ CONTACT CLOSED, □ CONTACT OPEN, ▨ DIFFERENTIAL TRAVEL - CONTACT CLOSED	MAXIMUM OPERATING TORQUE $\frac{m}{LB-IN}$	MAXIMUM DISCONNECT TORQUE $\frac{m}{LB-IN}$	MAX OPERATE DEGREE/S	MIN OPERATE VELOCITY DEGREE/S	MAX OPERATE RATE CYCLES/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{0.1}{.9}$	N/A	360	8	100

FIGURE 15, CAT WISKER HEAD, SIDE ACTUATION AT 100mm

CATALOG LISTING	CONTACT BLOCK DIAGRAM	NOMINAL TRAVELS AND RELATED TERMINALS ■ CONTACT CLOSED, □ CONTACT OPEN, ▨ DIFFERENTIAL TRAVEL	MAXIMUM OPERATING FORCE $\frac{m}{LB}$	MAXIMUM DISCONNECT FORCE $\frac{m}{LB}$	MAX OPERATE VEL $\frac{m}{IN/S}$	MIN OPERATE VEL $\frac{m}{IN/S}$	MAX OPERATE FREQUENCY OPS/MIN
GL**02K	SNAP - ACTION CONTACTS SINGLE POLE 		$\frac{1.3}{.3}$	N/A	$\frac{.5}{19.7}$	$\frac{11}{.43}$	100

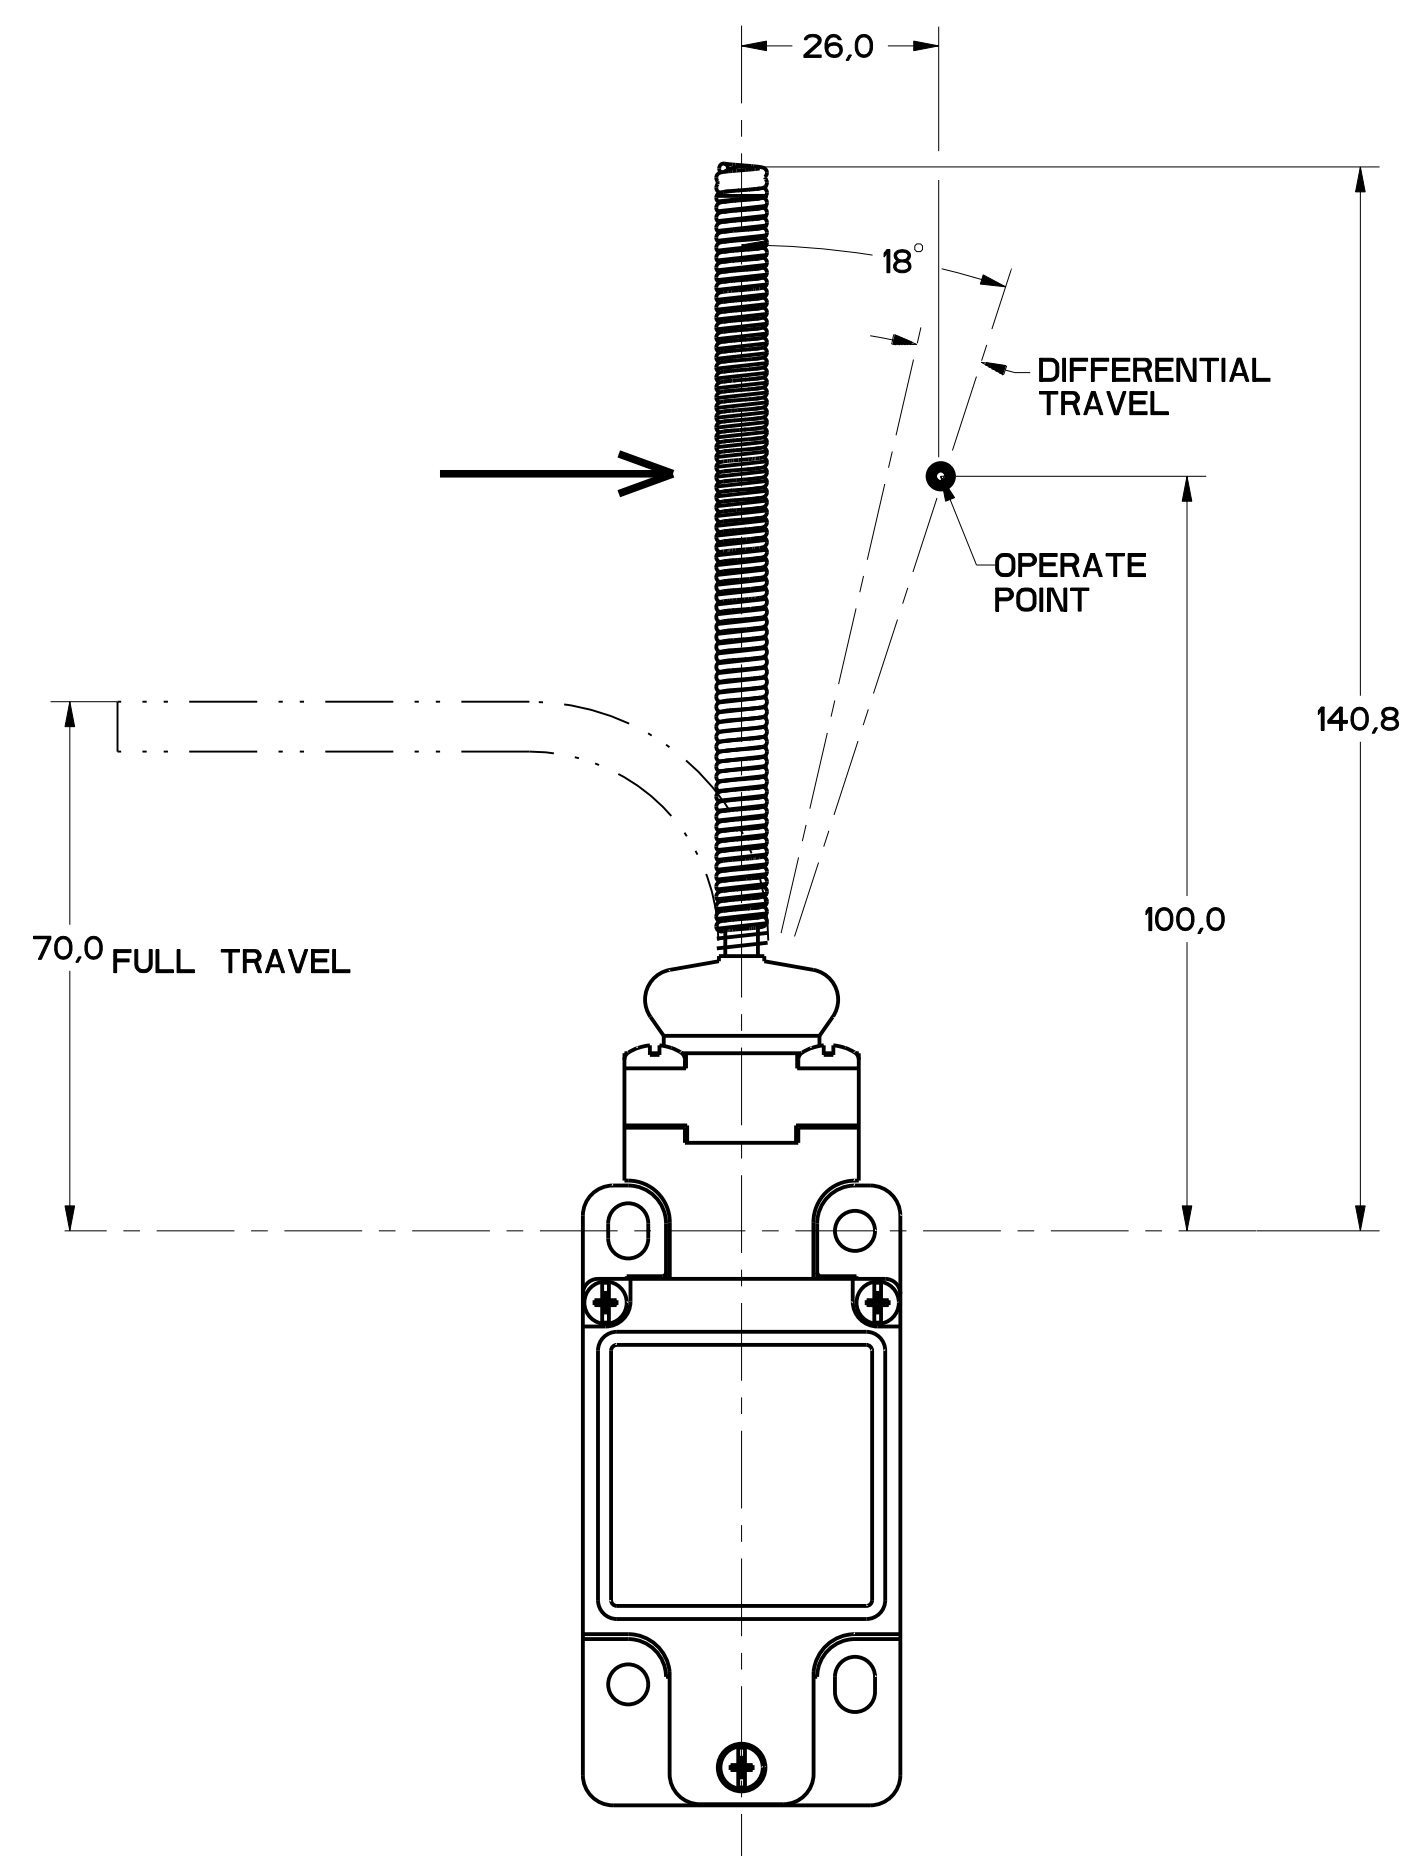


FIGURE 15

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

FED. MFG. CODE 91929

MICRO SWITCH
a Honeywell Division

SWITCH, ENCLOSED

CATALOG LISTING
GL SERIES CHART 2

NO. PLACES	SI METRIC	TOL.	US CUSTOMARY
ONE PLACE	X .1X	± .04	X .1
TWO PLACES	X .1X	± .02	X .1X
THREE PLACES	X .1X	± .01	X .1X
ANGLES	± °		

DESIGN UNITS SI METRIC US CUSTOMARY

WEIGHT

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONCESSIONS ARE ONLY FOR REFERENCE, UNLESS NOTED. TOLERANCES ARE:



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.